

The effect of parameterization on isogeometric analysis of free-form curved beams

Hosseini, SF, Moetakef-Imani, B, Hadidi-Moud, S & Hassani, B

Author post-print (accepted) deposited by Coventry University's Repository

Original citation & hyperlink:

Hosseini, SF, Moetakef-Imani, B, Hadidi-Moud, S & Hassani, B 2016, 'The effect of parameterization on isogeometric analysis of free-form curved beams' *Acta Mechanica*, vol 227, no. 7, pp. 1983-1998

<https://dx.doi.org/10.1007/s00707-016-1610-9>

DOI 10.1007/s00707-016-1610-9

ISSN 0001-5970

ESSN 1619-6937

Publisher: Springer

The final publication is available at Springer via <http://dx.doi.org/10.1007/s00707-016-1610-9>

Copyright © and Moral Rights are retained by the author(s) and/ or other copyright owners. A copy can be downloaded for personal non-commercial research or study, without prior permission or charge. This item cannot be reproduced or quoted extensively from without first obtaining permission in writing from the copyright holder(s). The content must not be changed in any way or sold commercially in any format or medium without the formal permission of the copyright holders.

This document is the author's post-print version, incorporating any revisions agreed during the peer-review process. Some differences between the published version and this version may remain and you are advised to consult the published version if you wish to cite from it.

The Effect of Parameterization on Isogeometric Analysis of Free-Form Curved Beams

Seyed Farhad Hosseini ^a, Behnam Moetakef-Imani ^{a,*}

Saeid Hadidi-Moud ^a, Behrooz Hassani ^a

^a*Department of Mechanical Engineering, Ferdowsi University of Mashhad (FUM), Mashhad, Iran*

Abstract

In the present paper, the effect of parameterization on the results of isogeometric analysis of free-form approximated curved beams is investigated. An Euler-Bernoulli beam element for an initially curved beam with variable curvature is developed. The model is applied to four different examples. The effect of three parameterization strategies (the equally spaced method, the chord length method and the centripetal method) in the curve approximation process is considered. Also, the effect of least square approximation error is taken into consideration. The results strongly suggest avoiding the equally spaced method. Among the chord length and centripetal methods, the method which leads to a less least square error is recommended.

1. Introduction:

The concept of isogeometric analysis (IGA) was first introduced by Hughes et al [1] in 2005. It can be viewed and interpreted as a logical extension to the finite element method. The method employs shape functions based on different types of Splines (B-spline, NURBS, T-splines, etc.). The main feature of this approach is that the shape functions not only represent the CAD geometry, but also are considered as a basis for the numerical approximation of the solution space. IGA integrates finite element ideas in commercial CAD systems without the necessity to generate new computational meshes. This approach was successfully applied to

*Corresponding author. Tel.: +989151133175

a wide range of physical problems such as solid mechanics [2-4], fluid mechanics [5], heat transfer [6], and Eigen value problems [7].

Very recently, the isogeometric analysis of curved beams has attracted many researchers. Bouclier et al. [8] investigated the use of higher order NURBs to address static straight and curved Timoshenko beams with several approaches that are usually employed in standard locking free finite elements. Nagy et al. [9] studied sizing and shape optimization of curved beams using IGA. Cazzani et al. [10] presented a plane curved beam element which is almost insensitive to both membrane and shear locking. They stated that membrane and shear locking phenomena can be easily controlled by either properly choosing the number of elements or the NURBs degree.

In general, a free-form curve can be constructed from arbitrary input data points using interpolation or approximation methods [11]. In interpolation, the curve is precisely passed through all data points, while in approximation, the least square error between data points and their corresponding points on the curve is minimized.

In the work done by Luu et al. [12], the gap between the free vibration isogeometric analysis of curved beams with constant curvature and those with variable curvature is eliminated. They considered a Tschirnhausen cubic curved beam configuration to study the dynamic behavior of a free form curved beam. There exist different types of interpolation and approximation methods distinguished by their different parameterization methods. Two visually identical curves may have different parameterizations which lead to different control points and knot vectors. One can interpret the parameterization as a “hidden” concept that can affect the results of IGA. Different parameterizations will lead to different discretization which can in turn cause mesh distortion. Mesh distortion is a serious problem in both FEA and IGA. Kolman [13] tested two types of parameterizations for a straight line; a non-linear parameterization given by uniformly spaced control points and a linear parameterization as a result of employing the Greville abscissa.

Cotrell et al. [14] showed that the non-linear parameterization is superior for outlier frequencies. Other researchers [15] have investigated the effect of perturbing control points in one-dimensional setting, and extended this concept to

multiple dimensions. Perturbing a control point in one-dimensional setting would change the parameterization, whereas the line is visually unchanged. Although there exists a series of studies briefly addressing the effect of parameterization [16-19], a much needed comprehensive research focusing on the effect of parameterization on free form approximated (interpolated) curved beam is necessary. Therefore the present work aims to provide a sound insight into this concept based on IGA.

The article is organized as follows: Firstly, in section 2 a brief introduction into B-spline and NURBs functions is presented and the interpolation and approximation methods as well as three parameterization techniques are introduced. After that, the formulation of isogeometric analysis of free form (variable curvature) curved beams is presented in section 3. This formulation is adopted from the concept of shell isogeometric element developed in [20]. In section 4, the effect of parameterization on isogeometric analysis of curved beams is shown and a complete discussion on the results is given. Finally section 5 concluded the discussion.

2. Basic Definitions

B-spline curve and surface algorithms required for implementing surface skinning are briefly introduced in this section.

2.1. B-spline curves and surfaces

B-spline theory is a parametric method of describing curves and surfaces. Outstanding properties and programming capabilities have made the method popular for CAD/CAM applications. A clamped B-spline curve is a piecewise polynomial which is expressed by:

$$C(u) = \sum_{i=0}^n N_{i,p}(u)P_i \quad (1)$$

where p is the degree and $P_i, i = 0, \dots, n$ is the control polygon which is defined by $P_i = (x_i, y_i, z_i)$. The term $N_{i,p}(u), i = 0, \dots, n$ represents B-spline basis functions that are defined on the knot vector, U :

$$U = \{\underbrace{0, \dots, 0}_{p+1}, u_{p+1}, \dots, u_{m-p-1}, \underbrace{1, \dots, 1}_{p+1}\} \quad (2)$$

The extension of B-spline theory to a tensor product of two B-spline curves results in a definition for B-spline surface, S :

$$S(u, v) = \sum_{i=0}^n \sum_{j=0}^m N_{i,p}(u) N_{j,q}(v) P_{i,j} \quad (3)$$

where p and q are surface degrees in u and v directions respectively and $P_{i,j}$ $\begin{matrix} i=0, \dots, n \\ j=0, \dots, m \end{matrix}$ is a net of control points defined as $P_{i,j} = (x_{i,j}, y_{i,j}, z_{i,j})$. Also $N_{i,p}(u)$, $i = 0, \dots, n$ and $N_{j,q}(v)$, $j = 0, \dots, m$ are B-spline basis functions in u and v directions which are defined on the following knot vectors respectively:

$$\begin{aligned} U &= \{\underbrace{0, \dots, 0}_{p+1}, u_{p+1}, \dots, u_{r-p-1}, \underbrace{1, \dots, 1}_{p+1}\} \\ V &= \{\underbrace{0, \dots, 0}_{q+1}, v_{q+1}, \dots, v_{s-q-1}, \underbrace{1, \dots, 1}_{q+1}\} \end{aligned} \quad (4)$$

Further details of B-spline curves and surfaces can be found in [11].

2.2. Approximation of curves and surfaces

Three necessary stages should be passed on to obtain an approximated surface

- a) Selecting proper parameter for each data point
- b) Generating a proper knot vector
- c) Calculating control points as the output of problem

There are several methods to fulfill each of the above stages. What are going on are formulations related to a specific method which has been used in this work.

2.2.1. Parameter selection

Parameters are in fact the reflection of distribution of data points. Three parameterization techniques, the equally spaced, chord length and centripetal methods are used for most applications. The input data points and their corresponding parameters are denoted by Q_i , $i = 0, \dots, k$, and t_i , $i = 0, \dots, k$. Thus, the evaluated point on the approximated curve at t_i is equal to Q_i .

In the equally spaced method:

$$\begin{cases} t_0 = 0 \\ t_i = i/k \\ t_k = 1 \end{cases} \quad (5)$$

In the chord length method data point parameters are calculated by:

$$\begin{cases} t_0 = 0 \\ t_i = t_{i-1} + \frac{|Q_i - Q_{i-1}|}{L} \\ t_k = 1 \end{cases} \quad (5)$$

where

$$L = \sum_{i=1}^k |Q_i - Q_{i-1}|$$

And for the centripetal method, parameters may be obtained by:

$$\begin{cases} t_0 = 0 \\ t_i = t_{i-1} + \frac{\sqrt{|Q_i - Q_{i-1}|}}{L} \\ t_k = 1 \end{cases} \quad (6)$$

where

$$L = \sum_{i=1}^k \sqrt{|Q_i - Q_{i-1}|}$$

2.2.2. knot vector generation

Several methods are suggested for knot vector selection, amongst them, the following algorithm is usually preferred and implemented [11]:

$$\begin{aligned} d &= \frac{k+1}{n-p+1} \\ i &= \text{int}(jd) \quad , \quad \alpha = jd - i \\ u_{p+j} &= (1-\alpha)\bar{u}_{i-1} + \alpha\bar{u}_i \quad , \quad j = 1, \dots, n-p \end{aligned} \quad (8)$$

where k is the number of data points, n is the number of control points and p is the degree of B-spline. The "int" command gives the largest integer smaller than its input real number. The above algorithm will ensure that there are a specific and almost equal number of parameters between each two consecutive middle knots which plays an important role in the stability of solutions [21].

2.2.3. Least square approximation

In the least square method, the following error function is to be minimized:

$$\sum_{i=1}^{k-1} |Q_i - C(t_i)|^2 \quad (9)$$

which leads to the following system of equations [11]:

$$(N^T N)P = R \quad (10)$$

where N is a $(n-1)$ by $(k-1)$ matrix:

$$\begin{bmatrix} N_{1,p}(t_1) & \cdots & N_{n-1,p}(t_1) \\ \vdots & \ddots & \vdots \\ N_{1,p}(t_{k-1}) & \cdots & N_{n-1,p}(t_{k-1}) \end{bmatrix} \quad (11)$$

and R is a $(n-1)$ vector:

$$\begin{bmatrix} N_{1,p}(t_1)R_1 + \cdots + N_{1,p}(t_{k-1})R_{k-1} \\ \vdots \\ N_{n-1,p}(t_1)R_1 + \cdots + N_{n-1,p}(t_{k-1})R_{k-1} \end{bmatrix} \quad (12)$$

R_i is defined by:

$$R_i = Q_i - N_{0,p}(t_i)Q_0 - N_{n,p}(t_i)Q_k, i = 1, \dots, k - 1 \quad (13)$$

It should be noted that P , the vector of control points, is the unknown of problem.

3. Isogeometric analysis of plane free form curved beams

For the description of free form curves, it is advantageous to use curvilinear coordinates and local bases as depicted in Fig. (1).

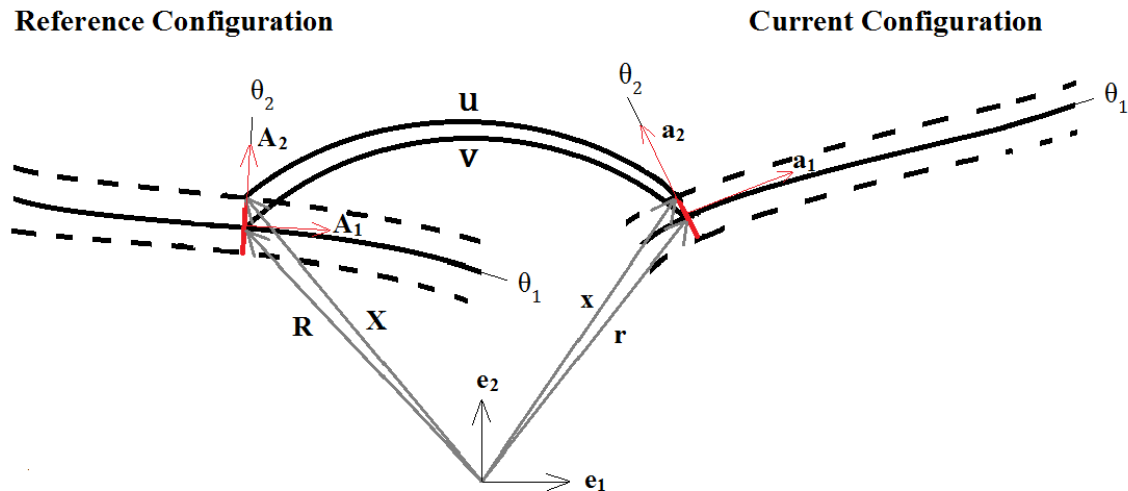


Figure 1. Curved beam configurations in reference and deformed (current) states

where the vectors \vec{A} and \vec{a} are the base vectors in reference and current configurations respectively. The deformation of a thin, elastic and uniform Euler-Bernoulli beam is comprised of membrane and flexural components. The position of each point on the deformed beam (Fig. (2)) can be expressed using the following relations:

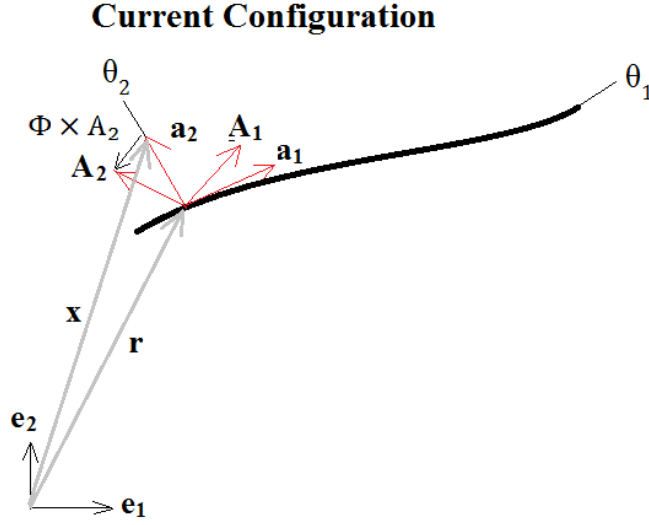


Figure 2. A curvilinear configuration

$$x(\theta^1, \theta^2) = r(\theta^1) + \theta^2 a_2(\theta^1) \quad (14)$$

where θ^1 and θ^2 are curvilinear coordinates and r is the position vector of corresponding point on the midline of the beam. The director \vec{a} can be written as:

$$\mathbf{a} = A_2 + \Phi \times A_2 \quad (15)$$

where Φ is the rotation vector. Considering the rotation angle, the rotation vector can be written as:

$$\Phi = \varphi A_2 \quad (16)$$

φ is the rotation angle and can be obtained using the following equation:

$$\varphi = -\frac{1}{\|A_2\|} (a_1 - A_1) \cdot A_2 = -\frac{1}{\|A_2\|} v_{,1} \cdot A_2 \quad (17)$$

Where $v_{,1}$ is the partial derivative of midline displacement field, v , of beam with respect to the coordinate θ^1 and $\|A_2\|$ is the Euclidean norm of A_2 .

The difference between position vectors x and X will lead to a displacement field “ u ” at each point of a plane curved beam:

$$u = x - X \quad (18)$$

The derivation of the Green-Lagrange strain tensor coefficients ε_{ij} requires partial derivatives of the displacement field, u , with respect to the coordinate θ^1 :

$$u_{,1} = v_{,1} + \theta^2 (\Phi_{,1} \times A_2 + \Phi \times A_{2,1}) \quad (19)$$

Considering the finite Green-Lagrange formula, the individual strain can be obtained as follows:

$$\varepsilon_{11} = v_{,1} A_1 + \theta^2 (v_{,1} A_{2,1} + \Phi_{,1} \times A_2 \cdot A_1) \quad (20)$$

With the strain component of equation (20), the internal virtual work of the Euler-Bernoulli beam can be defined:

$$\delta\pi = \int_{\Omega} \delta(\varepsilon)^T C \varepsilon d\Omega \quad (21)$$

where C is the material property coefficient.

In IGA, this discretization is performed using the B-spline and NURBs functions. According to the isoparametric concept, the discrete displacement field of the midline, v , is determined from the sum of NURBs element basis functions and associated displacements of the control points as follows:

$$v(\xi) = \sum_{i=1}^{n_{cp}} N_i^p(\xi) v^i \quad (22)$$

where n_{cp} is the number of control points, ξ is the parameter, p is the B-spline degree, N_i^p are the basis functions and finally v^i are control point values.

In as much as the vector A_1 is always tangent to the curve, it can be written as:

$$A_1(\xi) = \sum_{i=1}^{n_{cp}} N_i^p(\xi)_{,\xi} P^i \quad (23)$$

where P^i are the control points of the input geometry. The problem unknowns (v^i) are computed by discretization of equation (21) using equations (20), (22) and (23).

4. Results and Discussion

The effect of parameterization on the isogeometric analysis of free form curved beams was investigated. A free form curve can be constructed from a set of data points using approximation and interpolation techniques. As described in section 2, there are various parameterization methods which may lead to visually identical, yet intrinsically different curves, because they have different control points and different knot vectors.

The curved beam isogeometric analysis was performed on four benchmark examples. In all examples, the number of meshes can be altered by employing different number of control points as an approximation (interpolation) input. For comparison purposes, the variation of the approximation least square error is also plotted versus the number of control points. The results are reported in the subsequent sections.

Example 1: A cantilever straight beam:

The configuration and input data points are shown in Figs. (3) and (4) respectively. Since the input data points are uniformly distributed, the error outputs for chord length and centripetal approximations are the same.



Figure 3. The configuration of a cantilever straight beam

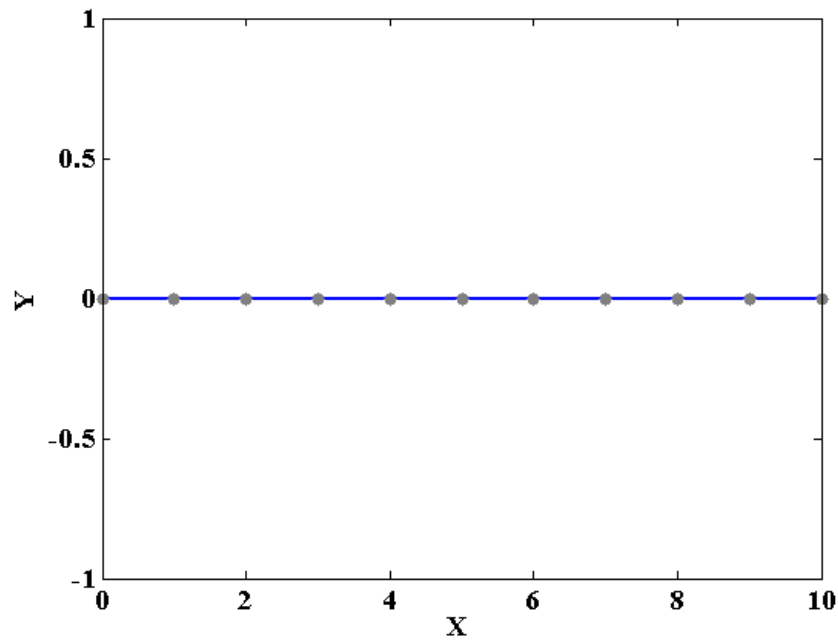


Figure 4. The input data points of a cantilever straight beam

The variation of least square and tip deflection errors versus the number of control points are depicted in Figs. (5) and (6) respectively.

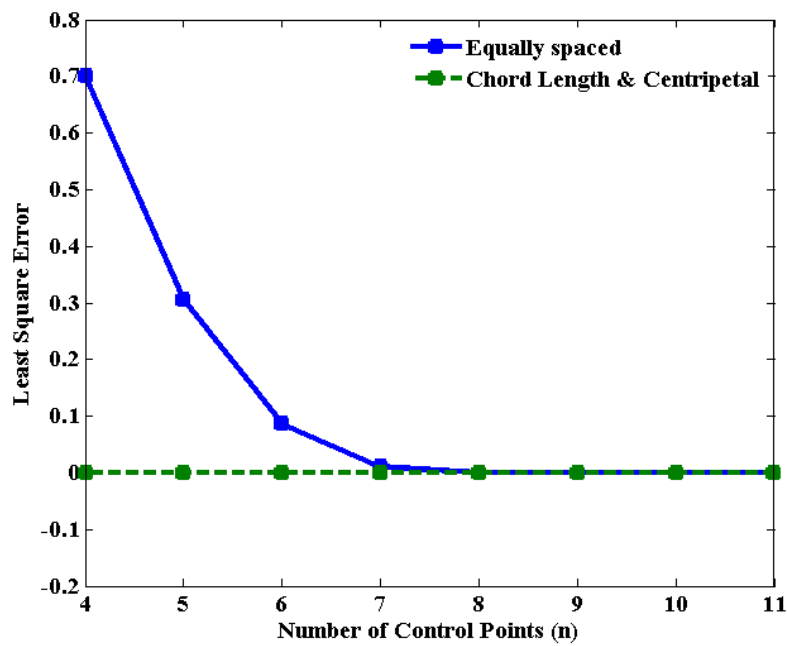


Figure 5. Least square error versus the number of control points for different types of parameterization in example 1

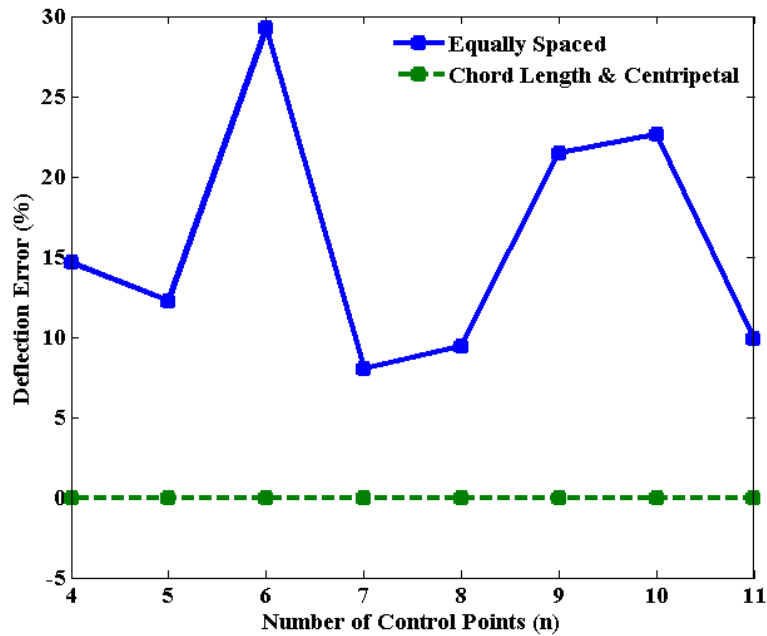


Figure 6. Tip deflection error versus the number of control points for different types of parameterization in example 1

Example 2: A quarter circular in-plane cantilever curved beam:

Figs. (7) and (8) are showing the configuration and input data points of a cantilever quarter circle beam. The data points are again uniformly distributed, hence the chord length and centripetal outputs are identical.

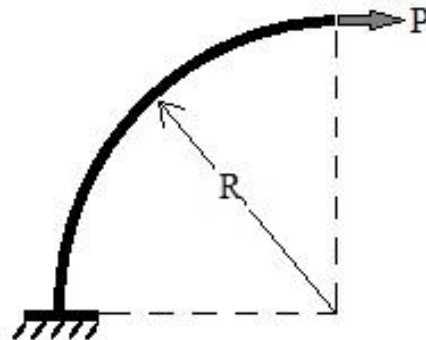


Figure 7. The configuration of a quarter circular in-plane cantilever curved beam

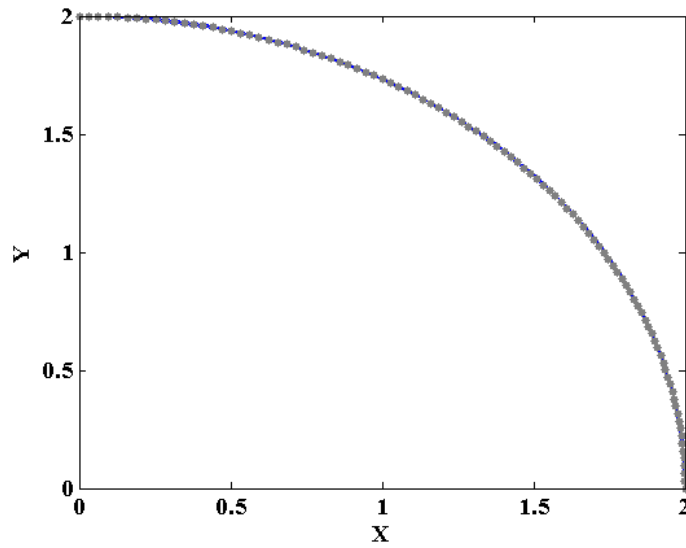


Figure 8. The input data points of the beam in example 2

The variation of least square and vertical tip deflection errors versus the number of control points are depicted in Figs. (9) and (10) respectively.

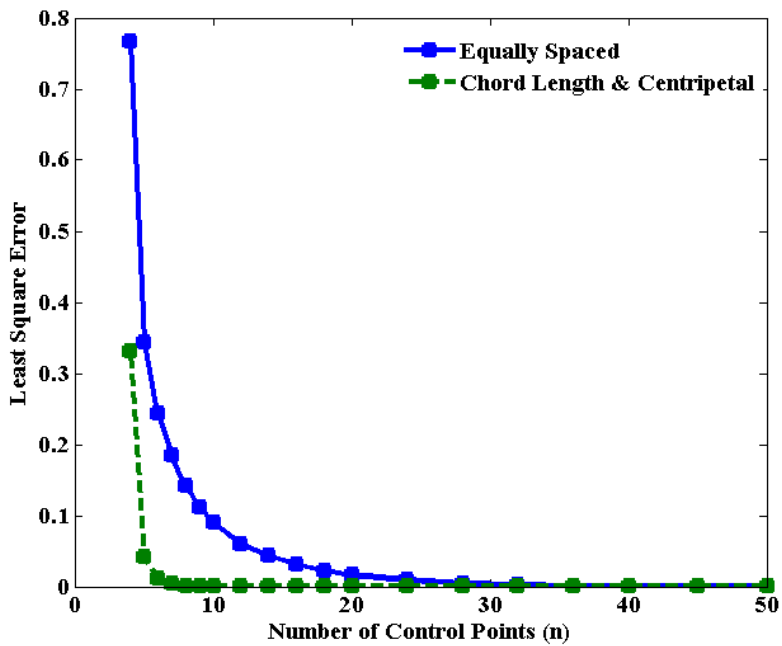


Figure 9. Least square error versus the number of control points for different types of parameterization in example 2

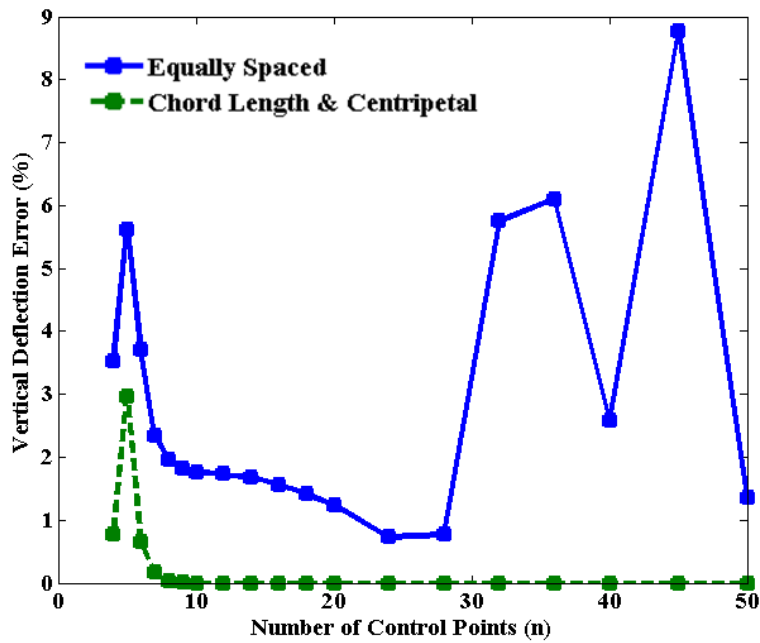


Figure 10. Vertical tip deflection error versus the number of control points for different types of parameterization in example 2

Example 3: A cantilever quarter circular in-plane curved beam with non-uniform input data points:

This example is devised to investigate the effect of non-uniform input data points. The configuration is similar to the previous example, with the exception of the distribution of data points which is different as shown in Fig. (11).

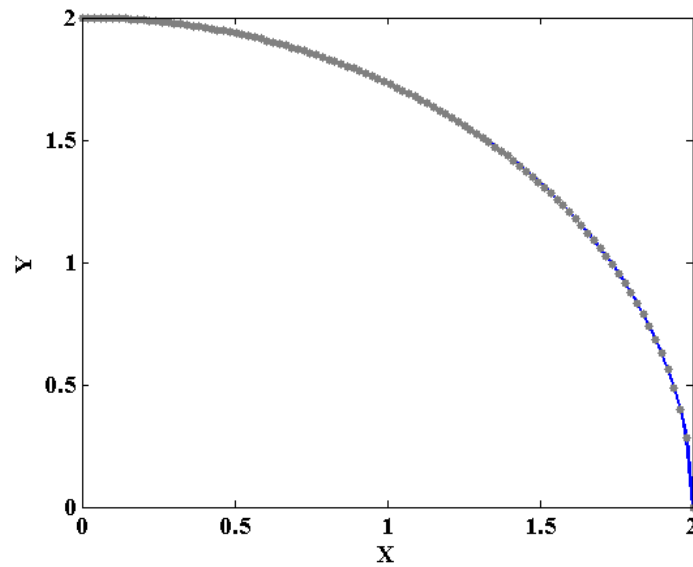


Figure 11. The non-uniform input data points of the beam in example 3

The variation of least square and vertical tip deflection errors versus the number of control points are depicted in Figs. (12) and (13) respectively.

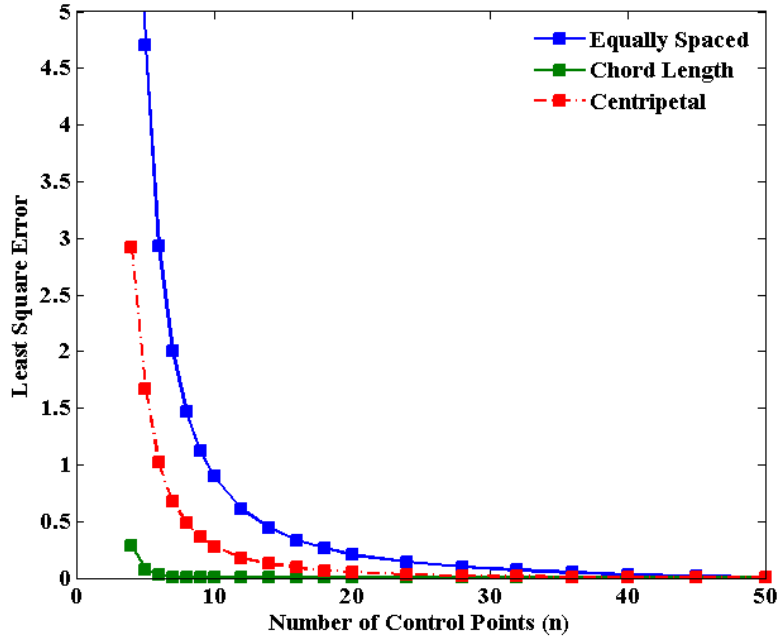


Figure 12. Least square error versus the number of control points for different types of parameterization in example 3

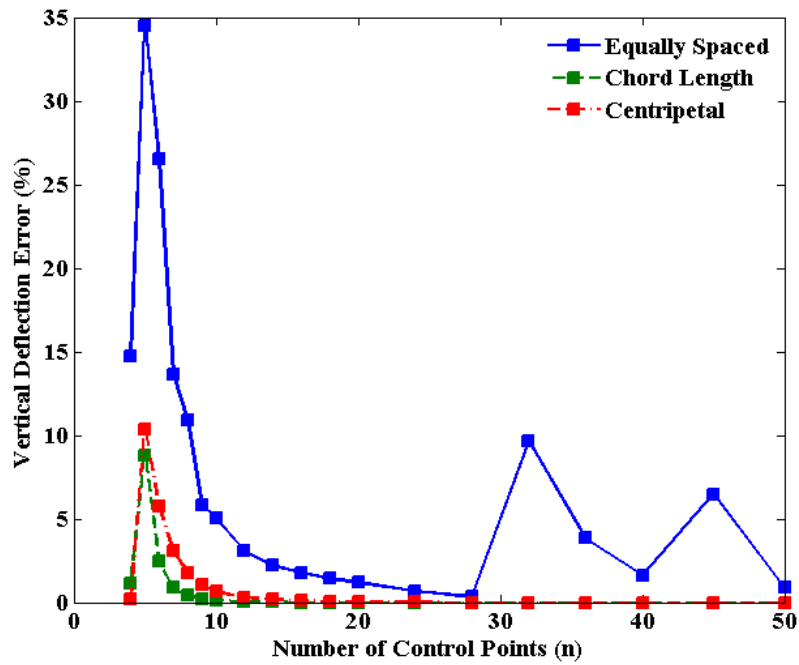


Figure 13. Vertical tip deflection error versus the number of control points for different types of parameterization in example 3

Example 4: A cantilever Tschirnhausen plane curved beam:

To take the curvature variation into consideration, the Tschirnhausen curve was considered. The Configuration is demonstrated in Fig. (14).

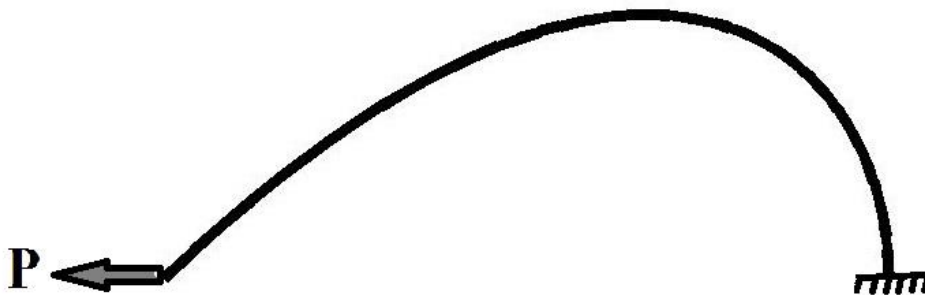


Figure 14- The configuration of a Tschirnhausen cantilever beam used in example 4

The data points were calculated from the following Tschirnhausen parametric equation:

$$x = 3a(t^2 - 3)$$

$$y = ta(t^2 - 3)$$

Choosing $a=1$, the data points are shown in Fig. (15).

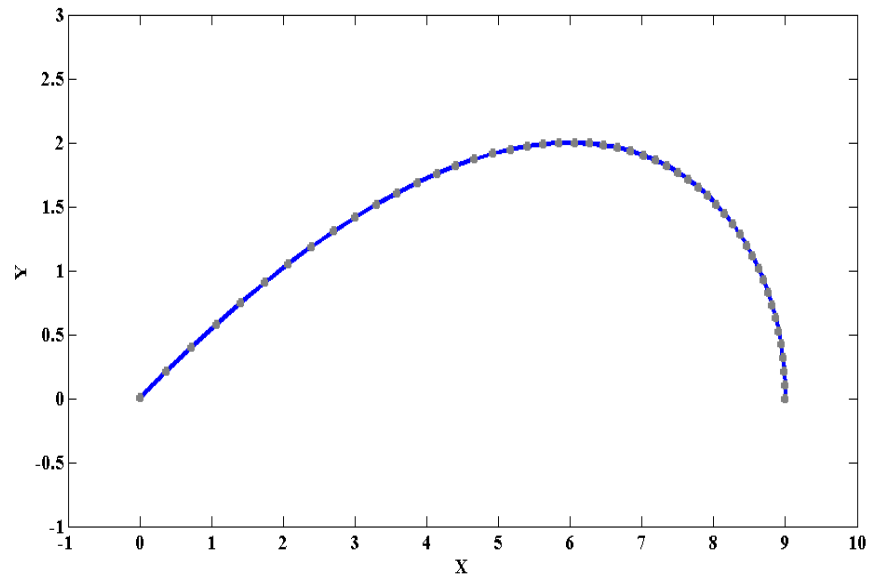


Figure 15. The input data points of a Tschirnhausen curve

Considering this geometry as a cantilever beam, with a clamped edge at right, the variation of least square and tip deflection errors versus the number of control points are demonstrated in Figs. (16) and (17).

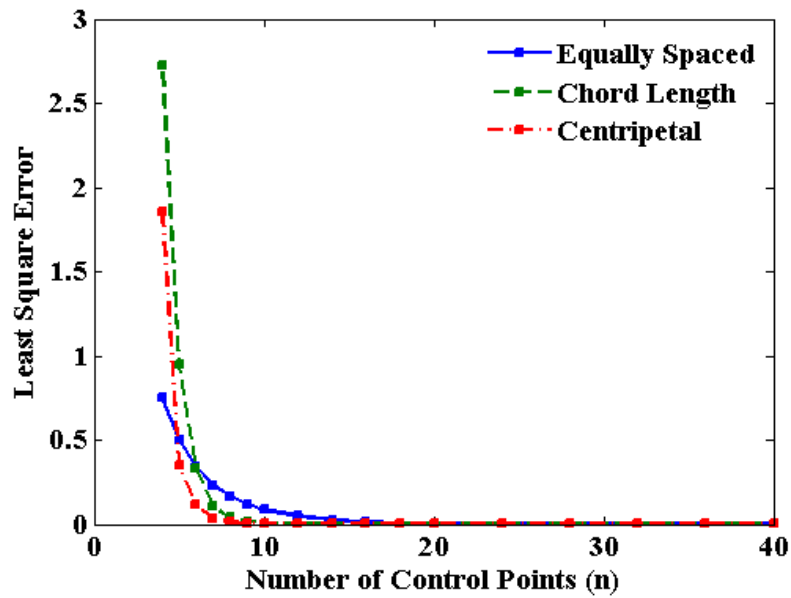


Figure 16. Least square error versus the number of control points for different types of parameterization in example 4

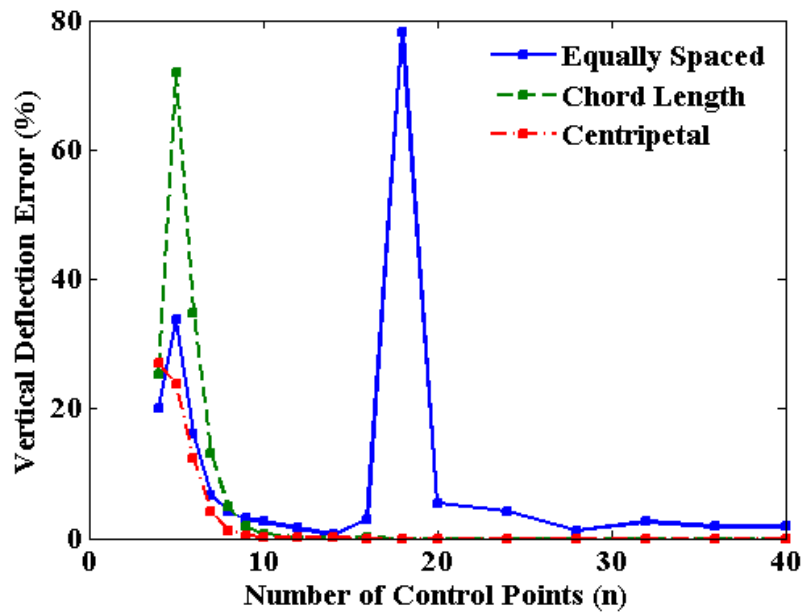


Figure 17. Vertical tip deflection error versus the number of control points for different types of parameterization in example 4

4.1. Effect of arc-length parameterization

Parameterization has significant influence on mesh distortion of the geometry. With a linear parameterization, the arc-length mapping from a model space into its parameter space is achieved. In this case, The Jacobian corresponding to this mapping is constant [15]. These characteristics of the arc-length parameterization were evaluated for all examples considered in this work. For a fixed number of control points, the variation of model coordinate, X , and Jacobian versus the B-spline parameter for different parameterization approaches are shown in Figs. (18) and (19) for Example1.

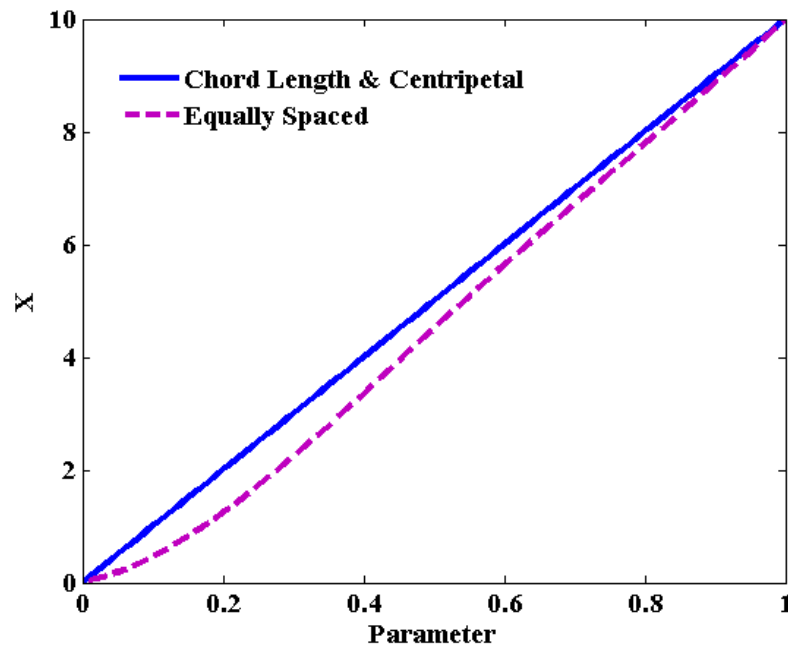


Figure 18. Plot of the parameterization for the cases of equally spaced and Chord length parameterizations for example 1

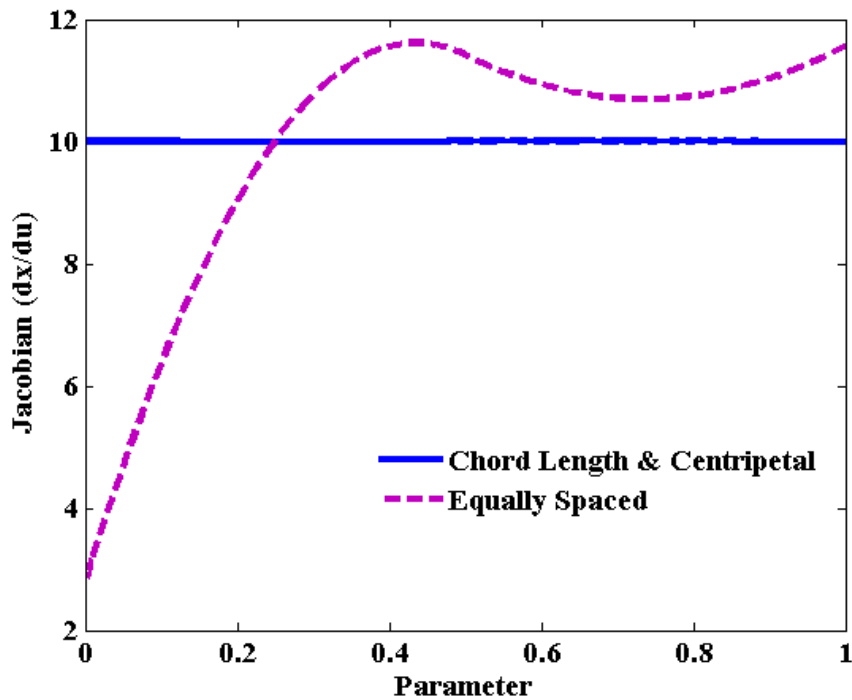


Figure 19. Plot of the Jacobian of the parameterization for the cases of uniformly spaced control points and linear parameterization for example 1

From these figures, it is clear that the chord length and centripetal parameterizations are more likely to lead to a linear (or arc length) parameterization.

However, centripetal parameterization is not always linear. Fig. (20) shows the plot of the Jacobian versus the spline parameter for example 4.

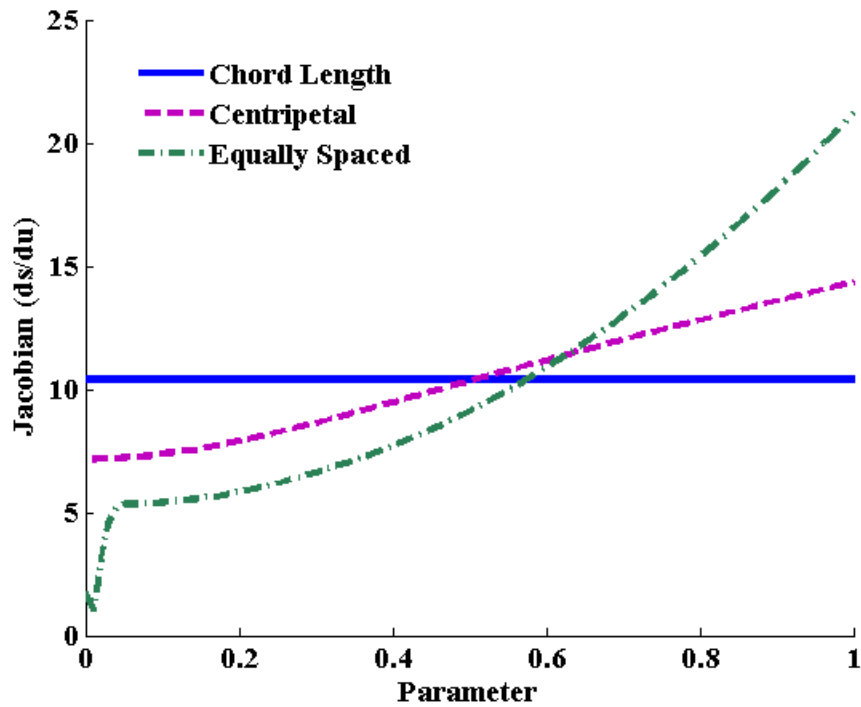


Figure 20. Plot of the Jacobian of the parameterization for all parameterization methods for example 4

Although the centripetal parameterization is not linear in this example, its deflection error is slightly smaller than the chord length parameterization (Fig. (17)). This may be due to the fact that centripetal parameterization, like chord length parameterization, takes the initial distribution of data points into consideration.

Considering this fact, we can conclude that in most cases, mesh distortion in chord length and centripetal parameterizations is generally less than equally spaced parameterization, hence, chord length and centripetal parameterizations give more accurate results.

4.2. Effect of the least square approximation error

In general, less error of the least square approximation leads to less deflection errors. However this is not always true as it depends on the parameterization method used. By careful observation of Figs. (12) and (13), one can find out that

an equally spaced parameterization with 32 control points has led to less approximation error than a centripetal parameterization with 5 control points, whereas the deflection error of the latter is less. Moreover, there is not a uniform relation between the least square error and the deflection error for the equally spaced procedure.

By careful examination of the results obtained for example 4, it is suggested that the convergence rate of centripetal method in variable curvature problems is faster than the chord length method. This may be due to the fact that the convergence of the approximation least square error to zero in centripetal method is faster than in the chord length method. On the other hand, in example 3, where non-uniform input points were introduced, the chord length method is superior. This is because at a fixed number of control points its least square error is less than the error in centripetal method. Therefore, it maybe concluded that between the chord length and centripetal methods, the one which leads to less approximation error is more likely to also lead to less deflection error.

5. Conclusions:

- The effect of parameterization and least square approximation error on isogeometric analysis results of free-form curved beams was considered.
- Implementing “chord length” and “centripetal” parameterizations showed that by increasing the accuracy of approximation, i.e. increasing the number of approximation control points, the accuracy of isogeometric results was also increased.
- Implementing “equally spaced” approximation suggested that increasing the accuracy of approximation did not necessarily lead to more accurate results.
- “Chord length” and “centripetal” approaches that reflect the initial distribution of input points resulted in more accurate results. Therefore, it could not be concluded that use of a linear parameterization would always results in more accurate IGA solutions.
- The authors highly suggest avoiding equally spaced parameterization for IGA. Among chord length and centripetal methods, authors recommend the method which results in a less least square error.

References:

1. Hughes, T.J.R., J.A. Cottrell, and Y. Bazilevs, *Isogeometric analysis: CAD, finite elements, NURBS, exact geometry and mesh refinement*. Computer Methods in Applied Mechanics and Engineering, 2005. **194**(39–41): p. 4135-4195.
2. Hassani, B., A.H. Taheri, and N.Z. Moghaddam, *An improved isogeometrical analysis approach to functionally graded plane elasticity problems*. Applied Mathematical Modelling, 2013. **37**(22): p. 9242-9268.
3. Nagy, A.P., S.T. Ijsselmuiden, and M.M. Abdalla, *Isogeometric design of anisotropic shells: Optimal form and material distribution*. Computer Methods in Applied Mechanics and Engineering, 2013. **264**: p. 145-162.
4. Guo, Y., A.P. Nagy, and Z. Gürdal, *A layerwise theory for laminated composites in the framework of isogeometric analysis*. Composite Structures, 2014. **107**: p. 447-457.
5. Ghaffari Motlagh, Y., et al., *Simulation of laminar and turbulent concentric pipe flows with the isogeometric variational multiscale method*. Computers & Fluids, 2013. **71**: p. 146-155.
6. Yoon, M., S.-H. Ha, and S. Cho, *Isogeometric shape design optimization of heat conduction problems*. International Journal of Heat and Mass Transfer, 2013. **62**: p. 272-285.
7. Shojaee, S., et al., *Free vibration analysis of thin plates by using a NURBS-based isogeometric approach*. Finite Elements in Analysis and Design, 2012. **61**: p. 23-34.
8. Bouclier, R., T. Elguedj, and A. Combescure, *Locking free isogeometric formulations of curved thick beams*. Computer Methods in Applied Mechanics and Engineering, 2012. **245–246**: p. 144-162.
9. Nagy, A.P., M.M. Abdalla, and Z. Gürdal, *Isogeometric sizing and shape optimisation of beam structures*. Computer Methods in Applied Mechanics and Engineering, 2010. **199**(17–20): p. 1216-1230.
10. Cazzani, A., M. Malagu, and E. Turco, *Isogeometric Analysis of Plane-Curved Beams*. Mathematics and Mechanics of Solids, 2014. **1**: p. 1 - 16.
11. Piegl, L. and W. Tiller, *The NURBS Book*. 2 ed. 1996: Springer.
12. Luu, A.-T., N.-I. Kim, and J. Lee, *Isogeometric vibration analysis of free-form Timoshenko curved beams*. Meccanica, 2015. **50**(1): p. 169-187.
13. Kolman, R., *Isogeometric Free Vibration of An Elastic Block*. Engineering MECHANICS, 2012. **19**(4): p. 279 - 291.

14. Cottrell, J.A., et al., *Isogeometric analysis of structural vibrations*. Computer Methods in Applied Mechanics and Engineering, 2006. **195**(41–43): p. 5257-5296.
15. Lipton, S., et al., *Robustness of isogeometric structural discretizations under severe mesh distortion*. Computer Methods in Applied Mechanics and Engineering, 2010. **199**(5–8): p. 357-373.
16. Shojaee, S., et al., *Free vibration and buckling analysis of laminated composite plates using the NURBS-based isogeometric finite element method*. Composite Structures, 2012. **94**(5): p. 1677-1693.
17. Kolman, R., J. Plešek, and M. Okrouhlík, *Complex wavenumber Fourier analysis of the B-spline based finite element method*. Wave Motion, 2014. **51**(2): p. 348-359.
18. Cohen, E., et al., *Analysis-aware modeling: Understanding quality considerations in modeling for isogeometric analysis*. Computer Methods in Applied Mechanics and Engineering, 2010. **199**(5–8): p. 334-356.
19. Hughes, T.J.R., A. Reali, and G. Sangalli, *Duality and unified analysis of discrete approximations in structural dynamics and wave propagation: Comparison of p-method finite elements with k-method NURBS*. Computer Methods in Applied Mechanics and Engineering, 2008. **197**(49–50): p. 4104-4124.
20. Echter, R., B. Oesterle, and M. Bischoff, *A hierarchic family of isogeometric shell finite elements*. Computer Methods in Applied Mechanics and Engineering, 2013. **254**: p. 170-180.
21. Park, H. and K. Kim, *Smooth surface approximation to serial cross-sections*. Computer-Aided Design, 1996. **28**(12): p. 995-1005.