

# An instability of particulate pipe flow

Rouquier, A., Potherat, A. & Pringle, C.

Author post-print (accepted) deposited by Coventry University's Repository

**Original citation & hyperlink:**

Rouquier, A, Potherat, A & Pringle, C 2019, 'An instability of particulate pipe flow', Journal of Fluid Mechanics, vol. 870, pp. 247-265.  
<https://dx.doi.org/10.1017/jfm.2019.264>

DOI 10.1017/jfm.2019.264

ISSN 0022-1120

ESSN 1469-7645

Publisher: Cambridge University Press

**Copyright © and Moral Rights are retained by the author(s) and/ or other copyright owners. A copy can be downloaded for personal non-commercial research or study, without prior permission or charge. This item cannot be reproduced or quoted extensively from without first obtaining permission in writing from the copyright holder(s). The content must not be changed in any way or sold commercially in any format or medium without the formal permission of the copyright holders.**

**This document is the author's post-print version, incorporating any revisions agreed during the peer-review process. Some differences between the published version and this version may remain and you are advised to consult the published version if you wish to cite from it.**

## Instability of particulate pipe flow

Journal:	<i>Journal of Fluid Mechanics</i>
Manuscript ID	JFM-18-S-0472.R3
mss type:	JFM Papers
Date Submitted by the Author:	13-Feb-2019
Complete List of Authors:	Rouquier, Anthony; Coventry University Faculty of Engineering and Computing, Fluid mechanics and flow measurement Potherat, Alban; Coventry University Faculty of Engineering and Computing, Fluid mechanics and flow measurement Pringle, Chris; Coventry University Faculty of Engineering and Computing, Fluid mechanics and flow measurement
Keyword:	Particle/fluid flows < Multiphase and Particle-laden Flows, Instability

SCHOLARONE™  
Manuscripts

# An instability mechanism for particulate pipe flow

Anthony Rouquier, Alban Poth erat and Chris C.T. Pringle

(Received xx; revised xx; accepted xx)

We present linear stability analysis for a simple model of particle-laden pipe flow. The model consists of a continuum approximation for the particles two-way coupled to the fluid velocity field via Stokes drag (Saffman 1962). We extend previous analysis in a channel (Klinkenberg et al. 2011) to allow for the initial distribution of particles to be inhomogeneous in a similar manner to Boronin (2012) and in particular consider the effect of allowing the particles to be preferentially located around one radius in accordance with experimental observations. This simple modification of the problem is enough to alter the stability properties of the flow, and in particular can lead to a linear instability [offering an alternative route to turbulence within this problem](#).

*Keywords:* Particulate flow, shear flow, instability

## 1. Introduction

This paper is concerned with the wide issue of how particles affect the transition to turbulence in a pipe flow. Beside the fundamental interest of this canonical problem, several industrial sectors have seen a growing need to accurately measure flow rates or volume fractions in complex fluid mixtures flowing through pipes. Examples range from the precise determination of the volume fraction of oil in the oil-water-sand-gas mixture that is extracted from offshore wells, to needs in the food processing industry (Ismail et al. 2005), and flows of molten metal carrying impurities during recycling processes (Kolesnikov et al. 2011). Each of these examples requires dedicated flow metering technologies, most of which rely on *a priori* knowledge of the nature of the flow inside the pipe or the duct and in particular whether it is turbulent or not (Wang and Baker 2014). Though none of these examples could satisfactorily be modelled as a single fluid phase carrying one type of particles, the ideal problem of the particulate pipe flow constitutes one of their elementary building blocks. As such it is a good starting point from which to infer the basic mechanisms governing the transition to turbulence.

Adding particles opens a number of possibilities, associated with different physical mechanisms: particles can be buoyant or not, of different sizes and shapes, and also mono- or polydisperse. As a first step in studying the transition to turbulence in particulate pipe flows, we shall focus on the simpler case of neutrally buoyant, monodisperse spherical particles. Whether the effect of particles on the transition to turbulence in general is a stabilising or destabilising one mostly depends on the size and volume fraction of particles. Early experiments on the transition to turbulence in a pipe highlighted a critical volume fraction of particles below which they favoured the transition at a lower Reynolds number. At higher volume fractions than this critical value, by contrast, the effect was reversed (Matas et al. 2003). Recent numerical simulations based on accurate modelling of individual solid particles recovered this phenomenology for pipe flows (Yu et al. 2013) and channel flows (Wang et al. 2018).

The non-trivial nature of the influence of particles is further supported by the numerical study of individual perturbations introduced in a channel: whilst below a critical volume

fraction, particles lower the critical energy beyond which perturbations trigger the transition to turbulence, the transition takes place longer after the perturbation was introduced in the presence of particles if the perturbation took the form of streamwise vortices (Klinkenberg et al. 2013). At high volume fraction, the critical energy was increased. Linear stability analysis in the same configuration provides a hint on the origin of this non-monotonous effect of volume fraction: it reveals the existence of an optimal stabilisation regime due to a maximum in the Stokes drag, when the particle relaxation time (*i.e.* the time for a particle at rest to accelerate to the velocity of the surrounding fluid), coincides with the period of the streamwise oscillation (Klinkenberg et al. 2011).

Single phase pipe flow is governed by the a sole parameter, the nondimensional flow rate or Reynolds number. While for low flow rates the problem remains laminar, it is known to transition to a turbulent regime when the flow rate is increased. This transition poses a classical problem in fluid dynamics as the base (laminar) flow remains linearly stable even at much higher flow rates (Meseguer and Trefethen 2003). The observed turbulence, therefore, must be initiated by finite amplitude disturbances. The inclusion of particles complicates the problem, but also allows for the possibility of entirely new forms of transition.

Adding particles to the pipe flows raises the question of how particles shall be distributed in the pipe, at least in some initial state. While a homogeneous spatial distribution may first come to mind as the simplest possible, neutrally buoyant particles in pipe are known to aggregate near a specific radius greater than 65% of the pipe radius (Segré and Silberberg 1962), that increases slowly with the Reynolds number. The underlying mechanism is driven by the radial variations of the lift force experienced by particles rotating due to the background shear (Repetti and Leonard 1964). The dependence of the aggregation radius (often called the *Segré-Silberberg radius*) on the Reynolds number can be explained by means of asymptotic theory introducing the particle Reynolds number as the small parameter in the expression of the lift force (Schonberg and Hinch 1989; Hogg 1994; Asmolov 1999).

While this dependence is well recovered in experiments at moderate Reynolds numbers, a second equilibrium position appears at a lower radius (Matas et al. 2004a) for  $Re > 600$ . Although this transition coincides with a change in the concavity of the radial profile of the lift force, the detailed mechanisms driving this effect remain to be found, and the authors left open the question of whether this equilibrium is stable or not. Han et al. (1999) note that the main effect of particle concentration on this phenomenology is to disperse the particle distribution around the equilibrium annulus. However, higher concentrations can also lead to the formation of trains of particles aligned with the stream Matas et al. (2004b). In the context of the transition to turbulence, the natural tendency of particles to aggregate around specific radii at different Reynolds numbers raises the question of the critical Reynolds at which these annuli of particles break-up and whether this break-up plays any role in the triggering of turbulence.

The variety of phenomena observed in particulate flows illustrates the numerous aspects of its transition to turbulence (starting with the difficulty of even distinguishing turbulent fluctuations from particle-induced ones). As such, our purpose in the context of the pipe flow shall be limited to the first step of investigating the linear stability of the particulate pipe flow to infinitesimal perturbations. Tackling this question requires the choice of a strategy to model particles (see Maxey (2017) for a review on current methods). While the most accurate method consists of modelling particles as individual solids (Uhlmann 2005), this approach is the most computationally expensive and may not allow for consideration of a long enough pipe to cover long-wave instabilities. Cost-

effective alternatives exist based on individual point-particle model (Ferrante and Elghobashi 2003; Squires and Eaton 1991) that can incorporate various levels of complexity (one or two-way interaction, rotation of particles, particle interaction etc...). Another approach for the description of particulate flow is the averaging method, defining a suitable weighting function depending on the distance to the particle so that the particles variables can be expressed through a continuous function while the macro-scale properties of the particulate flow are preserved (Jackson 2000; Zhu and Yu 2002). This allows, ideally, to simplify the problem while conserving all relevant information. The averaged system of equations is however not closed, so that a closure model is necessary, a wide array of closure problems have been developed to account for the flow characteristics and the nature of the problem (Elghobashi 1994; Jackson 2000). However, in the spirit of simplicity of this first step, we shall follow the even simpler option of modelling particles as a second fluid phase whose interaction with the fluid phase is limited to the drag forces that each phase exerts on the other (Saffman 1962; Klinkenberg et al. 2011; Boronin 2012). Within this framework we address the questions of whether particulate pipe flow is stable for either homogeneous or inhomogeneous distributions of particles; which distributions of particles most adversely effect stability; and whether the distributions are realistic in comparison with experiments. The paper is organised as follow: in section 2, we shall introduce the model and the assumptions it relies on as well as the numerical methods used. We shall then start by considering the simplest case of a homogeneous particle distribution in the pipe (section 3), before studying the linear stability of particles normally distributed around a radius, paying particular attention on how the standard deviation and the value of this radius influence the flow stability (section 4). We then compare our findings to the experiments of Segré and Silberberg (1962) and Matas et al. (2004a) (section 5), where localisation was observed before discussing the possible implications of our results for the transition to turbulence (section 6).

## 2. Model and governing equations

In order to avoid the heavy computational cost incurred when accounting for particles as individual solids, we describe the particulate flow using the “two-fluid” model first derived by Saffman (1962). Particles are described as a continuous field rather than as discrete entities with a finite size. This model takes into account neither effects due to particle-particle interactions such as collisions or clustering, nor the deflection of the flow around the particles. It is therefore valid for lower concentrations and in the limit where particles are sufficiently smaller than the characteristic scale of the flow.

We consider the flow of a fluid (density  $\rho_f$ , dynamic viscosity  $\mu$ ) through a straight pipe with constant circular cross-section of radius  $r_0$  and driven by a constant pressure gradient. The fluid carries particles of radius  $a$ . To describe the problem we adopt the model proposed by Saffman (1962) and studied by Klinkenberg et al. (2011) and Boronin (2012) in the context of channel flow, and Boronin and Osipov (2014) in a boundary layer.

The particles are considered as a continuous field with spatially varying number density  $N$ , their motion coupled to the fluid solely via Stokes drag,  $6\pi a\mu(\mathbf{u}_p - \mathbf{u})$ . Other forces commonly considered (virtual mass, buoyancy, the Magnus force, the Saffman force and the Basset history) are all quadratic or above in particle radius and so can in general be neglected with the exception of the Saffman force which may become significant if the background shear is large rather than  $O(1)$  as here (Boronin and Osipov 2008). Jackson (2000) gives more details on the relative importance of the forces affecting the particles, it is argued that in the framework of an averaging method, the forces can be

4

partitioned between the buoyancy forces and other forces, and that the pressure term needs to be modified to account for the pressure term. The Stokes drag however does not require a pressure compensation. In the limit of very small particles buoyancy and gravity can be neglected as it scales with  $a^3$  whereas the Stokes drag scales with  $a$  and dominates all other forces. Consequently, in the absence of buoyancy and gravity forces there is no need for a modification of the pressure gradient. In this context the model used in this work can be seen as a simplified version of Jackson's approach in the limit of small particles where the partition of forces reduces to the part that does not include buoyancy (nor gravity). The continuous model assumes small, heavy particles in a dilute suspension. While the model is ill-suited to the study of turbulent flows since collisions and clustering are not taken into account, it retains validity for laminar flows and their perturbation and has been previously used to study the stability of shear flows (Klinkenberg et al. 2011; Boronin and Osipov 2008; Boffetta et al. 2007). Details of a scaling argument outlining the conditions in which this approach is consistent are given in appendix A.

We take coordinates  $(r, \theta, z)$  with respective velocities  $\mathbf{u} = (u, v, w)$ . Where relevant, we distinguish those quantities associated with the particles from those associated with the fluid by means of a subscript  $p$ . After nondimensionalising by the centreline velocity,  $U_0$ , the pipe radius  $r_0$  and the fluid density  $\rho_f$  we have the equations

$$\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u} = -\nabla p + \frac{1}{Re} \nabla^2 \mathbf{u} + \frac{fN}{SRe} (\mathbf{u}_p - \mathbf{u}), \quad (2.1)$$

$$\partial_t \mathbf{u}_p + (\mathbf{u}_p \cdot \nabla) \mathbf{u}_p = \frac{1}{SRe} (\mathbf{u} - \mathbf{u}_p), \quad (2.2)$$

$$\partial_t N = -\nabla \cdot (N \mathbf{u}_p), \quad (2.3)$$

$$\nabla \cdot \mathbf{u} = 0. \quad (2.4)$$

Non-dimensional governing parameters are the Reynolds number  $Re = U_0 r_0 \rho_f / \mu$ , the dimensionless relaxation time  $S = 2a^2 \rho_p / 9r_0^2 \rho_f$  and mass concentration  $f = m_p / m_f$ , the ratio between the particles and fluid mass over the entire pipe.  $N$  is normalised so that  $\int N dV = 1$ , for a given position  $\mathbf{x}$ ,  $N(\mathbf{x}) > 1$  implies than the local concentration of particles is higher than the pipe average,  $N(\mathbf{x}) < 1$  implies the opposite. These equations are augmented with an impermeable and no-slip boundary condition for the fluid

$$\mathbf{u}|_{r=1} = 0 \quad (2.5)$$

and a no penetration boundary condition for the radial velocity of the particles

$$u_p|_{r=1} = 0. \quad (2.6)$$

The stability of the flow is studied through the addition of a small perturbation to the steady solution ( $\mathbf{U} = \mathbf{U}_p = (1 - r^2)\hat{\mathbf{z}}$ )

$$\mathbf{u} = \mathbf{U} + \mathbf{u}', \quad \mathbf{u}_p = \mathbf{U} + \mathbf{u}_p', \quad p = P + p', \quad N = N_0 + N'.$$

Linearising equations (2.1) - (2.4) around this base state and dropping the primes gives

$$\partial_t \mathbf{u} + \mathbf{U} \cdot \nabla \mathbf{u} + \mathbf{u} \cdot \nabla \mathbf{U} = -\nabla p + \frac{1}{Re} \nabla^2 \mathbf{u} + \frac{fN_0}{SRe} (\mathbf{u}_p - \mathbf{u}), \quad (2.7)$$

$$\partial_t \mathbf{u}_p + \mathbf{u}_p \cdot \nabla \mathbf{U} + \mathbf{U} \cdot \nabla \mathbf{u}_p = \frac{1}{SRe} (\mathbf{u} - \mathbf{u}_p), \quad (2.8)$$

$$\partial_t N = -N_0 \nabla \cdot \mathbf{u}_p - \mathbf{u}_p \cdot \nabla N_0 - \mathbf{U} \cdot \nabla N, \quad (2.9)$$

$$\nabla \cdot \mathbf{u} = 0. \quad (2.10)$$

The boundary conditions for the perturbation are the same as for the full flow. We note that equation (2.7) is only dependent on  $N_0$ , so that equation (2.9) is decoupled from the rest of the problem.

### 2.1. Numerical method

Given the streamwise and azimuthal invariance of the problem, we consider perturbations of the form

$$g(r, \theta, z, t) = \sum_{n=0}^N g_n T_n(r) \exp\{i((\alpha z + m\theta - \omega t))\}, \quad (2.11)$$

$T_n$  is the  $n^{\text{th}}$  Chebyshev polynomial,  $\alpha$  and  $m$  are the streamwise and azimuthal wavenumbers respectively, and  $g$  is any of the fields of interest. Substituting this into equations (2.7)-(2.10) and boundary conditions (2.5) and (2.6) leads, after collocation, to a generalised eigenvalue problem

$$i\omega \mathbf{A}\phi = \mathbf{B}\phi \quad (2.12)$$

which can be solved using LAPACK for the eigenvalue  $\omega$  and coefficients  $g_n$ .

The code was validated for the case of non-particulate pipe flow against Meseguer and Trefethen (2003) and for particulate flow in a channel against Klinkenberg et al. (2011). With 100 Chebyshev polynomials per field, the relative error remains below  $10^{-7}$  for the various tested combinations of values of  $\alpha \leq 1$ ,  $m \leq 1$  and  $Re < 10^4$ . With the addition of particles, the precision dropped to  $10^{-6}$  for  $S = 10^{-3}$  and down to  $10^{-5}$  for  $S = 0.1$ , with as many as 200 polynomials.

To further test all cases, we created a linear simulation code based on the non-particulate DNS code of Willis (2017). This code uses Fourier-modes in the axial and azimuthal directions, and finite differences radially. This allowed us to check the leading eigenvalue of each different Fourier mode for any given configuration. Accuracy between the methods was confirmed to be within 1%.

## 3. Uniform particle distribution

Previous work on this model (Klinkenberg et al. 2011) has made the assumption that the initial distribution of particles is uniform throughout the domain. This simplifies the governing equations as  $\nabla N_0 = 0$ , removing a term from equation (2.9). We consider values of  $f$  ranging from 0 to 0.1, since the particles considered are much heavier than the fluid, this implies that the maximal volume concentration is below 1% so that the particulate flow is dilute. The values of  $S$  used in this work range from  $S = 10^{-4}$  to  $S = 10^{-1}$ , assuming density ratio between particles and fluid  $\rho_p/\rho_f$  to be a 1600 (corresponding to the ratio between air and sand) as an [example](#). This corresponds to particle / pipe ratio ranging from approximately  $5 \times 10^{-4}$  to  $1.5 \times 10^{-2}$ , with the majority of the results obtained for  $S = 10^{-3}$  corresponding to a size ratio  $a \approx 1.5 \times 10^{-3}$ . The ranges of volume ratio and particles size considered in this work fall within the assumptions of dilute suspension with small particles made by the model.

### 3.1. Modified eigenvalue spectrum

The addition of uniformly distributed particles does not lead to large changes in the stability problem of pipe flow. Figure 1 compares the eigenvalue spectra of the particulate and non-particulate problems for one typical case. The overall shape of the

6

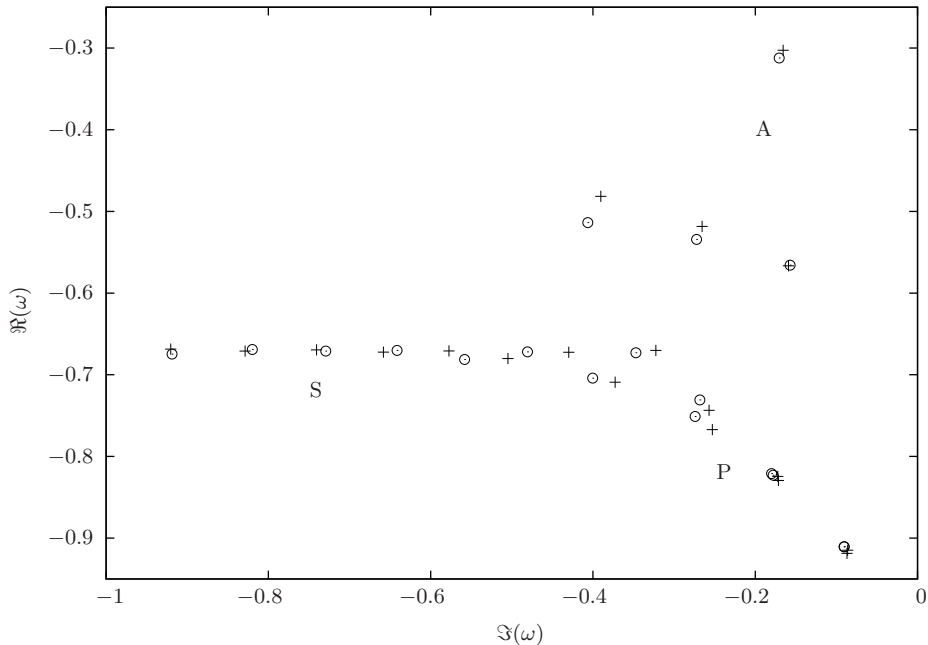


FIGURE 1. Eigenvalue spectra for the generalised eigenvalue problem (2.12) for  $Re = 1000$ ,  $S = 10^{-3}$ ,  $\alpha = 1$ ,  $f = 0.1$ . The classical single phase eigenvalues are marked ‘+’ while the eigenvalues for the particulate flow are marked ‘o’. The three branches of the eigenspectrum are labelled  $A$ ,  $P$  and  $S$  in accordance with the notation of Mack (1976).

spectrum is qualitatively unchanged, maintaining three branches, the location of the leading eigenvalue being at the tip of the ‘P’-branch (Mack 1976) .

We quantify the change in the eigenvalue spectrum by tracking the normalised growth rate

$$\lambda'_p(Re, \alpha, m, f, S) = \frac{\Im\{\omega_p(Re, \alpha, m, f, S)\}}{\Im\{\omega_f(Re, \alpha, m)\}}, \quad (3.1)$$

where  $\omega_p$  and  $\omega_f$  are the leading eigenvalues in the particulate and non-particulate problems. From the definition (2.11) the growth rate is the imaginary part of the eigenvalue. As the pure-fluid problem is linearly stable (meaning  $\Im\{\omega_f\}$  is always negative),  $\lambda'_p > 1$  is indicative of the particles stabilising the flow while  $\lambda'_p < 1$  corresponds to them destabilising the flow. The critical value  $\lambda'_p = 0$  would indicate the particulate problem crossing the neutral stability threshold, however this was never observed for any parameter combination with a uniform distribution of particles.

Parameter space is simplified by the observation that the role of  $f$ , the concentration, seems to be secondary. Figure 2 shows  $\lambda'_p$  as a function of  $f$  and in all cases the concentration serves simply to amplify the underlying result almost linearly. Consequently, in the analysis of the uniform particle distribution problem we fix  $f = 0.01$  in the knowledge that trends could be exacerbated further by increasing the quantity.

### 3.2. Influence of the dimensionless relaxation time

The dimensionless relaxation time  $S$  reflects the inertia, and hence size of the particles. It is most easily understood in terms of its limiting values. In the ballistic limit,  $S \rightarrow \infty$  the large particles become independent of the flow. In the other extreme,  $S \rightarrow 0$ , the particles are passive tracers. In neither case do the particles unduly influence the flow. In



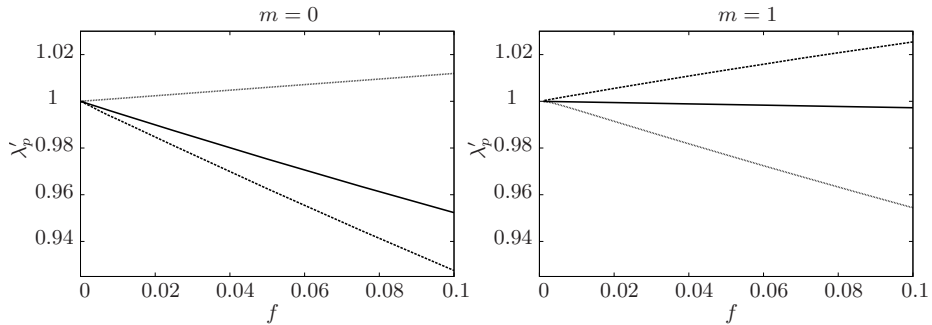


FIGURE 2. Normalised growth rate,  $\lambda'_p$ , as a function of  $f$  for  $S = 10^{-3}$  (line),  $S = 10^{-2}$  (dots),  $S = 10^{-1}$  (dashed) with  $Re = 1000$ ,  $\alpha = 1$ . In all cases examined,  $\lambda'_p$  is very close to being proportional to  $f$ , suggesting that this parameter simply serves to amplify the underlying result linearly.

the former, they fully decouple and one recovers the pure fluid results. In the latter case, the particles act as one with the fluid, only changing the effective density of the total suspension. This rescales the effective Reynolds number as  $Re' = (1 + f)Re$  (Klinkenberg et al. 2011).

Between these two extreme limits, non-trivial changes occur to the leading eigenvalue. For  $m = 0$  the behaviour is readily described. In figure 3 (left),  $\lambda'_p$  smoothly varies from less stable ( $\lambda'_p \simeq 0.995$  for  $S = 0$ ) to unaffected ( $\lambda'_p = 1$  for  $S \rightarrow \infty$ ), it does not do so monotonically. In particular it initially *decreases* the stability of the flow, then *over stabilises* the flow past the level of a pure fluid before it subsides to the particle-free result. This occurs for all  $Re$  and  $\alpha$  considered.

This result is clarified further by fixing  $S$  and varying  $Re$ , as in figure 4. For low values of  $S$  (here  $10^{-3}$ ) the stability remains effectively unchanged at these Reynolds numbers with the particles remaining as passive tracers. For large [dimensionless relaxation times](#) ( $S = 0.1$ ) there is some variation of  $\lambda'_p$  with  $Re$ , but it is relatively benign as the particles decouple from the flow. It is only at intermediate [relaxation times](#) ( $S = 0.01$ ) that we see nontrivial behaviour for moderate Reynolds number.

The case of  $m = 1$  is more complex (figure 3, bottom). The limiting cases of very large or very small  $S$  still behave as expected (though now even smaller values of  $S$  must be considered to recover the limiting case) but the intermediate behaviour is more involved. The particles can either stabilise or destabilise the flow depending on the precise parameters chosen. For a given  $Re$  and  $\alpha$ , increasing  $S$  can lead to the flow switching between one and the other.

We conclude this section by noting that the behaviour of the relative growthrate for  $m = 0$  suggests we may be able to isolate a simple scaling law. To identify the region in which particles have the most significant effect on the flow, we define  $S^m$  to be the [dimensionless relaxation time](#) for which the flow is most destabilised and  $\lambda'_p$  is minimised. Least squares fitting suggests a clear scaling of  $S^m$  with both  $Re$  and  $\alpha$  as shown in figure 5. No such scaling was observed for  $m = 1$ .

While the influence of particles is somewhat unsurprisingly amplified at larger Reynolds number, it mostly concerns longer wavelengths and remains limited in amplitude in all cases (we never found an increase of growth rate more than 2% higher than the single fluid case).

8

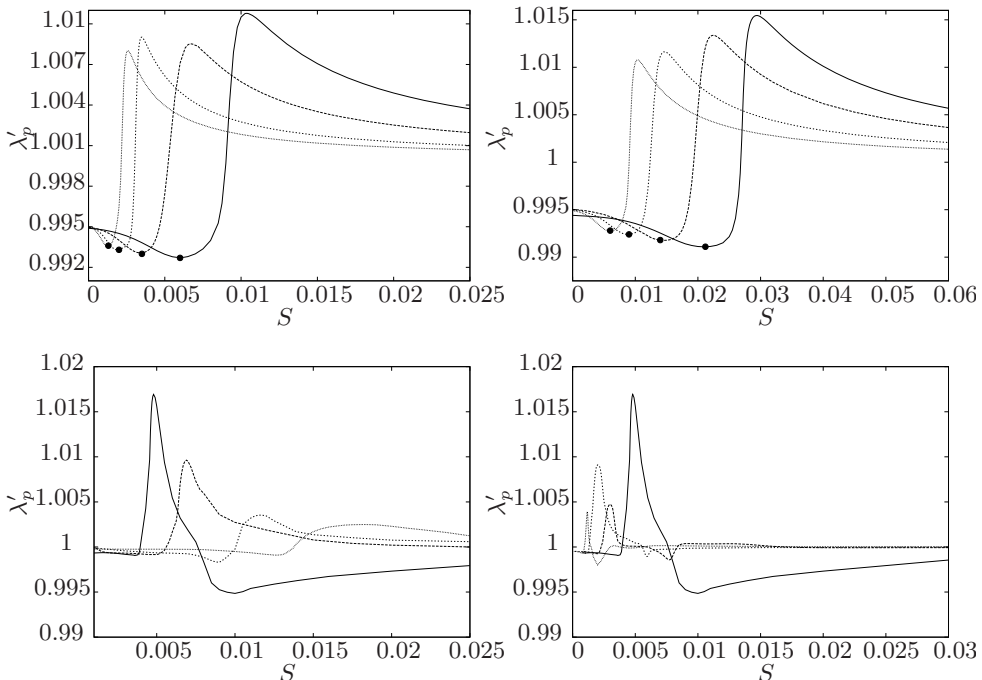


FIGURE 3. Normalised leading growth rate,  $\lambda'_p$ , as a function of  $S$  while keeping  $f = 0.01$ . The top row is  $m = 0$ , the bottom is  $m = 1$ . In all cases we see that for low [dimensionless relaxation times](#) we recover the result of a single fluid, albeit of larger effective density. For large  $S$  the particulate eigenvalue tends towards that of the non-particulate case and hence  $\lambda'_p \rightarrow 1$ . For  $m = 0$ , in each case there is a clearly defined  $S^m$  (marked  $\bullet$ ) for which  $\lambda'_p$  is minimised and the flow is least stable. **Left:** Fixed  $\alpha = 2$  and  $Re = 1000$  (line), 3000 (dashed), 10000 (short dashed), 20000 (dots). There is no qualitative change in behaviour, but the [value of  \$S\$](#)  for which the effect of the particles changes from destabilising to stabilising reduces with  $Re$ . **Right:** Fixed  $Re = 1000$  and  $\alpha = 0.2$  (line), 0.4 (dashed), 1 (short dashed), 2 (dots). Again there is no qualitative change with  $\alpha$  but the region of  $S$  where the effect changes from destabilising to stabilising decreases with  $\alpha$ .

#### 4. Nonuniform particle distributions

There is nothing inherent in the model which requires the initial distribution of particles to be uniform (Boronin 2012). Relaxing this assumption allows us to consider a more general problem. As discussed in the introduction, experimental work suggests that for low to moderate Reynolds numbers [neutrally buoyant](#) particles congregate at a particular radius forming an annulus from their distribution centred in the region  $r = 0.5 - 0.8$ . In this section we capture the essence of this by considering distributions of the form

$$N_0(r) = \tilde{N} \exp\{-(r - r_d)^2/2\sigma^2\}, \quad (4.1)$$

with  $\tilde{N}$  chosen such that  $\int_0^1 N_0(r) dr = 1$ .

Throughout this section we keep  $S = 10^{-3}$ ,  $f = 0.1$  and  $m = 1$  fixed to reduce the space of parameters being considered. The first two of these is consistent with experimentally realisable parameters (see section 5) while  $m = 1$  is the only azimuthal wavenumber for which we observed instability.

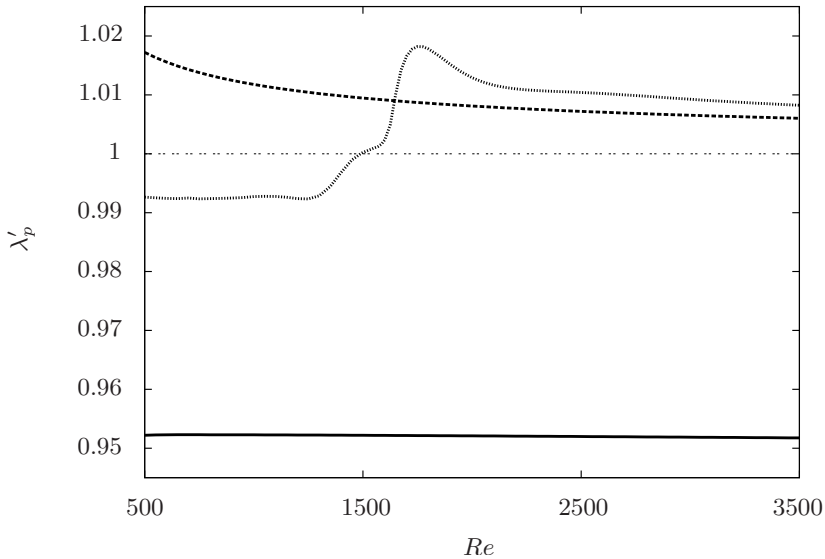


FIGURE 4. Normalised leading growth rate,  $\lambda'_p$  for  $m = 0$  as a function of  $Re$ , for  $S = 10^{-3}$  (line),  $S = 10^{-2}$  (dots),  $S = 10^{-1}$  (dashed) with  $f = 0.01$ ,  $\alpha = 1$ . While the largest and smallest values of  $S$  present straightforward, monotonic behaviour, the intermediate value  $S = 0.01$  presents non-trivial variation with the Reynolds number.

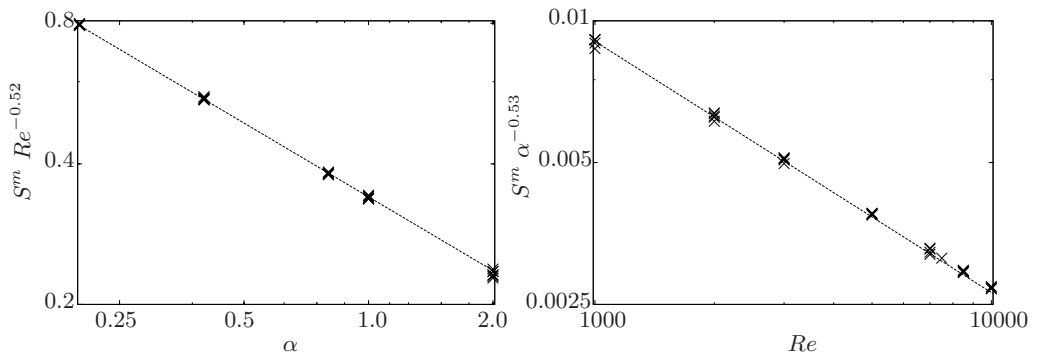


FIGURE 5. Variations of  $S^m$  with  $Re$  and  $\alpha$ . The data can be collapsed down on to a single line by using an appropriate rescaling. **Left:**  $S^m Re^{-0.52}$  (exponent given to two significant figures) as a function of  $\alpha$ . The collapsing of the data onto close to a single line suggests  $S^m \propto Re^{0.52}$ . **Right:**  $S^m \alpha^{-0.53}$  as a function of  $Re$ . The data again collapses onto a single line, though not as cleanly as for the scaling in  $Re$ . Nonetheless, this suggests  $S^m \propto \alpha^{-0.53}$ .

#### 4.1. The onset of instability

As soon as the assumption of uniform particle distribution is relaxed we see a linear instability occurring. Figure 6 shows the leading eigenvalues for a localised distribution of particles compared with the uniform distribution result. Whereas the latter of these remains stable for all  $Re$ , the non-uniform distribution is unstable. Of particular note is that we see instability for *moderate* Reynolds number, but *not* for either high or low  $Re$ . This initially surprising observation that the flow re-stabilises as  $Re$  increases is a recurrent observation. For very large  $Re$ , there is no coupling between the fields and everything is stable. For low  $Re$ , viscous diffusion dominates and imposes stability. Only in the middle is instability possible.

For higher  $Re$ , after the flow has restabilised we observe a switching of the leading

10

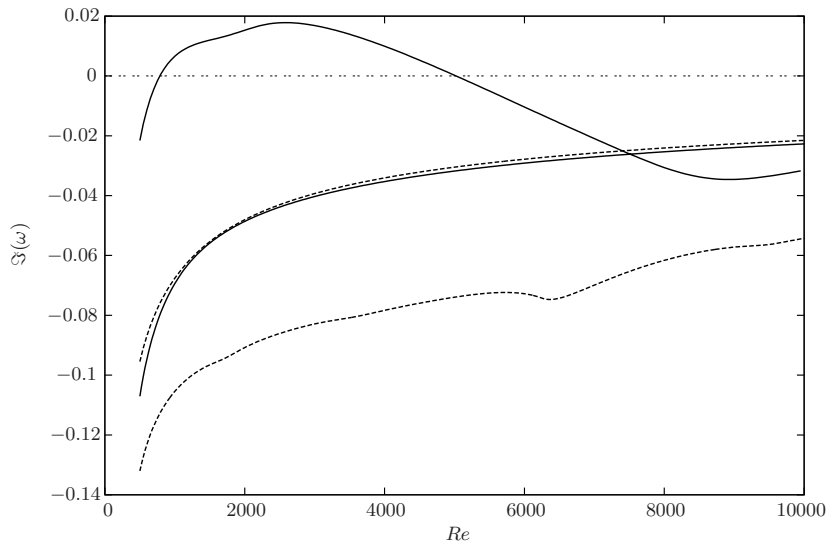


FIGURE 6. The leading eigenvalues for uniform (dashed) and non-uniform particle distributions, centred at  $r = 0.6$  (solid). The uniform distribution is stable for all  $Re$ , but the non-uniform distribution is unstable for a range of  $Re$ . For higher  $Re$  the leading eigenmode switches between A and P branches for the non-uniform distributions at  $Re \simeq 7500$ .

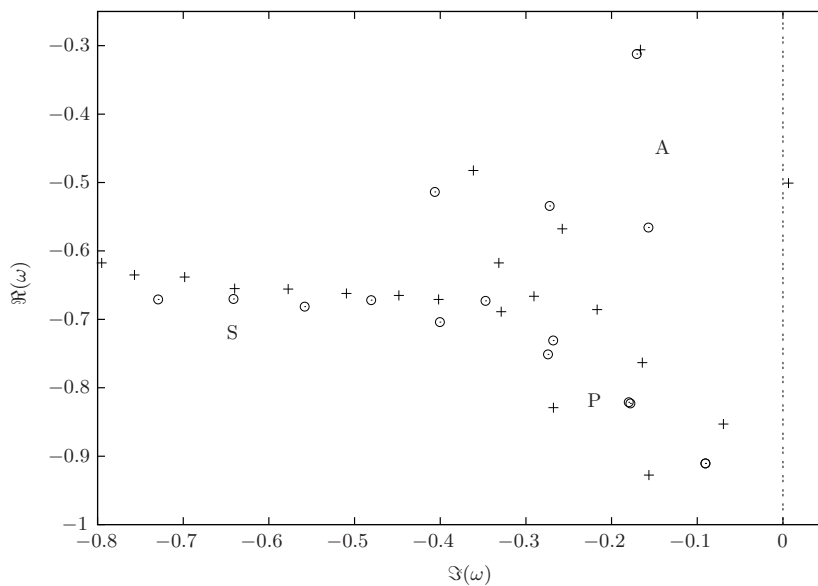


FIGURE 7. Eigenvalue spectra for the non-particulate ( $\circ$ ) and particulate cases ( $+$ ). In both cases  $Re = 1000$ ,  $\alpha = 1$  and  $m = 1$  while the particles were non-uniformly distributed with  $f = 0.1$ ,  $r_d = 0.6$  and  $\sigma = 0.1$ . In the non-uniformly distributed case the spectrum becomes unstable (circled eigenvalue)

eigenmode (at around  $Re = 6000 - 8000$ ), after which the dominant eigenmode appears to be the same as for the uniform problem. Closer examination of the eigenvalue spectrum (figure 7) reveals that for an unstable configuration, the leading eigenvalue is now in the A-branch of the spectrum, rather than the P-branch as in the case of both the non-particulate and uniformly distributed problems.

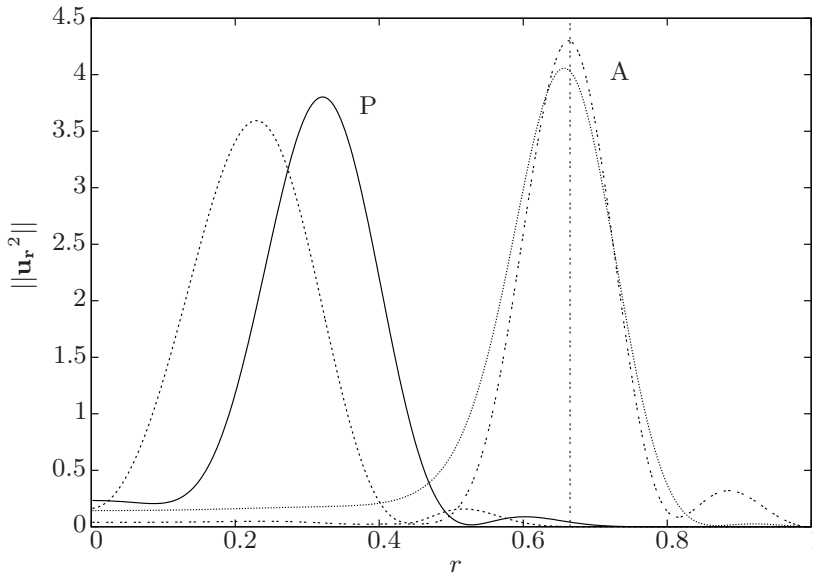


FIGURE 8. The distribution of the fluid energy in the leading eigenmodes. The two that peak on the left are the leading P branch modes for the non-particulate (solid line) and particulate case (dashed). The leading A modes peak on the right with the non-particulate case being double-dashed and the particulate profile dotted. For the particulate case the particles are non-uniformly distributed with  $Re = 1000$ ,  $m = 1$ ,  $f = 0.1$ ,  $S = 10^{-3}$ ,  $r_d = 0.7$  and  $\sigma = 0.1$ . The vertical line is at  $r_d^* = 0.666$ .

The reason for the switching of branches becomes clear as soon as we examine the eigenmodes associated with the two eigenvalues. In figure 8 the leading eigenmodes of the two branches are plotted. The overall shape is relatively insensitive to the distribution of particles, but the modes of the two branches are primarily active in different parts of the pipe. For the P-branch, the eigenmode is localised to a relatively central part of the domain (centred at  $r \approx 0.3$ ), while the A-branch mode is located nearer the edge of the pipe ( $r \approx 0.7$ ). It is unsurprising that when the particle distribution is centred near this outer location, these are the eigenmodes that are primarily excited.

As well as only being unstable for a finite range of  $Re$ , the flow is also only unstable for a finite range of  $\alpha$  (figure 9). For both small and large wavenumber disturbances the flow is stable. The latter is to be expected due to the stabilising influence of viscosity, but it is important to note the instability exists at very moderate wave numbers for which the model is expected to be valid.

#### 4.2. Effect of the radial distribution of particles

The exact location where the particle annulus ( $r_d$ ) is centred, and how sharply the distribution peaks around this location, plays an important role in determining whether the flow becomes unstable or not. By searching over  $\alpha$  we can trace out neutral stability contours in  $Re - r_d$  space for differing values  $\sigma$  (figure 10, upper). The enclosed regions are unstable and we see that all the contours are indeed closed. The fact that there is a minimum/maximum value of  $Re$  for which the flow is unstable is consistent with our earlier observations, while the fact that there are bounds on the value of  $r_d$  supports the idea of needing to excite the P-branch in order to destabilise the flow. We note that for all values of  $\sigma$ , the curves are concentric and the broadest range of unstable  $Re$  occurs when  $r_d$  is in the region  $0.6 - 0.7$ .

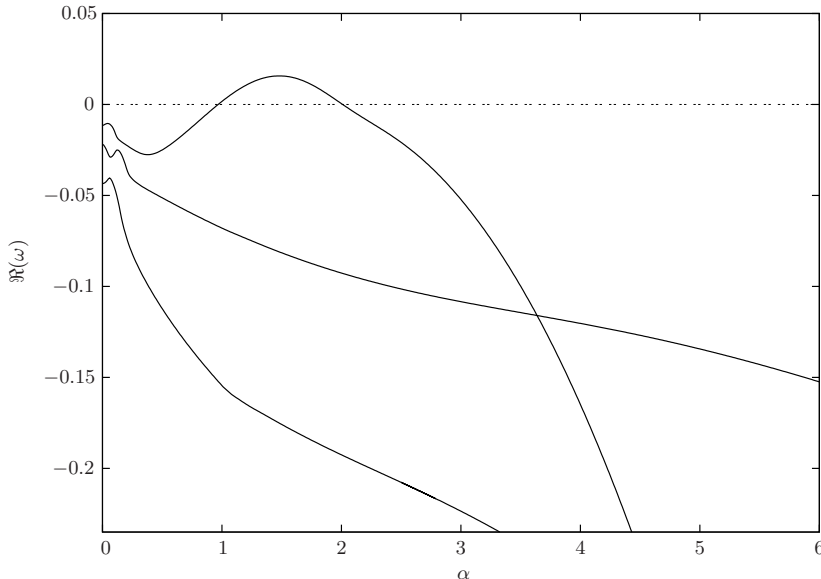


FIGURE 9. The three leading growth rates for the case  $Re = 1000$ ,  $m = 1$ ,  $f = 0.1$ ,  $S = 10^{-3}$ ,  $r_d = 0.65$  and  $\sigma = 0.1$ . Instability ( $\Im\{\omega\} > 0$ ) only occurs for a finite range of  $\alpha$ , with the flow being stable to both long and short wavelength disturbances.

---

$Re$	$S$	$\Im\{\omega\}$		
		particle free	discontinuous	continuous
67	$2.743 \times 10^{-3}$	-0.58409	-0.56033	-0.55828
350	$2.743 \times 10^{-3}$	-0.14605	-0.16606	-0.17752
1000	$7.689 \times 10^{-4}$	-0.091143	-0.10480	-0.10635
1650	$7.689 \times 10^{-4}$	-0.074771	-0.094478	-0.099083

---

TABLE 1. Comparison of leading eigenvalues for the linear stability problem obtained in the cases of no particles, with particles distributions experimentally found by Matas et al. (2004a) (see figure 11), and with particles distributed with closest Gaussian fits to the experimental data (the parameters given in figure 11). In each case the eigenvalues are given for  $m = 1$  and  $\alpha = 1$ .

Next, we track the maximum and minimum values of  $r_d$  for which instability exists in figure 10 (lower). By doing so, we arrive at a minimum degree of localisation required to trigger instability, corresponding to  $\sigma^* = 0.111$ , for which the particle distribution must be centred at  $r_d^* = 0.666$ .

## 5. Relevance to experimental configurations

Matas et al. (2004a) experimentally explores the effect of adding [neutrally buoyant](#) particles to pipe flow. As with other experimental work they report the clustering of particles at preferential radii that motivates this study but they do not report evidence of a linear instability. In this section we analyse the configurations observed by Matas et al. and show that our numerical results are consistent with the experiments - that is that we find the configurations to be linearly stable.

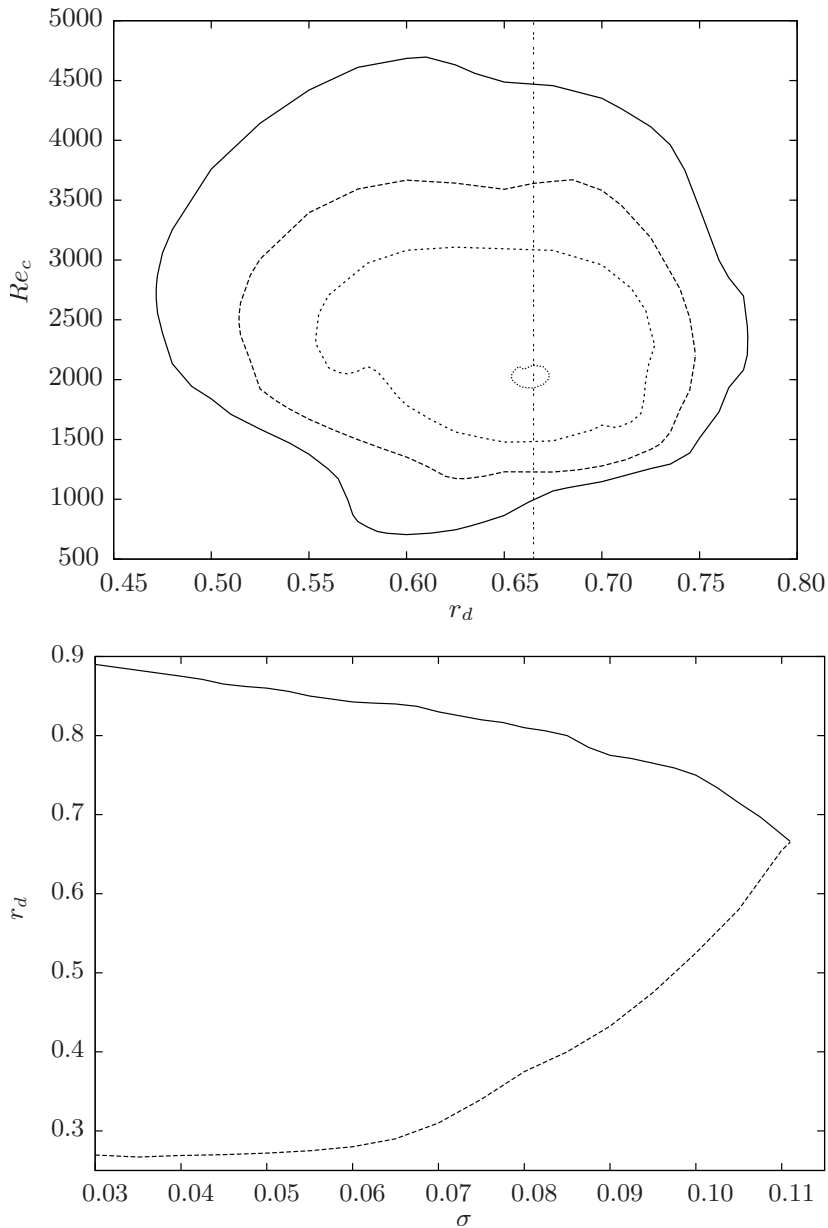


FIGURE 10. **Upper:** Contours of neutral stability in  $Re - r_d$  space for values of  $\sigma = 0.110, 0.105, 0.100$  and  $0.095$  from innermost to outermost. In each case, the enclosed region is the unstable region. That all the contours are closed indicates that there is a maximum/minimum value of both  $Re$  and  $r_d$  for which flow is unstable. **Lower:** The maximum (solid)/minimum (dashed) values of  $r_d$  for which the flow becomes unstable as  $\sigma$  is varied, searching across all  $Re$ . There is a maximum value of  $\sigma$  beyond which instability is not possible.

In the experimental work, four configurations of particles are explicitly given (figure 11) corresponding to  $Re = 67, 350, 1000$  and  $1650$  (left to right, top to bottom). At low  $Re$  the particles all cluster at a single radius consistent with Segré and Silberberg (1962). As  $Re$  is increased, two preferential radii emerge and coexist. We capture these distributions within the linear stability analysis with two approaches. First, we fit either

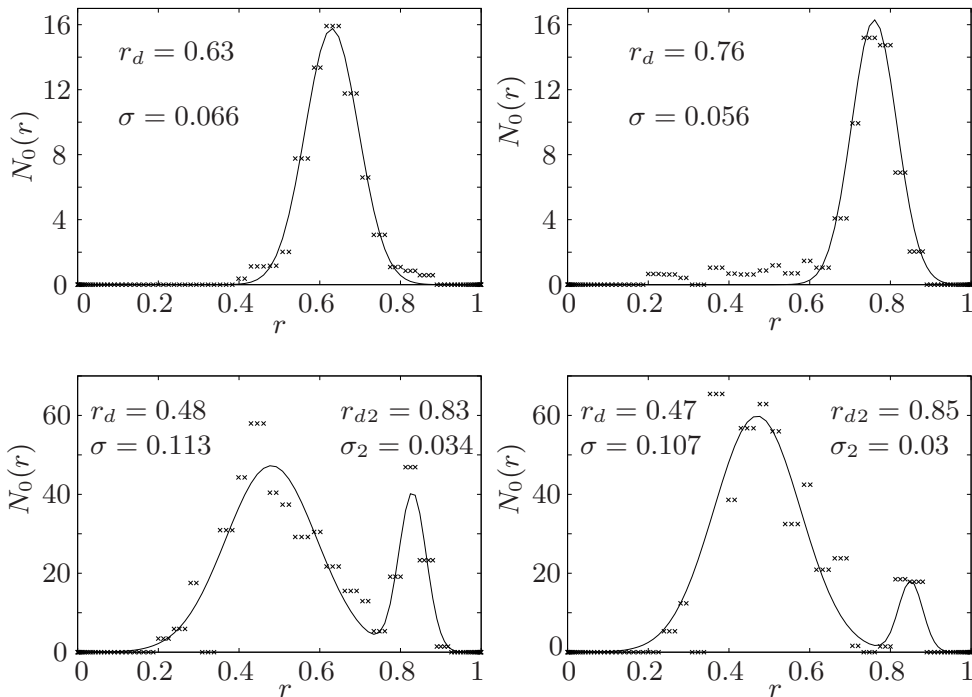


FIGURE 11. Particles concentration as a function of the radius. The crosses show the experimental results of Matas et al. (2004a) while the lines are our fitted distributions. For the top row ( $Re = 67$  (left) and  $Re = 350$  (right)) a single Gaussian was fitted for each case, centred at  $r_d$  and of width  $\sigma$ . For the bottom row ( $Re = 1000$  (left) and  $Re = 1650$  (right)) each set of data was fitted with the sum of two Gaussians of the given locations and widths.

one or two Gaussian distributions through the data using least squares. These fits and the corresponding fitting parameters are those given in figure 11. Secondly, we use the raw data to give a discontinuous distribution with the  $N_0(r)$  being taken as constant between data points.

In table 1 we give the growth rates of the leading eigenvalues for non-particulate flow, particles distributed continuously and particles distributed discontinuously for the different configurations reported by Matas et al.. For  $Re = 67$  both distributions of particles reduce the stability of the flow, but not so far as to make it unstable. For the higher values of  $Re$ , the particles in fact stabilise the flow further. These effects apply for both the Gaussian and discontinuous particle distributions and all growth rates agree to within at most 7%, much less than the discrepancy with the non-particulate case. We conclude that within the set of cases experimentally studied, our numerical results are fully consistent with the observations.

## 6. Conclusions and discussion

We have presented a very simple model for particulate pipe flow. Although this model has been examined before in plane shear flow (Saffman 1962; Klinkenberg et al. 2011; Boronin 2012), without the addition of complexity to the model the flow has always remained stable. Here this is observed for pipe flow too when the particles are distributed homogeneously throughout the pipe. We are able to track the curves in parameter space



for which the flow becomes most effected by the presence of particles, but it does always remain stable, [as for non-particulate pipe flow](#).

Relaxing the assumption of uniformly distributed particles, and allowing for the experimentally observed situation of particles arranged preferentially in an annulus is sufficient to induce linear instability in the flow for certain ranges of parameter. In particular, the flow is only ever unstable for intermediate Reynolds numbers, restabilising as  $Re$  is increased further. This intermediate regime is sandwiched between low  $Re$  flows dominated by viscous diffusion and high  $Re$  flows where the two phases decouple. The instability also only exists at intermediate axial wavenumbers. This avoids both the small length scale disturbances which violate the assumptions of the model and also the large (axial) scale disturbances which must test any assumption of axial independence of the base state.

The linear instability appears strongest when the annulus of particles is centred at  $r_d \approx 0.65$  both in terms of this being the location where the smallest degree of localisation is needed for instability and being closely correlated with the widest band of unstable  $Re$  for stronger localisation. This is particularly important as experimental work suggests that [neutrally buoyant](#) particles naturally congregate at a similar radii. The experimental work done to date on transitional particulate pipe flow (Matas et al. 2003, 2004a) has all been within the region of parameter space that this study has found to be linearly stable. Hence our results are entirely consistent with these experimental flows being found stable.

That linear instability is possible even within such a simple framework highlights the complexities of the problem and reveals that very different transition scenarios can be at play within the broader problem of particulate pipe flow. There is already evidence in other problems that particles being distributed non-uniformly has a greater effect on the stability of shear flows (Boronin 2012; Boronin and Osipov 2014; Wang et al. 2018) and most recently that if in addition to this gravity is included, then for vertical channel flow it can entirely destabilise the problem (Boronin and Osipov 2018).

We do not submit this as a full explanation for the transition problem not least because it is possible that some of the excluded physics has a stabilising effect on the flow. In particular, the inertial mechanisms driving the particles to form into an annulus could be expected to act as a stabilising influence. These forces are weak in the case of small particles, but if the flow as a whole is linearly stable they would have time to effect the distribution. [Instead we highlight that a new mechanism for triggering instability exist in the presence of non-uniformly distributed particles](#). The formation of an annulus of particles could then be a key step in the onset of turbulence for certain, experimentally relevant parametric configurations of the problem. Already there is numerical evidence in channel flow that before the onset of turbulence, particles begin to preferentially cluster in layers close to the wall (Loisel et al. 2013).

## Acknowledgements

AR is supported by TUV-NEL. CCTP is partially supported by EPSRC grant No. EP/P021352/1 . AP acknowledges support from the Royal Society under the Wolfson Research Merit Award Scheme (Grant WM140032). We thank Ashley Willis for use his code as well as useful discussions on adapting it.

## Appendix A. Assumptions

The two-fluid model for particulate flow has been extensively used, especially in the context of stability theory (Saffman 1962; Klinkenberg et al. 2011; Boronin 2012). Although a simplistic model, it can highlight some of the basic consequences of particle-fluid interactions, even if it may struggle to reproducing precise, quantitative experimental details. In this appendix we layout when this approach can be expected to give relevant results in terms of the non-dimensional parameters in the problem

The simplest set of forces to consider involves the particle's weight:

$$P \sim \frac{4}{3}\pi\rho_p a^3 g, \quad (\text{A } 1)$$

the buoyancy force,

$$B \sim \frac{4}{3}\pi\rho_f a^3 g, \quad (\text{A } 2)$$

pressure forces around the particle, which scale with the buoyancy (Jackson 2000)

$$G \sim 4\pi a^2 \nabla p \sim B, \quad (\text{A } 3)$$

and Stokes' drag:

$$D \sim 6\pi\rho_f \nu a U. \quad (\text{A } 4)$$

The two-fluid model involves three non-dimensional numbers that can be adjusted and therefore should be allowed to remain finite in the regime  $a/r_0 \ll 1$ , where the model is expected to be valid. These are the Reynolds number:

$$Re = \frac{U r_0}{\nu}, \quad (\text{A } 5)$$

the dimensionless particle mass concentration,

$$f = \frac{m_p}{m_f} = \frac{4}{3}\pi a^3 n \frac{\rho_p}{\rho_f}, \quad (\text{A } 6)$$

where  $n$  is the number of particles per unit of volume, and the dimensionless relaxation time

$$S = \frac{2}{9} \left( \frac{a}{r_0} \right)^2 \frac{\rho_p}{\rho_f}. \quad (\text{A } 7)$$

Keeping both  $f$  and  $S$  finite in the limit  $a \rightarrow 0$  implies

$$\frac{a}{r_0} \sim \left( \frac{\rho_f}{\rho_p} \right)^2, \quad (\text{A } 8)$$

$$n \sim r_0^{-3} \left( \frac{a}{r_0} \right)^{-1}. \quad (\text{A } 9)$$

The last condition requires a sufficiently large number of particles. In the limit  $a \rightarrow 0$ , the ratio of solid to fluid volumes scales as  $n(4\pi/3)a^3 \sim (4\pi/3)(a/r_0)^2$  and vanishes as  $a \rightarrow 0$ . Hence, the condition (A 9) also guarantees that particles are diluted in volume. This justifies ignoring collisions between them.

Since in the two-fluid model we are considering, particles and fluid interact only through Stokes' drag, the latter must dominate the other three forces for the model

to keep some physical relevance. This imposes two additional conditions:

$$\frac{P}{D} \sim S \frac{Ga}{Re} \ll 1, \quad (\text{A } 10)$$

$$\frac{B}{D} \sim \frac{G}{D} \sim \frac{2}{9} \left( \frac{a}{r_0} \right)^2 \frac{Ga}{Re} \ll 1, \quad (\text{A } 11)$$

where the Galileo number  $Ga = r_0^3 g / \nu^2$  represents the ratio of gravity to viscous forces in the fluid. The first condition suggests that the model tends to be better justified for larger Reynolds numbers.

Returning to the problem under consideration, if we consider typical values of  $S = 10^{-2}$  and  $Re = 10^3$ , the first condition would require  $Ga \ll 10^5$ . For typical values for dust and air,  $\nu \simeq 10^{-5} \text{ m}^2/\text{s}$ ,  $\rho_p/\rho_f \simeq 1600$  and  $g \simeq 10$  which requires a pipe under 1 cm diameter. For  $S = 10^{-2}$ , the particle's diameter would have to be below 50  $\mu\text{m}$  (and for  $Re = 1000$ , the flow should travel in excess of 1 m/s). Such dimensions are small but not unrealistic in experiments: pipe flow experiments normally use pipes of a few cm diameter and particles ranging from 10 to 500  $\mu\text{m}$ . Even when these conditions are not perfectly matched, the model can be expected to have sufficient relevance to highlight the underlying mechanisms we are interested in.

The above argument suggests that it is reasonable at any instant in time to neglect gravitational forces compared to other forces. Nonetheless, it should be noted that if the flow is allowed to develop for an arbitrarily long period of time until a fully steady state develops, the presence of gravity *will* effect the base state. This has a knock on effect on the stability problem, even though gravity is absent from the perturbation equations.

Including this effect in the problem presents a problem as the ultimate steady state will be to have all the particles at the bottom of the pipe unless an alternative mechanism for redistributing them (such as turbulence) emerges. The exception to this comes if gravity is aligned in the streamwise direction. In this case the base flow is effected by the particles, potentially to such an extent that inflection points may appear in it (Boronin and Osipstov (2018)). This important problem is left for future work and instead we rely on our scaling argument to treat our base state as a quasi-steady state about which linear stability analysis can be appropriately performed.

## REFERENCES

- Asmolov, E. S. (1999). The inertial lift on a spherical particle in a plane poiseuille flow at large channel reynolds number. *J. Fluid Mech.*, 381:63–87.
- Boffetta, G., Celani, A., De Lillo, F., and Musacchio, S. (2007). The eulerian description of dilute collisionless suspension. *EPL (Europhysics Letters)*, 78(1):14001.
- Boronin, S. (2012). Optimal disturbances of a dusty-gas plane-channel flow with a nonuniform distribution of particles. *Fluid Dynamics*, 47(3):351–363.
- Boronin, S. and Osipstov, A. (2008). Stability of a disperse-mixture flow in a boundary layer. *Fluid Dynamics*, 43(1):66.
- Boronin, S. and Osipstov, A. (2014). Modal and non-modal stability of dusty-gas boundary layer flow. *Fluid Dynamics*, 49(6):770–782.
- Boronin, S. and Osipstov, A. (2018). Effect of settling particles on the stability of a particle-laden flow in a vertical plane channel. *Physics of Fluids*, 30(3):034102.
- Elghobashi, S. (1994). On predicting particle-laden turbulent flows. *Applied scientific research*, 52(4):309–329.
- Ferrante, A. and Elghobashi, S. (2003). On the physical mechanisms of two-way coupling in particle-laden isotropic turbulence. *Physics of fluids*, 15(2):315–329.
- Han, M., Kim, C., Kim, M., and Lee, S. (1999). Particle migration in tube flow of suspensions. *J. Rheol.*, 43:1157–1174.

- Hogg, A. J. (1994). The inertial migration of non-neutrally buoyant spherical particles in two-dimensional shear flows. *J. Fluid Mech.*, 272:285–318.
- Ismail, I., Gamio, J., Bukhari, S., and Yang, W. (2005). Tomography for multi-phase flow measurement in the oil industry. *Flow Measurement and Instrumentation*, 16(2):145–155. Tomographic Techniques for Multiphase Flow Measurements.
- Jackson, R. (2000). *The dynamics of fluidized particles*. Cambridge University Press.
- Klinkenberg, J., de Lange, H., and Brandt, L. (2011). Modal and non-modal stability of particle-laden channel flow. *Physics of Fluids (1994-present)*, 23(6):064110.
- Klinkenberg, J., Sardina, G., De Lange, H., and Brandt, L. (2013). Numerical study of laminar-turbulent transition in particle-laden channel flow. *Physical Review E*, 87(4):043011.
- Kolesnikov, Y., Karcher, C., and Thess, A. (2011). Lorentz force flowmeter for liquid aluminum: Laboratory experiments and plant tests. *Metallurgical and Materials Transactions B*, 42(3):441–450.
- Loisel, V., Abbas, M., Masbernat, O., and Climent, E. (2013). The effect of neutrally buoyant finite-size particles on channel flows in the laminar-turbulent transition regime. *Physics of Fluids*, 25(12):123304.
- Mack, L. M. (1976). A numerical study of the temporal eigenvalue spectrum of the blasius boundary layer. *Journal of Fluid Mechanics*, 73(3):497–520.
- Matas, J.-P., Morris, J. F., , and Guazzelli, E. (2003). Transition to turbulence in particulate pipe flow. *Phys. Rev. Lett.*, 90:014501.
- Matas, J.-P., Morris, J. F., , and Guazzelli, E. (2004a). Inertial migration of rigid spherical particles in poiseuille flow. *J. Fluid Mech.*, 515:171.
- Matas, J.-P., V., G., Morris, J. F., and Guazzelli, E. (2004b). Trains of particle at finite reynolds number pipe flow. *Phys. Fluids*, 16(11):4192–4195.
- Maxey, M. (2017). Simulation methods for particulate flows and concentrated suspensions. *Annual Review of Fluid Mechanics*, 49(1):171–193.
- Meseguer, A. and Trefethen, L. N. (2003). Linearized pipe flow to reynolds number 10 7. *Journal of Computational Physics*, 186(1):178–197.
- Repetti, R. V. and Leonard, E. F. (1964). Segré-Silberbergs annulus formation: a possible explanation. *Nature*, 203:1346–1348.
- Saffman, P. G. (1962). On the stability of a laminar flow of a dusty gas. *Journal of Fluid Mechanics*, 13(01):120–128.
- Schonberg, J. A. and Hinch, E. J. (1989). Inertial migration of a sphere in poiseuille flow. *J. Fluid Mech*, 203:517–524.
- Segré, G. and Silberberg, A. (1962). Behaviour of macroscopic rigid spheres in poiseuille flow part 2.: Experimental results and interpretation. *J. Fluid Mech.*, 14:136–157.
- Squires, K. D. and Eaton, J. K. (1991). Preferential concentration of particles by turbulence. *Physics of Fluids A: Fluid Dynamics*, 3(5):1169–1178.
- Uhlmann, M. (2005). An immersed boundary method with direct forcing for the simulation of particulate flows. *Journal of Computational Physics*, 209(2):448–476.
- Wang, G., Abbas, M., and Climent, E. (2018). Modulation of the regeneration cycle by neutrally buoyant finite-size particles. *arXiv preprint arXiv:1806.02862*.
- Wang, T. and Baker, R. (2014). Coriolis flowmeters: a review of developments over the past 20 years, and an assessment of the state of the art and likely future directions. *Flow Measurement and Instrumentation*, 40:99–123.
- Willis, A. P. (2017). The Openpipeflow Navier–Stokes solver. *SoftwareX*, 6:124–127.
- Yu, Z., Wu, T., Shao, X., and Lin, J. (2013). Numerical studies of the effects of large neutrally buoyant particles on the flow instability and transition to turbulence in pipe flow. *Phys. Fluids*, 25:043305.
- Zhu, H. and Yu, A. (2002). Averaging method of granular materials. *Physical Review E*, 66(2):021302.