

# High Security Door Lock System by Using Android Mobile with Bluetooth

PUTLURU SRAVANI

PG Scholar, Dept. of ECE, GATES Institute of Technology, Gooty, AP.

S. KANNAPPAN

Associate professor, Dept. of ECE, GATES Institute of Technology, Gooty, AP.

**Abstract:** Security is the main concern for everyone. Everyone wants to live securely in his/her house. Everybody wants themselves to keep safe or secure from various incidents like theft in their house or accidents caused due to LPG gas leakage or accidents due to fire in their house. Now days many times we hear news about house robbery or theft in some houses, bungalows, flats. These robberies or thefts take place when nobody is in house or in some cases we find that robbery take place even if people are in their houses. This thesis discusses about an ongoing project that serves the needs of people with physical disabilities at home. It uses the Bluetooth technology to establish communication between user's Smartphone and controller board. The prototype support manual controlling and microcontroller controlling to lock and unlock home door. By connecting the circuit with a relay board and connection to the Arduino controller board it can be controlled by a Bluetooth available to provide remote access from tablet or smart phone. This thesis addresses the development and the functionality of the Android-based application (Android app) to assist disabled people gain control of their living area.

## I. INTRODUCTION

In Malaysia the number of disabled people keeps increasing year by year probably because of two common factors. Some are born this way while others have unfortunate accidents. According to the statistics from the Department of Social Welfare, the total number of disabled people in Malaysia in December 2012 is 305640. Among them, 27,363 are visual, 39,303 hearing, 180 speech, 106,252 physical, 117,699 learning, 2,130 mental and 12,713 multiple disabled people [1]. According to [2], disabled people have a limited ability to control electrical and electronics devices (On and OFF) at their home because normally the switches are placed at a height of 15m while the comfortable height for a wheelchair user is up to 13m only. It is also mentioned that the number of disabled friendly facilities in Malaysia are still minimum. Therefore, providing a very practical facility that can ease accessing home appliances is really required which can greatly improve the lives of the disabled.

People with disabilities (PWDs) in Malaysia can be considered as one of the most vulnerable of the minority group in the Malaysian population [1]. WHO and World Bank (2011) estimated that there are 15% of the world population have some form of disabilities. According to the statistics from the Department of Social Welfare, the registered number of disabled people is 197,519 [2]. Total 359,203 disabled people were registered with the Department of Social Welfare in December 2012. Rashid mentioned that total number of disabled people in Malaysia is 305640. Among them, 27,363 are visual, 39,303 hearing, 180 speech, 106,252 physical, 117,699 learning, 2,130 mental and 12,713 multiple disabled people [3]. However, these data are incomplete as registration of persons with

disabilities in Malaysia is not compulsory, and is done only on a voluntary basis. In addition, the data are not up to date, as the names of those who have died are not deleted from the main record [4]. See and Hashim argue that the lack of a comprehensive database on the specific problems faced by people with disabilities in Malaysia poses a great challenge [5], [6]. The number of people with disabilities is expected to increase due to population ageing, rapid increase of chronic diseases and improvements in methodologies used to measure disability.

There are various forms of open discussion on the equal rights and the quality lifestyle of the people with disabilities in Malaysia. Their opinions are often excluded from the decisions that affect their welfare and livelihood. Most important thing is that a large numbers of disabled people are socially excluded in Malaysia and they are now out of the main development stream [7]. There is no complete statistics on this number, but this process is very influential. Disability in one hand and social exclusion in another, intensifies the lives of disabled people so challenging. Persons with disabilities are usually the nation's largest minority and they tend to be marginalized in all aspects of life. They usually experience substantially poorer quality of life and are more likely to be unemployed due to institutional discrimination [4]. Amar-Singh mentions a number of challenges of the disabled people, which include continued charity model with lack of respect, lack of uniform professional and quality services by the Health, Welfare & Education Departments, growth of poorly trained professional manpower, lack of integration between various sectors, unhealthy rise in financially motivated services, and vulnerable segments of the population [8].

Recently, lot of researches have been devoted to a technology-based home security and automation. Smart Key Door with Wireless Security System using RF Signal [3] and Door Locking System using RFID Technology [4] using different mechanism to lock and unlock the door namely RF identification card (RFID). Both using PIC 16F87XA as a micro controller. Besides that, the Main Door Security System using SMS [5] propose the uses of Short Message Service Text Messaging (SMS) as a mechanism to control the system via mobile phone to lock and unlock the door. Rabbit Microprocessor is use as a micro controller to perform this operation. Face Recognition Based on Auto-Switching

Magnetic Door Lock System using Microcontroller [6] use face recognition as a mechanism to lock and unlock the door. With the rapid development in the fields of communication/networks and other related wireless technologies such as RFID (Radio Frequency Identification), UWB (Ultra Wide Band), Zigbee, NFC (Near Field Communication) and Bluetooth enable us to develop various kinds of wireless systems via handsets or smart phones. Research by [7] use handset and actuator for remote operation of various electrical devices at home.

By pressing a single button on the handset, the signal is sent through the Zigbee technology to the actuator and subsequently switches ON/OFF the intended device. Research [8] on the other hand, demonstrated a handwriting recognition technology as a security tool to manage a security of the door. Once the disabled user enter the handwriting on the Smartphone, the door will immediately opened after going through the process of identification by the system. Researcher [9] develops a home automation through Bluetooth on Android mobile device. This system allows the user to lock and unlock a door in a short range.

Since Bluetooth has become so prevalent in mobile devices, it was seen as a simple, low cost and secure solution for wirelessly connecting a mobile device to a home automation system. Therefore, this paper developed a security system by exploiting Bluetooth as a wireless connection protocol on Android Mobile Device to control only one electrical appliance which is magnetic door lock. This project, however, focuses on those who are paralyzed from the legs up to waist level, in particularly those who use wheelchairs. The disabled user can easily use the Graphic User Interface (GUI) application that has been created in the Android Smartphone to lock or unlock the magnetic door through Bluetooth Protocol. A pop-up block will automatically appear on the screen to show the status of the door. At the same time, a small bulb that is attached to the door will switch "ON" once the door is opened.

## II. RELATED WORKS

Security is the main concern for everyone. Everyone wants to live securely in his/her house. Everybody wants themselves to keep safe or secure from various incidents like theft in their house or accidents caused due to LPG gas leakage or accidents due to fire in their house. Now days many times we hear news about house robbery or theft in some houses, bungalows, flats. These robberies or thefts take place when nobody is in house or in some cases we find that robbery take place even if people are in their houses. Another bad news we hear is about accidents are caused or blast happens because of LPG gas cylinder leakage. In house we find that LPG gas is commonly and widely used for cooking purpose. So in every kitchen we find that LPG gas cylinder is placed.

However due to some reasons, LPG gas might leak from these cylinders. And because of this LPG gas leakage, fire might be ignited or it can even cause the LPG gas cylinder blast. Which can damage the house or in even worst situations, it can cause life threat to the person living inside the house. Another problem / fear are about fire in our house. There can be various reason of this fire being ignited or house getting caught in fire. Reason of fire can be electrical short circuit or due to some other things like candles or oil lamps kept inside our house or because of fireworks in festival season. Early detection of all these problems is really necessary. Sometimes fire lighted is small but if proper attention is not paid to it or if proper actions are not taken to control this fire, then it can convert into big tragedy as this fire can spread in complete house. Same with LPG gas leakage, if it is detected on time and if it is controlled on time then it can avoid a big accident. Also in case of robbery it would be beneficial if we can blow some alarm. Let's take an example that we are out of our home and theft is going on in our house. In such case if we are intimated about theft then we can inform our neighbors, then they can create some noise or take some appropriate action so that this theft can be avoided. Let's take another problem; sometimes key of our home is lost. If we do not replace our lock and if these keys are found by thieves then it can cause robbery. We all know that duplicate key can be created within few minutes and also key duplication is easy. These are the disadvantages of traditional locking system which uses a key and a lock. To overcome all the above stated disadvantages of existing system we have designed a GSM based home security system. It can avoid these undesirable situations, hazardous conditions like LPG gas leakage, fire ignition and theft.

## III. SYSTEM DEVELOPMENT

The architecture of the proposed home door locks application via Bluetooth technology is depicted in Fig. 1.

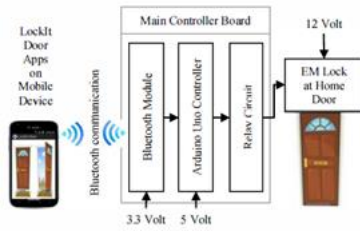


Fig. 1. System architecture

An Android Apps called Lock It Door is designed to allow user choose their selection whether lock or unlock the door. The LockIt Door Apps is developed using Eclipse software and programmed using Java language. Fig. 3.8 shows its graphical user interface (GUI) and algorithm.

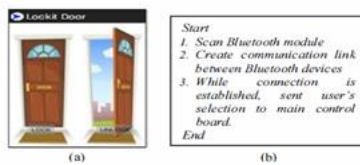


Fig. 2. Android apps (a) GUI and (b) algorithm

Once wireless communication between Smartphone Bluetooth and Bluetooth module is established through a pairing process, user's key selections are sent as radio frequency (RF) signal to the main controller board installed at home. Then Arduino Uno controller is used to interpret key selections and determines whether to release or not the electromagnetic (EM) lock home door. The Arduino is programmed with C language. It sensed the RF signal at the input port of the controller. The relay circuit that is connected to Arduino released the EM lock to open the door if the relay circuit is triggered at 12V.

#### IV. RESULTS AND DISCUSSION

Fig. 3 shows the hardware set-up for the entire project which compose with three main parts; LockIt Door Apps on the Smartphone, main controller board and EM lock.

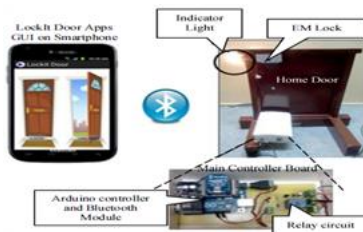


Fig. 3. Hardware set-up

Fig. 4 shows the experimental setup using smart phone as transmitter, Bluetooth module as receiver and LED as output. Basically, signal strength is depends on Bluetooth RF transmitted power, receiver sensitivity, and the absorption rate of the medium. When the medium absorbs transmitted energy higher than the signal at the receiver, it

seems like the receiver sensitivity is low, then, the connection is lost.

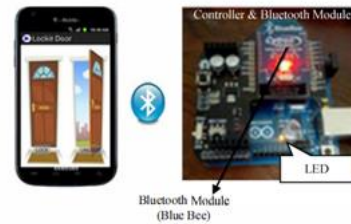


Fig. 4. Experimental set-up

The Bluetooth Module of Blue Bee type can receive the RF signal from 20 to 30 meter in non-obstacle environment. Due to these, two experiments are conducted to compare with the theoretical part.

#### Measurement set-up for different location

There are three (3) different types of measurements have been done; (i) indoor and, (ii) outdoor with non-obstacle area and (iii) indoor with obstacle area. As shown in Table I, it is found that, for indoor (obstacle and non-obstacle area), the maximum distance that the receiver can detect the RF signal from the Smartphone is around 15 meters in house while for outdoor area, the maximum distance is 20 meters. In this case, it can be said that for non-obstacle area, the system can communicate between input and output at a distance of at least 20 m. However, the effectiveness of the system is reduced up to 20% for an obstacle area.

Reading	Area	Distance (m)	Connected/ Intermittent/ Disconnected
First	Indoor (non-obstacle)	5	Connected
		10	Connected
		15	Intermittent
		20	Disconnected
		25	Disconnected
		30	Disconnected
Second	Outdoor (non-obstacle)	5	Connected
		10	Connected
		15	Connected
		20	Intermittent
		25	Intermittent
		30	Disconnected
Third	Indoor (obstacle)	5	Connected
		10	Connected
		15	Intermittent
		20	Intermittent
		25	Disconnected
		30	Disconnected

TAB LE I. SIGNAL STRENGTH FOR DIFFERENT LOCATIONS.


#### 5.1. Bluetooth power strength measurement

Bluetooth power strength measurement has been done in Electromagnetic Compatibility Center (EM C), UTHM. Based on the data, three (3) different types of analysis can be analyzed in terms of (i) frequency range, (ii) power strength for two different distances and (iii) Frequency Hoping Spread Spectrum (FHSS).


#### Frequency range

Theoretically, Bluetooth is a wireless technology standard for exchanging data over short distances (using short-wavelength UHF radio waves in the ISM band from 2.4 to 2.485 GHz) from fixed and mobile devices, and building personal area networks

(PAN s) [10]. Thus, from the measurement set-up as shown in Fig. 6.3 and 6.4 it is proved that the frequency range is still in the range of Bluetooth frequency even in a different distance and condition.

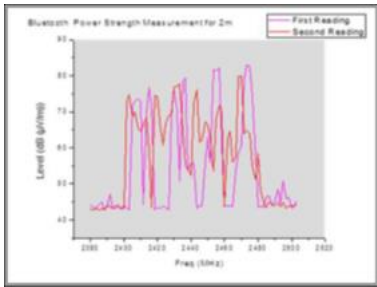

**Fig: 5. Bluetooth power strength for 2m.**

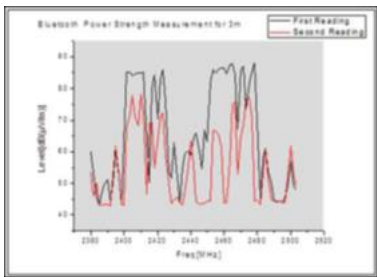

**Fig: 6. Bluetooth power strength for 3m.**

**Power strength**

The reading of the graph in Fig. 6.3 and 6.4 are converted from dB(IIV/m) to the dBm to calculate the value of transmitted power of Bluetooth using Eq. 1.

$$Pr = E \left[ dB \left( \mu \frac{V}{m} \right) \right] - 104.7 + (20 \log d). \tag{1}$$

Where

Pr is power strength in dB

E is level in dB(IIV/m)

d is distance between Bluetooth module and antenna.

Basically, the received power from Bluetooth module (Blue Bee) is 2-4dBm which is Class 2 radio [10]. Thus, the measurement has proved the data which is mentioned in [10] whereby the power strength is greater than 4dBm for both distances as illustrated in Fig 6.3 and 6.4.

**FHSS**

Frequency hopping is the one of the most secure modulation techniques available. Its primary responsibility is to receive the data signal input to be transmitted and modulate it with a carrier signal such that the modulated signal hops from one frequency to another at the different time slots and is spread over a wide band of frequencies. Spread spectrums spread a signal's power over a wider band of frequencies, for example there is a band width

trade-off in order to gain signal-to-noise performance, This contradicts the normal approach to conserve frequency bandwidth, but the spreading process makes the data signal much less susceptible to electrical noise and other interference than conventional radio modulation technique, Other transmission and electrical noise, typically narrow in bandwidth, will only interference with a small portion of the spread spectrum signal, resulting in a much less interference and less errors when the receiver demodulates the signal, From these theory, we can know that why the graph at fig, 6.3 and 6.4 have too many peak in the range from 2AGHz to 2A8 GHz when the Bluetooth start communicate between the Smartphone and the Bluetooth module, EM lock for door consists of a magnet bar, a steel plate and mounting accessories.

When current flow, they will be bonded together strongly until the current is cut off. The relationship between the magnetic field contribution and its source current element is called the Biot-Savart law as written in Eq. 2.

$$dB = \frac{\mu_o I dl \times r}{4\pi r^3}. \tag{2}$$

where

dB is perpendicular both to ds (which is the direction of the current) and to the unit vector r directed from the element to the point.


Puo is the magnetic constant

I is steady current

dl is a vector whose magnitude is the length of the differential element of the wire

r is the distance from the element to the point P

When electrical current flow through a conductor, a very weak magnetic field is generated due to the positively and negatively charge atoms. Fig. 6.5 shows the direction of the magnetic field contribution follows the right hand rule illustrated for a straight line wire.

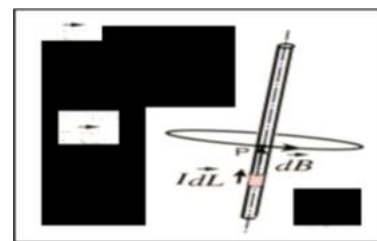

**Fig: 7. Direction of magnetic field contribution**

From Eq. 2, we can see that, the current flow can produce the electromagnetic. According to Biot-Savart's Law when the signal "Lock" from the Smartphone is transmitted to the Bluetooth module, the current will flow to trigger the relay circuit and the relay is normally close condition. In this

condition, Magnetic Door Lock will bind together. When the signal "Unlock" is transmitted from the Smartphone, it will trigger back the relay and the relay was in a normally open condition, so the Magnetic Door Lock will release because no more the current flow.

#### V. CONCLUSION AND FUTURE WORKS

The goal of this study is to propose a system that can help disabled people to open a magnetic door wirelessly using Android smart phone. The range and security aspects were considered through the use of Bluetooth technology that is embedded in the mobile device. The system was able to actuate a pin to Lock or Unlock the door from a short distance away by just pressing a button on a smart phone. The status of the door also has been created to make the system more complete. In future, the LockIt Door Apps should offer assistance in controlling more doors, windows and basic home electronic appliances. Battery backup system should also be considered to ensure the completeness of the system.

#### VI. REFERENCES

- [1] Islam, M.R., "Right of the People with Disabilities and Social Exclusion in Malaysia", *International Journal of Social Science and Humanity*, Vo. 5, No. 2, pp. 171-177, 2015.
- [2] RA Ramlee, D. H. Z. Tang, M.M.Ismail, "Smart Home System for Disabled People Via Wireless Bluetooth", in *Proc. of IEEE International Conference on System Engineering and Technology*, pp. 1-4, 2012.
- [3] Julius Bin Pelipos (2010), "Smart Key Door with Wireless Security System using RF Signal," Faculty of Electrical and Electronic Engineering, Universiti Tun Hussein Onn Malaysia: Final Year Project Report.
- [4] lunaina Mohd Shah (2009), "Door Locking System using RFJD Technology of{Y," Faculty of Electrical and Electronic Engineering, University Tun Hussein Onn Malaysia: Final Year Project Report.
- [5] Iulisah Binti Mohamad Isah (2009), "Main Door Security System using SMS." Faculty of Electrical and Electronic Engineering, Universiti Tun Hussein Onn Malaysia: Final Year Project Report.
- [6] Harnani Hassan, Raudah Abu Bakar, Ahmad Thaqib and Fawwaz Mokhtar (2012), "Face Recognition Based on Auto Switching Magnetic Door Lock System using Microcontroller" in *International Conference on System Engineering and Technology*, Indonesia.
- [7] Stapathy, A. and Das, D.P., "A system for remote operation of devices: Helpful for elderly and disabled people" in *Proc. Of TEEE International Conf on Advanced Electronic Systems*, pp. 350- 353, 2013.
- [8] Kuang-Yow Lian, Sung-Jung Hsiao and Wen-Tsai Sung, "Home Safety Handwriting Pattern Recognition System" in *Proc. Of IEEE 1ph International Conf on Cognitive Informatics and Cognitive Computing*, pp. 477-483, 2012.
- [9] Potts, J. and Sukittanon, S., "Exploiting Bluetooth on Android Mobile Devices for Home Security Application", in *Proc. Of IEEE South east con*, pp. 1-4, 2012. [10] "Fast Facts". Bluetooth.com. Retrieved 10 December 2013