



Construction Of Geo Polymer Concrete With High Potency And Sorptivity

S MOUNIKA

MTech student, Dept of CIVIL, Priyadarshini
Institute of Technology & Science for Women's,
Chintalapudi, Tenali, A.P, India.

K KIRAN KUMAR

Assistant Professor, Dept of CIVIL, Priyadarshini
Institute of Technology & Science for Women's,
Chintalapudi, Tenali, A.P, India.

Abstract: During this research, the water absorption and sorptivity residential properties of fly-ash based geopolymer concrete were examined thoroughly. Geopolymer concrete is one amongst the steps taken towards lasting building. It has a lower greenhouse footprint than traditional concrete. The result of accelerated corrosion on geopolymer concrete was likewise studied and the outcomes were compared with control concrete. It was wrapped up with the study that geopolymer concrete is much less permeable and also has a lower direct contour as contrasted to manage concrete.

Keywords: Geopolymer; Sorptivity; Flyash Concrete; Water Absorption; High Level Concrete;

1. INTRODUCTION:

Concrete use round the globe is 2nd entirely to water. Normal hydraulic concrete (OPC) concrete is that one of the best succeed as and also large made use of structure products, attributable to benefit of the raw products all over the world, its simplicity in preparation and also fabrication entirely develops of possible forms. About 1.5 a lot of raw materials is called for within the production of each ton of OPC, at the same time relating to the amount of CO₂ totally free throughout the making of typical hydraulic concrete (OPC) attributable to the calcinations of rock as well as burning of fuel is within the order of 1 load for every ton of OPC developed. On the contrary hand, the extensive ease of ash around the world develops. Opportunities to use this by-product of shedding coal, as a substitute for OPC to make Concrete. It's essential to choose options to form atmosphere pleasant concrete. An alternate to form environmentally friendly concrete is that the development of Not natural alumina- salt compound, described as Geopolymer, synthesized from materials of geologic beginning or byproduct products like ash that's made in chemical element as well as atomic number 13. Symphonious with Davidovits, geopolymerization is age of synthesis that with chemicals integrates products having chemical component and also atomic number 13. Throughout the technique, chemical component and atomic number 13 atoms square step integrated to develop the foundation that square action with chemicals and structurally enjoy those binding the natural rocks. By exploitation the ash mainly based geopolymer concrete minimizing the 2 environmental connected problems i.e. the high amount of free to ambience throughout production of OPC and also application of ash. In this research, style combination of M25 quality was utilized for the examinations. Elements like alkalescent fluid to ash measurable relationship =0.4, soluble glass to moisturized oxide measurable

relation =2.0, Morality=M14, set temperature level =750C, set Time = 24hours, alleviation = 1day, Admixture indefinite quantity =2% were unbroken continuous throughout the examinations. The most unbiased of the study was to compare the water absorption capacity and sorptivity of management as well as geopolymer concrete.

2. RELATED STUDY:

Concrete is the most commonly used construction material, its usage by the communities across the globe is second only to water. The worldwide demand for Ordinary Portland Cement (OPC) would increase further in the future. OPC production is a major contribution to carbon dioxide emissions. The global warming is caused by the total green house emission to the earth atmosphere contributing greatly to the global warming. Many efforts are being made in order to reduce or replace the use of OPC in concrete. These efforts are being made to utilization of supplementary cementitious materials such as fly ash, GGBS, silica fume and rice-husk ash etc. In terms of reducing the global warming the geopolymer technology could reduce the CO₂ emission to the atmosphere cause by cement about 80%. The word Geopolymer introduced to the world by Davidovits in year 1980s, proposed that binders could be produced by a polymeric reaction of alkaline liquids with the Silicon and the Aluminum in source materials of geological origin or by-product materials such as fly ash and GGBS, he termed these binders as "Geopolymer". The temperature during curing is very important, and depending upon the source materials and activating solution, heat often must be applied to facilitate polymerization, although some systems have been developed that are designed to be cured at room temperature 2&3. The necessity of Geopolymer Concrete, the Constituents, Properties, Applications and Limitations are discussed in detail in this paper. Construction is one of the fast growing

fields worldwide. As per the present world statistics, every year around 260,00,00,000 Tons of Cement is required. This quantity will be increased by 25% within a span of another 10 years. Since the Lime stone is the main source material for the ordinary Portland cement an acute shortage of limestone may come after 25 to 50 years. More over while producing one ton of cement, approximately one ton of carbon di oxide will be emitted to the atmosphere, which is a major threat for the environment. In addition to the above huge quantity of energy is also required for the production of cement. Hence it is most essential to find an alternative binder.



Fig.2.1. Aggregates of geopolymer concrete.

The reaction of Fly Ash with an aqueous solution containing Sodium Hydroxide and Sodium Silicate in their mass ratio, results in a material with three dimensional polymeric chain and ring structure consisting of Si-O-Al-O bonds⁷. Water is not involved in the chemical reaction of Geopolymer concrete and instead water is expelled during curing and subsequent drying. This is in contrast to the hydration reactions that occur when Portland cement is mixed with water, which produce the primary hydration products calcium silicate hydrate and calcium hydroxide. This difference has a significant impact on the mechanical and chemical properties of the resulting geopolymer concrete, and also renders it more resistant to heat, water ingress, alkali-aggregate reactivity, and other types of chemical attack^{3&5}. In the case of geopolymers made from fly ash, the role of calcium in these systems is very important, because its presence can result in flash setting and therefore must be carefully controlled⁵. The source material is mixed with an activating solution that provides the alkalinity (sodium hydroxide or potassium hydroxide are often used) needed to liberate the Si and Al and possibly with an additional source of silica (sodium silicate is most commonly used).

3. METHODOLOGY AND ANALYSIS:

Geopolymer concrete is concrete which does not utilize any Portland cement in its production. Rather, the binder is produced by the reaction of an alkaline liquid with a source material that is rich in silica and alumina. Geopolymers were developed as a result of research into heat resistant materials after a series of catastrophic fires The research

yielded non-flammable and non-combustible geopolymer resins and binders Geopolymer is being studied extensively and shows promise as a greener alternative to Portland cement concrete. Research is shifting from the chemistry domain to engineering applications and commercial production of geopolymer. It has been found that geopolymer concrete has good engineering properties. The use of fly ash has additional environment advantages. The annual production of fly ash in Australia in 2007 was approximately 14.5 million tonnes of which only 2.3 million tonnes were utilized in beneficial ways; principally for the partial replacement of Portland cement Development of geopolymer technology and applications would see a further increase in the beneficial use of fly ash, similar to what has been observed in the last 14 years with the use of fly ash in concrete and other building materials.

Fly Ash:

The fly ash used in the production of geopolymer concrete at Curtin University is Class F fly ash sourced from the coal fired power station approximately 200 km south of Perth, Western Australia. The results of X-ray fluorescence testing (XRF) are shown in Table 1 for the fly ash used in the research program. The class F fly ash is characterized by high silicon and aluminum contents and low calcium content, and a loss on ignition of 0.46.

Alkaline solutions:

Sodium based alkaline solutions were used to react with the fly ash to produce the binder. Sodium-silicate solution type A53 was used for the concrete production. The chemical composition Sodium hydroxide solution was prepared by dissolving sodium hydroxide pellets in water. The pellets are commercial grade with 97% purity thus 14 molar solutions were made by dissolving 404 grams of sodium hydroxide pellets in 596 g of water.

Aggregates:

Coarse aggregates with nominal sizes of 7mm, 10mm and 20mm granite and dolerite, were sourced from two local quarries. The aggregates had a particle density of 2.6 tonnes/cubic metre for the granite and 2.63 tonnes/cubic metres for the dolerite. The dolerite aggregate was used in one series of trial mixtures to assess the impact of aggregate type on workability and strength gain of the geopolymer concrete. Fine sand was sourced from a local supplier. The sand has a low clay content (less than 4%)and fineness modulus of 1.99.Previous geopolymer research had been performed with aggregates being prepared to surface saturated dry (SSD) condition, a state of aggregate saturation in which the aggregate will not

absorb any further moisture but no surface water is present.

4. EXPERIMENTAL ANALYSIS:

Heat-curing substantially assists the chemical reaction that occurs in the geopolymer paste. Both curing time and curing temperature influence the compressive strength of geopolymer concrete. The effect of curing time is illustrated in Figure 2. The test specimens were 100x200 mm cylinders heat-cured at 60o C in an oven. The curing time varied from 4 hours to 96 hours (4 days). Longer curing time improved the polymerization process resulting in higher compressive strength. The rate of increase in strength was rapid up to 24 hours of curing time; beyond 24 hours, the gain in strength is only moderate. Therefore, heat-curing time need not be more than 24 hours in practical applications. Figure 1 shows the effect of curing temperature on the compressive strength of geopolymer concrete. Higher curing temperature resulted in larger compressive strength. Heat-curing can be achieved by either steam-curing or dry-curing. Test data show that the compressive strength of dry-cured geopolymer concrete is approximately 15% larger than that of steam-cured geopolymer concrete.

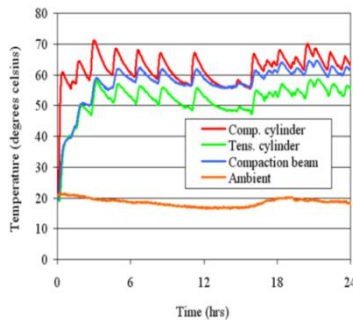


Fig.4.1. Compressive Strength at 28 Days.

The required heat-curing regime can be manipulated to fit the needs of practical applications. In laboratory trials, precast products were manufactured using geopolymer concrete; the design specifications required steam-curing at 60o C for 24 hours. In order to optimize the usage of formwork, the products were cast and steam-cured initially for about 4 hours. The steam-curing was then stopped for some time to allow the release of the products from the formwork. The steam-curing of the products then continued for another 21 hours. This two-stage steam-curing regime did not produce any degradation in the strength of the products.

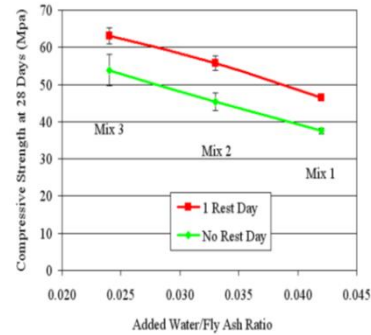


Fig.4.2. With Flyash adding.

After casting, the cylinders were covered with plastic bags and placed under the culvert moulds. A plastic cover was placed over the culvert mould and the steam tube was inserted inside the cover. The culverts and the cylinders were steam-cured for 24 hours. Initially, the specimens were steam-cured for about 4 hours; the strength at that stage was adequate for the specimens to be released from the moulds. The culverts and the remaining cylinders were steam-cured for another 20 hours. The operation of the precast plant was such that the 20 hours of steam-curing has to be split into two parts. That is, the steam-curing was shut down at 11 p.m. and restarted at 6 a.m. next day. In all, the total time taken for steam-curing was 24 hours.



Fig.4.3. Practical implementation models.

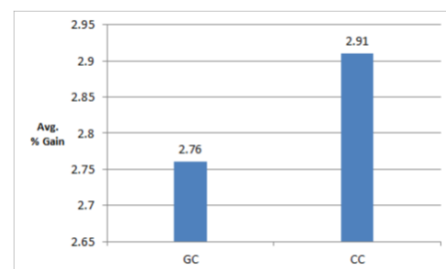


Fig.4.4. Water Absorption of Concrete.

5. CONCLUSION:

The mix style of M25 geopolymer concrete was employed in the study. The results were compared thereto of management concrete. it absolutely was found that The Sorptivity curve is a smaller amount linear as compared thereto of management concrete. Which means the speed of absorption of geopolymer is a smaller amount. Check results of water absorption check shows that the body of

geopolymer concrete is a smaller amount as ash is okay than OPC and leads to less water absorption than the management concrete. Accelerated Corrosion check was conjointly performed on cylinders of one hundred fifty millimetre diameters and three hundred millimetre height with chrome steel bar and HYSD bar embedded in it. Affected current technique was adopted with 30V constant power provide. Corrosion resistance was evaluated by amendment in current, 0.5 cell potential meter readings, UPV results and visual examination. The results showed that the corrosion incidence in geopolymer concrete takes longer time than management concrete.

REFERENCES:

- [1] Chatterjee A,K., Indian Fly Ashes: Their Characteristics and potential for Machanochemical Activation for Enhanced Usability.
- [2] Malhotra V,M., Introduction: Sustainable development and concrete technology, ACI Concrete International, 24(7), 2002
- [3] Chakravarti M, Bhat V, Utility bonanza dust-fly ash, Envis newsletter,6(2),2007
- [4] Rajamane N,P, nataraja M,C., LAKshmanan N, Ambily P,S.,Geopolymerconcrete- An ecofriendly concrete, The MasterBuilder, 11, 2009, Pp:200-206
- [5] DavidovitsJ., Properties of geopolymer cements, First international conference on alkaline cement and concretes,Ukrain,1994,Pp:131-149
- [6] Duxsonetal.(2007). Geopolymer technology: the current state of the art. Jour-nal of Materials Science, 42(9),2917-2933.
- [7] Palomoetal. (2005). Microstructure development of alkaliactivated flyashcement: a descriptive model. Cement and Concrete Research, 35(6), 1204-1209.
- [8] Xu & Van Deventer (2000). The geopolymer is ation of alumi no silicate minerals. International Journal of Mineral Processing, 59(3), 247-266.
- [9] Davidovits, J. (1999). Chemistry of Geopolymeric Systems, Terminology. Geopolymer '99 International Conference, France.
- [10] Davidovits, J. (1999). Chemistry of Geopolymeric Systems, Terminology.