

# Remote Monitoring for the Operation Status of CNC Machine Tools Based on HTML5

Yu-Shun Wang, Ling-Song He<sup>\*</sup>, Zhi-Qiang Gao, Jun-Feng Wang, Yang-Fan Cao

School of Mechanical Science and Engineering, Huazhong University of Science and Technology, Wuhan, China

Received 23 April 2019; received in revised form 10 May 2019; accepted 28 July 2019

## Abstract

In order to improve the accuracy of remote monitoring of computer numerical control (CNC) machine tools and reduce the difficulty of monitoring; a remote monitoring method for CNC machine tools based on HTML5 is proposed in this paper. The core idea of this method is to record external sensor information and internal working condition information in the same time, and then visualize the information in multiple directions. Monitoring accuracy is improved through the combined use of internal and external information. In response to the difficult problem of traditional method monitoring; the internal working condition information, external sensor information, 3D model and multimedia information of CNC machine tools are jointly visualized. The 3D model synchronous motion is driven by real-time working condition data. Remote low-latency multimedia information transmission is implemented by using cloud live broadcast technology.

**Keywords:** CNC machine tool, remote monitoring, HTML5, 3D model

## 1. Introduction

Intelligent manufacturing, as the core of Industry 4.0, has been the focusing research of global manufacturing field in recent years. As a “mother machine”, the CNC Machine Tool is the core equipment for intelligent manufacturing. Its monitoring of operation status and adaptive control are critical to intelligent manufacturing. As a means of monitoring, the operation status of CNC machine tools and remote monitoring have attracted attention of many researchers.

For traditional remote monitoring of CNC machine tools, the monitoring of operation status and fault diagnosis are realized by monitoring the external sensor information (e.g., vibration, sound, current, temperature). However, the sensor signal is the physical quantity measured indirectly. It can only represents the state of the sensor, but not the whole cutting process. In addition, the stability and reliability of the sensor signal can be easily affected by the complex working environment of the CNC machine tool (e.g., electromagnetic, temperature, external noise), which can easily prone to misjudgment [1]. Moreover, the data acquisition of the internal operating conditions is ignored, which lead to lack of data (e.g., G code, axis position, feed rate, spindle speed) guidance during condition monitoring and fault diagnosis. Therefore, it is not possible to understand the state and the process of processing in a short time, which can easily lead to misjudgment. Simultaneously, the degree of data visualization is limited and the interactive operations in data analysis was scanty.

In recent years, researchers have investigated in a lot of energy to break through the limits of traditional CNC machine tool monitoring methods. In 2016, AVIC proposed a four-layer Cyber Physical System (CPS) CNC machining process intelligent platform, which could monitor the machine tool in real time and realize ultra-low delay transmission of processing

---

<sup>\*</sup> Corresponding author. E-mail address: helingsong@hust.edu.cn

Tel.: +86-13554303940

data and high-fidelity 3D visualization and reproduction [2]. In 2017, Eun-Young Heo et al. proposed a process monitoring system combined with virtual machining that simulates the NC tool path cutting process through virtual machining to predict the static and dynamic characteristics of the operation [3]. The real-time diagnosis was realized by combining the internal working condition data and sensor data of the CNC machine tool with the predicted virtual machining data. In the same year, Yi Cai et al. merged sensor data and information to build a digital twin virtual machine for network physical manufacturing, which was used for the diagnosis and prediction of CNC machine faults [1]. The above researches all used the working condition information and external sensor information as main data source, which could significantly improve the accuracy of monitoring. However, the cross-platform, visualization, and interaction of the designed system need to be further improved.

In view of the advantages of Hyper Text Markup Language (HTML5) can supports the multi-device cross-platform operation, responsive web design, instant update, better interaction, and good support for audio and video[4, 5], a remote monitoring method for CNC machine tools based on HTML5 is proposed in this paper. This method used the working condition information and external sensor information inside the open CNC system as the main data source, and monitored the machine tool through internal and external information fusion to improve the monitoring accuracy. Visualize with HTML5, make full use of its high-level support for 2D charts, 3D models, audio and video visualization tools, and multi-dimensional visualization of data to reduce the difficulty of monitoring.

## 2. Overall System Design

The design concept for the overall architecture of the system was the CPS model [1-2, 6]. A four-layer architecture based on device awareness layer, network layer, data layer and visualization layer was built, and its system architecture is shown in Fig. 1.

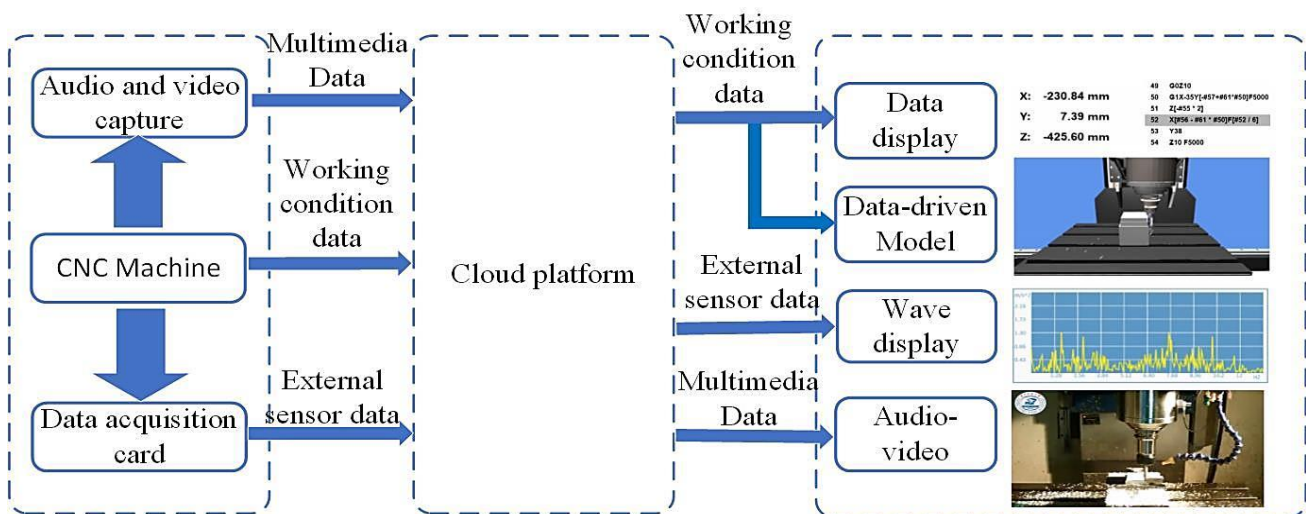


Fig. 1 System architecture

The internal working condition data, external sensor data, and multimedia data are acquired through the device sensing layer in this system. The data is collected and parsed, and then the processed data was transmitted to the data layer through the network layer to complete the data service and data storage. The core of the remote monitoring system is the visualization layer. The data processed by the data layer is again transmitted to the visualization layer via the network layer, and the multi-level visual monitoring of the data is completed and the corresponding analysis and processing are performed. It can also provide operators with more real-time, more comprehensive, more decision-making reference value CNC machining process information. This helped the operator to strengthen the monitoring and fault analysis of the real-time operating state of the machine during the entire machining process.



facilitate the control of the 3D model, it has been divided into different components according to the motion mode, and then WebGL is used to “virtual assembly” according to its relative position. The mapping relationship between the component and the driving data is established to realize the motion of the assembled CNC machine model through real-time data driving, as shown in Fig. 3.

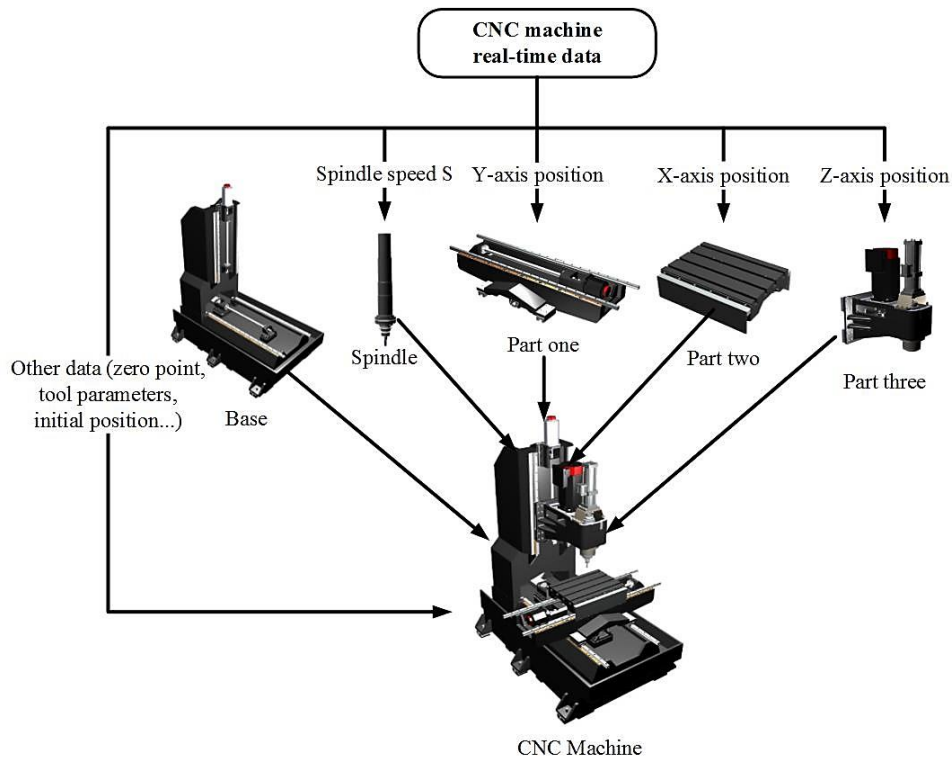


Fig. 3 Mapping of real-time data and 3D model

The CNC machine is ready to add the corresponding blank from the blank stock as required. After the tool is calibrated, the data corresponding to G54 in the CNC machine controller is acquired, which was the real workpiece zero point. By establishing a mapping with the zero point of the virtual machine tool workpiece, the mapping relationship between the virtual machine tool and the physical machine tool could be established, thereby realizing the initialization of the data driven model. The mapping equation is as follows:

$$X_V = -X_R + X_{G54} + 300 \tag{1}$$

$$Y_V = Y_R - Y_{G54} + 1160 \tag{2}$$

$$Z_V = Z_R - Z_{G54} - (83.8 - H_{Workpiece}) \tag{3}$$

$$S_V = -0.3 \times S_R \times \pi \times 2 / 360 \tag{4}$$

where  $X_V, Y_V, Z_V, S_V$  is corresponding to the X, Y, Z axis position and spindle speed in the virtual machine tool respectively;  $X_R, Y_R, Z_R, S_R$  is corresponding to the X, Y, Z axis position and spindle speed in the physical machine tool respectively;  $X_{G54}, Y_{G54}, Z_{G54}$  is corresponding to the workpiece zero position on the physical machine respectively;  $H_{Workpiece}$  is the height of the workpiece in the virtual machine.

After the virtual machine model is initialized and the mapping relationship is established, the real-time spindle speed S and the X, Y, Z axis position could be obtained and used to drive the model motion in real time, as shown in Fig. 4. When the initialization of the data-driven model was completed, the machine zero point, tool parameters, and tool initial position could

be obtained. After the table position is partially magnified, the appearance of the workblank could be observed. The real-time data could drive the model to observe the current tool position. After processing, the final rendering of the part could be observed.

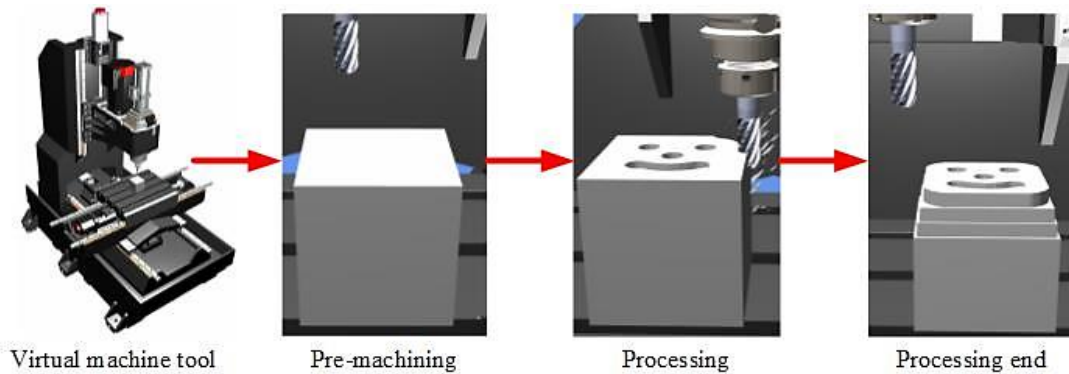


Fig. 4 Processing renderings of real-time data driven parts

### 3.3. Low latency video

The general architecture of video surveillance in traditional remote monitoring systems are content delivery network (CDN), real time messaging protocol (RTMP) and http live streaming (HLS), with a delay of more than 3 seconds, which cannot meet the current requirements for monitoring in real-time. This system drew on the idea of interactive live broadcast, using WebRTC technology to control the average delay to about 200ms to realize the real time of video monitoring, as shown in Fig. 5. The data transmission is mainly divided into two parts. One was the transmission of signaling, which is realized by exchange the session information, network configuration, media configuration, etc. between the two ends of the peer to peer (P2P) through the cloud platform, and finally the NAT penetration is achieved. Then a peer-to-peer connection between the device collection end and the Kurento server, between the Kurento server and the viewer is established [9-11]. Another part is the transmission of the video stream. This part directly transmitted data through the P2P channel. When the video data is collected by the device, the video is uploaded to the Kurento streaming server via the P2P channel, and then the viewer and the Kurento terminal are respectively transmitted via the P2P channel. Due to the video passes through the P2P channel in both transmissions, there is a small delay and realized low delay of video monitoring.

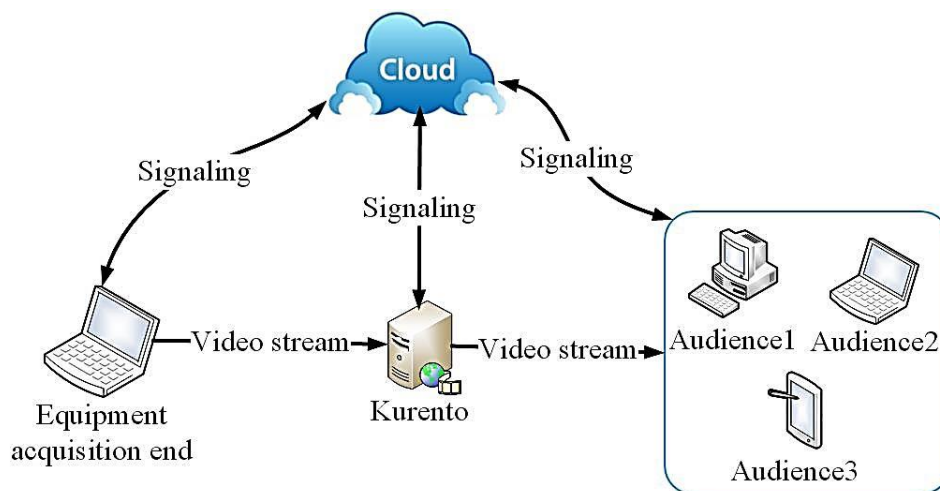


Fig. 5 Architecture diagram of video monitoring

### 3.4. Remote monitoring prototype system based on HTML5

Based on the above theoretical basis, a remote monitoring prototype system based on HTML5 is developed, as shown in Fig. 6. The monitoring system is mainly used for real-time monitoring and fault diagnosis of CNC machine tools.

The monitoring system visualizes the data in multiple directions, including data display, 2D controls, 3D models, and audio and video. Data presentations are intuitive enough to know their specific values, but they did not apply to data that is large in volume or needs to understand trends. The two-dimensional control is realized by HTML5 Canvas technology, which is used to dynamically generate raster-based images [12]. It could be used for a wide range of purposes, such as the dial could directly display the value (more suitable for occasions with slower data changes) and reflects the trend of change, the chart could display the corresponding waveform directly and switched the different display forms of the data by performing corresponding data processing. The 3D model could be intuitively perceived by the monitor. By driving the 3D model with real data, it is possible to quickly locate the specific machining position and observe the motion, such as linear or circular motion, face milling or shoulder milling. In addition, omnidirectional, multi-angle observations could be performed by rotating the 3D model. Through audio and video, you could understand the specific processing environment and reduce the difficulty of monitoring through both visual and auditory aspects. In this design, different visualization methods were adopted for different types of data, which reduced the difficulty of monitoring.



Fig. 6 Interface of remote monitoring prototype system based on HTML5

#### 4. Case study

The cutting stability during metal cutting directly affects the machining accuracy and machining efficiency of the machine tool, so real-time monitoring of cutting stability is a key means to evaluate the quality of part machining [13]. The greatest influence on cutting stability was the cutting chatter. Cutting chatter refers to a kind of violent self-excited vibration caused by the characteristics of the processing system under the action of no external force during the cutting process[14]. This experiment uses the prototype system to monitor the stability during the process of milling the three-layer pagoda, and analyzes the cause, time and position of the stability problem in time to provide assistance for the rapid diagnosis and analysis.

A three-axis vertical milling machine equipped with Huazhong CNC system was used in this experiment. The cutting and tool parameters are shown in Table 1.

During the experiment, the vibration and sound signal waveforms changed significantly at a certain moment, and the phenomenon is shown in Fig. 7.

By comparing the vibration sound waveforms of Fig. 7 (a) and (b), the following characteristics were obtained: from the time domain perspective, the amplitude in the Fig. 7 (b) is larger; from the frequency domain perspective, the frequency

domain in the Fig. 7 (a) is more discrete. There was no obvious maximum value, and there is a significant peak in the intermediate frequency domain of Fig. 7 (b). By listening to the audio data transmitted from the microphone, the sound at time in Fig. 7 (b) is sharper, and it is possible to guess that chatter may occur at that moment. At this time, combined with the internal working condition data of G code, axis position data and the visualization of the video and 3D model, it could be found that the running track and the cutting parameters of the workpiece had not changed at this time, and the vibration and sound waveform were proved. The difference is not caused by the change of the running track and the cutting parameters of the workpiece. It could be confirmed that the waveform change at this time is caused by the chatter.

Table 1 Cutter, cutting and workpiece parameters of a three-axis vertical milling machine

Cutter parameters			
Diameter (mm)	10	Helix angle	45°
Edge number	3	Material	Cemented carbide
Cutting parameters			
Feed rate (mm)	1/6	Axial depth (mm)	7
Radial depth (mm)	0.3~0.9	-	-
Workpiece parameters			
Size (mm)	50*50*50	Material	Aluminum 7075

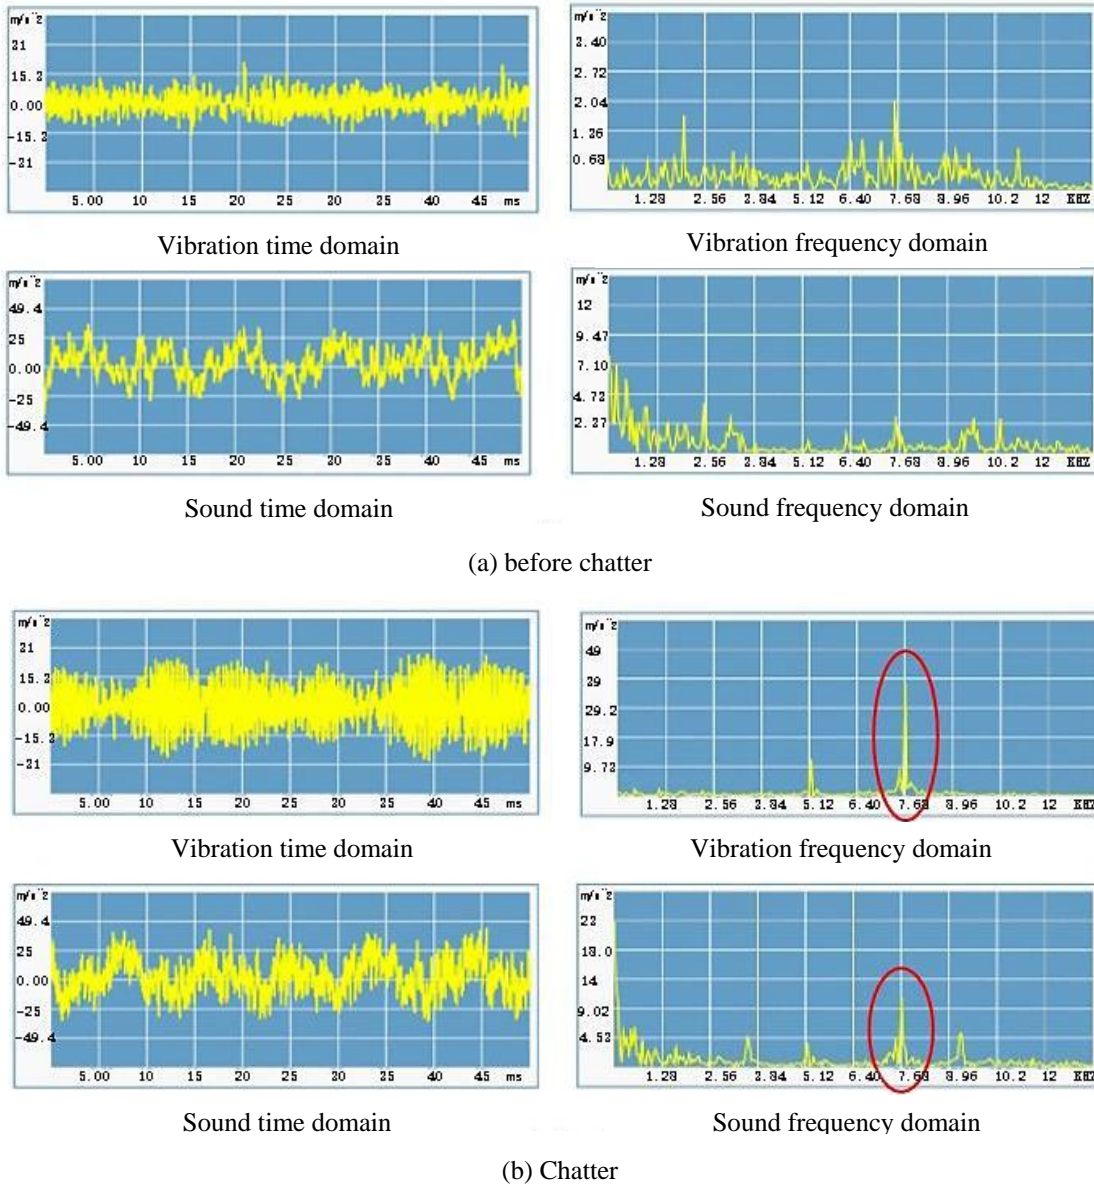


Fig. 7 Cutting stability experiment

In addition, when the chatter is successfully monitored, if only the vibration and sound waveforms of the external sensor are passed, it was not possible to quickly locate the position where the chatter occurs and the cause of the chattering. At this time, through the video and data-driven 3D model, the tool trajectory can be visualized in real time, and the chatter position could be quickly located, which played a positive role for subsequent observation and analysis. When the processing is completed, the vibration pattern could be clearly observed by observing the above-mentioned located position under the microscope, as shown in Fig. 8. By real-time acquisition and visualization of the internal data of the CNC controller in CNC machine tool, it is possible to obtain internal operating conditions such as spindle rotation speed, feed rate, and override when chattering occurs. This helped to understand the cause of the chatter and provided guidance for suppressing chatter.

It is easy to judge the machining abnormality by the external sensor signal in this experiment. At this time, the internal condition data could be combined to determine the type of abnormality as chatter. The accuracy of the monitoring is improved. There are a variety of visualization methods in this monitoring system, which could help to quickly locate abnormal positions. In addition, it helped to grasp the information of CNC machine tool conditions at all times, which reduced the difficulty of subsequent fault analysis and diagnosis.

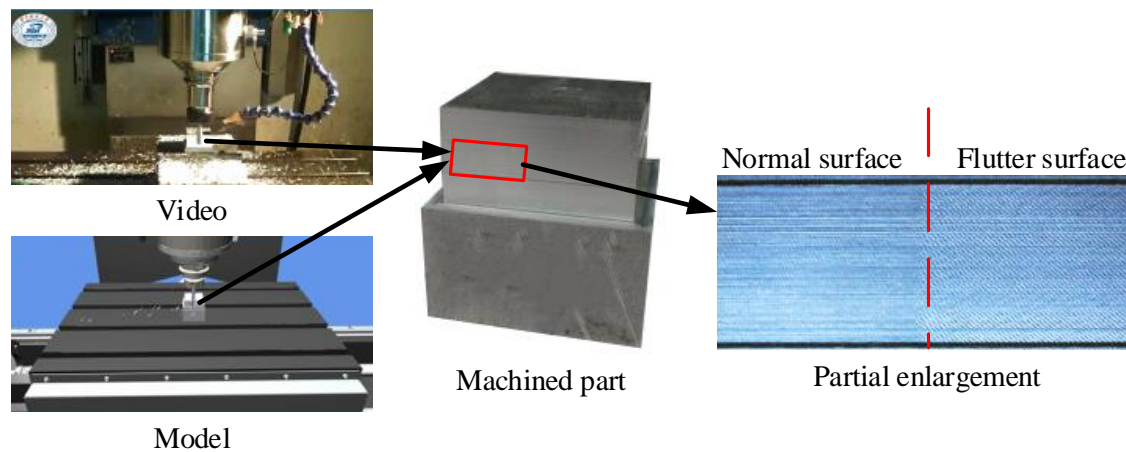


Fig. 8 Processed workpiece and detailed vibration lines

## 5. Conclusions

A method based on HTML5 for remote monitoring of CNC machine tools is proposed in this paper. This method improved the accuracy of monitoring by combining the internal working condition data of CNC machine tools with external sensor data. A variety of visualization methods, such as data display, 2D controls, 3D models, and audio and video were used to reduce the difficulty of monitoring and analysis. Based on this, a prototype system is developed and the corresponding experiments are carried out. The results indicated that the system can significantly improve the accuracy of monitoring and reduce the difficulty of monitoring and analysis. This monitoring system could improve workpiece quality and fault diagnosis accuracy significantly.

## Conflicts of Interest

The authors declare no conflict of interest.

## References

- [1] Y. Cai, B. Starly, P. Cohen, and Y. S. Lee, "Sensor data and information fusion to construct digital-twins virtual machine tools for cyber-physical manufacturing," *Procedia Manufacturing*, vol. 10, pp. 1031-1042, 2017.
- [2] X. H. Li and W. Y. Li, "The research on intelligent monitoring technology of NC machining process," *Procedia CIRP*, vol. 56, pp. 556-560, 2016.



- [3] E. Y. Heo, H. Lee, C. S. Lee, D. W. Kim, and D. Y. Lee, "Process monitoring technology based on virtual machining," *Procedia Manufacturing*, vol. 11, pp. 982-988, 2017.
- [4] Z. Lei, W. Hu, and H. Zhou, "Deploying web-based control laboratory using HTML5," 2016 13th International Conference on Remote Engineering and Virtual Instrumentation (REV), Madrid, pp. 69-73, 2016.
- [5] Y. Sheng, J. Huang, F. Zhang, Y. An, and P. Zhong, "A virtual laboratory based on HTML5," 2016 11th International Conference on Computer Science & Education (ICCSE), Nagoya, pp. 299-302, 2016.
- [6] J. Chen, J. Yang, H. Zhou, H. Xiang, Z. Zhu, Y. Li, C. H. Lee, and G. Xu, "CPS modeling of CNC Machine Tool work processes using an instruction-domain based approach," *Engineering*, vol. 1, pp. 247-260, 2015.
- [7] J. Y. Xia, B. J. Xiao, D. Li, and K. R. Wang, "Interactive WebGL-based 3D visualizations for EAST experiment," *Fusion Engineering and Design*, vol. 112, pp. 946-951, 2016.
- [8] L. Lianzhong, Z. Kun, and X. Yang, "A Cloud-Based framework for robot simulation using WebGL," 2015 Sixth International Conference on Intelligent Systems Design and Engineering Applications (ISDEA), Guiyang, pp. 5-8, 2015.
- [9] A. S. Rosas and J. L. A. Martínez, "Videoconference system based on WebRTC with access to the PSTN," *Electronic Notes in Theoretical Computer Science*, vol. 329, pp. 105-121, 2016.
- [10] Sredojević, D. Samardžija, and D. Posarac, "WebRTC technology overview and signaling solution design and implementation," in 2015 38th International Convention on Information and Communication Technology, Electronics and Microelectronics (MIPRO), 25-29 May 2015, Piscataway, NJ, USA, 2015.
- [11] K. I. Z. Apu, N. Mahmud, F. Hasan, and S. H. Sagar, "P2P video conferencing system based on WebRTC," 2017 International Conference on Electrical, Computer and Communication Engineering (ECCE), Cox's Bazar, pp. 557-561, 2017.
- [12] S. Dumke, H. Riemann, T. Bluhm, R. Daher, M. Grahl, M. Grün, A. Holtz, J. Krom, G. Kühner, H. Laqua, M. Lewerentz, A. Spring, and A. Werner, "Next generation web based live data monitoring for W7-X," *Fusion Engineering and Design*, vol. 129, pp. 16-23, 2018.
- [13] Z. Yongliang and L. Zhiyuan, "Stability and online monitoring of cutting chatter: a review," *Applied Mechanics and Materials*, vol. 121-126, pp. 377-81, 2011.
- [14] K. J. Li, Y. X. Liu, and Z. Zhao, "Research in multiple factors vibration controlling of CNC milling machine," 2011 Fourth International Conference on Intelligent Computation Technology and Automation, Shenzhen, Guangdong, pp. 472-475, 2011.



Copyright© by the authors. Licensee TAETI, Taiwan. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY-NC) license (<http://creativecommons.org/licenses/by/4.0/>).