



Missouri University of Science and Technology  
Scholars' Mine

---

Mechanical and Aerospace Engineering Faculty  
Research & Creative Works

Mechanical and Aerospace Engineering

---

01 Jan 1998

## Adjustable Ice Fishing Tip-Up

Ashok Midha

Missouri University of Science and Technology, [midha@mst.edu](mailto:midha@mst.edu)

Follow this and additional works at: [https://scholarsmine.mst.edu/mec\\_aereng\\_facwork](https://scholarsmine.mst.edu/mec_aereng_facwork)

 Part of the [Mechanical Engineering Commons](#)

---

### Recommended Citation

A. Midha, "Adjustable Ice Fishing Tip-Up," *U.S. Patents*, Jan 1998.

This Patent is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in Mechanical and Aerospace Engineering Faculty Research & Creative Works by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact [scholarsmine@mst.edu](mailto:scholarsmine@mst.edu).



US005896694A

**United States Patent** [19]  
**Midha**

[11] **Patent Number:** **5,896,694**  
[45] **Date of Patent:** **Apr. 27, 1999**

- [54] **ADJUSTABLE ICE FISHING TIP-UP**
- [75] Inventor: **Ashok Midha**, Rolla, Mo.
- [73] Assignee: **Maurice Sporting Goods, Inc.**,  
Northbrook, Ill.
- [21] Appl. No.: **09/027,758**
- [22] Filed: **Feb. 23, 1998**
- [51] **Int. Cl.<sup>6</sup>** ..... **A01K 85/01**
- [52] **U.S. Cl.** ..... **43/17; 74/567**
- [58] **Field of Search** ..... **43/17, 16, 15;**  
**74/567**

4,790,099	12/1988	Miller, Jr. ....	43/17
4,823,494	4/1989	Waterman .....	43/17
4,845,878	7/1989	Hackel .....	43/17
4,887,777	12/1989	Rasmussen .....	242/106
4,907,363	3/1990	Dury .....	43/15
4,928,419	5/1990	Forrestal .....	43/17
4,942,687	7/1990	Post .....	43/17
4,993,182	2/1991	Monsen .....	43/17
4,996,788	3/1991	Wieting et al. ....	43/17
5,005,310	4/1991	Rinehart .....	43/17
5,044,108	9/1991	Rinehart .....	43/17
5,067,269	11/1991	Eppley et al. ....	43/17
5,097,618	3/1992	Stoffel .....	43/17
5,101,591	4/1992	Frazier et al. ....	43/17
5,107,614	4/1992	Gonnello .....	43/17
5,133,144	7/1992	Formica .....	43/17
5,168,651	12/1992	Wilson .....	43/17
5,224,284	7/1993	Kelsey et al. ....	43/17
5,235,773	8/1993	Rinehart .....	43/17
5,339,558	8/1994	Monsen .....	43/17
5,363,583	11/1994	Brunner .....	43/17
5,448,850	9/1995	Gonnello .....	43/17
5,488,796	2/1996	Taylor et al. ....	43/17
5,564,213	10/1996	Rinehart .....	43/17

[56] **References Cited**  
**U.S. PATENT DOCUMENTS**


D. 282,272	1/1986	Eli .....	43/17
D. 311,499	10/1990	Mason .....	D10/104
D. 317,195	5/1991	Hackel .....	D22/134
D. 336,507	6/1993	Werner .....	D22/134
D. 352,543	11/1994	Venable .....	D22/147
2,654,176	10/1953	Kachelski et al. ....	43/17
2,720,719	10/1955	Stancheck et al. ....	43/17
2,759,287	8/1956	Urban .....	43/16
2,786,294	3/1957	Whitacre .....	43/17
3,352,048	11/1967	Fleming .....	43/17
3,641,693	2/1972	Pinnow .....	43/17
4,021,958	5/1977	Snodie .....	43/17
4,121,367	10/1978	Gonnello .....	43/16
4,253,262	3/1981	Johnson .....	43/17
4,270,297	6/1981	Yates .....	43/4
4,285,154	8/1981	Grahl .....	43/17
4,310,983	1/1982	Irvin et al. ....	43/17
4,373,287	2/1983	Grahl .....	43/17
4,565,024	1/1986	Maerz .....	43/17
4,566,216	1/1986	Randall .....	43/17
4,633,608	1/1987	Savarino .....	43/17
4,651,460	3/1987	Sykes .....	43/17
4,685,240	8/1987	Fralick .....	43/17
4,718,190	1/1988	Ward et al. ....	43/17
4,727,673	3/1988	Dumar .....	43/17
4,754,532	7/1988	Thomson et al. ....	24/303
4,787,166	11/1988	Vogt et al. ....	43/17

*Primary Examiner*—Michael J. Carone  
*Assistant Examiner*—Judith A. Nelson  
*Attorney, Agent, or Firm*—Emrich & Dithmar

[57] **ABSTRACT**

An ice fishing tip-up includes a base frame adapted to span a hole in a layer of ice over a body of water, and carrying a mast which is extendible through the hole into the water. The mast includes a shaft fixed at its lower end to a spool of fishing line and at its upper end to a cam cylinder with a helical groove formed in its outer surface. A signal staff is spring-biased to a raised position and is movable to a lowered position received in one of the convolutions of the helical groove. A pull on the fishing line rotates the cam until the staff reaches the end of the helical groove, releasing it to its raised position, the amount of pull required to trip the staff being adjustable with the cam groove convolution in which it is retained.

**15 Claims, 5 Drawing Sheets**

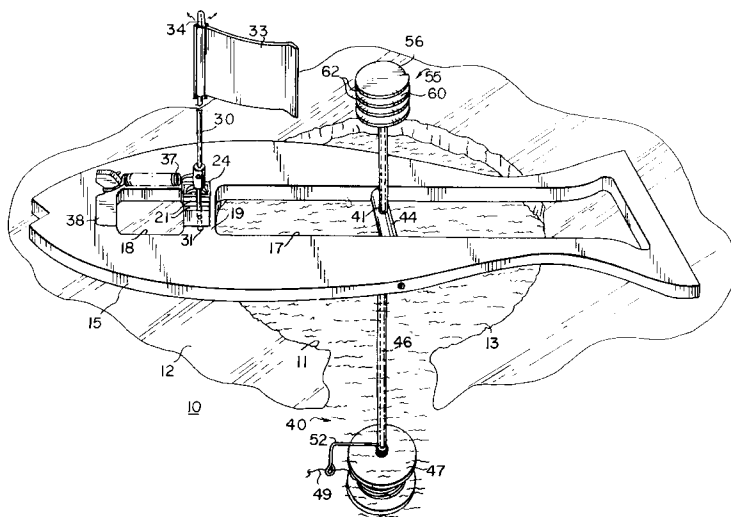

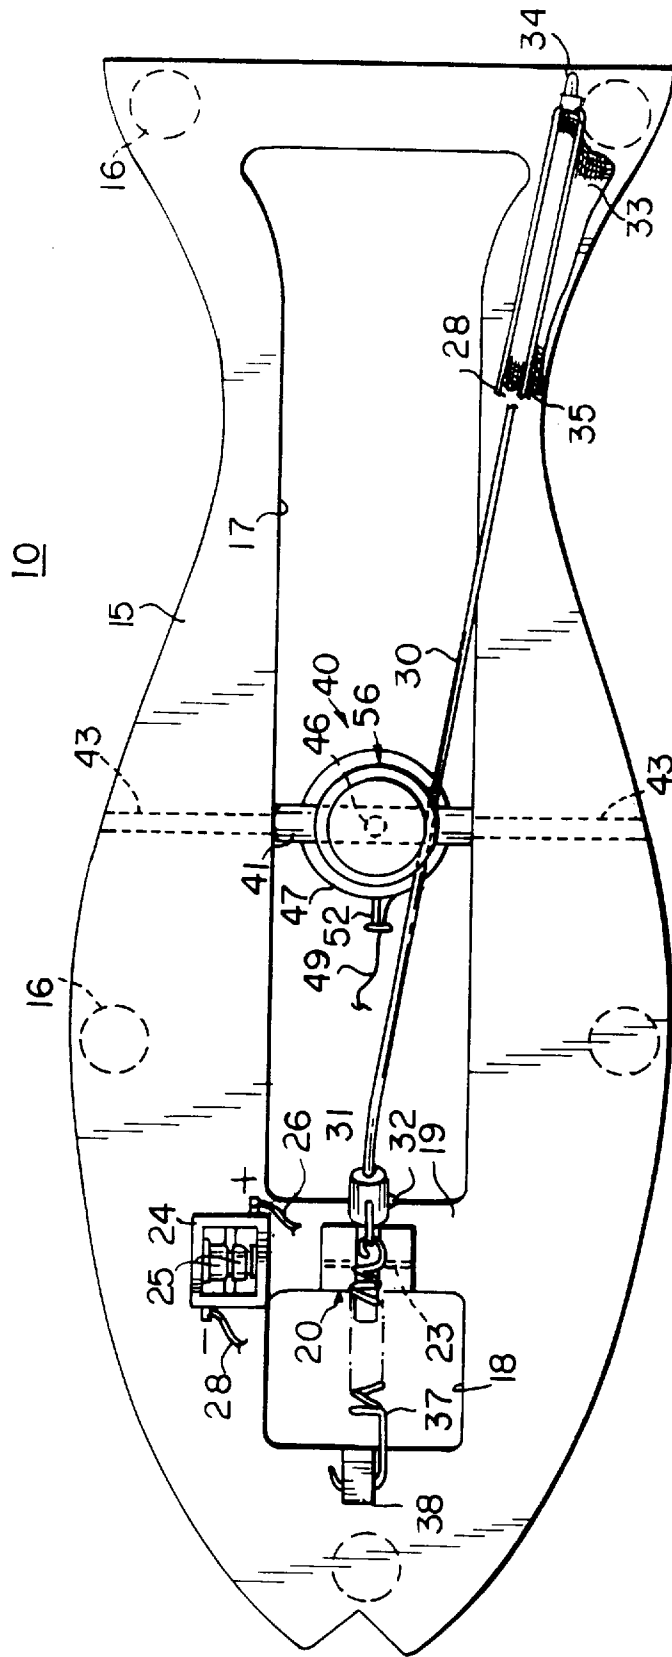
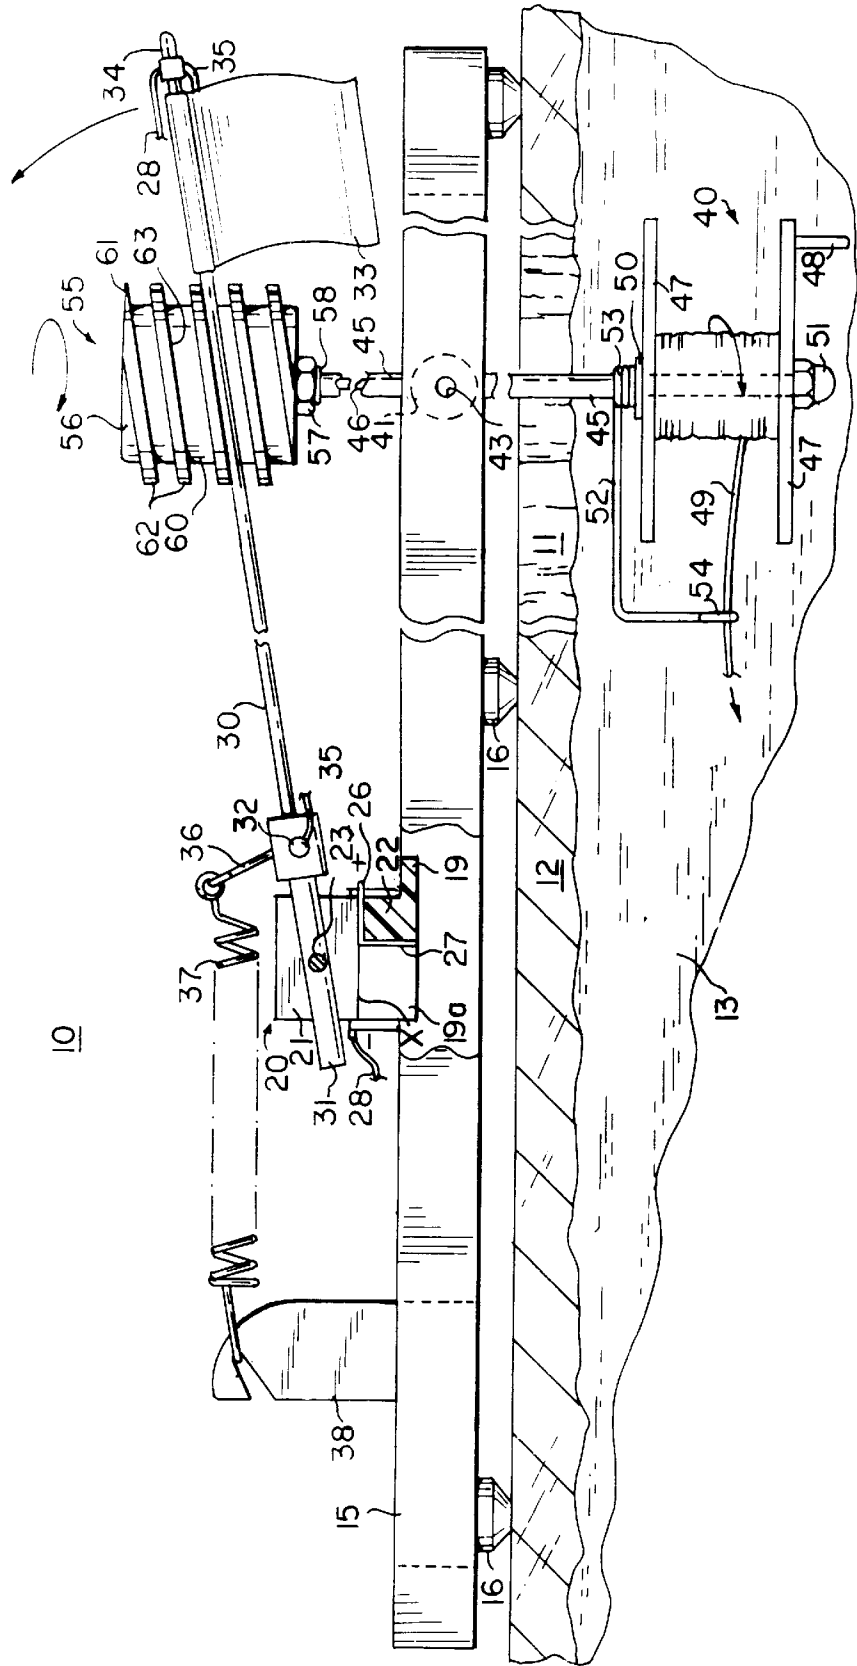


FIG. 1

FIG. 2



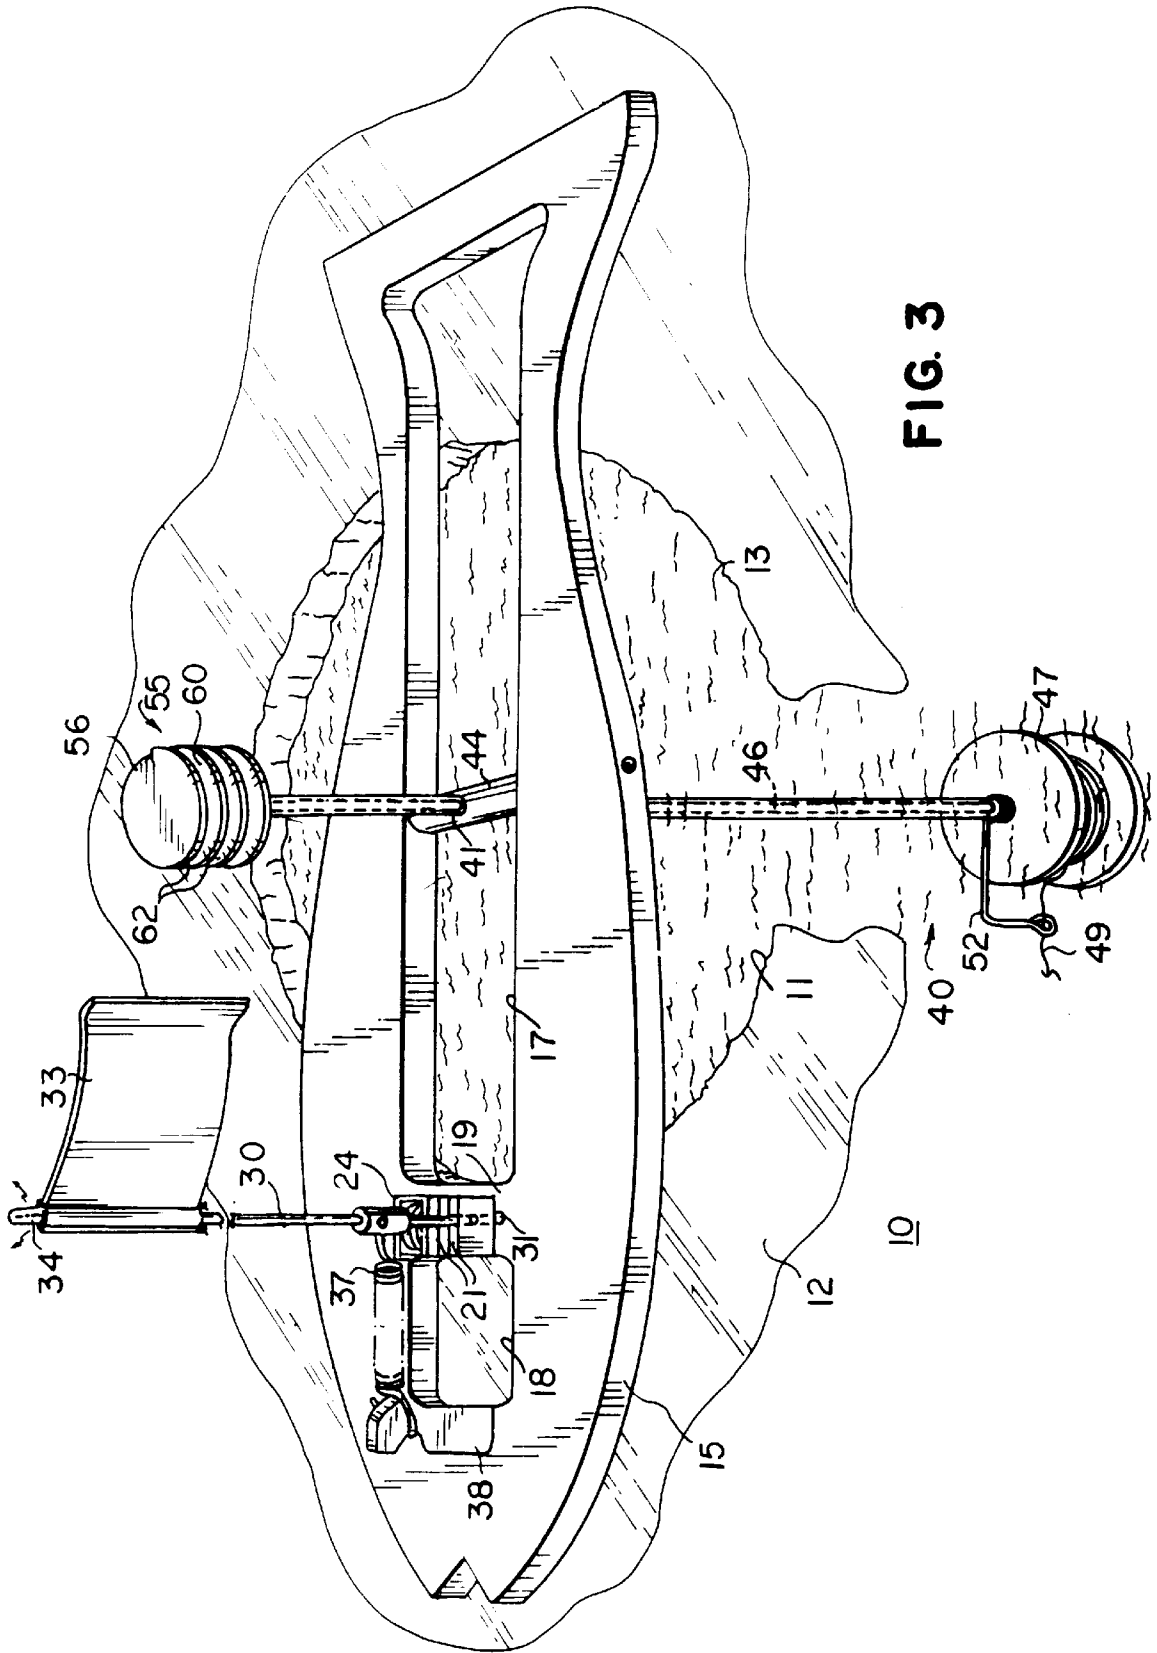


FIG. 3

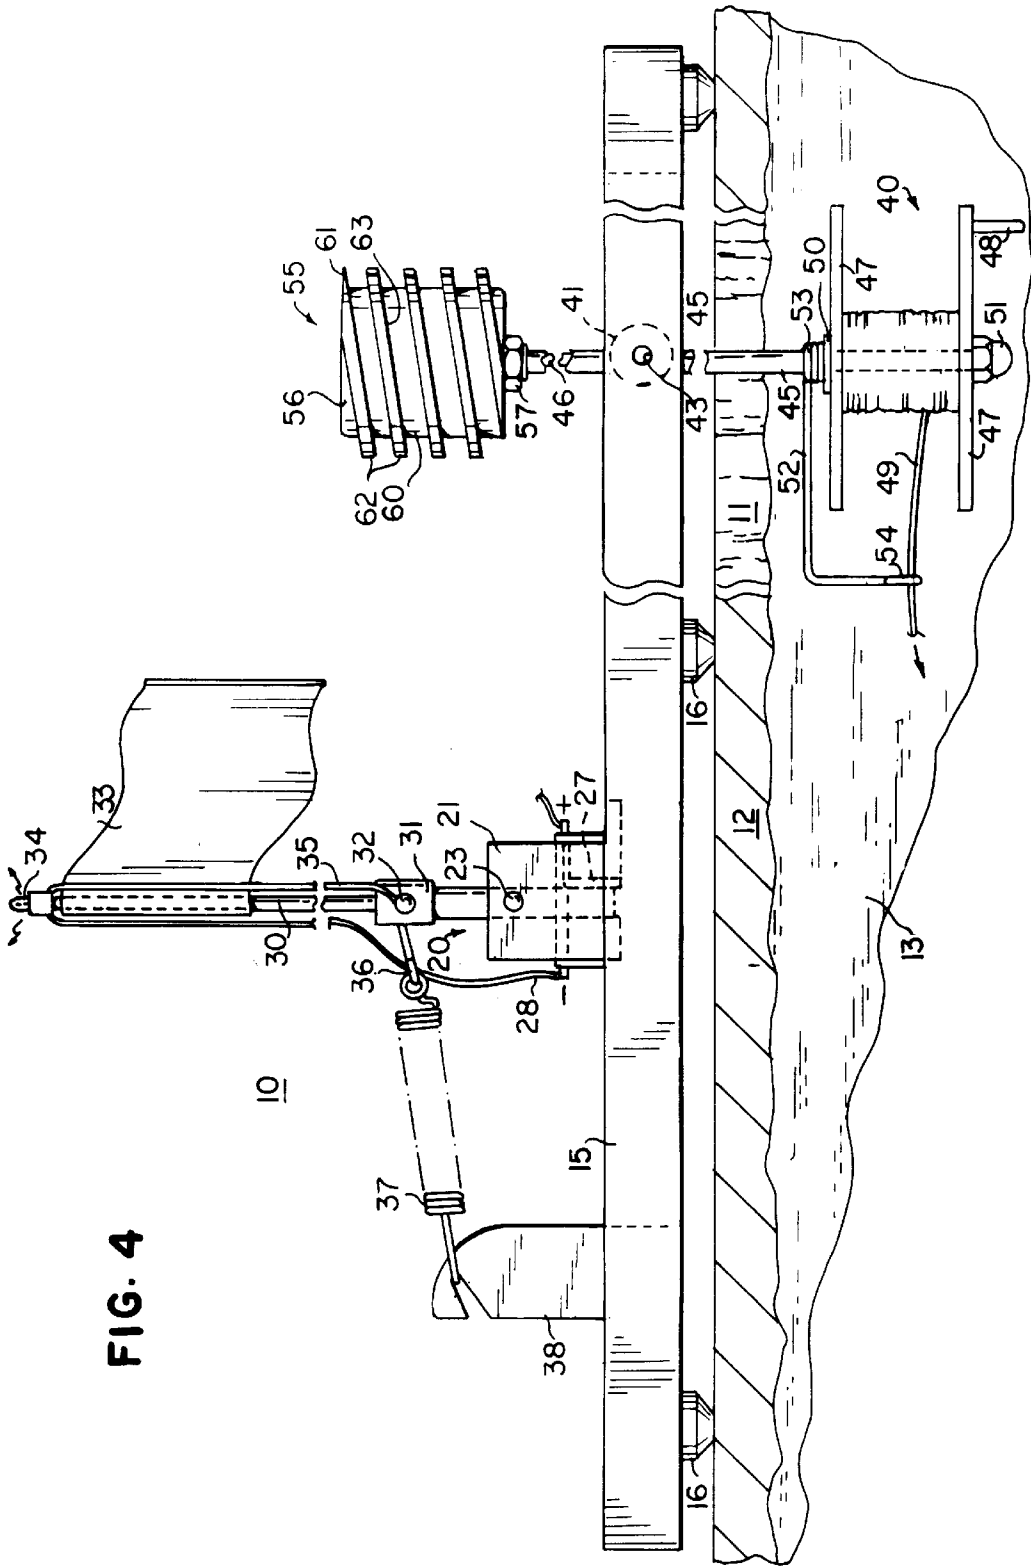


FIG. 4

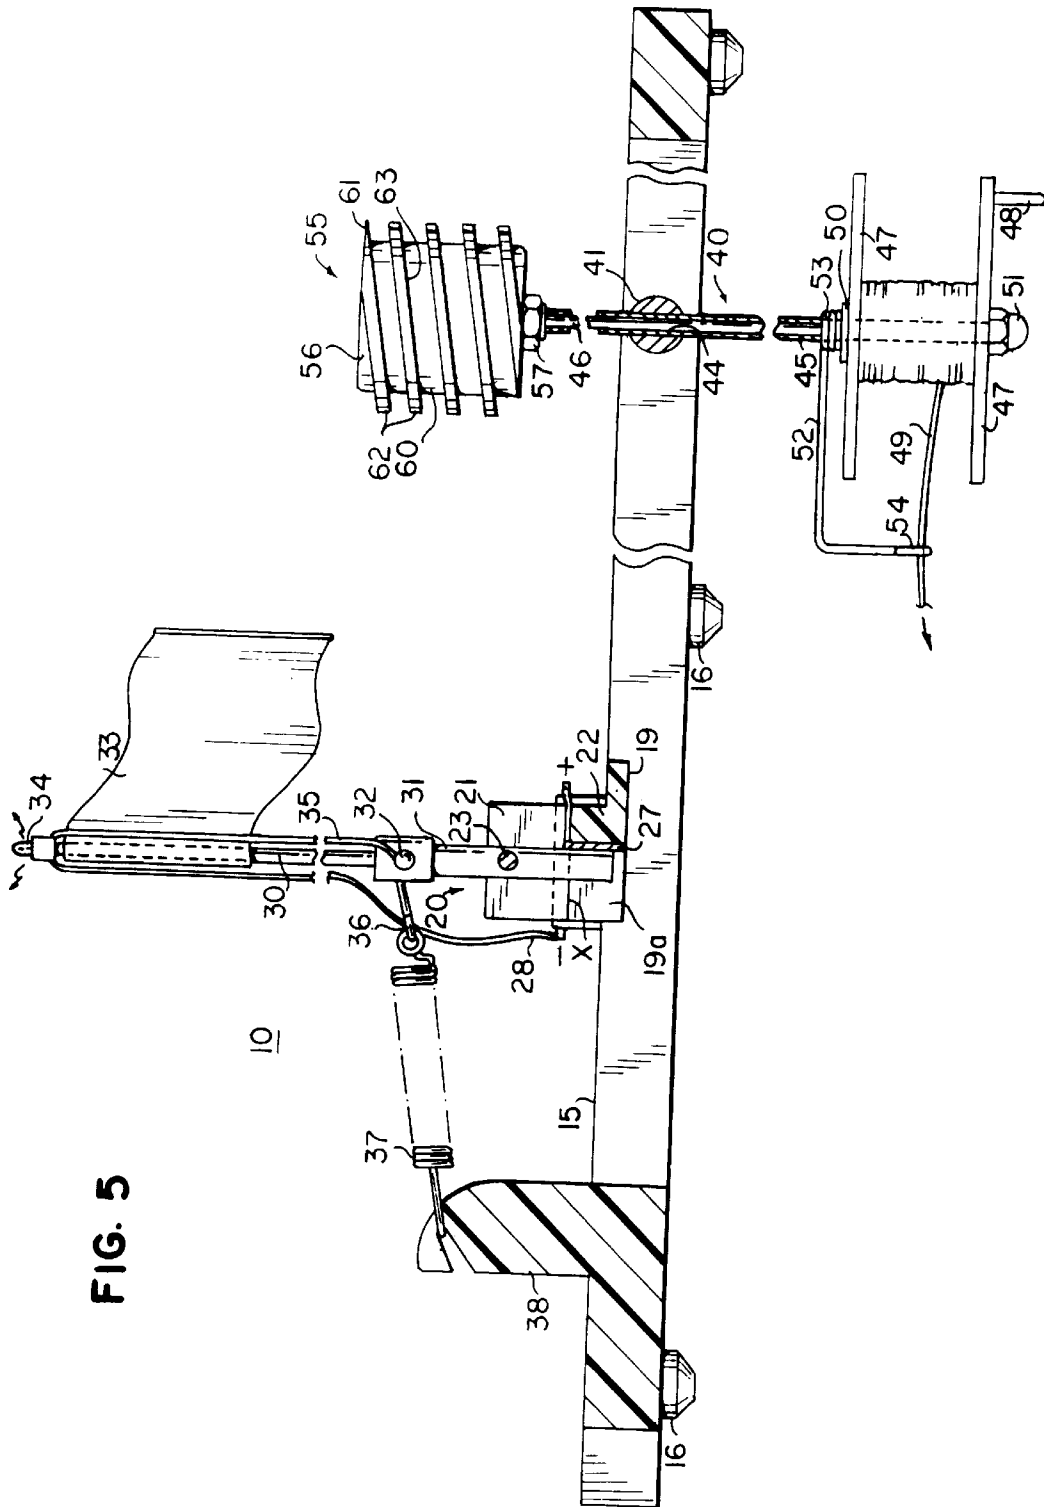


FIG. 5

## ADJUSTABLE ICE FISHING TIP-UP

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention generally relates to a tip-up signal device for ice fishing and, in particular, to a tripping mechanism for the signal staff of such a device.

#### 2. Description of the Prior Art

In ice fishing a fisherman frequently leaves a fishing line unattended, extending into the water through a hole in the ice. Accordingly, signaling devices of various types have been used with ice fishing apparatus in order to signal to the fisherman that a fish has taken the hook and pulled the fishing line from the fishing reel. When fishing through a hole in the ice, a retracted signaling device, such as a signal flag, is retained in a non-signaling position by various structural arrangements. A tripping mechanism responds to a pull on the fishing line to trip the retaining structure and release the signal flag for movement to a signaling position. A disadvantage of such prior art signaling devices is that the tripping mechanism is designed so that a predetermined pulling force on the fishing line, or unreeling of a predetermined length of line, will trip the mechanism. But different types of fish and different fishing conditions sometimes make it desirable to allow for different pull forces or different pull lengths to occur before signaling that a fish has actually taken the bait. A disadvantage of prior signaling devices is that they have not allowed for variation of the tripping conditions.

### SUMMARY OF THE INVENTION

It is a general object of the invention to provide an improved ice fishing signaling device which avoids the disadvantages of prior such devices while affording additional structural and operating advantages.

An important feature of the invention is the provision of a signaling device of the type set forth, which is adjustable as to the conditions under which signaling will occur.

In connection with the foregoing feature, a further feature of the invention is the provision of a signaling device of the type set forth, with a tripping mechanism which is adjustable as to the fish striking conditions which will cause the mechanism to trip.

A further feature of the invention is the provision of an ice fishing signaling device of the type set forth which is of relatively simple and economical construction.

Certain ones of these and other features of the invention may be attained by providing, in an ice fishing signaling device including a base frame adapted to span a hole cut in a layer of ice overlying a body of water, including a signal staff carried by the base frame for movement between raised and lowered positions and resiliently biased to the raised position, and a fishing line disposable in the water, the improvement comprising: a tripping mechanism coupled to the base frame and to the fishing lines the tripping mechanism including a retaining assembly having a helical groove with an axis and an exit end and disposed, for receiving the staff in the groove and a retaining surface to retain the staff in its lowered position while it is in the groove, and a support assembly mounting the retaining assembly for rotation of the helical groove about its axis in response to a pull on the fishing lines whereby rotation of the helical groove cams the staff along the groove to the exit end thereof and out of engagement with the retaining surface to release the staff for movement to its raised position.

The invention consists of certain novel features and a combination of parts hereinafter fully described, illustrated in the accompanying drawings, and particularly pointed out in the appended claims, it being understood that various changes in the details may be made without departing from the spirit, or sacrificing any of the advantages of the present invention.

### BRIEF DESCRIPTION OF THE DRAWINGS

For the purpose of facilitating an understanding of the invention, there is illustrated in the accompanying drawings a preferred embodiment thereof, from an inspection of which, when considered in connection with the following description, the invention, its construction and operation, and many of its advantages should be readily understood and appreciated.

FIG. 1 is a top plan view of an ice fishing tip-up in accordance with the present invention, shown with the signal staff retained in its lowered or non-signaling position;

FIG. 2 is an enlarged side elevational view of the tip-up of FIG. 1, shown in position over an ice-fishing hole, and with portions broken away;

FIG. 3 is a perspective view of the ice fishing tip-up of FIG. 2 with the signal staff in its raised position;

FIG. 4 is a view, similar to FIG. 2, of the tip-up in the position of FIG. 3; and

FIG. 5 is a view similar to FIG. 4 with portions in section more clearly to show internal construction

### DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to the drawings, there is illustrated an ice fishing signaling device in the form of a tip-up **10** having a base frame **15** adapted to span a hole **11** in a layer of ice **12** overlying a body of water **13**. In the preferred embodiment, the base frame **15** is a flat, elongated body, which may be formed of wood, plastic or any other suitable material, and has a length sufficient to span the size hole required for the type of fishing to be undertaken. In the illustrated embodiment the base frame **15** is in a decorative shape of a fish outline, but it will be appreciated that it could have any shape. Fixed to the underside of the base frame **15** at spaced-apart locations around the periphery thereof are a plurality of depending support feet **16** for engagement with the upper surface of the ice layer **12**. The feet **16** serve to space the body of the base frame **15** above the ice and provide a plurality of substantially point contacts with the ice to facilitate removal of the base frame **15** if the contact points become frozen into the ice. Formed through the base frame **15** is an elongated rectangular opening **17** and a shorter rectangular opening **18**, the space therebetween defining a web **19** which is of reduced thickness (see FIGS. **2** and **5**) and has a U-shaped notch **19a** formed in the forward edge thereof.

Projecting upwardly from the web **19** is a pivot block **20**, which includes a pair of legs **21**, respectively disposed on opposite sides of the notch **19a**, and a bight **22** joining the legs **21** at the lower rear ends thereof (FIGS. **2**, **3** and **5**). A pivot pin **23** spans the legs **21** adjacent to their upper ends. While, in the illustrated embodiment, the pivot block **20** has been shown as unitary with the base frame **15**, it will be appreciated that it could be a separate structure which is secured by any suitable means to the base frame **15**.

Also mounted on the base frame **15** adjacent to the pivot block **20** at one end of the web **19** is a generally rectangular



battery case **24** holding one or more batteries **25**, such as camera or watch batteries. The case **24** includes contacts, one of which is connected to a terminal wire **26**, which extends behind the pivot block **20**, over the bight **22**, and has a stripped or uninsulated actuating end **27** which is fitted down inside the rear end of the notch **19a** (FIGS. 2 and 5). The other contact of the battery case **24** is connected to a terminal wire **28**, which extends upwardly along an elongated signal staff **30**. The lower end of the signal staff **30**, which is preferably formed of a suitable flexible and resilient material, such as a suitable metal or plastic, is socketed in a pivot socket **31**, which receives the pivot pin **23** transversely therethrough for pivotal movement thereon, the staff **30** preferably being fixed in the pivot socket **31**, as by a set screw **32**. A signaling device, such as a flag **33** or the like, is carried by the distal end of the staff **30**, which may also mount a signal lamp **34**. The terminal wire **28** extends upwardly along the staff **30** to connect to one terminal of the lamp **34**, the other terminal of which is connected to a wire **35** which extends downwardly along the staff **30** and is fixed to the set screw **32**, as by soldering or the like. The pivot socket **31** is formed of a suitable electrically conductive material, such as a suitable metal, and has a length such that, when the staff **30** is in its substantially vertical raised position illustrated in FIGS. 3-5, the lower end of the pivot socket **31** is engageable with the actuating end **27** of the terminal wire **26** for closing the circuit across the batteries **25** and energizing the lamp **34**. It will be appreciated that when the staff **30** is pivoted from the vertical position, the circuit is broken and the lamp **34** is deenergized.

Preferably, the staff **30** is biased into its raised position by a helical tension spring **37**, one end of which is connected to a hook **36** on the pivot socket **31**, and the other end of which is connected to a hook **38** upstanding from the base frame **15**.

It is a significant aspect of the present invention that the tip-up **10** includes a tripping mechanism **40** for the signal staff **30**. More particularly the tripping mechanism **40** includes a pivot shaft **41** extending across the opening **17** of the base frame **15** and secured in place by suitable means such as screws or the like applied through transverse bores **43** in the base frame **15**. The shaft **41** has a hole **44** formed diametrically therethrough centrally thereof (FIGS. 3 and 5) and slidably receives therethrough an elongated mast in the form of a hollow tube **45**, which may be formed of metal or any other suitable material. An elongated shaft or rod **46** is received coaxially through the tube **45** and is fixed at one end thereof to a spool **47**, which is provided with a depending handle **48** and is adapted for storing a supply of fishing line **49**. Preferably, the spool **47** is disposed below the lower end of the tube **45**, the shaft **46** having a length sufficient to extend through the hub of the spool **47**, which is spaced from the tube **45** by a washer **50** and is secured to the shaft **46**, as by a cap nut **51** threaded onto the distal end of the shaft **46**. A line guide **52** is mounted on the tube **45** by a plurality of spring coils **53** which are loosely mounted on the tube **45**, so that the line guide **52** can swing freely in relation to the tube **45** and the spool **47**. The lower end of the line guide **52** is in the form of a loop **54**, through which the leading end of the fishing line **49** is threaded, all in a known manner.

The other end of the shaft **46** projects outwardly beyond the adjacent end of the tube **45** and is secured to a retaining assembly **55** in the nature of a generally cylindrical cam body **56**. Preferably, the cam body **56** is spaced from the adjacent end of the tube **45** by a lock nut **57** and washer **58**, the shaft **46** preferably being threadedly engaged through the lock nut **57** and into the lower end of the cam body **56**.

Formed in the outer cylindrical surface of the cam body **56** is a helical groove **60**, having a pitch and depth sufficient to accommodate the signal staff **30**. The helical groove **60** terminates at an exit end **61** at the distal end of the cam body **56** and defines a spiral, radially outwardly extending flange **62**, the underside of which defines a retaining surface **63**.

In use, the base frame **15** is placed over the ice fishing hole **11** and the tube **45** is pivoted to a substantially vertical orientation so as to extend downwardly through the hole **11** and into the water **13**, with the spool **47** being disposed in the water **13**, as illustrated in FIGS. 2 and 5. The tube **45** may fall by gravity until the washer **58** rests on the pivot shaft **41** or, alternatively, a set screw (not shown) may be provided in the pivot shaft **41**, if it is desired to lock the tube **45** in a predetermined position raised above the pivot shaft **41**. The signal staff **30** is then pivoted downwardly and rearwardly, against the urging of the spring **37**, to a lowered position illustrated in FIGS. 1 and 2, and is seated in a selected one of the convolutions of the helical groove **60**, this cocking of the signal staff **30** being facilitated by its flexible and resilient nature. The force exerted by the bias spring **37** will urge the signal staff **30** against the retaining surface **63** of the flange **62**. It is a significant aspect of the invention that the helical groove **60** includes a plurality of convolutions, in any one of which the staff **30** may be selectively retained. It can be seen that the low height of the bight **22** of the pivot block **20** facilitates pivoting of the signal staff **30** to this lowered position.

The fishing line **49** is wound on the spool **47** and threaded through the line guide loop **54** in a manner such that, when a fish strikes and pulls the line the spool **47** will be rotated in the direction of the arrow in FIG. 2, and will correspondingly rotate the shaft **46** and the cam body **56**. As the cam body **56** rotates, the signal staff **30** will ride up along the retaining surface **63** until it reaches the exit end **61** of the helical groove **60**. At this point the retaining surface **63** disappears and the signal staff **30** is released to be pulled up to its raised position by the spring **37**, at which point the lamp **34** will be lit as explained above. It will be appreciated that the length of line which must be unspooled before the signal staff **30** is tripped is dependent upon the initial placement of the staff **30** in the helical groove **60**. Thus, e.g., the staff **30** could be placed very close to the exit end **61** of the helical groove **60**, so that the slightest pull on the fishing line **49** will trip the staff **30**, or it could be placed in one of the lower convolutions of the groove **60**, necessitating one or more rotations of the cam body **56** before the staff is released.

When the tip-up **10** is not in use, the tube **45** can be positioned and pivoted to a substantially horizontal orientation (not shown), wherein its lower end is against the underside of the rear end of the base frame **15**, with the spool **47** against the rear end of the base frame and the cam body **46** disposed in the elongated opening **17**. The signal staff may then be pivoted down to a substantially horizontal position and secured to the folded tube **45** and the base frame **15**, as by a rubberband or the like, to provide a more compact configuration for storage.

From the foregoing, it can be seen that there has been provided an improved ice fishing tip-up which affords significant adjustability of the length of fishing line which must be unspooled before the signal staff is tripped.

While particular embodiments of the present invention have been shown and described, it will be obvious to those skilled in the art that changes and modifications may be made without departing from the invention in its broader

## 5

aspects. Therefore, the aim in the appended claims is to cover all such changes and modifications as fall within the true spirit and scope of the invention. The matter set forth in the foregoing description and accompanying drawings is offered by way of illustration only and not as a limitation. The actual scope of the invention is intended to be defined in the following claims when viewed in their proper perspective based on the prior art.

I claim:

1. In an ice fishing signaling device including a base frame adapted to span a hole cut in a layer of ice overlying a body of water, including a signal staff carried by the base frame for movement between raised and lowered positions and resiliently biased to the raised position, and a fishing line disposable in the water, the improvement comprising:

a tripping mechanism coupled to the base frame and to the fishing line,

said tripping mechanism including a retaining assembly having a helical groove with an axis and an exit end and disposed for receiving the staff in said groove and a retaining surface to retain the staff in its lowered position while it is in the groove, and

a support assembly mounting said retaining assembly for rotation of the helical groove about its axis in response to a pull on the fishing line,

whereby rotation of said helical groove cams the staff along said groove to the exit end thereof and out of engagement with said retaining surface to release the staff for movement to its raised position.

2. The device of claim 1, wherein said retaining assembly includes a cylindrical member having the helical groove formed in an external cylindrical surface thereof.

3. The device of claim 2, wherein said axis is disposed substantially vertically in use.

4. The device of claim 1, wherein said helical groove includes a plurality of convolutions.

5. The device of claim 1, wherein said tripping mechanism includes a spool carrying a supply of the fishing line, a cylindrical body having an outer cylindrical surface in which the helical groove is formed, and an elongated shaft interconnecting said spool and said cylindrical body for rotation therewith coaxially therewith.

6. The device of claim 5, and further comprising a mounting assembly for mounting said shaft on the base frame for pivotal movement between a substantially vertical use position and a substantially horizontal storage position.

7. The device of claim 1, and further comprising a pivot on the base frame mounting the staff for pivotal movement between its raised and lowered positions.

## 6

8. The device of claim 7, and further comprising a bias spring coupled between the staff and the base frame for resiliently biasing the staff to its raised position.

9. In an ice fishing signaling device including a base frame adapted to span a hole cut in a layer of ice overlying a body of water, including a signal staff carried by the base frame for movement between raised and lowered positions and resiliently biased to the raised position, and a fishing line disposable in the water, the improvement comprising:

a tripping mechanism coupled to the base frame and to the fishing line,

said tripping mechanism including a shaft having a longitudinal axis and carried by the base frame for rotation about the axis and having a lower end extendable through the hole into the water and an upper end,

a spool of the fishing line carried by the lower end of the shaft for rotation therewith, and

a cam carried by the upper end of the shaft for rotation therewith and having a helical groove coaxial with the shaft and having an exit end and disposed for receiving the staff in said groove to retain the staff in its lowered position,

whereby the shaft is rotatable in response to a pull on the fishing line for camming the staff along said helical groove to the exit end thereof to release the staff for movement to its raised position.

10. The device of claim 9, wherein said helical groove includes a plurality of convolutions.

11. The device of claim 9, and further comprising a mounting assembly for mounting said shaft on the base frame for pivotal movement between a substantially vertical use position and a substantially horizontal storage position.

12. The device of claim 9, and further comprising a tubular sleeve carried by the base frame and receiving the shaft coaxially therein for free rotation relative thereto.

13. The device of claim 12, and further comprising means adjustably supporting said sleeve on the base frame for varying the length of shaft extendible into the water.

14. The device of claim 9, and further comprising a signal lamp carried by the staff.

15. The device of claim 14, and further comprising a power supply carried by the base frame and responsive to movement of the staff to its raised position for energizing the lamp.

\* \* \* \* \*

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 5,896,694  
DATED : April 27, 1999  
INVENTOR(S) : Ashok Midha


Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title page,  
Item [56], **References Cited**, U.S. PATENT DOCUMENTS,  
add -- D282,273 1/1986 Eli. --

Signed and Sealed this

Twenty-ninth Day of June, 2004

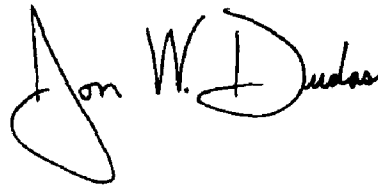A handwritten signature in black ink that reads "Jon W. Dudas". The signature is written in a cursive style with a large, looped initial "J".

---

JON W. DUDAS  
*Acting Director of the United States Patent and Trademark Office*