

16 Aug 2008, 8:45am - 12:30pm

Design Prediction and Performance of Piles for Seismic Loads

Vijay K. Puri

Southern Illinois University, Carbondale, IL

Shamsher Prakash

Missouri University of Science and Technology, prakash@mst.edu

Follow this and additional works at: <https://scholarsmine.mst.edu/icchge>



Part of the [Geotechnical Engineering Commons](#)

Recommended Citation

Puri, Vijay K. and Prakash, Shamsher, "Design Prediction and Performance of Piles for Seismic Loads" (2008). *International Conference on Case Histories in Geotechnical Engineering*. 6.

<https://scholarsmine.mst.edu/icchge/6icchge/session03/6>

This Article - Conference proceedings is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in International Conference on Case Histories in Geotechnical Engineering by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact scholarsmine@mst.edu.



DESIGN PREDICTION AND PERFORMANCE OF PILES FOR SEISMIC LOADS

Vijay K. Puri

Professor
Southern Illinois University
Carbondale, IL 62901

Shamsher Prakash

Professor Emeritus
Missouri University of Science and Technology
Rolla, MO 65409

ABSTRACT

Pile foundations are regarded as a safe alternative for supporting structures in seismic areas. The performance of piles depends on soil profile, pile and earthquake parameters. The soils may also be prone to liquefaction. In non-liquefying soils the shear modulus degrades with increasing strain or displacements. Material damping increases with increasing strain or displacement. Stiffness of single pile and pile groups are needed for different modes of vibration; e.g., vertical vibrations, horizontal sliding in x or y direction, rotation about x or y axis and torsion. Group action is generally accounted for by including interaction factors. Pile response in any mode of vibration is determined from principles of structural dynamics. In liquefiable soils, the liquefaction may lead to substantial increases in pile cap displacements above those for the non-liquefied case. Down-drag due to liquefied soil may also pose problems. After liquefaction, if the residual strength of the soil is less than the static shear stresses caused by a sloping site such as a river bank, lateral spreading or down slope displacements may exert damaging pressures against the piles as observed during the 1964 Niigata and the 1995 Kobe earthquakes. The paper presents state of the art on analysis and design of piles subjected to seismic loading.

INTRODUCTION

Piles are often the preferred choice of foundations in seismic areas. The seismic loading induces large displacements or strains in the soil. The shear modulus of the soil degrades and damping (material) increases with increasing strain. The stiffness of piles should be determined for these strain effects. The elastic solutions for determining response of piles subjected to dynamic loads have been presented by several investigators in the past (Kwaza and Kraft, 1980; Novak, 1974; Novak and El-Sharnouby, 1983; Novak and Howell, 1977; Poulos, 1971; Prakash and Puri, 1988; and Prakash and Sharma, 1991). Displacement dependent spring and damping factors for piles for vertical, horizontal and rotational vibrations have been presented by Munaf and Prakash (2002), Munaf et al. (2003) and Prakash and Puri (2008). For piles in non-liquefying soils the stiffness of the pile group is estimated from that of the single piles by using group interaction factors. The contribution of the pile cap, if any, is also included. The response of the single pile or pile groups may then be determined using principles of structural dynamics.

In liquefiable soils, progressive buildup of excess pore water pressure may result in loss of strength and stiffness resulting in large bending moments and shear forces in the pile. The mechanism of pile behavior in liquefying soil has been investigated by several investigators in the recent years (Liyanapathirana and Poulos, 2005).

The design of pile foundations subjected to earthquakes requires a reliable method of calculating the effects of earthquake shaking and post-liquefaction displacements on pile foundations. Keys to good design include

1. Reliable estimates of environmental loads.
2. Realistic assessments of pile head fixity.
3. A mathematical model which can adequately account for all significant factors that affect the response of the pile-soil-structure system to ground shaking and/or lateral spreading in a given situation.

PILES IN NON-LIQUEFIABLE SOIL

The equivalent spring stiffness and damping for making the mathematical model of the soil-pile system for any mode of vibration are a function of Young's modulus of pile material (E_p), shear modulus of soil (G_s), and geometry of the piles in the group. Shear modulus and hence spring and damping factors are strain or displacement dependent. There are six independent spring factors for a piles-cap system; i.e., k_x , k_y , k_z , in translation in x, y and z directions, respectively and k_θ , k_ϕ , k_ψ rotational-springs about x, y and z directions respectively. There are two rotational cross-coupled springs; i.e., $k_{x\phi}$ and $k_{y\theta}$ which include 2-components of displacement; i.e., translation and rotation about the appropriate axis. Also there are corresponding eight damping factors; i.e., c_x , c_y , c_z , c_θ , c_ϕ ,

c_{ψ} , and $c_{x\phi}$ and $c_{y\theta}$. To develop displacement dependent relationships for the spring and damping factors, appropriate relationships between strain and displacement are needed. Also, modulus degradation with strain needs be built into these relationships. Appropriate non-linear relationships for spring and damping factors have been developed using Novak's solutions by Munaf and Prakash (2002) and Munaf et al. (2003), which have been used for analysis of bridge structures (Anderson and Prakash et al., 2001 and Luna and Prakash et al., 2001). Novak's (1974) model was used for the computation of stiffness and damping of single pile and pile groups, with appropriate interaction factors. Stiffness and damping in all the modes; i.e., vertical, horizontal, rocking and torsion and cross coupling in both the x and y direction have been evaluated (Munaf and Prakash, 2002). The sign convention is explained in Fig. 1. The main assumptions in Novak's model are:

1. The pile is a circular and solid in cross section. For non-circular sections, an equivalent radius r_o , is determined in each mode of variation.
2. The pile material is linear elastic.
3. The pile is perfectly connected to the soil, i.e., there is no separation between soil and pile during vibrations. This assumption may not be valid and in practical situations separation between the pile and soil may occur during vibrations for some depth below the ground surface.

STIFFNESS AND DAMPING FACTORS OF SINGLE PILE

Vertical Stiffness (K_z) and Damping Factors (C_z)

$$K_z = \left[\frac{E_p A}{r_o} \right] f_{w1} \quad (1.a)$$

$$C_z = \left[\frac{E_p A}{V_s} \right] f_{w2} \quad (1.b)$$

Where;

E_p = modulus of elasticity of pile material

A = cross section of single pile

r_o = radius of a circular pile or equivalent pile radius

V_s = shear wave velocity of soil along the floating pile and f_{w1} and f_{w2} are obtained from Figure 2 for parabolic variation of shear modulus of soil ' G_s ' with depth.

Torsional Stiffness (k_{ψ}) and Damping Factors (c_{ψ})

$$k_{\psi} = \left[\frac{G_p I_{pp}}{r_o} \right] f_{T,1} \quad (2.a)$$

$$c_{\psi} = \left[\frac{G_p I_{pp}}{V_s} \right] f_{T,2} \quad (2.b)$$

Where;

G_p = shear modulus of elasticity of pile material

I_{pp} = Polar moment of inertia of single pile about z axis

$f_{T,1}$ and $f_{T,2}$ have been developed by Novak and Howell (1977) and are shown in figure 3.




Fig. 1. Sign Convention

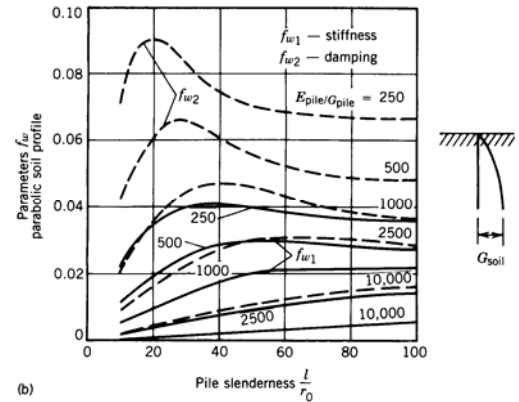


Fig. 2. Stiffness and Damping Parameters for Vertical Response of Floating Piles (Novak and El-Sharnouby; 1983)

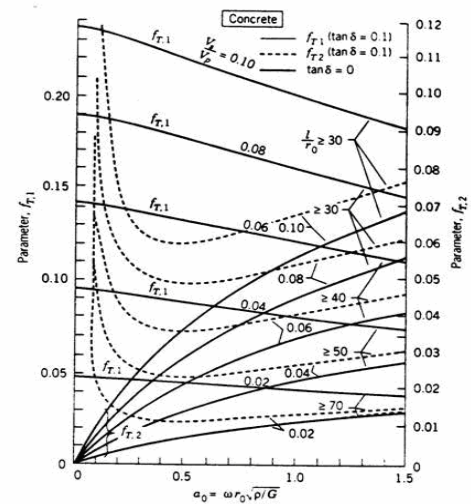


Fig. 3. Torsional stiffness and damping parameters for Reinforced Concrete (Novak And Howell, 1977)

Sliding and Rocking Stiffness and Damping Factors

Because, the pile is assumed to be cylindrical with a radius r_o , its stiffness and damping factors in any horizontal direction are the same. However, in the pile group, the number of piles

in the x and y directions may be different. Therefore the stiffness and damping factors of a pile group are dependent on the number of piles and their spacing in each direction.

Sliding (k_x, c_x)

$$K_x = \left[\frac{E_p I_p}{r_o^3} \right] f_{x1} \tag{3.a}$$

$$C_x = \left[\frac{E_p I_p}{r_o^2 V_s} \right] f_{x2} \tag{3.b}$$

Rocking (k_θ, c_θ) and ($k_{y\theta}, c_{y\theta}$)

$$K_\theta = K_\theta = \left[\frac{E_p I_p}{r_o^2} \right] f_{\phi1} \tag{4.a}$$

$$C_\theta = C_\theta = \left[\frac{E_p I_p}{r_o^2 V_s} \right] f_{\phi2} \tag{4.b}$$

Cross-coupling ($k_{x\phi}, c_{x\phi}$) and ($k_{y\theta}, c_{y\theta}$)

$$K_{x\phi} = K_{y\theta} = \left[\frac{E_p I_p}{r_o^2} \right] f_{x\theta1} \tag{5.a}$$

$$C_{x\phi} = C_{y\theta} = \left[\frac{E_p I_p}{r_o V_s} \right] f_{x\theta2} \tag{5.b}$$

Where;

I_p = moment of inertia of single pile about x or y axis
 r_o = pile radius and $f_{x1}, f_{x2}, f_{\phi1}, f_{\phi2}, f_{x\theta1}, f_{x\theta2}$ Novak's coefficient obtained from Table 1 for parabolic soil profile, with appropriate interpolation and for $\nu = 0.25$

GROUP INTERACTION FACTOR

To consider group effect, Poulos (1968) assumed one of the piles in the group as a reference pile. In the illustration in Figure 4, pile No. 1 is assumed as a reference pile and distance 'S' is measured from the center of the reference pile to center of other pile. For vertical vibrations use Figure 5 to obtain α_A for each pile for appropriate $S/2r_o$ values. α_A 's are function of length of the pile (L) and radius (r_o). Use Figure 6 (Poulos, 1971), to obtain α_L for each pile in the horizontal x-direction, considering departure angle β (degrees). α_L 's are a function of L, r_o and flexibility K_R as defined in Figure 6 and departure angle (β). This procedure will also apply for horizontal y-direction.

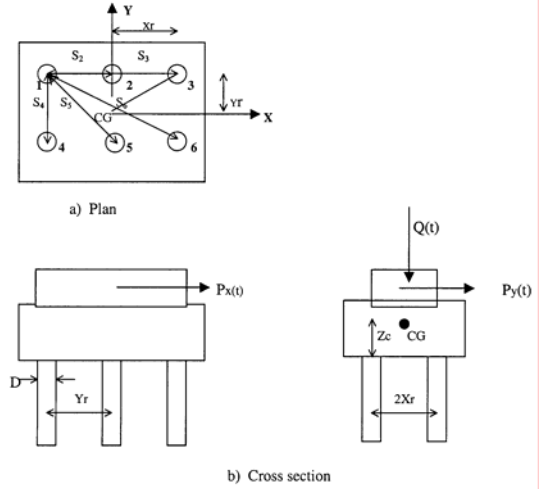


Fig. 4. Plan and Cross Section of Pile Group for illustration.

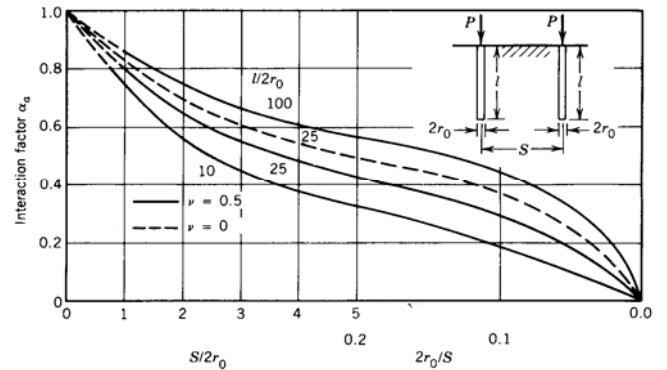


Fig. 5. α_A as a Function of Pile Length and Spacing (Poulos, 1968)

The group interaction factor ($\sum \alpha_L$) is the summation of α_L for all the piles. Note that the group interaction factor in x-direction and y-direction may be different depending on number and spacing of piles in each direction.

Table 1 Stiffness and Damping Parameters of Horizontal Response for Pile with $L/R_0 > 25$ for Homogeneous Soil Profile and $L/R_0 > 30$ for Parabolic Soil Profile

ν (1)	$\frac{E_{pile}}{G_{soil}}$ (2)	Stiffness Parameters				Damping Parameters			
		f_{s1} (3)	f_{s01} (4)	f_{s1}^* (5)	f_{s1}^{**} (6)	f_{d2} (7)	f_{s02} (8)	f_{d2} (9)	f_{s2}^* (10)
(a) Homogeneous Soil Profile									
0.25	10,000	0.2135	-0.0217	0.0042	0.0021	0.1577	-0.0333	0.0107	0.0054
	2,500	0.2998	-0.0429	0.0119	0.0061	0.2152	-0.0646	0.0297	0.0154
	1,000	0.3741	-0.0668	0.0236	0.0123	0.2598	-0.0985	0.0579	0.0306
	500	0.4411	-0.0929	0.0395	0.0210	0.2953	-0.1337	0.0953	0.0514
	250	0.5186	-0.1281	0.0659	0.0358	0.3299	-0.1786	0.1556	0.0864
0.40	10,000	0.2207	-0.0232	0.0047	0.0024	0.1634	-0.0358	0.0119	0.0060
	2,500	0.3097	-0.0459	0.0132	0.0068	0.2224	-0.0692	0.0329	0.0171
	1,000	0.3860	-0.0714	0.0261	0.0136	0.2677	-0.1052	0.0641	0.0339
	500	0.4547	-0.0991	0.0436	0.0231	0.3034	-0.1425	0.1054	0.0570
	250	0.5336	-0.1365	0.0726	0.0394	0.3377	-0.1896	0.1717	0.0957
(b) Parabolic Soil Profile									
0.25	10,000	0.1800	-0.0144	0.0019	0.0008	0.1450	-0.0252	0.0060	0.0028
	2,500	0.2452	-0.0267	0.0047	0.0020	0.2025	-0.0484	0.0159	0.0076
	1,000	0.3000	-0.0400	0.0086	0.0037	0.2499	-0.0737	0.0303	0.0147
	500	0.3489	-0.0543	0.0136	0.0059	0.2910	-0.1008	0.0491	0.0241
	250	0.4049	-0.0734	0.0215	0.0094	0.3361	-0.1370	0.0793	0.0398
0.40	10,000	0.1857	-0.0153	0.0020	0.0009	0.1508	-0.0271	0.0067	0.0031
	2,500	0.2529	-0.0284	0.0051	0.0022	0.2101	-0.0519	0.0177	0.0084
	1,000	0.3094	-0.0426	0.0094	0.0041	0.2589	-0.0790	0.0336	0.0163
	500	0.3596	-0.0577	0.0149	0.0065	0.3009	-0.1079	0.0544	0.0269
	250	0.4170	-0.0780	0.0236	0.0103	0.3468	-0.1461	0.0880	0.0443

Source: Novak and El-Sharnouby (1983). f_{s1}^* and f_{s2}^* are parameters for pinned end.

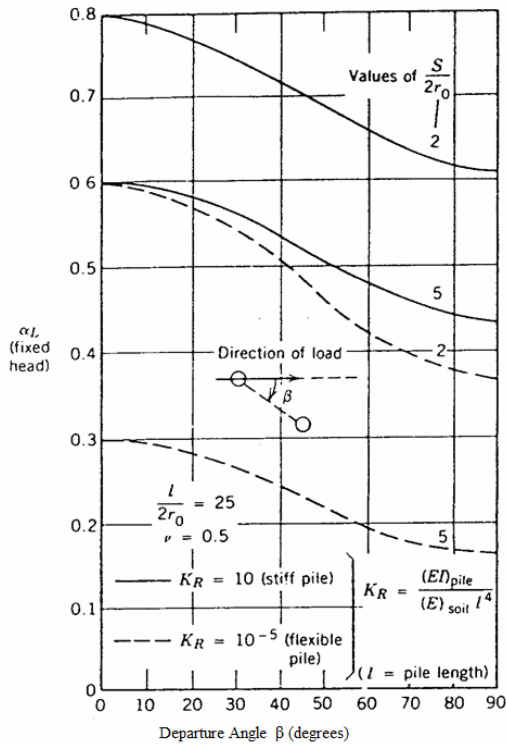


Fig. 6. Graphical solution of α_L (Poulos, 1971)

Group Stiffness and Damping

Figure 4 shows schematically the plan and cross sections of an arbitrary pile group. This figure will be used to explain the procedure for obtaining the stiffness and damping for a group of pile for all modes of vibration.

Vertical group stiffness (k_z^g) and damping factors (c_z^g)

$$k_z^g = \frac{\sum k_z}{\sum \alpha_A} \quad (6.a)$$

$$c_z^g = \frac{\sum c_z}{\sum \alpha_A} \quad (6.b)$$

Torsional group stiffness (k_ψ^g) and damping factors (c_ψ^g)

$$k_\psi^g = \frac{1}{\sum \alpha_A} [k_\psi + k_x(x_r^2 + y_r^2)] \quad (7.a)$$

$$c_\psi^g = \frac{1}{\sum \alpha_A} [c_\psi + c_x(x_r^2 + y_r^2)] \quad (7.b)$$

Sliding and Rocking and Cross Coupled Group Stiffness and Damping Factors

Translation along X-axis

$$k_x^g = \frac{\sum k_x}{\sum \alpha_{Lx}} \quad (8.a)$$

$$c_x^g = \frac{\sum c_x}{\sum \alpha_{Lx}} \quad (8.b)$$

Translation along Y Axis (k_y^g, c_y^g)

$$k_y^g = \frac{\sum k_y}{\sum \alpha_{Ly}} \quad (9.a)$$

$$c_y^g = \frac{\sum c_y}{\sum \alpha_{Ly}} \quad (9.b)$$

Rocking About Y- Axis (k_{ϕ}^g, c_{ϕ}^g)

$$k_{\phi}^g = \frac{1}{\sum \alpha_{Lx}} [k_{\phi} + k_z x_r^2 + k_x z_c^2 - 2z_c k_{x\phi}] \quad (10.a)$$

$$c_{\phi}^g = \frac{1}{\sum \alpha_{Lx}} [c_{\phi} + c_z x_r^2 + c_x z_c^2 - 2z_c c_{x\phi}] \quad (10.b)$$

Rocking About X- Axis ($k_{\theta}^g, c_{\theta}^g$)

$$k_{\theta}^g = \frac{1}{\sum \alpha_{Ly}} [k_{\theta} + k_z y_r^2 + k_y z_c^2 - 2z_c k_{y\theta}] \quad (11.a)$$

$$c_{\theta}^g = \frac{1}{\sum \alpha_{Ly}} [c_{\theta} + c_z y_r^2 + c_y z_c^2 - 2z_c c_{y\theta}] \quad (11.b)$$

Cross-Coupling: Translation along X Axis and Rotation about Y Axis. ($k_{x\phi}^g, c_{x\phi}^g$)

$$k_{x\phi}^g = \frac{1}{\alpha_{Lx}} \sum (k_{x\phi} - k_x z_c) \quad (12.a)$$

$$c_{x\phi}^g = \frac{1}{\alpha_{Lx}} \sum (c_{x\phi} - c_x z_c) \quad (12.b)$$

Cross-Coupling: Translation along Y-Axis and Rotation about X Axis. ($k_{y\theta}^g, c_{y\theta}^g$)

$$k_{y\theta}^g = \frac{1}{\alpha_{Ly}} \sum (k_{y\theta} - k_y z_c) \quad (13.a)$$

$$c_{y\theta}^g = \frac{1}{\alpha_{Ly}} \sum (c_{y\theta} - c_y z_c) \quad (13.b)$$

Comparison of Computed and Predicted Pile Response

Using the above equations, the stiffness and damping for any vibration mode can be determined and the pile response can be calculated. Several researchers have attempted to make a comparison of the observed and predicted pile response. Small scale pile tests, centrifuge tests and full pile tests have been used for this purpose (Gle, 1981; Novak and ElSharnouby, 1984; Woods, 1984; and Poulos, 2007). Woods (1984) reported results of 55 horizontal vibration tests on 11 end bearing piles 15 - 48 m long. The outer diameter of piles was 35.56 cm and the wall thickness varied from 0.47 cm to 0.94 cm. typical amplitude –frequency plot for one of the piles in soft clay is shown in Fig. 7. It may be seen from this plot that the observed natural frequency decreases with an increase in the value of ‘ θ ’ (increase in ‘ θ ’ means an increase in dynamic force at the same frequency of vibrations) indicating non-linear behavior. Woods (1984) also compared the observed and computed response of the piles. The stiffness and damping values were obtained using computer program PILAY which uses continuum model accommodating soil layers and assumes homogeneous soil in the layer with elastic behavior. A typical comparison of the pile response so computed with the observed response is shown in Fig. 8. It may be observed from Fig. 8 that the calculated and computed responses do not match.

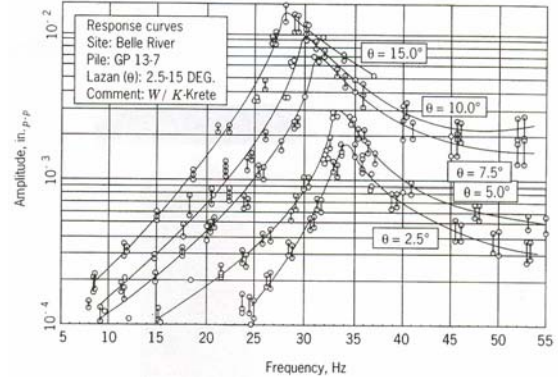


Fig. 7. Response curves; a decrease in resonant frequency with increasing amplitudes. (Woods, 1984)

Efforts were made to obtain a match between observed and predicted response by using reduced values of stiffness obtained from PILAY, which did not help much. A better match could, however, be obtained when a considerably softened or weakened zone was assumed surrounding the piles (program PILAY 2) simulating disturbance to soil during pile installation. A loss of contact of the soil with the pile for a short length close to the ground surface also improved the predicted response.

El-Sharnouby and Novak (1984) performed tests on 102 model pile groups using steel pipe piles. The response of the model pile groups was also computed by the following methods:

1. Using static interaction factors by Poulos (1971, 1975 and 1979) and Poulos and Davis (1980).
2. Using the concept of equivalent pier.
3. Using dynamic interaction factors given by Kaynia and Kausel (1982)
4. Direct dynamic analysis of Wass and Hartmann (1981).

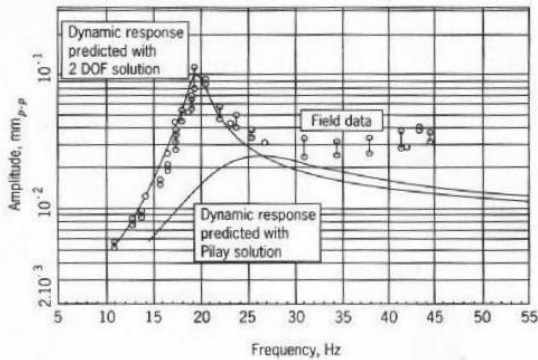


Fig. 8. Typical response curves predicted by PILAY superimposed on measured pile response (Woods, 1984)

A typical comparison of the theoretical and experimental horizontal response is shown in Fig.9. Plot a (Fig. 9) shows the theoretical group response without interaction effects. Response shown in plot 'b' was obtained by applying static interaction factors to stiffness only. Plot 'c' was obtained with arbitrary interaction factor of 2.85 applied to stiffness only.

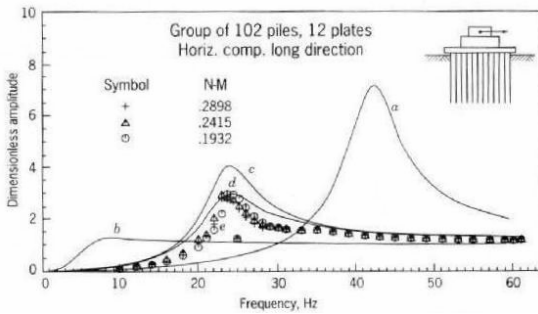


Fig. 9. Experiment horizontal response curves and theoretical curves calculated with static interaction factors. (Novak and El-Sharnouby, 1984)

Plot 'd' was obtained by using an arbitrary interaction factor of 2.85 on stiffness and 1.8 on damping respectively. Plot 'e' shows the experimental data. The plot which shows an excellent match with experimental data was obtained by arbitrarily increasing the damping factor by 45%.

The concept of equivalent pier with some assumption and using PILAY2, gave a better match of the natural frequency but under-estimated the amplitude. The prediction improved when the damping in the calculation was reduced to 40% of the theoretical value (Novak and EL-Sharnouby, 1984). The comparison of theoretical response obtained by using dynamic interaction factors of Kaynia and Kausel (1982) is shown in plot 'a' in Fig.10. Plot 'b' in Fig. 10 shows the calculated data

based on dynamic analysis of Wass and Hartmann (1981). The experimental data of Novak and EL-Sharnouby (1984) is shown by plot 'c' in the same figure. Novak and EL-Sharnouby, (1984) also compared the observed response for vertical and torsional vibrations with the predicted response.

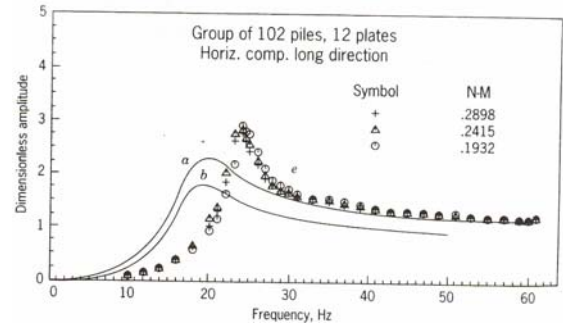


Fig. 10. Experimental horizontal response curve and theoretical curves.

(a) Calculated with Kaynia and Kausel dynamic interaction factors

(b) Calculated with Wass and Hartmann impedances

(c) Experimental (Novak and El-Sharnouby, 1984).

It was observed by El-Sharnouby and Novak (1984), Novak (1991) and Prakash and Sharma (1990) that the observed and predicted response for horizontal vibrations shows better agreement when a softened zone surrounding the piles and separation between pile and soil near the ground surface are accounted for in calculations.

El Marasafawi et al (1990) conducted horizontal vibration tests on a 0.32 m diameter, 7.5 long piles and compared with the calculated theoretical response after accounting for the weak zone surrounding the piles, Fig. 11. Similar data for a six pile group is shown in Fig. 12.

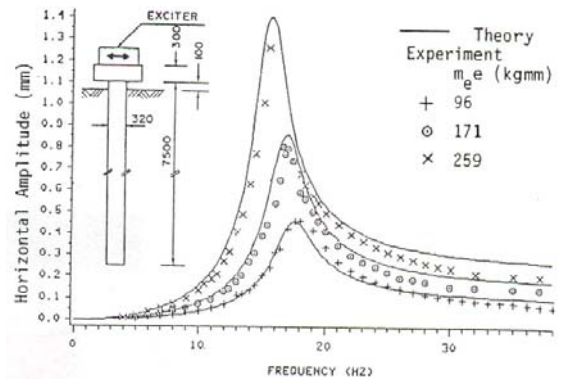


Fig. 11: Theoretical and experimental horizontal response of concrete pile for three levels of harmonic excitation (El Marsafawi et al., 1990)

STRAIN DEPENDENT SPRING AND DAMPING VALUES

Vucetic and Dobry (1991) have developed modulus degradation and damping relationships with shear strain.

These and similar other relationships can be used to develop non-linear spring and damping constants.

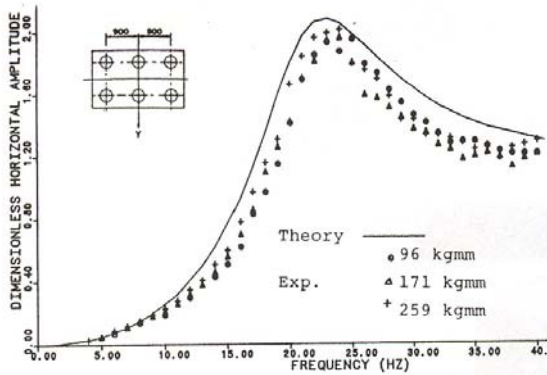


Fig. 12. Horizontal theoretical and experimental response in Y-direction for group of six concrete piles 7.50 m long, 0.32 m in diameter (El Marsafawi et al., 1990)

STRAIN-DISPLACEMENT RELATIONSHIPS

Shear strain and displacement relationships are not well defined in many practical problems. Reasonable expressions are assumed and used as the basis for evaluating the shear strain in each particular case. One such relationship has been recommended by Prakash and Puri (1988) for vertically vibrating footings as:

$$\gamma = \frac{\text{Amplitude of foundation vibration}}{\text{Average width of foundation}} \quad (14)$$

Kagawa and Kraft (1980) used the following relationship between shear strain (γ_x) and horizontal displacement (x);

$$\gamma_x = \frac{(1 + \nu)X}{2.5D} \quad (15)$$

Where,

ν = Poisson's ratio

X = horizontal displacement in x-direction

D = diameter of pile

Rafnsson (1991) recommended that the shear strain γ_ϕ due to rocking ϕ can be reasonably determined as

$$\gamma_\phi = \frac{\phi}{3} \quad (16)$$

Where,

ϕ = rotation of foundation about y axis

The shear strain-displacement relationship for coupled sliding and rocking can be determined as:

$$\gamma = \frac{(1 + \nu)X}{2.5D} + \frac{\phi}{3} \quad (17)$$

Note that, equations 15, 16, and 17 may be adopted for other directions as well.

SOLUTION TECHNIQUE FOR DISPLACEMENT DEPENDENT K'S AND C'S

1. OBTAIN unit weight, shear wave velocity, Poisson's ratio, and initial shear modulus; shear modulus degradation curve as function of soil shear strain.
2. OBTAIN pile length, pile diameter, elastic modulus of pile, and shear wave velocity in the pile.
3. SELECT relationship for half space stiffness and damping parameters as function of soil parameters, pile dimensions, and piles arrangements.
4. DETERMINE strain-displacement relationship.
5. DETERMINE stiffness and damping factor for single pile at selected displacements
6. CALCULATE group efficiency factor
7. CALCULATE group piles stiffness and damping factors
8. REPEAT Steps 5-7 for all desired displacements and plot stiffness (k) and damping (c) parameters versus displacement functions

EXAMPLE

A bridge abutment was supported on 6 piles shown in Fig. 13. The pile length was 7.01 m, pile diameter D = 0.406 m, $x_r=0.407$ m, $y_r=0.914$ m, $z_c = 0.407$ m and pile elastic modulus $E_p = 2.15 \times 10^7$ kN/m². Figure 14 and 15 show the calculated stiffness and damping factors, plotted against displacement functions.

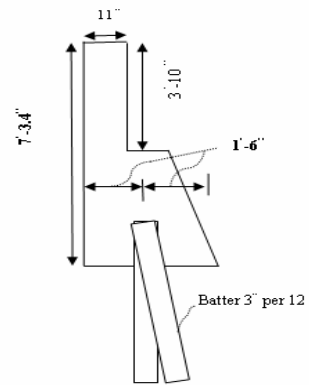


Fig. 13. Schematic Section of abutment of Old Wahite Bridge.

PRACTICAL APPLICATION OF DISPLACEMENT-DEPENDENT STIFFNESS AND DAMPING

The spring and damping values shown in Fig. 14 and 15 were used to determine the displacement response of an existing bridge abutment for magnitude 6.4 and 7 earthquakes.

A typical computed displacement versus time response is shown in Fig. 16 (Andesen et al., 2001).

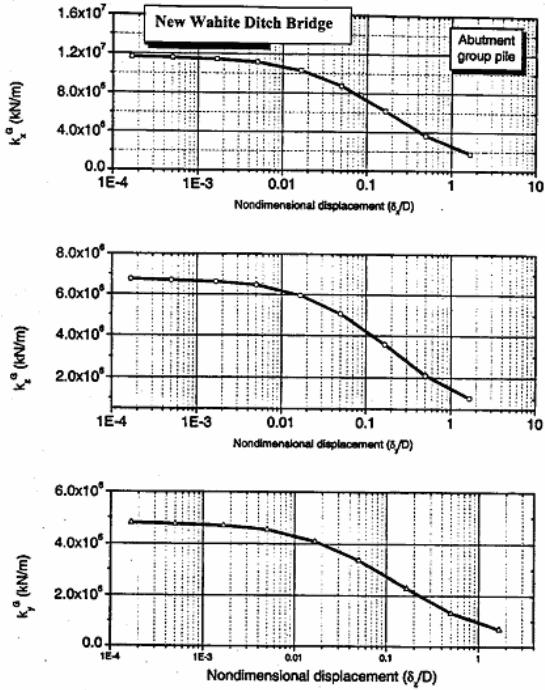


Fig. 14. Spring Stiffness for different Modes of Vibration (Munaf and Prakash 2002)

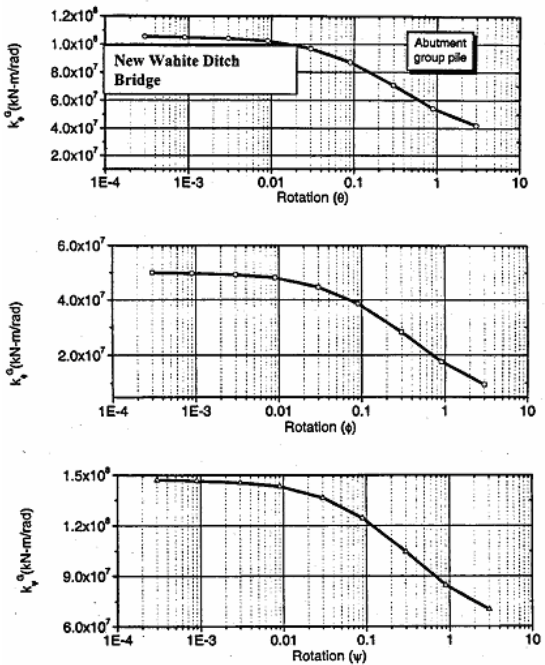


Fig. 14. Continued

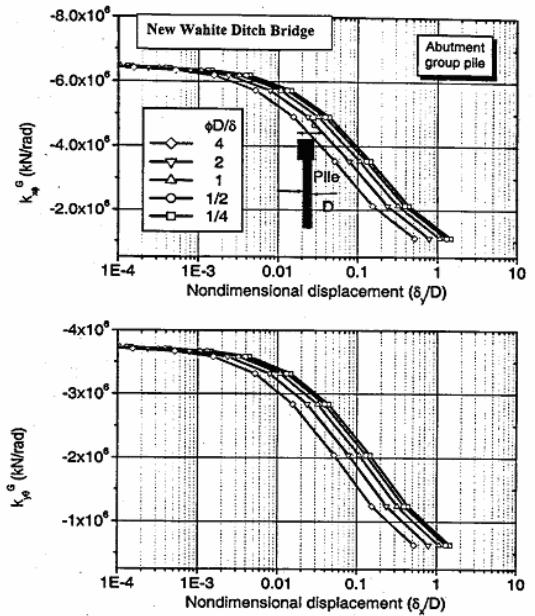


Fig. 14. Continued

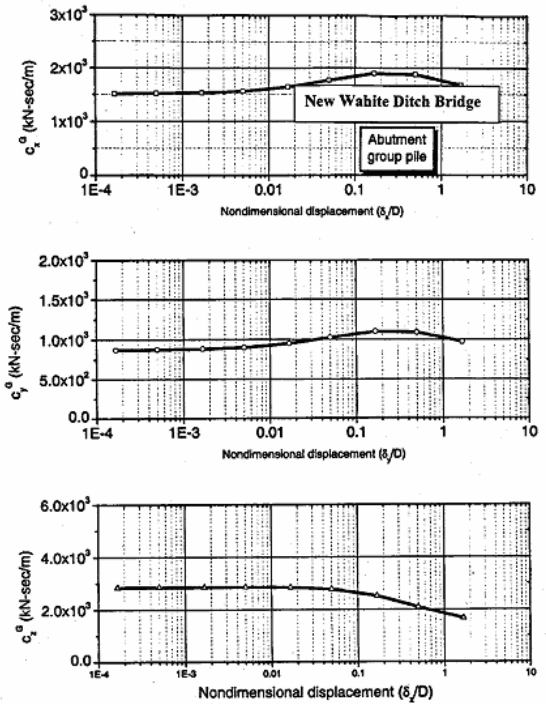


Fig. 15. Damping for Different Modes of Vibration (Munaf and Prakash 2002)

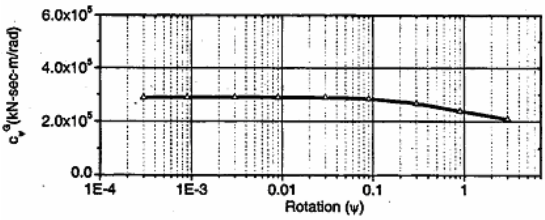
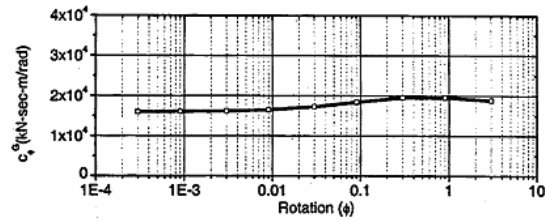
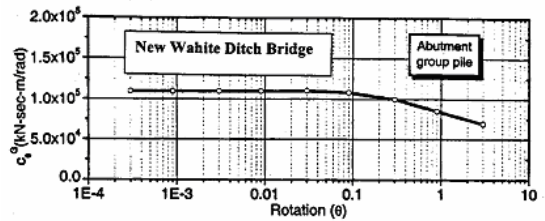


Fig. 15. Continued

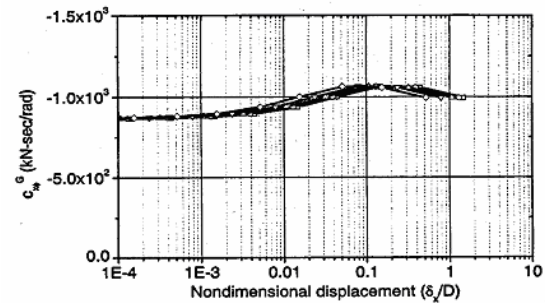
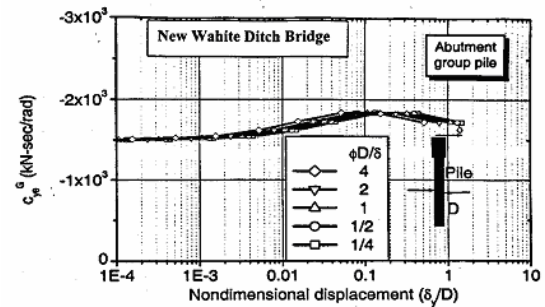


Fig. 15. Continued


PILES IN SOILS SUCEPTIBLE TO LIQUEFACTION

Excess pore pressures during seismic motion may cause lateral spreading resulting in large moments in the piles and settlements and tilt of the pile cap and the superstructure. Excessive lateral pressure may lead to failure of the piles which was experienced in the 1964 Niigata and the 1995 Kobe earthquakes (Finn and Fujita, 2004).


Damage to a pile under a building in Niigata caused by about 1 m of ground displacement is shown Figure 17 (Yasuda et al., 1990). Displacement of Quay wall and damage to piles supporting tank TA72 (Fig. 18, 19 and 20) during 1995 Kobe earthquake has been reported by Ishihara and Cubrinovski, (2004)

The quay wall moved approximately 1 m towards the sea. The seaward movement of the quay wall was accompanied by lateral spreading of the backfill soils resulting in a number of cracks on the ground inland from the waterfront. The lateral ground displacement was plotted as a function of the distance from the waterfront.

As indicated in the Fig 21 the permanent lateral ground displacement corresponding to the location of Tank TA72 is seen somewhere between 35 and 55 cm (Ishihara and Cubrinovski, 2004).

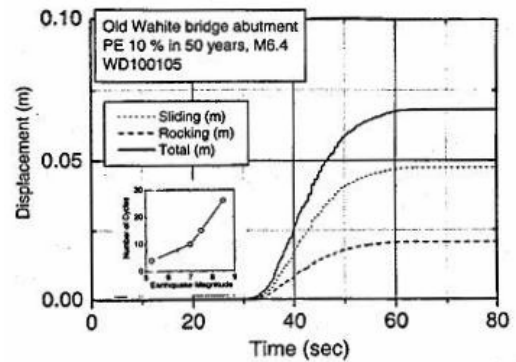

a. Magnitude 6.4

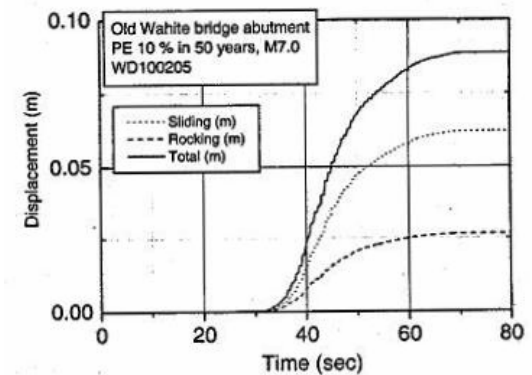

b. Magnitude 7.0

Fig. 16. Time histories of sliding, rocking and total permanent Displacement of the Old Wahite Ditch Bridge Abutment PE 10% in 50 years, (a) Magnitudes 6.4 and (b) Magnitude 7.0

To inspect the damage to the piles supporting the oil tank site after Kobe (1995) event, 70 cm wide and 1 m deep trenches were excavated at 4 sections and the upper portions of two piles was exposed. The wall of the cylindrical piles was cut to open a window about 30cm long and 15cm wide. From this window, a bore-hole camera was lowered through the interior

hole of the hollow cylindrical piles to examine the damage to the piles throughout the depth. It was observed that the piles had suffered multiple cracks and the largest damage was at the interface between the liquefying fill layer and the underlying silty soil layer.

DESIGN OF PILES IN LIQUEFYING SOIL

The design of pile foundations in liquefied soils requires a reliable method of calculating the effects of earthquake shaking and post-liquefaction displacements on pile foundations (Finn and Fujita, 2004). The methods currently in use for design of piles in liquefying soil are:

1. The force or limit equilibrium Analysis,
2. The displacement or p-y analysis, and
3. Dynamic analysis.



Fig. 17. Damage to pile by 2m of lateral ground displacement during 1964 Niigata earthquake (Yosuda et al.1999)

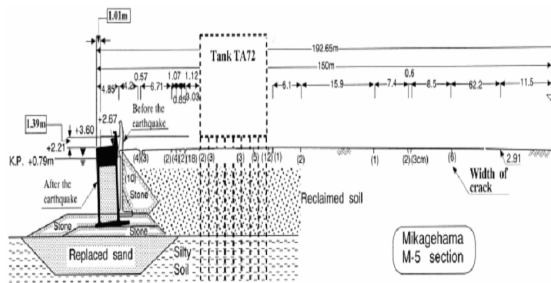


Fig. 18. Detailed profiles of the quay wall movement and ground distortion in the backfills at Section M-5 (Ishihara and Cubrinovski, 2004)

The Force or Limit Equilibrium Analysis

This method of analysis is recommended in several Japanese design codes for analysis of pile foundations in liquefied soils undergoing lateral spreading (JWWA, 1997; JRA, 1996). The method involves estimation of lateral soil pressures on pile and then evaluating the pile response.

A schematic sketch showing lateral pressures due to a non-liquefied and liquefied soil layers is shown in Figure 22. The non-liquefied top layer is assumed to exert passive pressure on the pile. The liquefied layer is assumed to apply a pressure which is about 30% of the total overburden pressure. This estimation of pressure is based on back calculation of case histories of performance of pile foundations during the Kobe earthquake (Ashford and Juirnarongrit, 2004; and Finn and Fujita, 2004). The maximum lateral pressure is assumed to occur at the interface between the liquefied and non-liquefied soil layers.

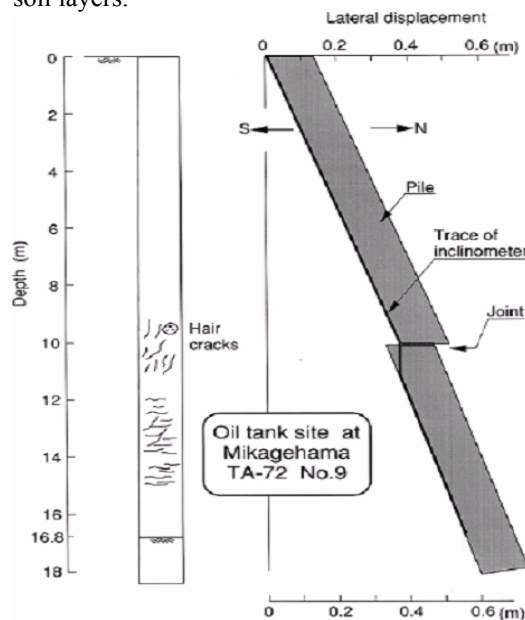


Fig. 19. Lateral displacement and observed cracks on the inside wall of Pile No. 9 Kobe 1995 EQ (Ishihara and Cubrinovski, 2004)

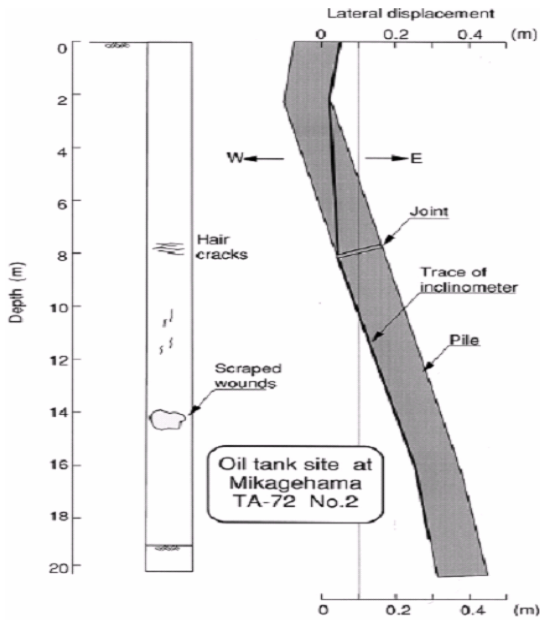


Fig. 20. Lateral displacement and observed cracks on the inside wall of Pile No. 2 Kobe 1995 EQ (Ishihara and Cubrinovski, 2004)

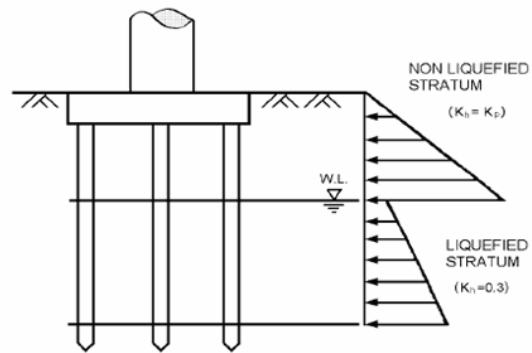


Fig. 22. Schematic sketch showing pressure distribution against the piles due to lateral soil flow associated with liquefaction (JWWA, 1997)

Displacement or p-y Analysis

This method involves making Winkler -type spring mass model shown schematically in Figure 23. The empirically estimated post-liquefaction, free field displacements are calculated. These displacements are assumed to vary linearly and applied to the springs of the soil-pile system as shown in Fig. 23 (Finn and Thavaraj, 2001).

Degraded p-y curves may be used for this kind of analysis. In the Japanese practice the springs are assumed to be linearly elastic-plastic and can be determined from the elastic modulus of soil using semi-empirical formulas (Finn and Fujita, 2004). The soil modulus can be evaluated from plate load tests or standard penetration tests. Reduction in spring stiffness is recommended by JRA (1996) to account for the effect of liquefaction. Such reduction is based on 'F'_L the factor of safety against liquefaction. These reduction factors are shown in Table 2.

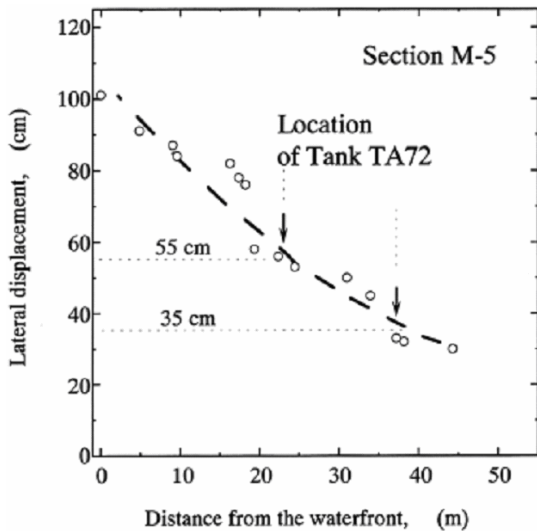


Fig. 21. Lateral ground displacement versus distance from the waterfront along Section M-5, Kobe 1995 EQ (Ishihara and Cubrinovski, 2004)

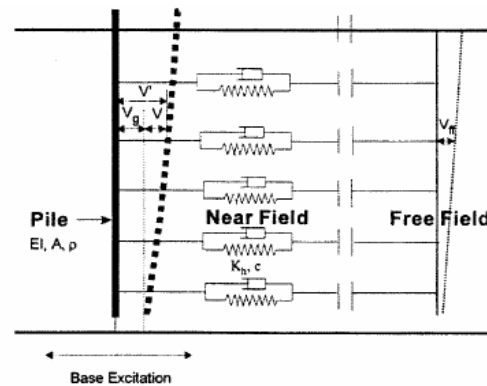


Fig. 23. Schematic sketch for Winkler spring Model for pile foundation analysis (Finn and Thavaraj, 2001)

Ashford and Juimarnongrit (2004) compared the force-based analysis and the displacement-based analysis for the case of single piles subjected to lateral spreading. They observed that the force-based analysis reasonably estimated the pile moments but underestimated the pile displacements. The displacement-based analysis was found to make a relatively better prediction of both the pile moments and the pile displacements compared to the force-based analysis.

Table.2 Reduction coefficients for soil constants due to liquefaction (JRA, 1996)

Range of F_L	Depth from the Present Ground Surface x (m)	Dynamic Shear Strength Ratio R	
		$R \leq 0.3$	$0.3 < R_a$
$F_L \leq 1/3$	$0 \leq x \leq 10$	0	1/3
	$10 < x \leq 20$	1/3	1/3
$1/3 < F_L \leq 2/3$	$0 \leq x \leq 10$	1/3	2/3
	$10 < x \leq 20$	2/3	2/3
$2/3 < F_L \leq 1$	$0 \leq x \leq 10$	1/3	1
	$10 < x \leq 20$	1	1

The North American practice is to multiply the p-y curves, by a uniform degradation factor p , called the p-multiplier, which ranges in values from 0.3 - 0.1. The values 'p' seems to decrease with pore water pressure increase (Dobry et al., 1995) and become 0.1 when the excess pore water pressure is 100%. Wilson et al. (1999) suggested that the value of 'p' for a fully liquefied soil also depends on the initial relative density D_r . The values of 'p' range from 0.1 to 0.2 for sand at about 35% relative density and from 0.25 to 0.35 for a relative density of 55%. It was found that the resistance of the loose sand did not pick up even at substantial strains in the denser sand, after an initial strain range in which it showed little strength, picked up strength with increasing strain Fig. 24. This finding suggests that the good performance of the degraded p-y curves which did not include an initial range of low or zero strength, must be test specific and the p-multiplier may be expected to vary from one design situation to another. Dilatancy effects may reduce the initial p-y response of the dense sands (Yasuda et al. 1999).

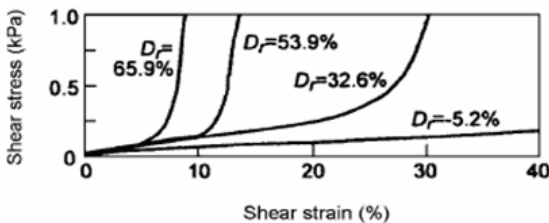


Fig. 24. Post-liquefaction un-drained stress-strain behavior of sand (Yasuda et al 1999)

Liyanapathirana and Poulos (2005) developed a numerical model for simulating the pile performance in liquefying soil. They also studied the effect of earthquake characteristics on pile performance and observed that the 'Arias intensity' and the natural frequency of the earthquake strongly influence performance of the pile in liquefying soil. Bhattacharya (2006) re-examined the damage to piles during 1964 Niigata and 1995 Kobe earthquakes and noted that pile failure in liquefying soil can be better explained as buckling type failures.

The force based and displacement based design procedure are based on limited number of observations. More research is needed to arrive at realistic design procedures for pile in liquefied soil.

CONCLUSIONS

(a) PILES IN NON-LIQUEFIABLE SOILS

1. Soil-pile behavior is strongly strain dependent
2. Simple frequency independent stiffness and damping equations of Novak give reasonably good results.
3. Group interaction factors are also frequency independent, since predominant excitation frequencies may not exceed 6-10 Hz in soft soils

(b) PILES IN LIQUEFIABLE SOILS

1. Liquefaction may result in large pile group displacements.
2. Lateral spreading of soils may cause large bending moments and shears on the pile, which may result in failure of piles below the ground level (as in Niigata and Kobe earthquakes)
3. Japanese and North American design practices may not give identical solutions.
4. Considerably more research is needed to refine design methods

REFERENCES

- Anderson, N, Prakash, S. et al [2001] "Earthquake Hazard Assessment Along Designated Emergency Vehicle Priority Access Routes," Final report RDT MO R 198-043 T-MoDOT
- Ashford, S. and Juirnarongrit, T., [2004], "Evaluation of Force Based and Displacement Based Analysis for Response of Single Piles to Lateral Spreading", Proceedings of 11th International Conference on Soil Dynamics and Earthquake Engineering and 3rd International Conference Earthquake Geotechnical Engineering, University of California, Berkeley, Vol. 1, pp. 752-759.
- Bhattacharya, S. [2006], "A Review of Methods for Pile Design in Seismically Liquefiable Soil" Design of Foundations in Seismic Areas: Principles and Applications, NICEE, IIT Kanpur.
- Cubrinovsky, M. and Ishihara, K. [2005], "Assessment of Pile Group Response to Lateral Spreading by Single Pile Analysis", Proceedings of the Workshop on Seismic Performance and Simulation of Pile Foundations in Liquefied and Laterally Spreading Ground, Geotechnical Special Publication No. 145, March 16-18, pp.242- 254.
- Dobry, R., Taboda, V. and Liu .L.(1995), "Centrifuge Modeling of Liquefaction Effects During Earthquakes", Proc.1st International Conference on Earthquake Engineering, Tokyo, Vol.3, pp.1291-1324.
- El-Marsafawi, H, Han, Y. and Novak, M. (1990) "Dynamic experiments on two Pile Groups", Research Report GEOT-20-90, Dept. of Civil Engineering, Western Ontario, August.

- Finn, W.D.L. and Fujita N.,[2004] ,”Behavior of Piles During Earthquakes : Analysis and design”, Proceedings, fifth international Conference on Case Histories in Geotechnical Engineering, New york, N.Y., April 13-17.
- Finn, W.D.L. and Thavaraj, T.[2001],” Deep Foundations in liquefiable Soil”, Proc. 4th Int. Conf. on Recent Adv. in Geotech. Earth. Engrg. And Soil Dynamics, San Diego.
- Gle, D.R., [1981], “The Dynamic Lateral Response of Deep Foundations”, PhD dissertation, University of Michigan, Ann Arbor.
- Ishihara ,K. and Cubrinovsky, M.,[2004] “Case Studies of pile Foundations Undergoing lateral Spreading in liquefied deposits”, Proceedings, fifth international Conference on Case Histories in Geotechnical Engineering, New york, N.Y., April 13-17.
- JRA [1996], “Seismic Design Specifications of highway Bridges”, Japan Road Association.
- JWWA [1997], “Seismic Design and Construction Guidelines for Water Supply Facilities, Japan Water Works Association, Tokyo.
- Kagawa, T., and Kraft, L.M., Jr. [1980], “Lateral Load-Deflection Relationships for Piles Subjected to Dynamics Loading”, Soil Foundations, Japanese Society of Soil Mechanics and Foundation Engineering, Vol. 20, No. 4, pp 19-36.
- Kaynia, A.M., and Kausel, F., (1982) “Dynamic behavior of Pile Groups”, Proc. Second International Conference on numerical Methods in Offshore Piling, Austin, TX, pp. 509-532
- Liyanapathirana, D.S. and Poulos, H.G., [2005], “Seismic Lateral Response of Piles in Liquefying Soil”, Journal of Geotechnical and Geo-Environmental Engineering, ASCE, Vol. 131, No. 12, pp.1466-1479
- Luna, R., Prakash...et al [2001], “Earthquake Assessment of Critical Structures for Route 66 Missouri, Paper No. 8-13 Proc. 4th International Conf. Recent Advances in Geot. Earthquake Energy Soil Dynamics, San Diego, CA, CD-ROM (March).
- Munaf, Y. and Prakash, S. [2002],”Displacement Dependent Spring and Damping Factors of Soil Pile Systems,” Proc. 12th ECEE, London Paper No. 763
- Munaf. Y, Prakash. S and Fennessey. T [2003] “ Geotechnical Seismic Evaluation of Two Bridges in SE Missouri” Proc PEEC, Christchurch NZ Paper No-5, CD-ROM
- Novak, M. [1974], Dynamic stiffness and damping of piles, Con. Geot. J. Vol. II No 4, pp. 574-598.
- Novak, M.(1991), “ Piles Under Dynamic Load”, Proceedings; second international Conference on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics, St. Louis, March 11-15.
- Novak, M. and El Sharnouby, E.B. [1983], Stiffness and damping constants for single piles, J. Geot. Engg. Dn. ASCE, Vol. 109 No 7, pp 961-974.
- Novak, M. and El Sharnouby, E.B. [1984], “Evaluation of Dynamic Experiments on Pile Groups”, J. Geot. Engg. Dn. ASCE, Vol. 101, No 6, pp. 737-756.
- Novak, M. and Howell, J.H. [1977].”Torsional Vibration of Pile Foundation”. J. Geotech. Eng. Div., Am. Soc. Civ. Eng. 103 (GT-4), 271-285.
- Poulos, H.G. [1968], “Analysis of the Settlement of Pile Groups”, Geotechnique 18(4), 449-471.
- Poulos, H.G. [1971],”Behavior of Laterally Loaded Piles. II Piles Groups. J. Soil Mech. Div., Am. Soc. Civ. Eng. 97(SM-5), 733-751.
- Poulos, H.G. (1975) , “Lateral load Deflection Prediction for Pile Groups”, Journal, Geotechnical Engineering Div., ASCE, Vol. 101, No. GT1, pp. 19-34
- Poulos, H.G. (1979) , “Group Factors for Pile Deflection Estimation” Journal, Geotechnical Engineering Div., ASCE, Vol. 105, No. GT12, pp. 1489-1509.
- Poulos, H.G. and Davis, E.H. (1980), “Pile Foundation Analysis and Design”, Wiley, NY
- Poulos, H.G.,[2007], “Ground Movements – a Hidden Source of Loading on Deep Foundations”, DFI , Journal, Vol.1, No. 1, pp. 37-53.
- Prakash, S., [1981]. “*Soil Dynamics*”. McGraw Hill, New York. Reprinted SP foundation, Rolla, MO
- Prakash, S. and Puri, V.K.,(2008), “Piles Under Earthquake Loads”, Geotechnical Earthquake Engineering and Soil Dynamics IV, CD-ROM, May 18-22, Sacramento, CA
- Prakash, S. and Puri, V.K. [1988]. “*Foundation for Machines Analysis and Design*”. John Wiley & Sons, New York.
- Prakash, S. and Sharma, H.D. [1990]. “*Pile foundations in engineering practice*”. John Wiley and Sons, NY.
- Puri, V.K. and Prakash, S. [2007] “Foundations for Seismic Loads” Geo-Denver, ASCE Conference, CDROM

Rafnsson, E.A. [1991], "Displacement-Based Design of Rigid Retaining Walls Subjected to Dynamic Loads Considering Soil Non-linearity", PhD Dissertation, University of Missouri Rolla.

Vucetic, M. and Dobry, R. [1991]; "Effect of Soil Plasticity on Cyclic Response". Journal of Geotechnical Engineering, Vol. 117, No. 1, ASCE. pp. 89-107.

Wass, G. and Hartmann, H.G. (1981), "Pile Foundations Subjected to Horizontal Dynamic Loads", European Simulation Meeting, "Modeling and Simulating of Large Scale Structural Systems", Capri, Italy, p.17

Wilson, D.O. Boulanger, R.W. and Kutter, B.L. [2000], "observed lateral resistance of liquefying Sand", journal of Geotechnical and Geo-Environmental Engineering, ASCE, Vol. 126, No. GT 10 pp.898-906

Woods, R.D. [1984], "Lateral Interaction between Soil and Pile", Proceedings International Symposium on Dynamic Soil Structure Interaction, Minneapolis, MN, pp. 47-54.

Yasuda, Y. N., Kiku, H. and Adachi, K. [1999], "A simplified Practical Method for evaluating Liquefaction Induced flow" proceedings 7th U.S.- Japan Workshop on Earthquake Resistant design Of lifeline facilities and Countermeasures against Liquefaction, November, pp. 311-320.