



Missouri University of Science and Technology  
Scholars' Mine

International Conferences on Recent Advances  
in Geotechnical Earthquake Engineering and  
Soil Dynamics

1981 - First International Conference on Recent  
Advances in Geotechnical Earthquake  
Engineering & Soil Dynamics

27 Apr 1981, 2:00 pm - 5:00 pm

## A Constitutive Equation for Cyclically Loaded Sands

A. Szavits-Nossan

*Docent, Faculty of Civil Engineering, Zagreb, Yugoslavia*

P. Kvasnicka

*Faculty of Civil Engineering, Zagreb, Yugoslavia*

Follow this and additional works at: <https://scholarsmine.mst.edu/icrageesd>

 Part of the [Geotechnical Engineering Commons](#)

### Recommended Citation

Szavits-Nossan, A. and Kvasnicka, P., "A Constitutive Equation for Cyclically Loaded Sands" (1981). *International Conferences on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics*. 13.

<https://scholarsmine.mst.edu/icrageesd/01icrageesd/session01b/13>

This Article - Conference proceedings is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in International Conferences on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact [scholarsmine@mst.edu](mailto:scholarsmine@mst.edu).



# A Constitutive Equation for Cyclically Loaded Sands

**A. Szavits-Nossan**

Docent, Faculty of Civil Engineering, Zagreb, Yugoslavia

**P. Kvasnicka**

Research Assistant, Faculty of Civil Engineering, Zagreb, Yugoslavia

**SYNOPSIS** A rate type constitutive equation with internal parameters is proposed for describing the behaviour of cyclically loaded sands in undrained conditions leading to liquefaction. The mathematical model is checked versus experimental data on undrained cyclic triaxial test on Monterey No.0 sand. General trends of real sand behaviour are captured. The equation is applicable for general stress states too.

## INTRODUCTION

The present state of computer technology and the development of numerical methods enable complex analyses of nonlinear soil behaviour under dynamic conditions. Few such analyses have been performed so far (Finn et al. 1976, 1978, Liou et al. 1976, Zienkiewicz et al. 1978, Szavits-Nossan and Kovačić 1980). Various types of constitutive equations describing stiffness and strength degradation of sand material under undrained cyclic loading were used. While the knowledge of various factors influencing liquefaction potential is well established (e.g. Seed 1976, Castro and Poulos 1976, Townsend 1978), mathematical descriptions of the material behaviour, constitutive equations, are still in their infancy.

The aim of the following study was to develop a proper invariant constitutive equation of rate type with internal parameters which could be constructed on the basis of known features of sand behaviour in static and cyclic conditions with material constants determinable by undrained cyclic triaxial tests. A number of such tests on Monterey No.0 sand were carried out as the experimental basis of the study. The tests were performed on a modified SBEL HX-100 dynamic triaxial apparatus while satisfying standard test quality requirements (Silver 1976). Pore pressure, vertical stress and strain measurements were taken continuously and plotted via two x/y plotters. In this way the effective stress paths and stress-strain curves were obtained (Fig.3).

## THE SHEAR STIFFNESS EQUATION IN TRIAXIAL CONDITIONS

As the basis for the relationship between the normalized deviator stress rate  $\dot{\eta}$  ( $\eta = q/p$ ,  $q = \sigma_1' - \sigma_3'$ ,  $p = 1/3(\sigma_1' + 2\sigma_3')$ ,  $\sigma_1'$  and  $\sigma_3'$  being vertical and lateral effective stresses respectively) and vertical strain rate  $\dot{\epsilon}_1$  in triaxial test conditions, an equation similar to one

developed earlier (Szavits-Nossan 1980) will be used:

$$\dot{\eta} = g(p'/p_0)^{\beta-1} \cdot \frac{\dot{\epsilon}_1 - m\eta |\dot{\epsilon}_1| s_1}{1 + m|\eta|s_1} \quad (1)$$

where  $g$  is a nondimensional constant dependent on relative sand density  $D_r$ ,  $s_1$  is a memory parameter

$$s_1 = (1 - m(\eta_n - |\eta|))^{n_1} \quad (2)$$

where  $\eta_n$  is defined as

$$\eta_n = \int_0^{\eta} \frac{d\eta}{d\epsilon_1} d\epsilon_1 \quad (3)$$

with  $s_1 = 1$ ,  $p = \text{const.}$  and  $d\epsilon_1 > 0$ ;  $p_0$  is an arbitrary reference pressure. Approximating

$$\dot{\eta}_n = g(p/p_0)^{\beta-1} (1 - m\eta)^2 \dot{\epsilon}_1 \quad (4)$$

and defining

$$x_1 = \int_0^{\eta} [d\epsilon_1] \quad (5)$$

the following equation for  $\eta_n$  is obtained:

$$\eta_n \approx \frac{x_1}{\frac{1}{g} \left(\frac{p'}{p}\right)^{1-\beta} + mx_1} \quad (6)$$

$\eta_n$  would be equal to  $\eta$  if a sample is sheared for the first time monotonously from  $\eta=0$  until the vertical strain  $\epsilon_1$  reaches the value  $x_1$ .

The proposed shear stiffness equation (1) has the following features:

- close similarity to the Kondner's equation for first loading (Kondner and Zalesko 1963)
- irrecoverable strains in unloading-reloading

cycle due to the term  $|\dot{\epsilon}_1|s_1$  in eq.1  
 - average stress level dependency due to the  
 term  $(p'/p_0)^{\beta-1}$  (El-Sohby 1969, Vermeer 1978).  
 Those features are illustrated on Fig.1.

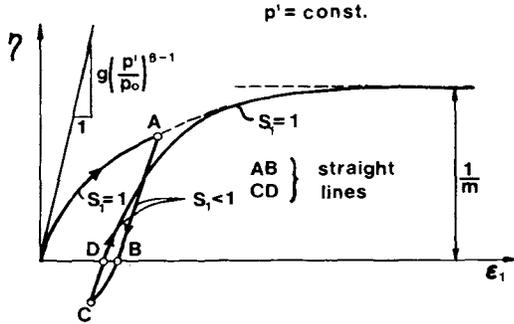


Fig.1. Properties of eq.1.

#### VOLUME CHANGES IN TRIAXIAL SHEAR

Mean effective stress changes  $p'$  in undrained cyclic tests develop due to the tendency of the sand to change its volume (Seed 1976, Finn et al. 1976, 1978, Castro and Poulos 1976). The volume changes in drained cyclic shear test happen due to the stress dilatancy effects and the collapse of the grain structure. Most stress dilatancy equations have in common that for some  $\eta=1/m_0 < 1/m$ ,  $dv/d\epsilon_1=0$ ,  $d\epsilon_1 > 0$ ,  $v$  being volumetric strain (Cole 1967, Rowe 1972, Tokue 1977). In the present study the following equation will be adopted for the rate of volume change:

$$\frac{dv_1}{d\epsilon_1} = F_i (1 - m_0 \eta), d\epsilon_1 > 0, \quad i = \begin{cases} 1 & \text{for } \eta > 1/m_0 \\ 2 & \text{for } \eta < 1/m_0 \end{cases} \quad (7)$$

where the term  $F_i$  will describe the collapse of the grain structure and the second term in eq.7. takes account of stress dilatancy effects. In undrained test the described volume change should be compensated by the volume change due to change in mean effective stress  $p'$ . This volume change can be described by the following equation (Rowe 1972, El-Sohby 1969).

$$\frac{dp}{dv_2} = K_j (p'/p_0)^\alpha \quad j = \begin{cases} 1 & \text{for } dp' > 0 \\ 2 & \text{for } dp' < 0 \end{cases} \quad (8)$$

In undrained test conditions  $dv_1 + dv_2 = 0$  i.e.

$$\frac{\dot{p}'}{p'} = - \frac{F_i K_j}{p_0 g} g \left(\frac{p'}{p_0}\right)^{\alpha-1} (1 - m_0 \eta) \dot{\epsilon}_1 \quad (9)$$

where eq.9. applies for compression conditions. As always  $dp' > 0$  for  $\eta > 1/m_0$  and  $dp' < 0$  for  $\eta < 1/m_0$  ( $d\epsilon_1 > 0$ ), the following constants will be renamed.

$$\frac{F_1 K_1}{p_0 g} = A_1, \quad \frac{F_2 K_2}{p_0 g} = A_2 \quad (10)$$

Parameter  $A_1$  will be assumed to be a material constant dependent on relative density  $D_r$ . As will be later introduced, the parameter  $A_2$  will be taken to be stress path dependent.

#### INVARIANT CONSTITUTIVE EQUATION FOR TRIAXIAL CONDITIONS

Having developed basic equations of sand deformability in undrained cyclic triaxial tests the following invariant form (independent of sign of  $\eta$  and  $dq_1$ ) of the constitutive equation for triaxial conditions is proposed:

$$\frac{\dot{q}_1}{p'} = g \left(\frac{p'}{p_0}\right)^{\beta-1} \frac{\dot{\epsilon}_1 - m\eta |\dot{\epsilon}_1| s_1}{1 + m |\eta| s_1} \quad (11)$$

$$\frac{\dot{p}_1}{p'} = -A_1 g \left(\frac{p'}{p_0}\right)^{\alpha-1} \cdot \frac{1}{2} \{ (|\dot{\epsilon}_1| - m_0 \eta \dot{\epsilon}_1) - [|\dot{\epsilon}_1| - m_0 \eta \dot{\epsilon}_1] \} \quad (12)$$

$$\dot{q}_2 = \eta \dot{p}_1' \quad (13)$$

$$\frac{\dot{p}_2'}{p'} = -A_2 g \left(\frac{p'}{p_0}\right)^{\alpha-1} \cdot \frac{1}{2} \{ |\dot{\epsilon}_1| - \frac{1}{2} m_0 (\eta \dot{\epsilon}_1 + |\eta \dot{\epsilon}_1|) + [|\dot{\epsilon}_1| - \frac{1}{2} m_0 (\eta \dot{\epsilon}_1 + |\eta \dot{\epsilon}_1|)] \} \quad (14)$$

where  $\dot{q} = \dot{q}_1 + \dot{q}_2$ ,  $\dot{p}' = \dot{p}_1' + \dot{p}_2'$ . For the case  $\eta \dot{\epsilon}_1 < 0$

$$\frac{\dot{p}'}{p'} = A_2 \left(\frac{p'}{p_0}\right)^{\alpha-\beta} \frac{|\dot{\epsilon}_1|}{\epsilon_1} \quad (15)$$

is the inclination of the stress path from A to B and D to E, Fig.2.

Values of the components of the constitutive equation for various section of the cyclic stress path are given in table I.

TABLE I. Values of components of the constitutive equation

stress path sect. from Fig.2	values of			
	$\dot{p}_1$	$\dot{p}_2$	$\dot{q}_1$	$\dot{q}_2$
AC , DE	=0	<0	≠0	=0
CD , FG	>0	=0	≠0	≠0

It remains to define the stress path dependency of the parameter  $A_2$  from eq.14. Parameter  $A_2$  determines the slope of the stress path when  $\dot{p}' < 0$  (Fig.2.). It can be seen from two characteristic stress paths for two different stress amplitudes (Fig.3.) that the stress path slope

is steeper for smaller stress amplitude test.

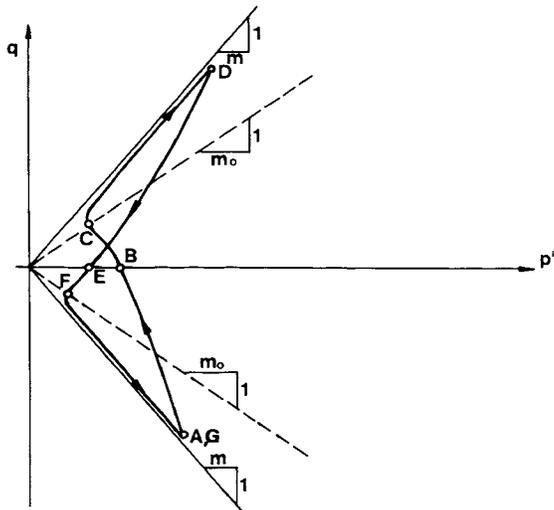


Fig. 2. Various sections of the cyclic stress path

To take this feature into account a new internal parameter  $\bar{x}$  is introduced:

$$\dot{\bar{x}} = (1 - bs_1) |\dot{\epsilon}_1| \quad (16)$$

where  $s_1$  is defined in eq.2. and  $b$  is a material constant. The parameter  $A_2$  will be taken to be dependent on internal parameter  $\bar{x}$  by the following relationship:

$$A_2 = A_0 \exp(-a\bar{x}) \quad , \quad \bar{x} > 0$$

$$A_2 = m - (m - A_0) \exp\left(\frac{A_0}{m - A_0} a\bar{x}\right) \quad , \quad \bar{x} \leq 0 \quad (17)$$

where  $a$  is a material constant. The development of the internal parameter  $\bar{x}$  during cyclic test with smaller (S) and larger (L) stress amplitudes and its influence on the magnitude of  $A_2$  is shown on Fig.4.

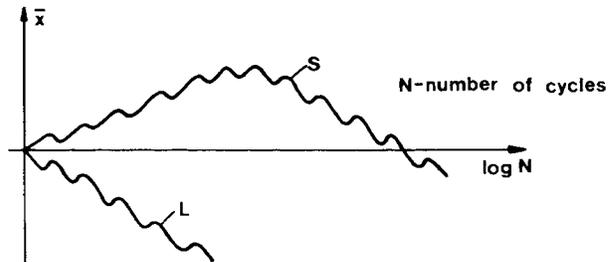


Fig. 4. Internal parameter  $\bar{x}$  and relationship of  $A_2$  vs.  $\bar{x}$

COMPARISON OF THE PROPOSED MODEL WITH TEST RESULTS

The applicability of the proposed equations to describe sand behaviour in undrained cyclic triaxial tests was checked on measured stress-strain and stress path data. Three characteristic undrained cyclic triaxial tests on Monterey No. 6 sand of relative density  $D_r = 60\%$  were selected. All sand samples were consolidated isotropically to  $100 \text{ kN/m}^2$ . Three different deviator stress amplitudes were applied: 55, 70 and

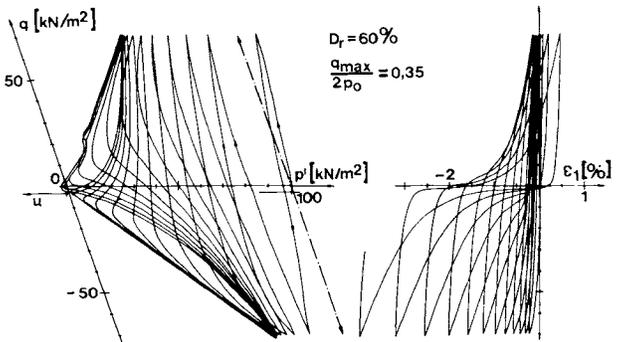


Fig. 3. Effective stress paths and stress-strain curves for two different cyclic stress ratios

90 kN/m<sup>2</sup>. Stress strain curves and stress paths of the first two tests are shown on Fig.3. Best fitting soil constants were adopted but still some improvements are possible. As the proposed constitutive equation has a circular cone as a failure surface in the stress space a compromise cone to approximate Mohr-Coulomb failure surface was used (Humpheson and Naylor 1975). The comparison between computed and measured quantities is shown on Figs.5. and 6. Selected material constants are given in table II.

TABLE II. Best fitting material constants for Monterey No.0 sand, D<sub>r</sub>=60 %

m = 0,90	A <sub>1</sub> = 0,324
m <sub>0</sub> = 1,11	A <sub>0</sub> = 0,03
g = 680	n = 2,0
p <sub>0</sub> = 100	a = 165,7
α=β= 0,5	b = 2,60

Note: All constants are nondimensional except P<sub>0</sub> which is given in kN/m<sup>2</sup>.

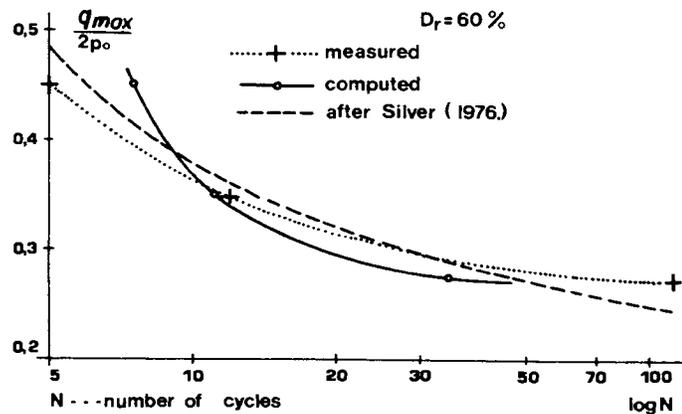


Fig.5. Computed and measured numbers of cycles to liquefaction

Although the computed values do not fit everywhere with a very good accuracy, the general trends of the material behaviour are modeled. The results seem encouraging.

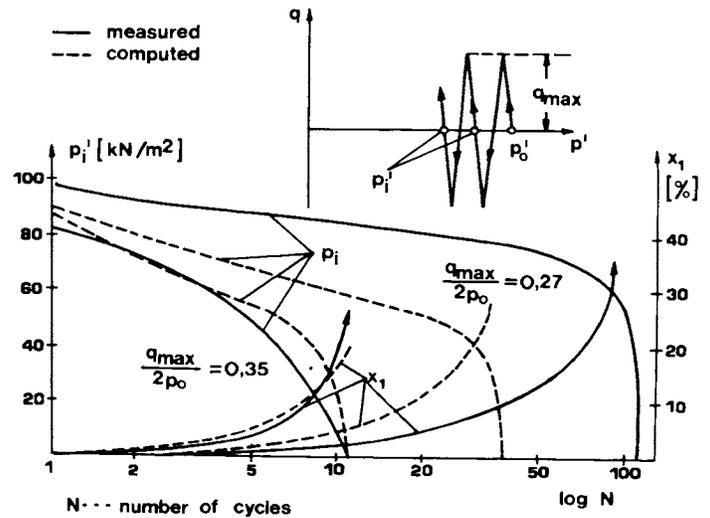


Fig.6. Computed and measured values of x<sub>1</sub> and p<sub>i</sub> for two characteristic tests

EXTRAPOLATION OF THE PROPOSED MODEL TO GENERAL STRESS STATES

The previously described constitutive equation applies only for undrained triaxial conditions. The equation can be extrapolated to general stress and strain states to be applicable in finite element computer programmes. By interchanging the following scalar stress and strain measures by appropriate stress and strain tensors and their corresponding rates in eqs. 2, 5, 11, 12, 13, 14 and 16:

$$q \rightarrow \frac{3}{\sqrt{6}} Q,$$

$$p' \rightarrow \frac{1}{3} \text{tr } T'$$

$$\eta \rightarrow \frac{9}{6 \text{tr } T'} Q,$$

$$\dot{\epsilon}_1 \rightarrow \frac{2}{\sqrt{6}} E,$$

$$\dot{x}_1 \rightarrow \frac{2}{\sqrt{6}} |E|,$$

$$\eta \dot{\epsilon}_1 \rightarrow \frac{3}{\sqrt{6}} \text{tr } (QE) \tag{18}$$

where T' is the effective stress tensor,

$$Q = T' - 1/3(\text{tr } T')I, \tag{19}$$

tr denoting trace, I being the identity tensor,

$$E = D - 1/3(\text{tr } D)I, \tag{20}$$

D being the strain rate tensor (Truesdell and Noll 1965) the proper invariant constitutive equation in tensorial form is obtained. To incorporate the sand behaviour for deformations with volume changes the procedure used by

Szavits-Nossan (1980) can be adopted.

#### CONCLUSIONS

The proposed constitutive equation for constant volume deformations has following constants:  $m$ ,  $m_0$ ,  $A_1$ ,  $g$ ,  $A_0$ ,  $n_1$ ,  $a$ ,  $b$ . The first five constants can readily be determined from one undrained triaxial cyclic test at least. The remaining four constants ( $A_0$ ,  $n_1$ ,  $a$ ,  $b$ ) must be determined by trial and error from one to two other cyclic undrained tests with different stress amplitudes. This is probably the main deficiency of the proposed equation. A computer programme can be devised to perform a best fit determination of those constants. The comparison of computed and measured results seem promising to further develop and study the properties of the proposed constitutive equation.

#### ACKNOWLEDGEMENT

The authors would like to thank Mr.T.Novosel of the Geotechnical laboratory, Faculty of Civil Engineering, Zagreb, for his support of the research.

#### REFERENCES

- Castro, G. and S.J. Poulos (1976), "Factors Affecting Liquefaction and Cyclic Mobility", ASCE National Convention, Philadelphia, Speciality Session, Liquefaction Problems in Geotechnical Engineering, Preprint No.2752, pp.105-137.
- Cole, E.R.L. (1967), "The Behaviour of Soils in the Simple Shear Apparatus", Ph.D.Thesis, University of Cambridge.
- El-Sohby, M.A. (1969), "Deformation of Sands Under Constant Stress Ratios", Proc.7th Int. Conf. SMFE, Mexico, 1, pp.111-119.
- Finn, W.D.L., K.W. Lee and G.R. Martin (1976), "An Effective Stress Model for Liquefaction", ASCE National Convention, Philadelphia, Speciality Session, Liquefaction Problems in Geotechnical Engineering, Preprint No.2752, pp.169-199.
- Finn, W.D.L., K.W. Lee, P.M. Byrne and G.R. Martin (1978), "Response of Saturated Sands to Earthquake and Wave Induced Forces", in Numerical Methods in Offshore Engineering, Zienkiewicz, Lewis, Stagg ed., J.Wiley, pp.515-554.
- Humpheson, C. and D.J. Naylor (1975), "The Importance of the Form of the Failure Criterion", Internal Report, University of Wales, C/R/243/75.
- Kondner, R.L. and J.S. Zalesko (1963), "A Hyperbolic Stress-Strain Formulation for Sands", Proc. 2nd Pan Am.Conf. Soil Mech., Brasil, I, pp.289-324.
- Liou, C.P., V.L. Streeter and F.E.Richart (1976), "A Numerical Model for Liquefaction, ASCE National Convention, Philadelphia, Speciality Session, Liquefaction problems in Geotechnical Engineering, Preprint No.2752, pp.313-341.
- Rowe, P.W. (1972), "Theoretical Meaning and Observed Values of Deformation Parameters for Soil", Roscoe Memor.Symp., Camb., G.T. Foulis, Henley-on-Thames, pp.143-194.
- Seed, H.B. (1976), "Evaluation of Soil Liquefaction Effects on Level Ground During Earthquakes", ASCE National Convention, Philadelphia, Speciality Session, Liquefaction Problems in Geotechnical Engineering, Preprint No.2752, pp.1-104.
- Silver, M.L. (1976), "Laboratory Triaxial Testing Procedures to Determine the Cyclic Strength of Soils", Report No.NUREG-31, U.S. Nuclear Regulatory Commission, Washington, D.C.
- Szavits-Nossan, A. (1980), "Endochronic Constitutive equation for Soil", Proc.Int. Symp. Soil Under Cyclic and Transient Loading, Swansea, Balkema, pp.347-352.
- Szavits-Nossan, A. and D. Kovačić (1980), "Liquefaction Analysis of a Flexible Strip Foundation", Proc.Int.Symp. Soils Under Cyclic and Transient Loading, Swansea, Balkema, pp.543-548.
- Tokue, T. (1977), "Deformations of Dry Sand Under Cyclic Loadings", Proc. Speciality Session 9 on Constitutive Equations of Soils, 9th Int.Conf.Soil.Mech.Found.Eng., Tokyo, pp.263-270.
- Townsend, F.C. (1978), "A Review of Factors Affecting Cyclic Triaxial Tests", Dynamic Geotechnical Testing, ASTM STP 654, ASTM, pp.356-383.
- Truesdell, C. and W. Noll (1965), The Nonlinear Field Theories of Mechanics, in:Handbuch der Physik, S. Flugge ed., Vol.III/3, Springer Verlag.
- Vermeer, P.A. (1978), "A Double Hardening Model for Sand", Geotechnique, 28, pp.413-433.
- Zienkiewicz, O.C., C.T. Chang and E. Hinton (1978), "Non-linear Seismic Response and Liquefaction", Int.Journ.Numerical and Analytical Methods in Geomechanics, Vol. 2 No.4 Oct-Dec. pp.381-404.