MONTE CARLO SIMULATIONS FOR UNCERTAINTY QUANTIFICATION: MATHEMATICAL FOUNDATION AND IMPLICATION OF UNDERLYING **ASSUMPTIONS**

Akeem O. Arinkoola^{1*}, Kazeem K. Salam¹ and Aladeitan M. Yetunde²

¹Petroleum Engineering Unit, Chemical Engineering Department, LadokeAkintola University of Technology, Ogbomoso, Nigeria

> ²Chemical Engineering Department, University of Abuja, Nigeria *Corresponding author

Abstract

Many problems in petroleum engineering involvesolving multivariable complex integrals andanalytic calculation is rarely possible in most practical cases. Numerical approximation appears to be practicable. However, majority of existing numerical solution of a D-dimensional integral with a relative accuracy (ϵ) requires a computation time proportional to ϵ^{-D} . Hence, the use of Ordinary Monte Carlo simulation (OMCS) in uncertainty quantification has gained tremendous attention. In reality, when historical data is available, variables are not independent and identically distributed (iid). The direct sampling of variable under this condition is not expected to be easy and use of OMCS can be erroneous. Methods based on Markov Chains will offer reasonable solution to this problem. This study evaluates simulation methodsfor quantifying uncertainty in reservoir forecast. The implications of underlying mathematics and assumptions that characterizes them were covered. The p5-p10-p50p90-p95 uncertainty envelopes from different methods were presented using acase study from Niger Delta. The result is useful for identification and selection of effective tools in uncertainty quantification in the oil industry.

Keywords: Numerical methods, Uncertainty, Markov chain, Monte Carlo

1.0 Introduction

Monte Carlo simulation is refers to simulation that utilizes random number and statistical analysis to compute results. It is very similar toany random experiments whose likely answer is not known. In this context, Monte Carlo simulation is considered a methodical way of doing "what-if analysis" (SamikRaychaudhuri, 2008).Petroleum engineering problems such as multi-phase and transport are usually integration problems. It is difficult to express a given reservoir performance perfectly as a closed function of a state and decision variables due to the associated uncertainties. Numerical solution of a multidimensional integral with reasonable accuracy requires a large computation time. Numerical Methods can handle more complex models but often characterize by repetition for each decision point.

point. A more important fact is that simulation methods are generally straightforward for investigator to implement. Itrelies on understanding of a few principles of simulation and the structure of the problem at hand (John Geweke, 1996). Contrarily, deterministic methods typically require much larger problem-specific investments in numerical methods and assumptions in cases analytical solutions are sort.

Monte Carlo simulations are stochastic algorithms using the central limit theorem to compute multidimensional integrals (Liu and Oliver, 2003). Thus, with the central limit theorem, Monte Carlo simulationserror scales as ϵ^{-2} , regardless of the dimensionality.

Every application of the Monte Carlo method can be reduced to a solution of a definite integral of form

brought to you by \$\mathbb{I}\$ CORE

 $I = \int f(x)dx \, (1)$

where domain Ω is a region in multiple-dimensional space and f(x) is the integrand. The integral I can be interpreted as the expected value of random variable f(X), where x is an independent random variable identically distributed (iid) in Ω . For practical application, the integral is usually of high dimensionality hence analytic calculation of an exact solution is not feasible. However, the approximate

View metadata, citation and similar papers at core.ac.uk

al., 1996).

The preference for simulation methods is increasing despite availability of some asymptotic advantages of deterministic approaches to integration(R.Y. Rubinstein, 1981 and Wilson and Adam, 1983). Deterministic methods are limited by high computing time. This is unacceptable to asset team in most cases because it affects developmental Simulation can handle very complex and realistic systems but has to be repeated for each decision solution also requires a probability distribution, π from which set of samples, x_1, \dots, x_n in Ω is determined.

The question this study set to address is that "What are the implications of different assumptions for the determination of point-estimate that reflect the actual structure of π ?

Given a probability distribution, π , approximation of the integral $\pi(g)$ is the expected value (equation 2) using random sample x.

$$\pi(g) = E_{\pi}[g(X)] = \int_{F} g(x)\pi(dx) (2)$$

Suppose u and l are the upper and lower bounds of the integral, respectively, and that the region can be split into m intervals $l = b_0 < b_1 < ... < b_{m-1} < b_m = u$. Then the integral of a function $\pi(.)$ is:

$$\int_{l}^{u} \pi(x)dx$$

$$= \sum_{i=1}^{m} \int_{bl-1}^{bl} \pi(x)dx$$
(3)

In practice, l and u may be infinite, in which case some cut-off point is required. In general, the cut-off are chosen so that the vast majority of the probability lies between l and u such that:

$$\int_{l}^{u} f(x)dx$$

$$\approx 1 \tag{4}$$

The function can be approximated numerically using a polygon with an easy-to- compute area. There are literally many of such approximations, each with their own advantages and limitations. The rectangle rule approximates the area under the curve with a rectangle (equation 5). The rectangle rule provides exact solution only if the function was piece-wise flat

$$\int_{l}^{u} h(x)dx \approx h\left(\frac{u+l}{2}\right)(u-l)(5)$$

Trapezoid rule improves the approximation by replacing the function at the midpoint with the average value of the function, and would be exact for any piece-wise linear function (including piece-wise flat functions). The trapezoid rule approximates the area under the curve with a trapezoid and is given by equation 6.

$$\int_{l}^{u} h(x)dx \approx \frac{h(u) + h(l)}{2} (u - l)(6)$$

Simpson's rule is based on using quadratic approximation to the underlying function. It is exact when the underlying function is piece-wise linear or quadratic. Simpson's Rule approximation is given by equation 7.

$$\int_{l}^{u} h(x)dx \approx \frac{u-l}{6} \left(h(u) + 4h\left(\frac{u+l}{2}\right) + h(l) \right) (7)$$

2.0 Ordinary Monte Carlo Simulations

Distinctions can be made between Monte Carlo Methods using graphical representation. For Ordinary Monte Carlo, the graphical model for naive Bayes (Figure 1) withno edges between any of the nodeshas been used (Iain Murray, 2007). The features x_d are dependent, but independent conditioned on the class variable c. Figure 1 is a directed graphical model for the joint distribution with class variable c and feature vector $x = \{x_d\}$. This simplest multivariate distribution assumes that all of their component variables x_d are independent.By implication, the independency of two measurable sets X_1 and X_2 (equation 8) implies any information about an event occurring in one set has no information about whether an event occurs in another set.

$$Pr(X_1 \cap X_2) = Pr(X_1)Pr(X_2)(8)$$

One immediate implication of this assumption is that, the conditional probability of one given the other is the same as the unconditional probability of the random variable. This is impossible in practical sense.

$$Pr(X_1/X_2) = Pr(X_1)(9)$$

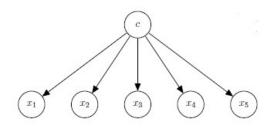


Figure 1:Ordinary Monte Carlo

Mathematically:

$$P(X) = \prod_{D} p(x_d) \tag{10}$$

The sum of this function divided by N will converge to the expectation of the function f as N becomes very large and the probability density S_N (an estimate of $\langle f \rangle$ and σ_N , its variance) in the large N limit can be written as

$$\lim_{N \to +\infty} P(S_N) = \frac{1}{\sqrt{2\pi\sigma_N^2}} e^{-\frac{(S_N - \langle f \rangle)^2}{2\sigma_N^2}} (11)$$

The estimate therefore becomes:

$$\int f(\vec{x})d^Dx \approx S_N \pm \sigma_N (12)$$

3.0 Bayesian Simulations

Bayesian simulation has two parts: a statistical part that describes the distribution of data (y) given the unknown quantities, and a prior distribution that describes ones beliefs about the unknown quantities independent of the data (Efendiev et al., 2006). Most commonly, the unknown quantities of interest are the parameters θ in a model, and the statistical model is the likelihood function $L(\theta/y)$. After collecting the data, one can update prior beliefs about θ and calculate the posterior distribution $P(\theta/y)$.

Bayesian approach, expresses uncertainties in the model's parameters θ in terms of probability. Parameter uncertainty is quantified first by introducing a prior probability distribution $P(\theta)$, which represents the knowledge about θ before collecting any new data, and second, by updating this prior probability on θ to account for the new data collected (D).

This updating is performed using Bayes' theorem, which can be expressed as:

$$P(D/\theta) = \frac{P(D/\theta).P(\theta)}{\int P(D/\theta).P(\theta).d\theta}$$
(13)

Where $P(\theta/D)$ is the posterior distribution of θ ; $\int P(D/\theta) \cdot P(\theta) d\theta$ is a normalizing constant required so that $\int P(D/\theta) \cdot d\theta = 1$, and $P(D/\theta)$ is the conditional probability for the measured data given the parameters. $P(D/\theta)$ isoften referred to as the likelihood function.

Unlike ordinary Monte Carlo, the arrow directions in Figure 2 make a big difference compare with Figure 1.

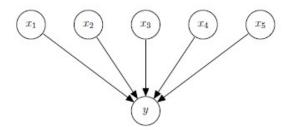


Figure 2: Hidden causes

The x_d are independent in the generative process. After observing y, knowledge about x forms a potentially complex joint distribution. Here, the direct sampling from p(x/y) is difficult. Methods based on Markov chains can offer a solution to this problem (Iain Murray, 2007).

Mathematically,

$$p(y,X) = p(y)p(X/y)$$

$$= p(y) \prod_{d=1}^{D} p(X_d/y)$$
(14)

Bayesian inference is carried out conditional on the observed data and does not rely on the assumption that a hypothetical infinite population of data exists. These differences give certain advantages to

Bayesian methods over ordinary Monte Carlo; such as that all inferences are exact and not approximated.

4.0 Case study

The use of uncertainty and risk analysis tools in the petroleum industry has increased since the first oil crisis. Uncertainty can emanate from numerous sources and directly impact the physical reservoir description (Vanegas et al., 2006). Monte Carlo simulation is usually combined to generate important probabilities that correspond to top-down figures with their corresponding values of parameters. The adoption of various methods is often based on discretions or practices with no or little attention been paid to the risks associated with decisions that came afterwards. The result from two Monte Carlo simulations for uncertainty quantification presented.

This case study demonstrates the application of Ordinary and Markov-Chain Monte simulations in quantifying uncertainty of production forecast of a field in the Niger Delta. The study objective was to evaluate infill drilling potentials and quantify associated uncertainty. Evaluation and selection of infill opportunity was carried out by simulating reservoir incremental oil production and water breakthrough time from vertical and horizontal wells completed within the reservoir sub-regions the details on the field description is available online (Arinkoola et al., 2015).

4.1 Forecast performance model

The proxy model for the production forecast was approximated by the function:

 $\hat{y}(SWI, PERMX)[MMstb]$

$$= \beta_0 + \beta_1 SWI + \beta_2 PERMX^2 (15)$$

where SWI is the initial water saturation, PERMX is the horizontal p the regression coefficients $\beta_0 = 2.488, \beta_1$

= 53.0332 and $\beta_2 = -17.2437$.

4.2 Crystal ball - Ordinary Monte Carlo Simulation

The process starts with Equation 15. One hundred thousand (100,000) uniformly distributed numbers between x_1 to x_2 , and y_1 to y_2 are randomly drawn using a Latin hypercube sampling technique from a probability density function (Eqn. 16) obtained by dividing $\hat{y}(SWI, PERMX)$ by the total area under the curve.

P(SWI, PERMX)

$$F(SWI, PERMX) = \frac{f(SWI, PERMX)}{\int_{x_1}^{x_2} \int_{y_1}^{y_2} f(SWI, PERMX) dSWIdPERMX}$$
(16)

A method of identifying (x_1, y_1) that makes more sense computationally is to utilize the cumulative distribution function. The pdf is transformed into a cumulative probability distribution.

$$R(X,Y) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} P(X,Y) dX dY (17)$$

The results from the Crystal ball are presented as shown in Figure 3 and 4 as pdf and cdf respectively. The distribution of forecast at 5% increment with

corresponding values of parameter is also presented in Table 2.

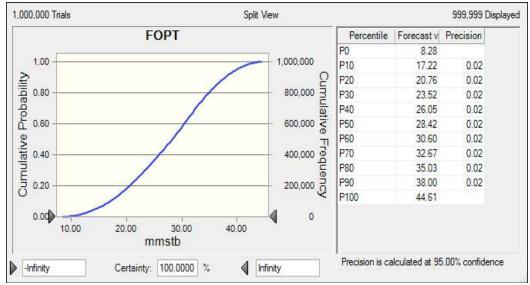


Figure 3: The cumulative density function of forecast distribution

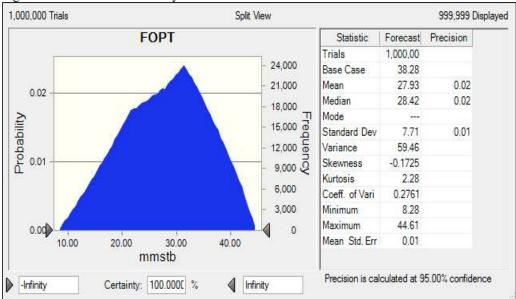


Figure 4: Pdf as forecast are with its statistics

Table 2: Forecast distribution and corresponding percentiles

Percentiles	FOPT(MMSTB)	PERMX	SWI	
P5	14.67	0.61	0.66	
P10	17.22	0.64	0.67	
P50	28.42	0.93	0.77	
P90	38.00	1.22	0.87	
P95	40.03	1.25	0.89	

4.3 WinBUGS - Bayesian Simulator

WinBUGS is a windows version of the BUGS program for Bayesian analysis of complex statistical

models using Markov Chain Monte Carlo (MCMC) techniques. WinBUGS allows models to be described using a slightly amended version of the BUGS language, or as Doodles (graphical representations of models) which can, if desired, be translated to a text-based description.

4.3.1 Specifying model in the BUGS language

The BUGS language allows a concise expression of the model, using the 'twiddles' symbol \sim to denote stochastic (probabilistic) relationships, and the left arrow ('<' sign followed by '-' sign) to denote deterministic (logical) relationships. The stochastic parameters $\beta_0,\,\beta_1,\,\beta_2$ and τ in the proxy equation are given proper but minimally informative prior distributions, while the logical expression for sigma allows the standard deviation (of the random effects distribution) to be estimated. The model is specified as follows:

```
\begin{tabular}{ll} \textbf{model} & \{for (i in 1:N) \{ \\ & r[i] \sim dbin(p[i], n[i]) \\ & b[i] \sim dnorm(0, tau) \\ & logit(p[i]) <- beta0 + \\ beta1*x1[i]+beta2*x2[i]+b[i] \end{tabular}
```

```
\label{eq:beta0} \begin{cases} \text{beta0} \sim \text{dnorm}(0, 1.0\text{E-6}) \\ \text{beta1} \sim \text{dnorm}(0, 1.0\text{E-6}) \\ \text{beta2} \sim \text{dnorm}(0, 1.0\text{E-6}) \\ \text{tau} \sim \text{dgamma}(0.001, \\ \\ \text{0.001}) \end{cases}
```

To check the convergence of MCMC simulations while running the model, multiple chains with divergent starting points were run using derivative-free adaptive rejection sampling algorithm.

Figure 5 shows the trace plots for different parameters. The overlapping of the chains is an indication that reasonable convergence has been achieved after 11000 iterations. To obtain samples for posterior inference, Monte Carlo error was calculated for each parameter. A total of additional 10000 simulations were required to obtain Monte Carlo error less than 5% of the sample standard deviation for all parameters.

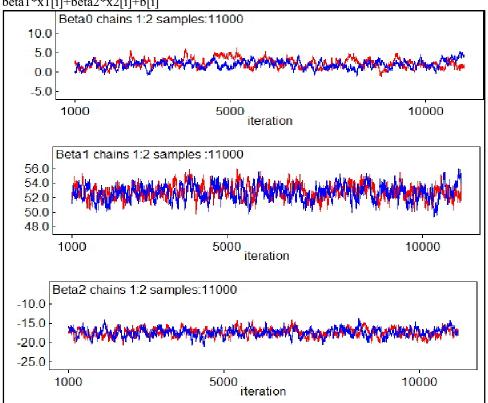


Figure 5 History plots showing two chains that are overlapped, an indication of convergence

Table 3 shows the posterior summaries of the parameters of the regression coefficients and the variance of the regression model. The posterior means and medians of the coefficients of PERMX and

SWI indicated that they are important variables. Moreover, we observe that the posterior means of β are slightly different from the ordinary least square estimates (2.152, 52.58, -17.31) T concluding that

Arinola A. O. et al/LAUTECH Journal of Engineering and Technology 10(2) 2016: 30-37

our prior was essentially a little bit informative

implementing minor on the model parameters.


of

Table 3 Posterior summaries of the indicator parameters included in the Bayesian model

-			MC	•			•			
node	mean	sd	error	2.5%	10%	50%	90%	97.5%	start	sample
beta0	2.152	1.02	0.06495	0.1555	0.8411	2.164	3.43	4.098	12001	16000
beta1	52.58	1.041	0.06051	50.47	51.21	52.61	53.89	54.51	12001	16000
beta2	-17.31	0.993	0.05526	-19.36	-18.58	-17.29	-16.06	-15.4	12001	16000

Figure 6 displays the posterior kernel density plots for model parameters β i. The posterior distributions of the coefficients are normal for all the variables. The posterior median of the

distribution and the posterior mean justify inclusion of the variables in the model.

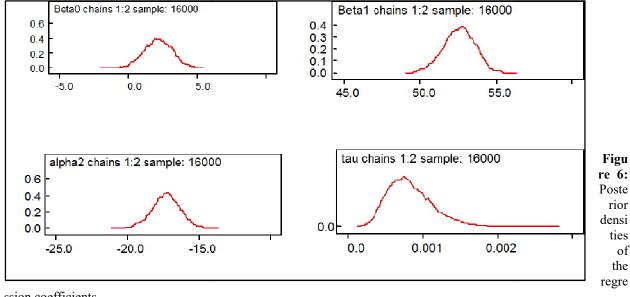

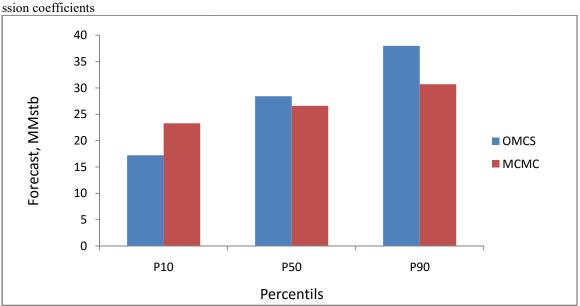


Figure 7: Histogram showing comparison of forecast distribution using ordinary and Markov Chain Monte Carlo simulations.

5.0 Conclusion

The OMCS indicated that the system under study was heterogeneous. This is evident from the extreme forecast distributions (P10 – P90) obtained. However, Bayesian analysis produced posterior estimates (P2.5%, P10%, P50% P97.5% and P90%) that are highly representative being fairly homogeneous typical of the system under study. The high uncertainty associated with the use of OMCS can largely be attributed to the assumption of parameter independency on the forecast. When parameters are not independent (iid) the application of Ordinary Monte Carlo analysis around a history match is not valid. A full Bayesian treatment is required.

6.0 Conflict of Interest

The authors declare that there is no conflict of interests regarding the publication of this paper.

References

SamikRaychaudhuri (2008), Introduction to Monte Carlo Simulation, Proceedings of the 2008 Winter Simulation Conference, USA

Gilks, W.R., Richardson, S., Spiegelhalter, D.J. (eds.): Markov Chain Monte Carlo in Practice. Chapman & Hall, New York (1996)

John Geweke (1996), Monte Carlo Simulation and Numerical Integration, Handbook of Computational Economics, Volume I Elsevier Science publisher

Liu, N., Oliver, D.S.: Evaluation of Monte Carlo methods for assessing uncertainty. SPE J. 8(2), 188–195 (2003)

Wilson B. C., Adam G., "A Monte Carlo model for the absorption and flux distributions of light in tissue," Med. Phys.. 10, (6), 824 –830 (1983). 0094-2405).

Bernd A. Berg1, Alain Billoire, Markov Chain Monte Carlo Simulations, Wiley Encyclopedia of Computer Science and Engineering, edited by Benjamin Wah, 2008 John Wiley & Sons, Inc.

R.Y. Rubinstein, Simulation and the Monte Carlo Method (John Wiley & Sons, New York, 1981)

Iain Murray. Advances in Markov chain Monte Carlo methods. PhD thesis, Gatsby computational neuroscience unit, University College London, 2007 (page 14 - 20)

Efendiev, Y., Hou, T., Luo, W.: Preconditioning Markov chain Monte Carlo simulations using coarse-scale models. SIAM J. Sci. Comput. 28(2), 776–803 (2006)

VanegasJW, Cunha JC, Cunha LB (2006). "Uncertainty Assessment of production Performance for a Heavy Oil Offshore Field by using the Experimental Design Technique", paper 2006-125 presented at the Petroleum society's 7th Canadian International Petroleum Conference, Calgary, Alberta, Canada, June 13-15, 2006.

ArinkoolaA O, Haruna M O, Ogbe D O (2015). Quantifying Uncertainty in Infill well Placement using Numerical Simulation and Experimental Design, J. Petrol Explor Prod Technol, ISSN 2190-0558, DOI 10.1007/s13202-015-0180-z http://paperity.org/p/73385638/quantifying-uncertainty-in-infill-well-placement-using-numerical-simulation-and- Experimental Design