

Drowsiness Detection and Vehicular Safety System for Monitoring the Loss of Attention in Locomotive Drivers

Akshay Kumar A¹, Chethan M S¹, Hanamantha R Karikal¹, Jayanth A¹, Nithyashree. S²

¹UG Students, ²Assistant Professor

^{1,2}Department of Electronics and Communication,

Dr. Ambedkar Institute of Technology,

Bangalore, Karnataka, India

Email: aksh79681@gmail.com

DOI: <http://doi.org/10.5281/zenodo.3340425>

Abstract

In a creating country like India, with progression in the transportation innovation and ascend in the complete number of vehicles, street mishaps increments are often. The fundamental driver behind these street mishaps are the absence of preparing establishments, untalented drivers, poor street conditions, utilization of PDAs amid driving, expending liquor while driving, over-burdening and poor administrative plans in such manner. The proposed work is to alarm the driver when he is lazy or diverted far from typical ready mode to non-ready mode by methods for ringer or vibration instrument. In this task, constant information is gathered by camcorder and other miniaturized scale electro mechanical framework gadgets (MEMS). This information gives data about driving state of the driver which goes about as contribution to controller. The suitable measures are taken by the controller to alarm the driver.

Keywords: Driver attention detector, driver safety system, drowsy driver identification, real time sleep capture

INTRODUCTION

Driver exhaustion (falling sleeping at the ride) is a noteworthy reason for street mishaps; representing up to 20% of genuine mishaps on motorways and tedious streets in Great Britain. The government's road safety strategy, Tomorrow's Roads: safer for everyone, distinguishes driver exhaustion as one of the fundamental territories of driver conduct that should be tended to if the objective for diminishing the quantity of individuals murdered and truly harmed in street mishaps by 40% by 2010 is to be accomplished.

Identifying the laziness of the driver is the surest method for estimating the driver weariness. The motivation behind this undertaking is to build up a sleepiness recognition framework. This framework works by examining the eye development

of the driver and alarming the driver by actuating the bell when he/she is languid. The framework so executed is a nonintrusive ongoing observing framework for eye identification. Amid observing, the framework can choose whether the eyes were opened or shut. At the point, when the eyes were recognized shut for a really long time, a sign was issued to caution the driver [6].

The misfortune or disturbance of rest results in lethargy amid periods when the individual would typically be completely wakeful. The loss of even one night's rest can prompt extraordinary momentary drowsiness, and nonstop upset rest can prompt endless sluggishness. The main viable approach to decrease lethargy is to rest. Dozing less than four hours out of every night hinders execution. The impacts of rest misfortune are combined, and

routinely losing a couple of long stretches of rest a night can prompt interminable languor after some time. Rest misfortune and rest interruption can be brought about by a wide scope of variables, some of which are past the person's control, however some of which are close to home decisions:

- Hours of work, including extended periods of time and move work
- Family duties
- Social exercises
- Illness, including rest issue
- Medication
- Stress

The point is on improving the security of the driver without being prominent. Obvious prompts were acquired through eye flicker rate by utilizing a camera, which normally portray the dimension of readiness of an individual. These were removed progressively and efficiently joined to check the weakness dimension of the driver. The framework can screen the driver's eyes to identify brief times of rest enduring 3 to 4 seconds. The framework actualized in this methodology keeps running at 8–15 outlines for every second. The application was actualized utilizing Open CV in Raspberry Pi condition with a solitary camera see. This framework was utilized to recognize the laziness of the driver and subsequently diminishing the street mishaps [1, 2].

LITERATURE SURVEY

A study done by National Highway Traffic Safety Administration assessed that there were 56,000 rest related street crashes in the U.S.A. in 1996. Another overview done in 2007 says that 18% of mishaps included exhaustion as the primary factor. In Britain up to 20% of genuine street mishaps were caused because of weariness. Also, study done by the Road and Traffic Authority expressed that in the year 2007, weakness added to 20% of mishaps caused on street. Mishaps because of sleep was

anticipated and controlled when the vehicle is crazy. Likewise, the plastered driving is identified by utilizing liquor finder in the vehicle. The term utilized here for the distinguishing proof that the driver is tired by utilizing eye squint of the driver.

These sorts of mishaps happened because of tiredness and most likely driver couldn't control the vehicle, when the driver wakes. The sluggishness was distinguished by the eye squint conclusion rate through infrared sensor worn by driver by methods for displays outline. In the event that the driver is in lazy state, at that point the framework will give bell signal and the speed of the vehicle will decrease and the obstruction sensor will be utilized to detect the contiguous vehicle to maintain a strategic distance from impact with that, and on the off chance that there is no vehicle in left adjoining side, at that point the vehicle will move to one side of the street via auto directing and controlling, and vehicle would be left with earlier signs. In the ongoing years, numerous specialists took a shot at these gadgets and few methodologies have been accounted for.

One of the proposed techniques is to screen the development of the vehicle to recognize sleepiness of the driver. Anyway this strategy has constraints as the outcomes are impacted by the kind of vehicle and the state of street. Another strategy is to process the electrocardiogram (ECG) sign of driver. This methodology likewise has impediments as ECG tests will dependably be associated with the driver's body. That would aggravate the driver. Hardly any looks into endeavoured to survey the exhaustion factor by checking the eye squint rate of the driver. Effective identification of eye flicker rate has been the enthusiasm of numerous specialists proposed strategies dependent on blend of projection and the geometry highlight of iris and student. T.D Orazio and Z.Zhang

utilize the way that the iris and student are darker than skin and white piece of the eye.

The calculation introduced by Ms. Devi utilized the Hough Transform to recognize the iris and to decide receptiveness of the eye. A few scientists depend on the projection of the picture, to decide the condition of an eye. Z. Liu says that the vertical projection of the picture of the two eyes is utilized. The even projection picture of an eye is utilized to decide the interim among eyebrows and eyelids and to perceive the condition of an eye. The flat projection of the picture of a face is determined to decide condition of an eye.

PROPOSED SYSTEM

The entire framework is based upon Raspberry Pi board, Raspbian OS, OpenCV picture handling library and QT as editorial manager. The essential centre is given to the quicker sluggishness identification and handling of information. The framework is utilized to recognize the eyes whether they are shut or open continuously through the logitech camera, where drivers are not associated with any outside gadgets and furthermore failing is exceedingly inconceivable. Insinuation administrations are given to caution the drivers through IoT where eye ball recognition, GPS and GSM modules are interfaced with the Raspberry pi board.

A Haar Classifier is an AI approach for visual article location initially created by Viola and Jones. It was initially planned for facial milestone and shape foreseeing, however, it can be utilized for any article. In the proposed idea, the driver's face is persistently recorded utilizing a camera, to identify the hypo-watchfulness level. At that point, the shut eye motion was identified for tired location. The eye flicker recurrence surpassing the typical rate is the exhausted state. The smaller scale rest that goes on for 3 to 4 seconds is the great marker of the exhausted state. This shut eye motion was actualized utilizing Open CV. It will alarm the driver

about his/her weariness utilizing a ringer. For following the area of the alcoholic driver for remote correspondence, satellite based GPS (worldwide situating framework) beneficiary module, with receiving wire is utilized. GPS module utilized in the framework utilizes regular citizen GPS sign to give area precision of 30–50m inside 5 minutes or less, the underlying time required to secure the satellite on a moving vehicle. The reason for the dynamic tracker is to get the ongoing area data of vehicle with alcoholic driver and transmit the equivalent to the customer versatile utilizing GSM modem connected to controller. The framework's yield could be a notice that can recover the driver's consideration only to the vehicle and the street or a notice for a vehicle organization or empower a bell. We are utilizing the liquor sensors to detect the utilization of the liquor upto the present rate. On the off chance that the driver's liquor utilization surpasses the farthest point, the signal goes on to caution the driver and start won't turn on.

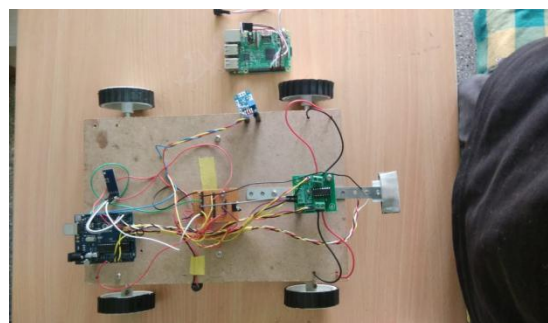


Figure 1: Prototype of Proposed Framework.



Figure 2: Raspberry pi Board with Buzzer and Zigbee.

Haar Cascade Method

In Haar Cascade Classifiers, a great deal of comparative and disparate pictures is prepared so as to identify weariness of the driver, based on eye and mouth viewpoint proportion. OpenCV is a learning-based technique, pressed with an identifier just as a coach. For preparing, a different database is kept up for face and eye with a few positive and negative pictures having eye and mouth shut and opened conditions and distinctive set facial pictures[4]. In 2013, Patil et al. proposed that dream based sleepiness is done utilizing Support Vector Machine and Haar Cascade Classifiers of the eye flicker sensor and was fixed in vehicle to recognize obviousness and it was shown through a caution. Here, we have utilized the equivalent Haarcourse technique to recognize yawning which when identified is demonstrated by ringer associated with raspberry pi board which won't stop our vehicle but only warns the driver [6, 7].

Shape predictor_68_Facial Landmark recognition and Eye Aspect Ratio (EAR) and Mouth Aspect Ratio (MAR)

So, as to foresee the face and eye locale in the live video stream, shape indicator is utilized. Fig.3 demonstrates the languor which is estimated by computing the eye angle proportion (Euclidean separation between the eyes are determined), mouth perspective proportion (same as EAR) and the contentions are passed to the predefined dataset and facial milestone discovery is completed. For each video arrangement, the eye and mouth tourist spots are found. The perspective proportion among width and stature of the eye and mouth is aligned to caution the driver.

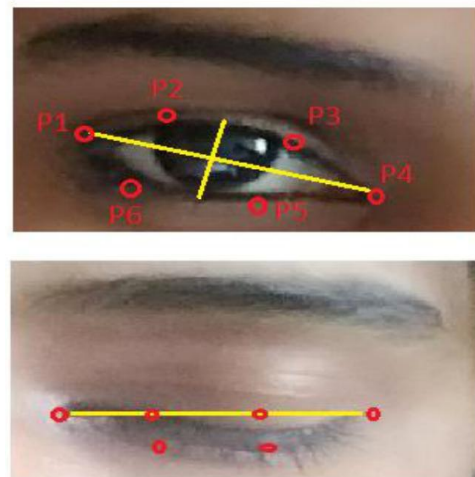


Figure 3: Close and Open Eyes with Landmark p_i Detected Automatically. The EAR is Calculated for Several Frames of a Video. A Single Blink is Represented [1].

Where p_1, \dots, p_6 are the two-dimensional milestone area, shown in Fig.2. The EAR is generally steady when an eye is open and is drawing near to zero while the eye isn't in open state. In the event that the individual survey the camera persistently, the Eye Aspect Ratio (EAR) is observed to be typical and it achieves low esteem when he/she shutting the eye for a more extended time. This equivalent idea is suggested for MAR. When the lower esteem is achieved, at that point sleepiness is distinguished [4, 5]. In 2012, Ubidsots expounded on associated programming and equipment answers for remotely control, computerize forms for social insurance customers and screen. Twilio is a cloud correspondence stage as an administration (PaaS), it enables a product designer to automatically send and get instant message utilizing its web administration APIs, make and get telephone calls. The paper presents cautioning process when the driver feels lethargic utilizing cloud server and portable API to communicate something specific and in the meantime giving an alert sign to the driver [9].

ALGORITHM FLOWCHART

Raspberry Pi 3 with Python IDLE is compelling. It includes programming in programming with expansions of OpenCV PC vision introduced. The whole calculation for languor identification is appeared with the assistance of a flowchart appeared in Fig. 4. The program will begin to run and it tends to be ended on recognizing eye and mouth shutting and

opening which will send direction to signal to caution the driver and stop the vehicle. So as to start the program execution, it will import the accompanying libraries like numpy, OpenCV, play sound, argparse, dlib, separate, clock, customer, ApiClient, and picamera. Liquor and way openingsensor recognize their progressions and cautions through signals. In both the cases the bell sounds and vehicle stops.

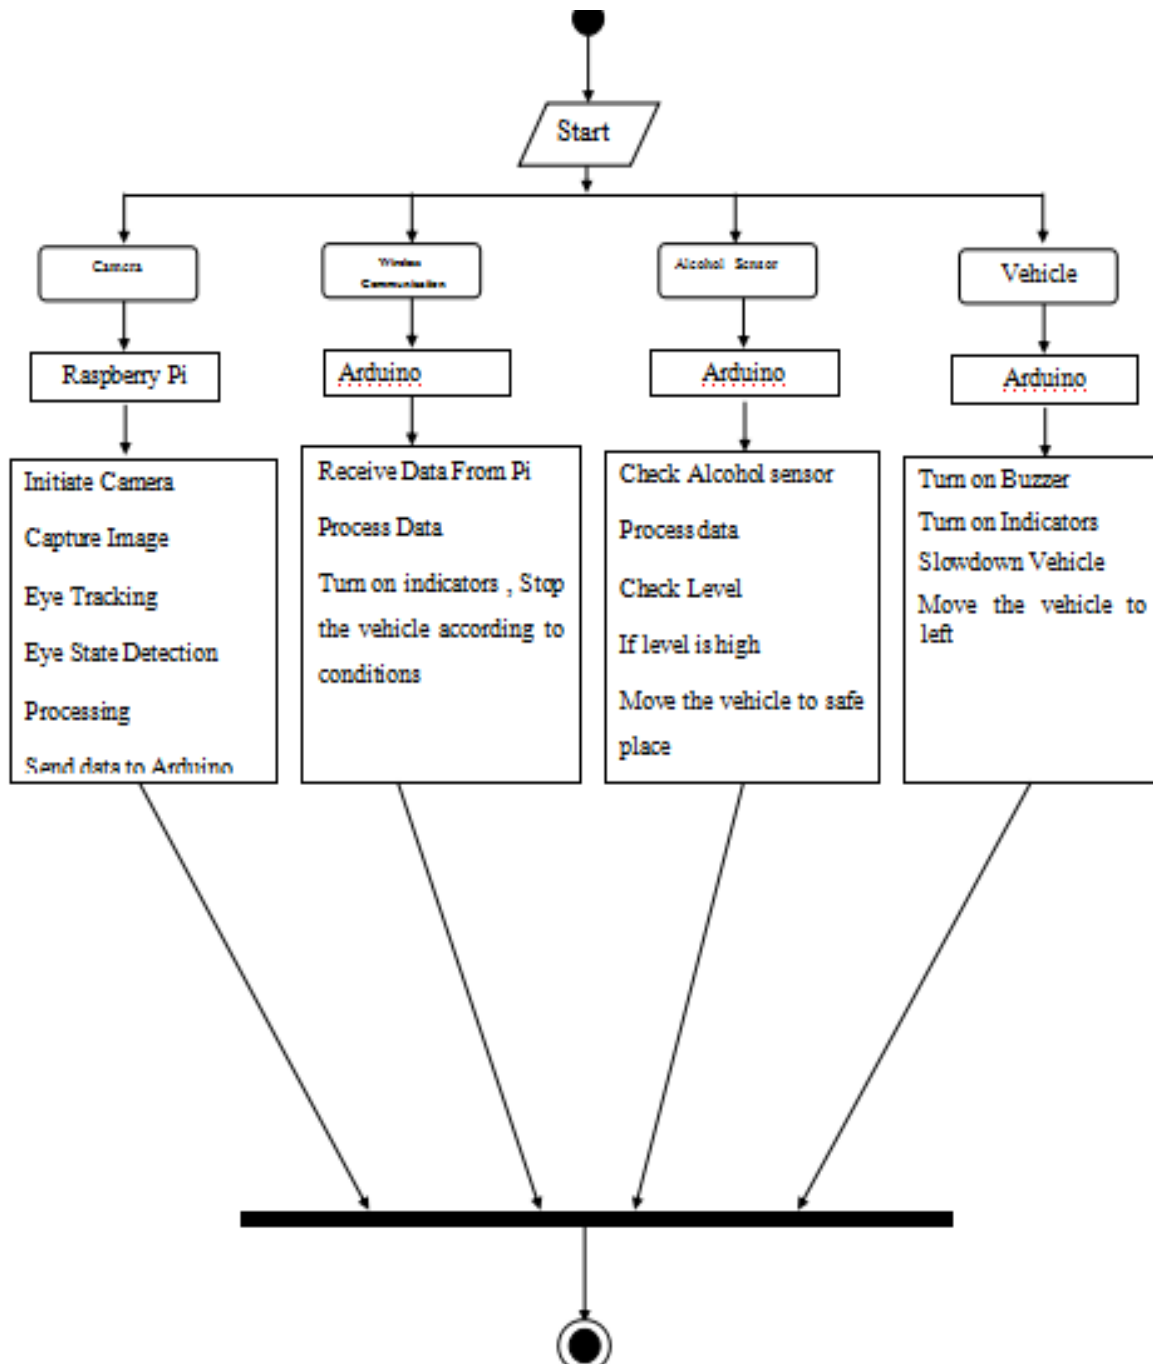


Figure 4: Activity Diagram.

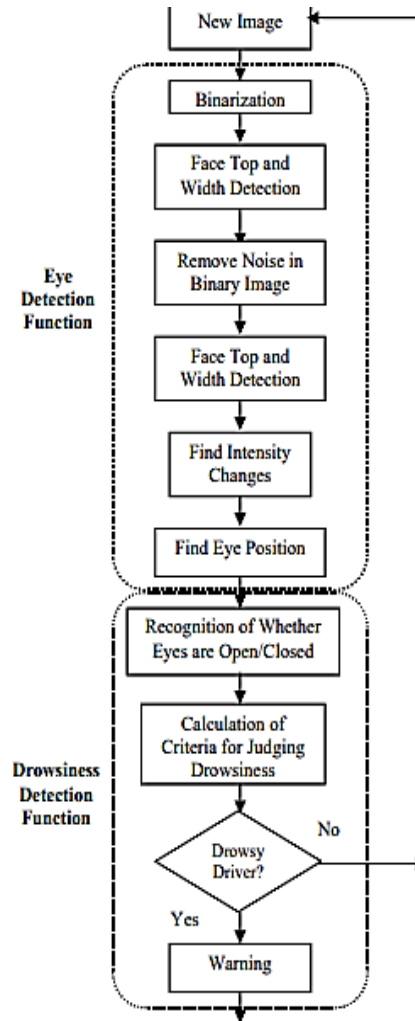


Figure 5: Drowsiness Detection Algorithm.

RESULT AND DISCUSSION

Drowsiness Detection

The driver tiredness can be estimated utilizing Eye Aspect Ratio (EAR). The proportion of the eye can shift for every single individual. The accompanying case is tried for seven unique casings for an individual with two conditions. One is determined for enlightening condition and another for eye shutting condition. Another code is set up to identify mouth open and close. In Fig.6 and Fig.7, eye shutting rate is estimated after each 0.5 seconds and if the esteem crosses previously existed edge value[less than 0.3 for our situation for every one of the seven frames], at that point the raspberry pi 3 gets the alarm signal from alert associated with the GPIO pins of Pi 3 board. (Fig 5), When the

individual shutting his eyes for more than fixed edge run then the alarm signal is produced to awaken the driver from drowsy state and furthermore through the weakness discovery is improved through yawning identification of mouth open and close. For the two cases the driver is cautioned by buzzer (for Drowsy recognition) in which one is associated at the vehicle and another at raspberry pi board (for yawning) with a zigbee.

The reason here for utilizing two signals at various closures is provided that the drowsiness is recognized, the driver is cautioned through bell in the vehicle, the vehicle hinders moves towards left and then keeps on moving following couple of moments. Be that as it may, for yawning

recognition we don't need the vehicle to back off or to stop, we simply need to give a notice tone to the driver to be mindful.

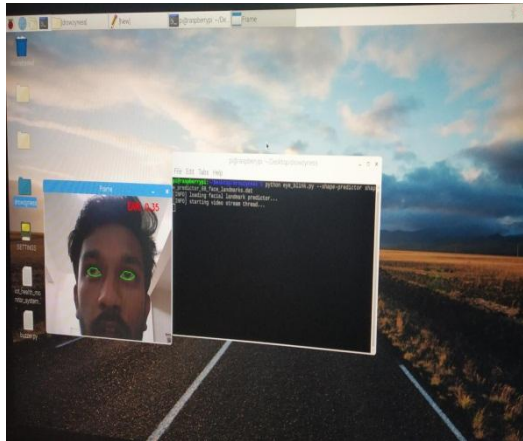


Figure 6: Eye Aspect Ratio for Normal Open Eye (0.3 or 0.35 in this case).

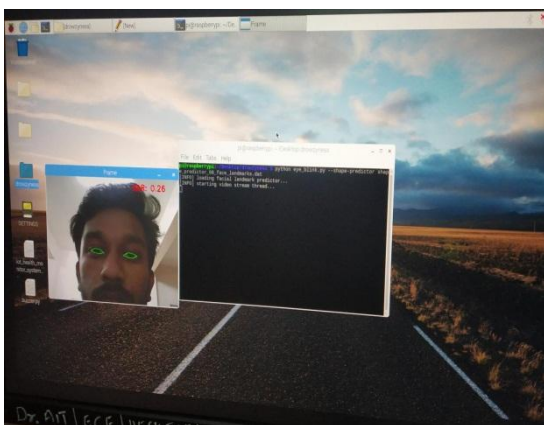


Figure 7: Eye Aspect Ratio for Drowsy Eye (0.26 in this case).

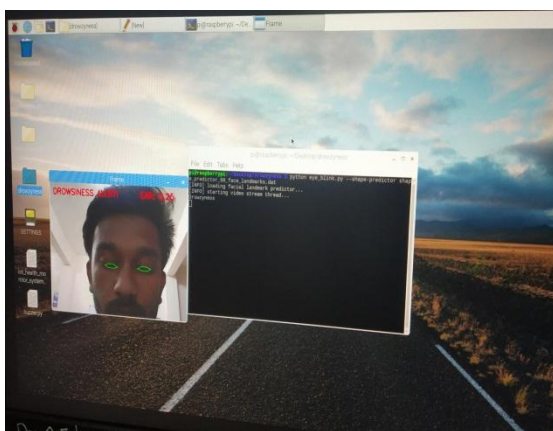


Figure 8: Drowsiness Detected After Verifying 7 Continuous Frames Less than Specified Threshold Value.

Yawning Detection

In yawning location, the limit esteem taken here is 0.5 [which is normal typical angle proportion of human mouth]. This information is gathered for 7 consistent turns at an interim of 0.5 seconds (Fig. 9 and 10). On the off chance that all there 7 turns are more noteworthy than or equivalent to edge value (0.5) at that point yawning is recognized and bell cautions the driver. The vehicle doesn't stop or back off for this situation however just alarms the driver through ringer. This yawning recognition additionally utilizes Aspect proportion estimation idea for example Mouth viewpoint ratio (MAR) in order to acquire the required outcome.

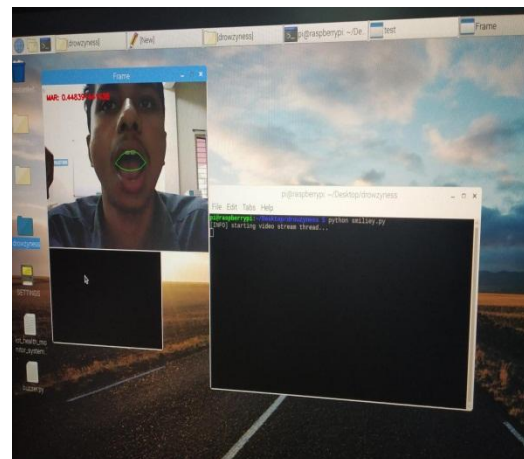


Figure 9: Mouth Aspect Ratio for Normal Mouth Opening.

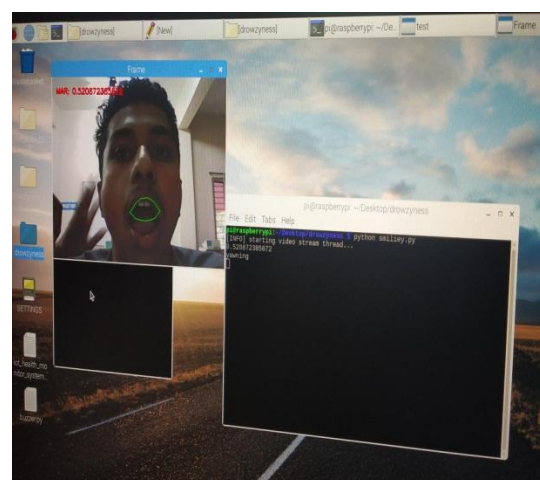


Figure 10: Yawning Detected After 7 Continuous Mouth Opening Frames Greater than Threshold Value.

CONCLUSION

A driver readiness discovery framework was proposed dependent on weakness identification progressively. The proposed technique effectively recognizes the eye squint and the tiredness. Data about the eyes position was acquired through picture handling calculations. Picture preparing offers a non-invasive way to deal with distinguish laziness with no inconvenience and obstruction. A calculation for performing face acknowledgment was utilized. It was discovered that with this calculation, a great estimation of the flicker rate was acquired. The proposed calculation had the option to recognize the eyes at medium and high brightening and free of sexual orientation and age, yet for ideal identification the camera must be situated as front as could be expected under the circumstances. So, as to forestall the impacts of poor recognition because of inadequate light, night vision camera was executed with the goal that better outcomes, unaffected by absence of splendour, will be gotten. Safe driving will be guaranteed by demonstrating the driver utilizing a bell marker.

Nowadays, smashed and driving mishaps are one of the serious issues. This study gives much propelled office in now daily's life as it can undoubtedly have actualized in vehicles with multi arrange testing such a way, that we can keep away from mishaps brought about by drunken driving. Along these lines, by this we can diminish the liquor related street mishaps and consequently these sorts of finders has extraordinary significance later on which we are going to actualize with IOT. Through this task we present equipment programming of IOT gadget to encourage as liquor locator and preventive gadget. This work proposed a framework to identify hand-held mobile phone use amid the demonstration of driving. The framework utilizes ring pointer for distinguishing this movement. The

framework's yield could be a notice that can recover the driver's consideration solely to the vehicle and the street or a notice for a vehicle organization or empower a ringer. We are utilizing the liquor sensors to detect the utilization of the liquor upto the preset rate.

FUTURE IMPROVEMENT

The mobile phone discovery improved by the half and half framework arrangement was conceivable with AI for movement detection and new highlights from optical flow as: level development, the zone of associated segments, and the elements of district development distinguished. The expansion of the edge every second preparing and the picture resolution. The technique can be additionally upgraded by communicating something specific the movement organization or closer police headquarters about the driver conduct and caution him to drive securely or drop his permit in most pessimistic scenario.

REFERENCES

1. L. Jia, D. Zhao, K. Zheng, Z. Li, G. Sun, F. Zhang (2016), "Smartphone-based fatigue detection system using the progressive locating method", *IET Intell. Transp. Syst.*, Volume 10, Issue 3, pp. 148–156.
2. J. S. Jayasenan, P. S. Smitha (2014), "Driver Drowsiness Detection System", Volume 4, Issue 1, pp. 34–37.
3. V. Triyanti, H. Iridiastadi (2017), "Challenges in detecting drowsiness based on driver's behavior", *IOP Conf. Ser. Mater. Sci. Eng.*, Volume 277.
4. F. Omid, G. N. Saraji (2016), "Non-intrusive Methods used to Determine the Driver Drowsiness: Narrative Review Articles", pp. 186–191.
5. P. P. Bhatt GHPatel PG, J. A. Trivedi Patel PG (2017), "Various Methods for driver drowsiness detection: An Overview", *Int. J. Comput. Sci. Eng.*, Volume 9, Issue 3, pp. 70–74.

6. D. Sarkar and A. Chowdhury, "A Real-Time Embedded System Application for Driver Drowsiness and Alcoholic Intoxication Detection", *Int. J. Eng. Trends Technol*, vol. 10, no. 9, pp. 461–465, 2014.
7. R. Ahmed, Kazi Emrul Kayes Emon, M. F. Hossain (2014), "Robust driver fatigue recognition using image processing", *Int. Conf. Informatics, Electron. Vis*, pp. 1–6.
8. O. Khunpisuth, T. Chotchinasri, V. Koschakosai, N. Hnoohom (2016), "Driver Drowsiness Detection Using Eye-Closeness Detection", *12th Int. Conf. Signal-Image Technol. Internet-Based Syst*, pp. 661–668.
9. L. F. Ibrahim et al. (2014), "Using Haar classifiers to detect driver fatigue and provide alerts", *Multimedia. Tools Appl*, Volume 71, Issue 3, pp. 1857–1877.
10. T. Soukupová, J. Cech (2016), "Real-Time Eye Blink Detection using Facial Landmarks", *21st Comput. Vis. Winter Work*.
11. N. G. Prajapati (2016), "Driver Drowsiness Detection with Audio-Visual Warning", Volume 3, Issue 1, pp. 294–300.
12. A. Suganya, A. Robertson (2017), "On-Road Drowsiness Alarm of Drivers using Raspberry Pi", *Int. J. Recent Trends Eng. Res*, Volume 3, Issue 11, pp. 199–204.
13. S. Indexed, R. Agrawal (2017), "A low-cost design to detect", Volume 8, Issue 9, pp. 1138–1149.
14. B. Siva Kumar, K. Srilatha (2016), "A novel method to segment blood vessels and optic disc in the fundus retinal images", *Res. J. Pharm. Biol. Chem. Sci*, Volume 7, Issue 3, pp. 365–373.
15. N. L. Fitriyani, C. K. Yang, M. Syafrudin (2016), "Real-time eye state detection system using haar cascade classifier and circular Hough transform", *IEEE 5th Glob. Conf. Consum. Electron. GCCE*, pp. 5–7.
16. G. J. AL-Anizy, M. J. Nordin, M. M. Razooq (2015), "Automatic Driver Drowsiness Detection Using Haar Algorithm and Support Vector Machine Techniques", *Asian Journal of Applied*, Volume 8, Issue 2, pp. 149–157.
17. T. Azim, M. A. Jaffar, A. M. Mirza (2014), "Fully automated real-time fatigue detection of drivers through Fuzzy Expert Systems", *Appl. Soft Comput. J*, Volume 18, pp. 25–38.
18. A. Manuscript (2010), "NIH Public Access", *Traffic*, Volume 11, Issue 2, pp. 126–136.
19. P. Thiffault, J. Bergeron (2003), "Monotony of road environment and driver fatigue: A simulator study", *Accid. Anal. Prev*, Volume 35, Issue 3, pp. 381–391.
20. L. Li, Y. Chen, Z. Li (2009), "Yawning detection for monitoring driver fatigue based on two cameras", *IEEE Conf. Intell. Transp. Syst. Proceedings*, pp. 12–17.
21. R. S. Rawal, S. S. Nagtilak (2016), "Drowsiness Detection Using RASPBERRY-Pi Model Based On Image Processing", pp. 328–331.
22. S. Salehian, B. Far 2015, "Embedded Real-Time Blink Detection System for Driver Fatigue Monitoring", *Ksiresearchorg.Ipage.Com*.
23. B. Reddy, Y. H. Kim, S. Yun, C. Seo, J. Jang, "Real-Time Driver Drowsiness Detection for Embedded System Using Model".

Cite this article as: Akshay Kumar A, Chethan M S, Hanamantha R Karikal, Jayanth A, & Nithyashree. S. (2019). *Drowsiness Detection and Vehicular Safety System for Monitoring the Loss of Attention in Locomotive Drivers. Journal of Signal Processing, 5(2), 26–34.*
<http://doi.org/10.5281/zenodo.3340425>