

Portland State University

PDXScholar

Electrical and Computer Engineering Faculty
Publications and Presentations

Electrical and Computer Engineering

6-2019

Evaluation of Bus-Bicycle and Bus/Right-Turn Traffic Delays and Conflicts

Katherine L. Keeling
Portland State University

Travis B. Glick
Portland State University

Miles Crumley
TriMet

Miguel A. Figliozzi
Portland State University, figliozzi@pdx.edu

Follow this and additional works at: https://pdxscholar.library.pdx.edu/ece_fac

 Part of the [Electrical and Computer Engineering Commons](#)

Let us know how access to this document benefits you.

Citation Details

Keeling, K. L., Glick, T. B., Crumley, M., & Figliozzi, M. A. (2019). Evaluation of Bus-Bicycle and Bus/Right-Turn Traffic Delays and Conflicts. *Transportation Research Record*, 2673(7), 443-453.

This Post-Print is brought to you for free and open access. It has been accepted for inclusion in Electrical and Computer Engineering Faculty Publications and Presentations by an authorized administrator of PDXScholar. For more information, please contact pdxscholar@pdx.edu.

1 **EVALUATION OF BUS-BICYCLE AND BUS/RIGHT-TURN TRAFFIC DELAYS AND**
2 **CONFLICTS**

3
4
5
6 **Katherine L. Keeling** 

7 Transportation Technology and People (TTP) Lab
8 Department of Civil and Environmental Engineering
9 Portland State University
10 PO Box 751—CEE, Portland, OR 97207-0751
11 Phone: 503-725-4282; Fax: 503-725-5950; Email: kkeeling@pdx.edu

12
13 **Travis B. Glick** 

14 Transportation Technology and People (TTP) Lab
15 Department of Civil and Environmental Engineering
16 Portland State University
17 PO Box 751—CEE
18 Portland, OR 97207-0751
19 Phone: 503-725-4282; Fax: 503-725-5950; Email: tglick@pdx.edu

20
21 **Miles Crumley**

22 Senior Operations Analyst, Operations Planning and Development
23 TriMet
24 4012 SE 17th Ave, Portland, OR 97202
25 Phone: 503-962-3035; Fax: 503-962-2488; Email: crumleym@TriMet.org

26
27 **Miguel A. Figliozi, Corresponding Author** 

28 Director Transportation Technology and People (TTP) Lab
29 Department of Civil and Environmental Engineering
30 Portland State University
31 PO Box 751—CEE, Portland, OR 97207-0751
32 Phone: 503-725-4282; Fax: 503-725-5950; Email: figliozi@pdx.edu

33
34
35
36 **Please reference as:**

37 Keeling, K., Glick, T., Crumley, M., & Figliozi, M (2019). Evaluation of Bus-Bicycle
38 and Bus/Right-Turn Traffic Delays and Conflicts, Transportation Research Record
39 Vol. 2673(7) 443–453

40
41

1 **ABSTRACT**

2 This research evaluates conflicts and delays caused by interactions among buses, bicycles, and
3 right-turning vehicles at a mixed traffic corridor in Portland, OR. The study site has a near-side
4 bus stop and a right curbside lane designated for buses and right-turning vehicles. Next to the
5 bus/right-turn lane is a bicycle lane with a bicycle box ahead of the bus stop (i.e. between the
6 intersection and bus stop). This research examines two concerns caused by these overlapping bus,
7 bicycle, and automobile facilities; the first is the number of bus-bicycle conflicts (as a proxy for
8 safety) and the second is bus delay. Video data was collected and analyzed to quantify conflicts,
9 travel time, and delay. For every bus passing through the study site, the mixed traffic scenario that
10 the bus incurs was categorized as one of 72 different combinations of bus, bicycle, and automobile
11 interactions. Video count data was weighted according to seasonal, weekly, and hourly bicycle
12 volume data to estimate the number of annual bus-bicycle conflicts. A regression analysis was
13 performed to identify potential sources of delays. The results indicate that each bicycle crossing
14 the intersection after the bus (within 60 feet of bus) contributes to bus delay. No statistically
15 significant delay was found from the bicycles stopped in the bicycle box, bicycles stopped behind
16 the bicycle box, bicycles that cross the intersection before the bus, or the presence of right-turning
17 vehicles.

18

19

20 *Keywords:* Bus-bicycle conflicts, Bus/right-turn conflicts, Transit Delay, Bus Stop, Multimodal
21 interactions

22

1 INTRODUCTION

2 Cities have sought to alleviate traffic congestion and its associated environmental impact by
3 encouraging cycling and transit use. The incremental development of cycling infrastructure and
4 transit networks requires a rethinking of existing strategies and scrutiny of recent innovations. In
5 general, most bus lines are routed on major streets and recommended bicycle routes are usually on
6 low-speed neighborhood streets. However, multimodal networks will have challenging segments
7 where bus routes, bicycle lanes, and motorized vehicles share space.

8 In 2010, Portland's City Council unanimously supported the Portland Bicycle Plan, with
9 its ambitious goal of reaching a 25% cyclist mode share. Since the early 1990s, the city's
10 investments in bicycle amenities have successfully achieved subsequent rises in cycling ridership
11 (1). In 2008, the city rolled out a new experimental traffic treatment, the right angle bicycle lane
12 extension, i.e. a bicycle or bike box. The most common application for the bicycle box is to place
13 cyclists in front of right-turning vehicles, thus preventing right hook conflicts (2). Many of the
14 city's bicycle boxes have been visually reinforced with green pavement marking, as is preferred
15 by both motorists and cyclists (2).

16 While the bicycle network has been improving, Portland's public transit provider, TriMet,
17 has been struggling with declining bus ridership and speeds (FIGURE 1). Not all modes of public
18 transit have declined; MAX (light rail) ridership has increased during this period. Although many
19 complex factors affect TriMet ridership, one major difference between bus and rail modes is
20 average speed. MAX rail cars have averaged about 18.2 mph while buses average 13.7 mph, for
21 2015–2017 (3). The quest to increase bus speeds—and plausibly, ridership—pushes transit
22 agencies to find ways to reduce bus delays.

24 [FIGURE 1]

25
26 In this context of growing bicycle ridership and slowing buses, it is important to study
27 intersection designs that may need to be redesigned or updated. To the best of the authors'
28 knowledge there is no research that has addressed bus, bicycle and automobile conflicts in the US.
29 This research contributes a novel categorization of mixed traffic conflicts, a methodology to
30 estimate annual bus-bicycle conflicts, and regression results identifying statistically significant
31 sources of delay. This new analysis of high-traffic, multimodal arterials can reveal patterns and
32 insights useful in developing future design guidelines.

35 LITERATURE REVIEW

36 There is much opportunity for research of bus-bicycle conflicts. In China, a models have been
37 proposed to estimate the number of conflicts, but these models are limited to midblock stops and
38 are not applicable for stops near signalized intersections (4) (5). With regard for bus delay, studies
39 have measured bus mean speeds with respect to particular bus stop designs; however, these studies
40 also focus exclusively on midblock stops (6) (7).

41 Unfortunately, intersections pose the most challenges for bus-bicycle conflicts. In regards
42 to bicycle safety, an Australian study found that 55% of bus-bicycle accidents take place at
43 intersections (8). Another UK study shows that of all bus-bicycle conflicts, the most common
44 cause was a bus overtaking a bicycle; that is, a collision resulting from a bus merging lanes in front
45 of a bicycle (9). It is a collision primarily in the lateral direction, with the side/back of the bus

1 striking the side/front of the bicycle. Another UK study found that on 30–40 mph streets, heavy
2 goods vehicles (including buses) allotted less passing space to bicyclists than cars or vans (10).

3 Many US studies on bus-bicycle conflicts evaluate road configurations, including shared
4 bus-bicycle lanes (SBBLs), contraflow bus lanes, and left-side bicycle lanes, and the ability of
5 these designs to mitigate conflict (11). From these existing configurations, cities seeking to
6 enhance their multimodal networks can refer to real-world results to inform their design guidelines
7 (12).

8 Interactions between bus operators and cyclists may vary between countries, therefore
9 geographically specific data is valuable. To the authors' knowledge, there are no US studies
10 quantifying bus-bicycle conflicts and delays or evaluating the safety concerns of overlapping of
11 bus and bicycle facilities.

12 13 **STUDY SITE**

14 The intersection at SE Madison & Grand connects two one-way streets: Madison travels
15 westbound and Grand travels north. The bus-bicycle conflict stems from Madison's two rightmost
16 lanes. The curbside lane serves as a bus lane and a right-turn lane with prohibited turn on red. One
17 lane to the left is a designated bicycle lane with striping and portions of green pavement marking.
18 Three bus routes serve the nearside bus stop on the right sidewalk. For the morning peak-hours, it
19 is not uncommon to have two buses located at the stop at the same time or for a bus to be stopped
20 behind cars queueing for the right turn. The right lane queueing may prompt the bus operator to
21 serve passengers further back from the intersection, just upstream of the bus stop. After servicing
22 the stop, buses must then merge into the central through lane to continue their routes. Depending
23 on the position of the bus when it serves the stop, the bus will either merge before the intersection
24 or while passing through the intersection. Bus and bicycle facilities are shown in FIGURE 2 and
25 FIGURE 3.

26 The bicycle box allows stopped bicycles to be readily visible to buses or right-turning cars.
27 However, the bicycle box is only employed when cyclists are stopped at a red light. If a cyclist
28 approaches the intersection during a green light, their bicycle path will gradually merge, in the
29 intersection, from a central lane to rightmost side of the road.

30
31 **[FIGURE 2]**

32
33 **[FIGURE 3]**

34
35 When a bus has finished serving passengers, it must merge from the right side lane to the
36 center lane. Since buses serve passengers at varying distances from the bus stop (due to traffic
37 queuing), the area of potential bus-bicycle conflict is about 160 feet long (highlighted in red,
38 FIGURE 3). In effect, the bicycle box addresses right hook conflicts with right-turn vehicles, but
39 still leaves cyclists vulnerable in bus-bicycle conflicts. The conflict area is the result of overlapping
40 bus and bicycle paths, at and in the intersection.

41 42 **Site History**

43 The Hawthorne Bridge underwent major improvements in 1999: sidewalks were widened, ramps
44 with conflicting traffic closed, and merging conditions improved (13). Hawthorne is Portland's
45 most heavily-cycled bridge. The intersection of Madison and Grand is the closest intersection to
46 the westbound Hawthorne bridge access and is a key arterial for automobiles, transit, and

1 bicycles. Madison received cycling upgrades in 2010: a green bicycle box and green thermoplastic
2 striping.

3 Three bus routes, (2, 10, and 14) serve the morning commutes into downtown. The bus
4 stop on site, stop 3633, has been in operation since 1999; that same year, the first round of cycling
5 improvements were completed. During peak bus service, stop 3663 often has buses scheduled to
6 arrive concurrently or with only a 1–2 minute headway.

7 A combination of graphic road markings are utilized on the pavement. The graphic layout
8 of the street can have positive effects on a cyclist's perception of safety (14). Indeed, a stripe is
9 what demarks and upgrades a bicycle-accessible shoulder to a designated bicycle lane. However,
10 a bicycle lane is not always the preferred type of facility; many cyclists prefer separated paths (15).
11 If a bicycle lane is used, studies have shown that the use of bold demarcation is important for the
12 efficacy of a bicycle box (16).

13 The bicycle box on Madison has solid green thermoplastic background with a white bicycle
14 symbol on top. To prevent vehicle encroachment, the bicycle box has a bold stop bar and the words
15 "WAIT HERE" painted underneath. The bicycle lane is solid green for most of the block leading
16 up to the intersection. Although painted bicycle lanes are received favorably, the effects of
17 pavement markings on cyclist behavior are still being reviewed. A follow-up study to Portland's
18 1997-1999 trial implementation of colored bicycle lanes found that after a bicycle box was
19 installed, bicyclists turned their heads less to scan surrounding traffic conditions (17). At this study
20 site, the area directly in front of the bus stop but before the bicycle box has a break in the green
21 pavement marking; there are only white boundary stripes. This design graphically cues bicyclists
22 that the uncolored section of the bicycle lane is not a bicycle-exclusive zone. However, while this
23 break in color prompts cyclists to pay attention, it does not run the length of the potential conflict
24 area.

25 TriMet considers routes 2, 10, and 14 as high-risk routes. Some bus operators prefer to
26 avoid these challenging assignments, as their job performance is contingent on avoiding traffic
27 violations and complaints. Other operators thrive on this challenge as it allows them to showcase
28 their skills and become more proficient operators. A factor that compounds the impact of deficient
29 geometric designs is the seniority basis of route assignments, which rotate on a 90 day cycle.
30 Hence, the experienced operators can elect to drive less challenging routes and a less-experienced
31 operator may consequently drive a difficult one. The researchers interviewed a TriMet operator to
32 get their opinion about the challenges presented in the study. The operator mentioned that had been
33 driving with TriMet for just over 1 year before driving route 2. The operator described the
34 challenge of merging across a bicycle lane into a through-vehicle lane: "It's hard to judge [a merge]
35 when you have that much going on. Bicycles want to challenge buses and cars don't want to let
36 you in." (18)

37 Merging buses into traffic is not a new challenge for operators. In Oregon, the Oregon
38 Revised Statutes (ORS) address transit vehicles merging away from service stops. ORS 811.167
39 states that a vehicle must yield to a bus with its left turn signal on pulling away from a service stop
40 (19). At TriMet the buses are also equipped with an operator-activated light-up yield sign on the
41 rear to amplify the signal to other road users that the bus is merging back into traffic. Use of this
42 light varies by operator: some use it every time they merge away from a stop, and others use it on
43 an as-needed basis. However, even if the operator does not activate the yield sign, all vehicles
44 (including bicycles) are required to yield to the bus merging into traffic from a service stop.

45
46

METHODOLOGY

Categorization of Traffic Scenarios

The scenarios that a bus encounters were categorized by the surrounding traffic conditions in two different lanes, the right curbside lane and the bicycle lane. The combination of bicycles, buses, and cars queuing in these two lanes is relevant because it affects the location that a bus serves passengers; and consequently, the location from which a bus can begin to merge into the center lane.

The traffic conditions in the bicycle lane are categorized in terms of relative location and movement status. For example, bicycles may be stopped, or bicycles may be in motion. A cyclist may overtake the bus, or cross the intersection after the bus. The activity in the lanes varies from moment to moment; for this study, the traffic conditions were categorized at the time a bus was ready to leave the stop.

[FIGURE 4]

FIGURE 4 shows the conventions of categorizing the traffic scenarios. Conditions A–L reflect the activity in the bicycle lane. Four bicycle conditions were identified: bicycle stopped in box, bicycle stopped in lane, bicycle overtaking bus, and bicycle crossing intersection after bus. As noted in the key, a bicycle icon in the figure represents one or more bicycles. There was a small number of occurrences where a skateboarder, electric scooter user, or motorized board user was using the bicycle lane. In these cases, they were counted as bicycles.

Scenarios 1–6 reflect the activity in the right curbside lane. A bus might be at the bus stop, behind a right-turn vehicle, behind a bus, or behind buses and right-turn vehicles. As noted in the key, a car icon in the figure represents one or more right-turn vehicles. When two buses arrive at intersection, the first bus would be classified with scenario 1 or 2, and the second bus would be classified with scenarios 3–6.

The traffic scenarios A–L and 1–6 were ordered in terms of their increasing demand of judgement on the bus operator. For example, in the “A” category, the bus has no bicycles anywhere near it. This is clearly the simplest scenario for the bus operator. In the “B” category, there is at least one bicycle stopped in the bicycle box in front of the bus, clearly visible. Bicycle(s) in the “C” category are stopped in the bicycle box and overflowing into the peripheral bicycle lane. “D” category has at least one moving bicycle in the bicycle lane, overtaking the bus. Categories “E” and “F” are combinations of the aforementioned variables.

The “G” scenario has a bicycle behind the bus when crossing the intersection. A bicycle less than 60 feet behind the bus was considered to be part of the bus’s traffic scenario; 60 feet was chosen because it is 1.5 times the length of a bus. When located within a distance of 60 feet, the presence of bicycle(s) forces a critical judgement call from the bus operator. The operator must judge the length of the gap and check to see whether the cyclist is yielding or intending to overtake the bus. When bus operators intend to merge away from the right lane, they are forced to make these assessments quickly, with the weight of their judgement directly bearing on a cyclist’s safety. For these reasons, any category with a bicycle behind the bus (“G”–“M”) is ranked as more complex than bicycles in front of/overtaking the bus. Similarly, traffic scenario components 1–6 are ordered from least complex to more complex.

For this study, the bicycle box is defined as the entire width of the right angle extension, including the area in line with the bicycle lane. For our intersection, this definition is congruent

1
2 **[FIGURE 8]**
3
4

5 To validate the estimation of the service time, TriMet bus stop level (BSL) dwell, with
6 dwell being the amount of time between bus doors opening and closing. BSL data also provided
7 additional information about the number of passengers boarding and alighting, including lifts.
8

9 **RESULTS**

10 The data was collected during a weekday in June, August, and September, when cycle activity is
11 high due to sunny and dry weather. The first two hours, 6:30am–8:30am, reflect peak (bus service)
12 conditions, while 6:00am–6:30am and 8:30am–11am reflect off-peak bus service conditions.
13 Specifically, for peak conditions, the bus stop on site is scheduled to host a bus every 2.8 minutes.
14 For off-peak conditions: a bus every 4.8 minutes. The grade at the site is slight (+2%) and the
15 impact on bus acceleration is negligible at grades less than 3% (20).

16 The aggregate traffic conditions from our data collections are shown in TABLE 1. Our
17 analysis included 219 bus events. Though the peak/off-peak distinction was determined by
18 scheduled bus service, the bicycle traffic was also heavier during peak conditions. The number of
19 cars in the right-turn lane was actually greater during the off-peak conditions.
20

21 **[TABLE 1]**
22

23 The bicycle arrivals were counted in 15 minute intervals. Assuming a bicycle speed of 10
24 mph and a conflict zone of 160 feet, a bicycle is expected to be in the conflict area for 10.9 seconds.
25 Assuming Poisson arrivals, the probability of a bus encountering a bicycle increases from 6:00 –
26 8:45am, and declines from 8:45–11:00am (FIGURE 9). The highest probability for bus-bicycle
27 conflicts occurs in the 15 minute interval before 8am and the 15 minute interval before 9am.
28

29 **[FIGURE 9]**
30
31

32 **[FIGURE 10]**
33
34

35 During the 14 hours of data collected, 33 of the possible 72 traffic scenarios occurred. As
36 shown in FIGURE 10, the variation of traffic scenarios during peak traffic is broad. The off-peak
37 traffic has less variation, and a relatively high number of A1 scenarios, the scenario which buses
38 do not interact with right-turn vehicles or bicycles. However, high complexity scenarios occurred
39 in both peak and off-peak hours.

40 TABLE 2 is a summary of the seven most frequent traffic scenario types. To categorize
41 complexity, a low rating was assigned to the traffic scenarios with no moving bicycles when the
42 bus was ready to leave the stop (categories Ax–Cx). A medium rating was assigned when all
43 bicycles cross the intersection in front of the bus (categories Dx–Fx), and a high label is assigned
44 to any scenario that includes at least one bicycle crossing the intersection behind the bus (Gx–Lx).
45 During peak conditions, a bus is most likely to encounter a medium-complexity traffic scenario
46 and during off-peak conditions, a bus is most likely to encounter a low-complexity traffic scenario.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

[TABLE 2]

The bicycle traffic on Madison & Grand flows directly to the Hawthorne Bridge where there is a bicycle counter. There are no path nodes between Madison & Grand and the counter, so the westbound counter data can be referenced in this analysis. The bus traffic is relatively constant year round, so the variation in the number of conflicts can be scaled according to the bicycle count variation. The bicycle counter has been in use since 2013, so its data can be used to calculate daily, weekly, and seasonal factors for bicycle traffic, adapting the well-known methodology used to estimate Average Annual Daily Traffic (AADT).

The estimated annual number of high complexity conflicts is over 11,000. FIGURE 11 is a link to a video example of a J1 type scenario, a high complexity traffic occurrence.

[FIGURE 11]

Regression Analysis

Multiple regression analyses were conducted to identify variables that have a significant impact on dwell times. TABLE 3 shows the final model with six significant variables

- Stop: Binary variable equal to 1 if the bus services passengers
- Ons: Number of boarding passengers
- Offs: Number of alighting passengers
- Lift: Binary equal to 1 if the wheelchair lift was activated
- Number of Bicycles Behind Bus
- Route 2: Binary equal to 1 if the bus belonged to Route 2. 0 if the bus belonged to routes 10 or 14.

[TABLE 3]

Many other variables were tested, but dropped due to insignificance, including: non-linear passenger movements, bicycles stopped in the bicycle box, bicycles stopped in the bicycle lane, number of bicycles, the number of right-turn vehicles, the number of buses, number of cars and binary variables indicating “at least one” bicycle or car in each position. Routes 10 and 14 follow the same path beyond this stop and end shortly after entering downtown Portland while Route 2 follows a separate path.

The only statistically significant variable related to traffic interactions was the number of bicycles behind the bus when crossing the intersection; each bicycle contributes 0.516 seconds of delay. Conversely, the bicycles stopped in the bicycle box, stopped in the bicycle lane, or overtaking the bus had no significant relationship with bus delay. In other words, the bicycles that cross the intersection in front of the bus do not significantly correlate with bus delay, regardless of their location (in front of bus or peripheral) or condition (stopped or moving). These regression results should be considered with caution due to the low number of observations. Future studies are necessary to solidify or reject these preliminary findings.

Validation of the Regression Model and BSL Data

The video analysis observed several measurable factors: the number of bicycles, the number of right-turning cars, the traffic scenario— the methodology was designed to be objective and repeatable. However, the most nuanced variable to ascertain was the interval of time the bus spent serving the bus stop. The hierarchy of available proxies was described in the methodology, and once the TriMet Bus Stop Level (BSL) data was available, it could be compared to the video analysis estimates.

[FIGURE 12]

In FIGURE 12, the scatter plot comparing BSL data and the video analysis show a strong correlation with a median offset of 12 seconds. This is an indication of the quality of the data collection effort. The 12 second offset is likely the result of how BSL data records arrive times and leave times. The resolution of BSL data is a 45 foot diameter around the bus stop (FIGURE 13) (21). If, for example, a bus starts serving passengers while 20 feet behind the stop bar, when it is finished, it may pull up closer to the intersection by 20 feet. However, TriMet’s BSL data would record the time spent waiting for a green light dwell time. In these scenarios, $t_g \neq$ BSL dwell.

[FIGURE 13]**CONCLUSIONS AND FINAL DISCUSSION**

This research presents a novel approach to study bus, bicycle, and automobile conflicts in the US. Conflicts are categorized as a function of traffic scenarios and main sources of delay are identified and quantified.

The results show that the overlapping of bus facilities and bicycle facilities does result in numerous bus-bicycle conflicts, most frequently during rush hours. However, complex bus-bicycle conflicts do happen, albeit less frequently, during off-peak hours. The results of the analysis

1 suggest that the bicycle box on site does not significantly contribute to bus delay, nor do stopped
2 bicycles that do not fit in the bicycle box but stop in the bicycle lane. Bicycle boxes have been
3 studied with regards to their effects on cyclist and motorist comfort and perception of safety, and
4 it is a welcome finding that they do not burden bus flow. However, each bicycle crossing the
5 intersection behind a bus adds a delay of more than half a second per bicycle.

6 The traffic scenarios categorized as highly complex (Gx-Lx) are equivalent to the
7 scenarios with bicycles that cause delay. The frequency of high complexity scenarios will increase
8 as bus and bicycle traffic increase. At current bus and bicycle volumes, we expect over 11,000
9 annual conflicts, a volume which supports concern for cyclist safety. These quantitative findings
10 can be used to justify funding for intersection upgrades or for an education/enforcement campaign.

11 As shown in FIGURE 14, configuring the bicycle lanes behind bus stops completely
12 eliminates all bus-bicycle conflicts. The Portland Bureau of Transportation has included “Bicycles
13 Behind Bus” as a operational strategy in their Enhanced Transit Corridors Plan (22).
14 Unfortunately, this configuration—colloquially called “bus stop islands”—is best for wide
15 roadways, as it requires a significant amount of right-of-way, and is relatively expensive (22).
16 Bicycles may be redirected on to the sidewalk but the study location only has a 10 foot sidewalk;
17 therefore this solution would create new bicycle-pedestrian conflicts but would increase bicyclists
18 comfort levels (23). For any transit treatment, questions of costs and benefits rely on available
19 data. The conflicts and delays observed on Madison & Grand offer insight as to what can be
20 expected without a bus island treatment.

21
22 **[FIGURE 14]**
23

24 Another treatment option is bus stop relocation and consolidation. Routes 10 and 14 have
25 a stop two blocks east of the study site at 7th Ave & Madison. If both stops at Grand and 7th were
26 eliminated in favor of a single stop at 6th & Madison (FIGURE 15), there would not be a bus stop
27 at a signalized intersection. Though there would still be bus-bicycle conflicts, the proposed
28 location would allow bus operators to focus on the merge without having to simultaneously
29 navigate the traffic signal or to merge right after serving the current bus stop. A secondary benefit
30 is that cars using the right-turn only lane at Grand would not have to wait behind buses serving the
31 station and vice versa. However, the increased walking distance to reach a stop on Grand may have
32 a negative effect on ridership; bus users would have to walk farther to connect with the streetcar
33 and other bus lines running on Grand Ave. Although bus stop consolidation is a strategy included
34 in Portland’s Enhanced Transit Corridors Plan, it is not a preferred treatment for our study site
35 specifically.

36
37 **[FIGURE 15]**
38
39

40 Another treatment option is to adjust the green pavement marking such that an elongated
41 break in the green color better aligns with the actual area of conflict (FIGURE 16). This may help
42 cue cyclists to pay attention for conflicts earlier.

43
44 **[FIGURE 16]**
45

1 Finally, buses incur long delays when they leave the stop only to find the end of the green
2 indication or the start of the red indication at the traffic signal. Delays caused by bicyclists and
3 traffic signals can be alleviated by a combination of floating island bus stop, jump queue signal
4 for the buses, and transit priority (see FIGURE 14 for a conceptual idea of the geometric design).
5 Unfortunately, this configuration requires a significant amount of right-of-way, resources, and is
6 incompatible with right-turn traffic. Future research efforts should evaluate cost tradeoffs that
7 result from the redesign of bus stop facilities at intersections with high volumes of conflicts and
8 delays.

9 Better design and engineering solutions can reduce conflicts and bus delays. In addition,
10 education and/or enforcement strategies can be used to improve cyclist and driver awareness of
11 bus priority and to improve transit operations citywide.

1 ACKNOWLEDGEMENTS

2 This project was funded by the National Institute for Transportation and Communities (NITC), a
3 U.S. DOT University Transportation Center.

4 AUTHOR CONTRIBUTION STATEMENT

5 The authors confirm contribution to the paper as follows: study conception and design: Figliozi,
6 Crumley; data collection: Glick, Keeling, Crumley; analysis and interpretation of results: Keeling,
7 Glick, Crumley, Figliozi; draft manuscript preparation: Keeling, Glick, Figliozi, Crumley. All
8 authors reviewed the results and approved the final version of the manuscript.

9

10 REFERENCES


- 11 1. Birk, M., & Geller, R. (2006). Bridging the Gaps: How Quality and Quantity of a
12 Connected Bikeway Network Correlates with Increasing Bicycle Use. *Transportation*
13 *Research Board 85th Annual Meeting, 1828*, pp. 116-123. Washington DC.
- 14 2. Dill, J., Monsere, C. M., & McNeil, N. (2012). Evaluation of Bike Boxes at Signalized
15 Intersections. *Accident Analysis and Prevention, 44*, 126-134.
- 16 3. Trimet. (2017). *Trimet Service and Ridership Statistics*. Portland: Trimet.
- 17 4. Zhao, X.-M., Bin, J., Gao, Z.-Y., & Jiang, R. (2009). Traffic Interaction Between
18 Motorized Vehicles and Nonmotorized Vehicles Near a Bus Stop. *Journal of*
19 *Transportation Engineering, 135*(11), 894-906.
- 20 5. Lu, L., Su, Y., Peng, L., & Xu, R. (2010). The Delay of Bus Near a Stop When Mixed
21 Traffic Flow is Considered. *2010 IEEE Intelligent Vehicles Symposium*. San Diego.
- 22 6. Zhao, D., Wang, W., Zheng, Y., Ji, Y., Wang, W., & Hu, X. (2014). Evaluation of
23 Interactions Between Buses and Bicycles at Stops. *Transportation Research Record:*
24 *Journal of the Transportation Research Board, 20468*, 11-18.
- 25 7. Zhang, F., Li, Z., Zhao, D., Wang, Y., Wang, W., & Li, J. (2014). Influences of Various
26 Types of Bus Stops on Traffic Operations of Bicycles, Vehicles and Buses. *94th Annual*
27 *Meeting of the Transportation Research Board*. Washington DC.
- 28 8. Austroads. (2005). *Bus-Bike Interaction Within the Road Network (No AP-R266/05)*.
29 Sydney: Austroads.
- 30 9. Pai, C.-W. (2011). Overtaking, Rear-End, and Door Crashes Involving Bicycles: An
31 Empirical Investigation. *Accident Analysis & Prevention, 43*(3), 1228-1235.
- 32 10. Parkin, J., & Meyers, C. (2010). The Effect of Cycle Lanes on the Proximity Between
33 Motor Traffic and Cycle Traffic. *Accident Analysis & Prevention, 42*(1), 159-165.
- 34 11. DeRobertis, M. M., & Rae, R. (2001). Buses and Bicycles: Design Alternatives for
35 Sharing the Road. *ITE Journal, 75*(5), 36-44.
- 36 12. State of Florida, Department of Transportation. (2012). *A Summary of Design, Policies*
37 *and Operational Characteristics for Shared Bicycle/Bus Lanes*. Tallahassee: Florida
38 Department of Transportation Research Center.
- 39 13. Birk, M. (2003, May-June). A Tale of Portland Bridges. *Westernite*, pp. 1,6-7.
- 40 14. Hunter, W. W. (2000). Evaluation of Innovative Bike-Box Application in Eugene,
41 Oregon. *Transportation Research Record: Journal of the Transportation Research*
42 *Board, 1705*, 99-106.

- 1 15. Pucher, J., Komanoff, C., & Schimek, P. (1999). Bicycling renaissance in North
2 America?: Recent trends and alternative policies to promote bicycling. *Transportation*
3 *Research Part A: Policy and Practice*, 33(7-8), 625-654.
- 4 16. Dill, J., & Voros, K. (2003). Factors Affecting Cicycling Demand: Initial Survey
5 Findings from the Portland, Oregon, Region. *Transportation Research Record: Journal*
6 *of the Transportation Reasearch Board*, 2031, 9-17.
- 7 17. Hunter, W. W., Harkey, D. L., Stewart, R., & Birk, M. L. (2000). Evaluation of Blue
8 Bike-Lane Treatment in Portland, Oregon. *Transportation Research Record: Journal of*
9 *the Transportation Research Board*, 1075, 107-115.
- 10 18. Gillette L., Interviewee, [Interview]. 18 July 2018.
- 11 19. Public Technology Ltd. (2017). *2017 ORS 811.167: Failure to Yield Right of Way to*
12 *Transit Bus*. (OregonLaws.org) Retrieved July 29, 2018, from
13 <https://www.oregonlaws.org/ors/811.167>
- 14 20. Furth, P. G., & SanClemente, J. L. (2006). Near Side, Far Side, Uphill, Downhill.
15 *Transportation Research Record: Journal of the Transportation Research Board*, 1971,
16 66-73.
- 17 21. Glick, T. B., & Figliozi, M. A. (2017). Measuring the Determinants of Bus Dwell Time:
18 New Insights and Potential Biases. *Transportation Research Record: Journal of the*
19 *Transportation Research Board*, 2647, 109-117.
- 20 22. The City of Portland, Oregon. *Enhanced Transit Cooridors Plan: Capital/Operational*
21 *Toolbox*. Retrieved July 29, 2018.
22 <https://www.portlandoregon.gov/transportation/article/640269>
- 23 23. Blanc, B., & Figliozi, M. (2016). Modeling the impacts of facility type, trip
24 characteristics, and trip stressors on cyclists' comfort levels utilizing crowdsourced
25 data. *Transportation Research Record: Journal of the Transportation Research Board*,
26 (2587), 100-108.

27
28

1 **FIGURES**

2

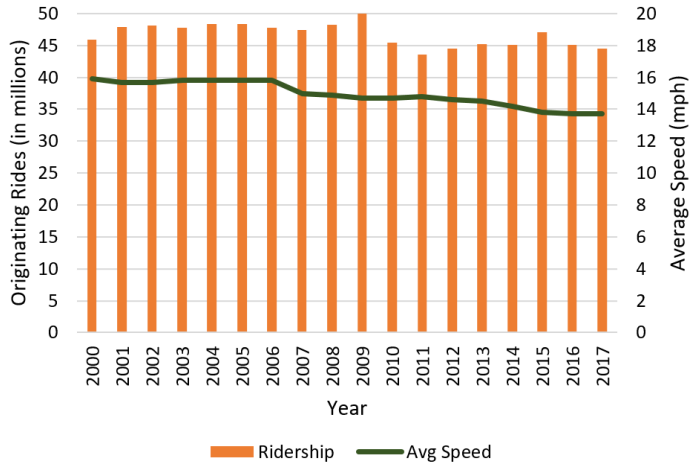

3

4

5 **FIGURE 1 TriMet bus ridership and average bus travel speed.**

6

7



8


9

10 **FIGURE 2 SE Madison & Grand, satellite image from Google Earth.**

11

12

travel direction, buses and bikes

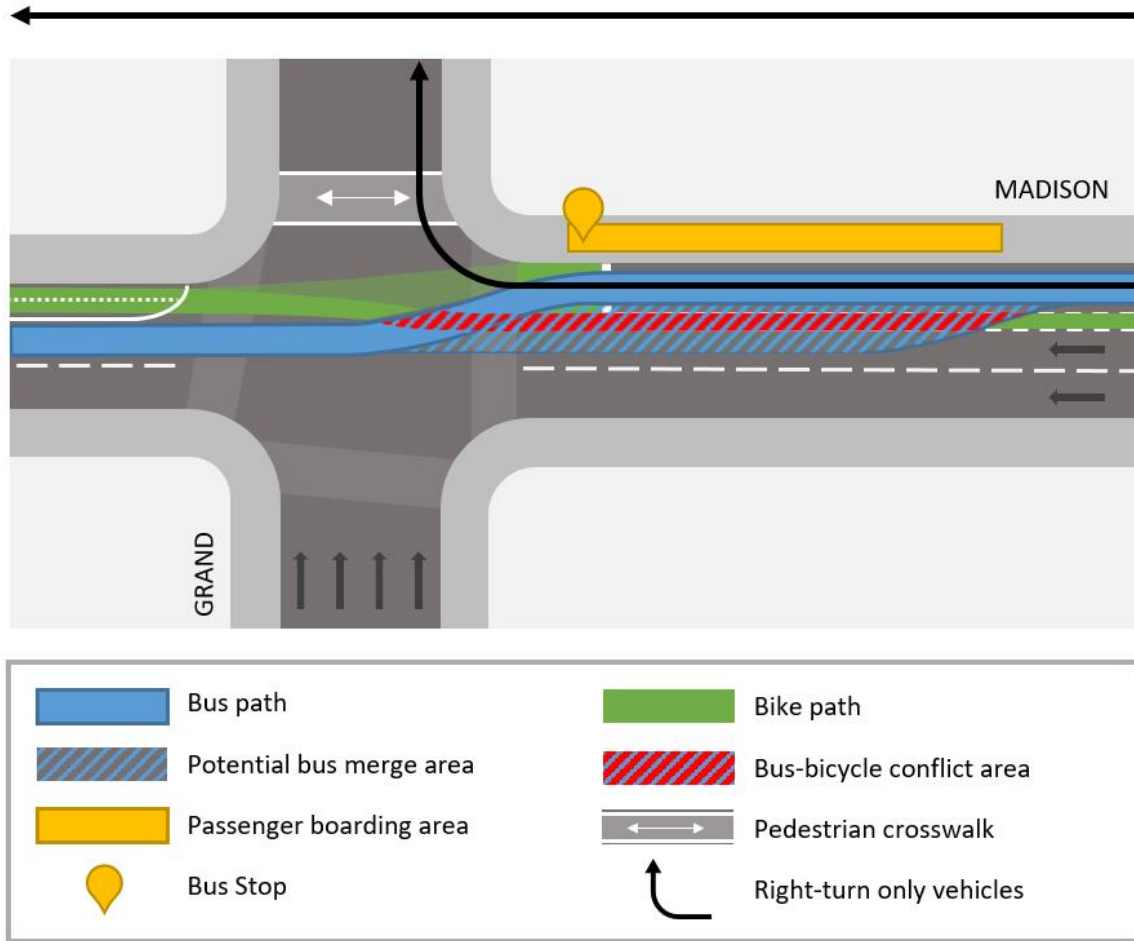

1
2
3
4
5

FIGURE 3 SE Madison & Grand, conflict diagram.

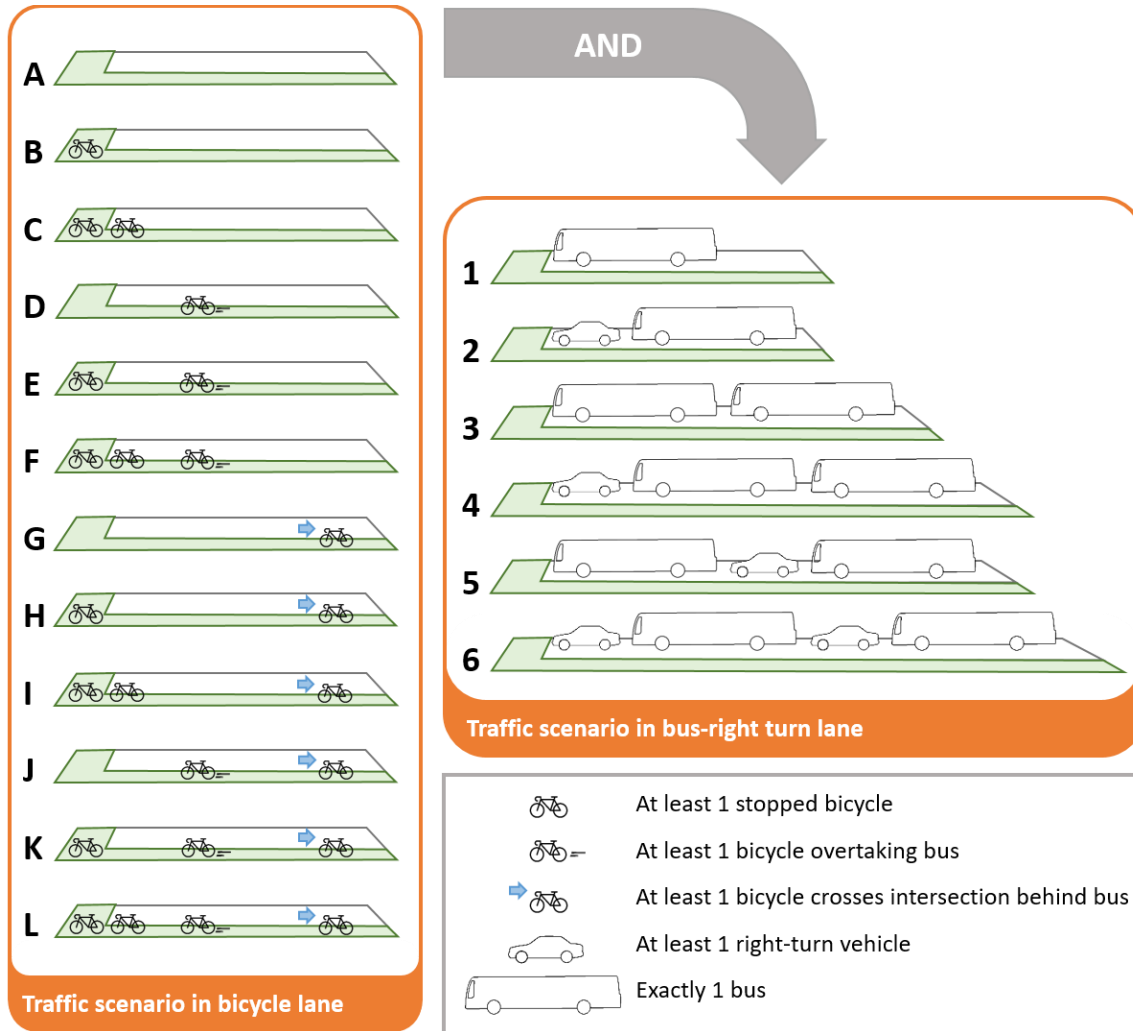


FIGURE 4 Categorizing traffic scenarios.


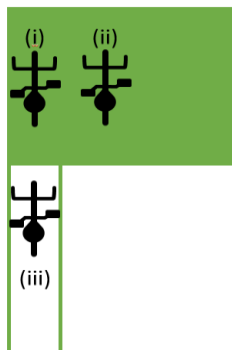


FIGURE 5 Distinction of bicycle box, in solid green.




1
2
3
4
5

FIGURE 6 Times used to calculate delay.

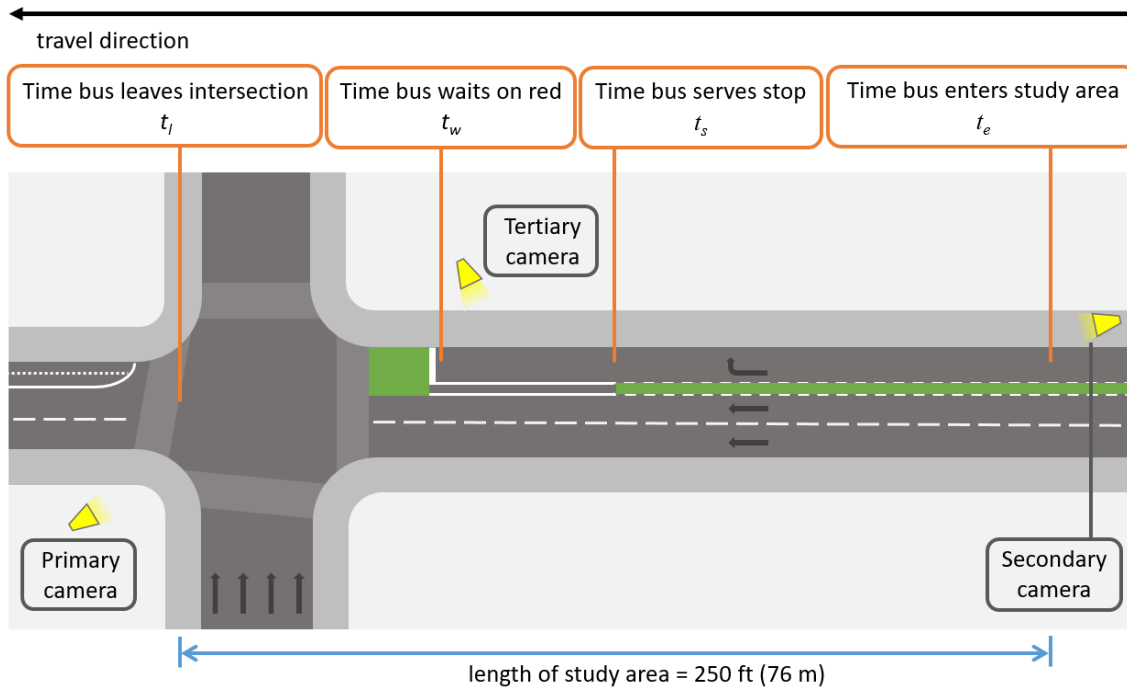


6
7
8
9
10

FIGURE 7 Primary camera view of study area.

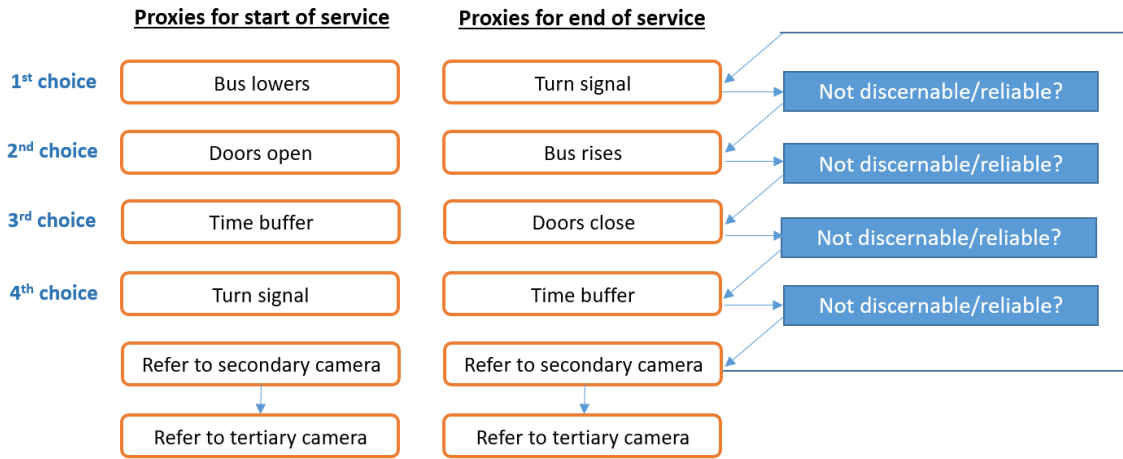


1
2
3
4
5

FIGURE 8 Hierarchy of utilizing service time proxies.

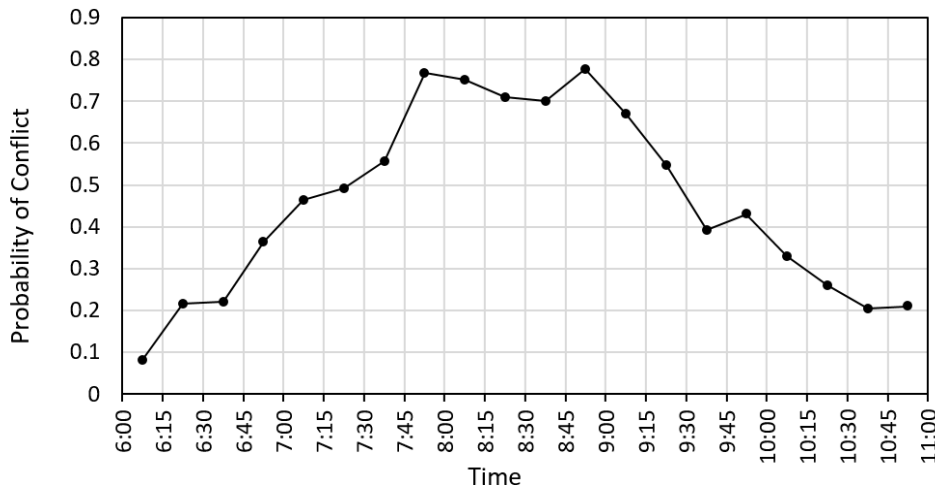


6
7
8
9
10

FIGURE 9 Probability a bus encounters a bicycle in the conflict area.

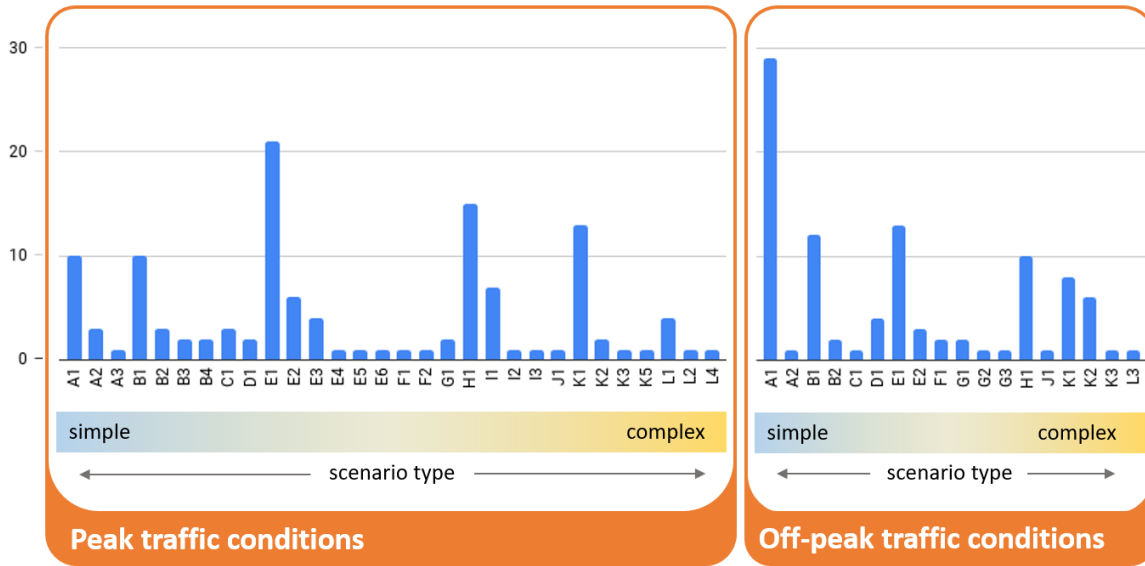


1
2
3
4
5

FIGURE 10 Traffic scenario distribution.




6
7
8
9
10

FIGURE 11 QR link to high complexity traffic scenario example.

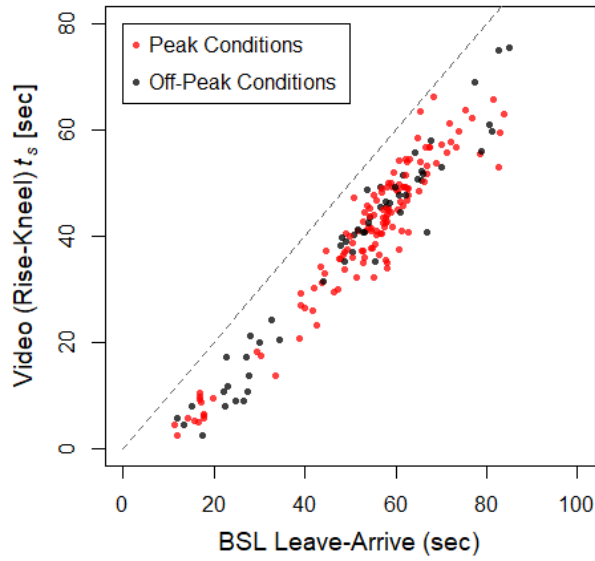

1
2
3
4
5

FIGURE 12 Correlation between video time of service and BSL leave-arrive time.

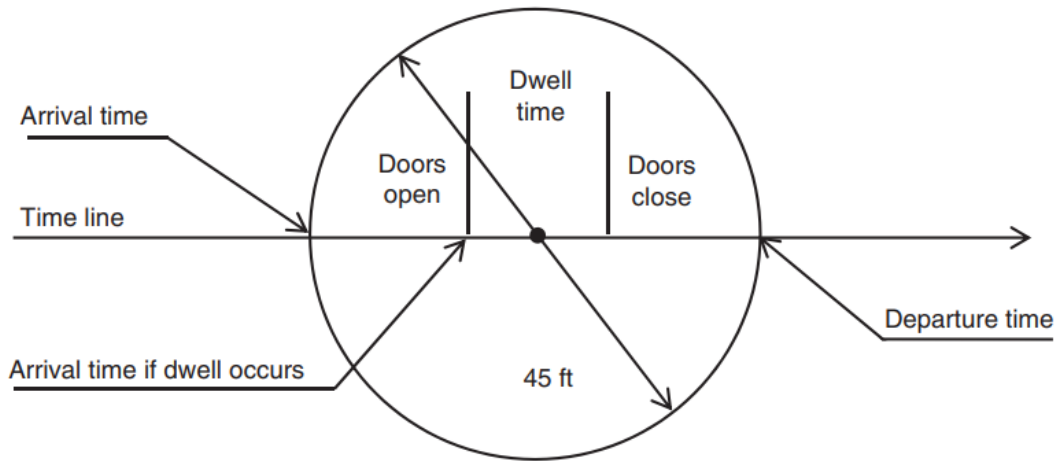


6
7
8
9
10

FIGURE 13 Resolution of bus stop level location data.




1
2
3
4
5

FIGURE 14 Bus stop islands (TriMet conceptual design – Division Transit Project).

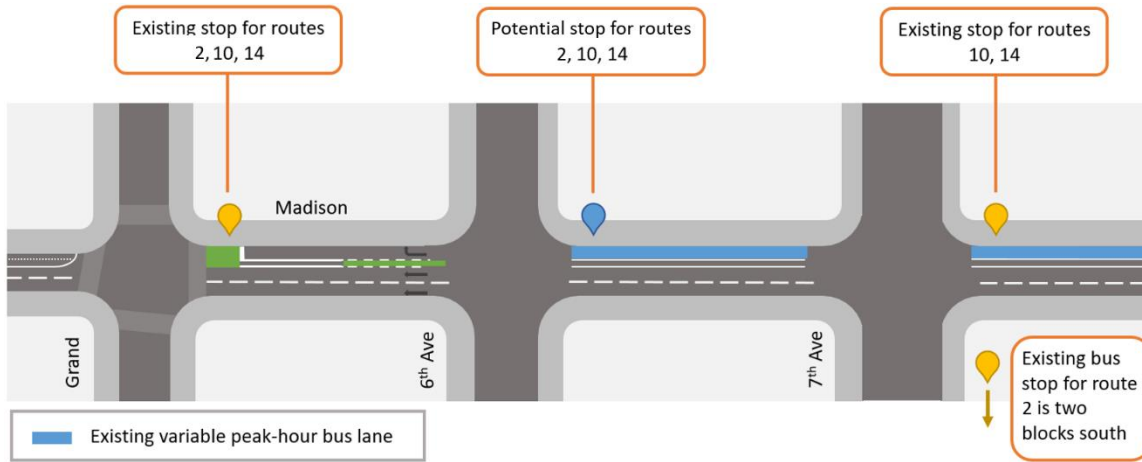

6
7
8
9
10

FIGURE 15 Potential bus relocation or consolidation.

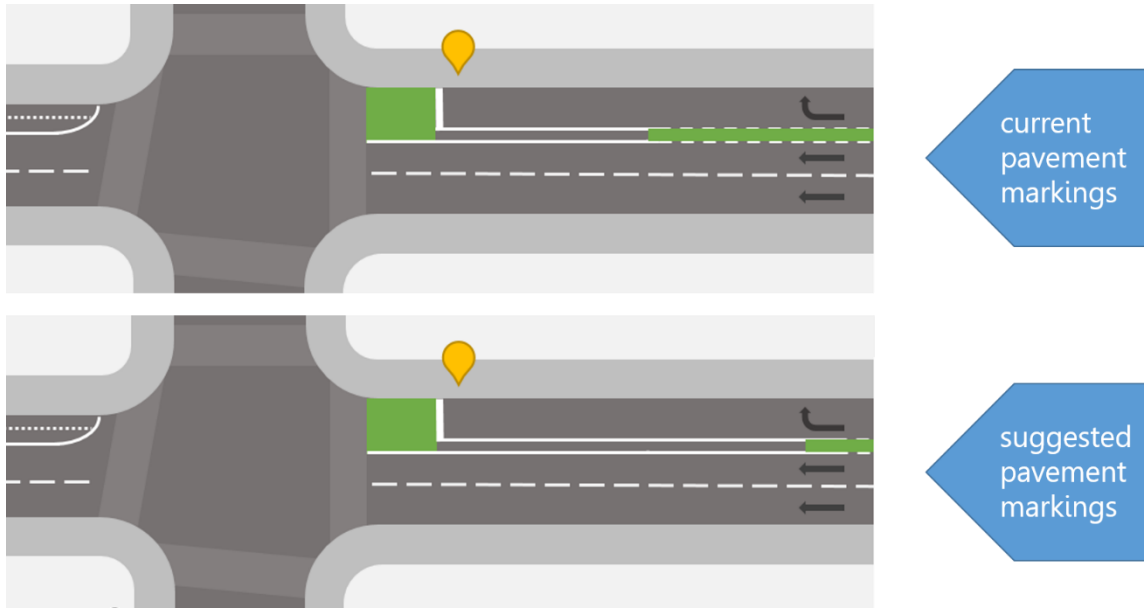

1
2
3
4

FIGURE 16 Suggested break in green pavement marking.

1 **TABLES**

2
3 **TABLE 1 Overall Study Traffic Conditions**

4

	Bicycle Flow (bicycle/hr)	Bus Flow (bus/hr)	Right-Turning Cars (veh/hr)
Peak Traffic	333	21	92
Off-peak traffic	199	12	148

5
6
7 **TABLE 2 Summary Statistics of 5 Most Common Traffic Scenario Types**

8

Rank of frequency of occurrences	Traffic scenario	Mean travel delay (sec)	Sample std. deviation	Occurrence rate, peak conditions	Occurrence rate, off-peak conditions	Complexity of bus-bicycle conflict
1	A1	19	5.78	8.2%	29.6%	Low
2	E1	25	6.16	17.2%	13.3%	Medium
3	H1	25	6.32	12.3%	10.2%	High
4	B1	22	2.59	8.2%	12.2%	Low
5	L1	24	6.24	10.7%	8.2%	High

9
10
11 **TABLE 3 Regression Analysis Results**

12

Variable	Coefficient	Standard Error	t-value	Relative Contribution
<i>Intercept</i>	0.907	1.896	0.478	—
Stops	8.792***	2.039	4.313	0.0973
Ons (Boardings)	2.771***	0.384	7.214	0.1650
Offs (Alightings)	0.899**	0.283	3.169	0.0545
Lift	34.445***	5.244	6.568	0.1155
Num. Bicycles Behind Bus	0.516*	0.278	2.127	0.0127
Route 2	-2.198*	1.032	-2.130	0.0069
* $p < 0.1$ ** $p < 0.05$ *** $p < 0.001$				Adjusted R-Square = 0.4365