

University of Groningen

## Planning for flood resilient cities

Restemeyer, Britta

**IMPORTANT NOTE: You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.**

*Document Version*

Publisher's PDF, also known as Version of record

*Publication date:*

2018

[Link to publication in University of Groningen/UMCG research database](#)

*Citation for published version (APA):*

Restemeyer, B. (2018). Planning for flood resilient cities: From promise to practice?. [Groningen]: Rijksuniversiteit Groningen.

**Copyright**

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

**Take-down policy**

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.

# Chapter 5

## A strategy-based framework for assessing the flood resilience of cities – a Hamburg case study\*

\* This paper has been published as:

Restemeyer, B., Woltjer, J., & van den Brink, M. (2015). A strategy-based framework for assessing the flood resilience of cities - A Hamburg case study. *Planning Theory and Practice*, 16(1), 45–62. <http://doi.org/10.1080/14649357.2014.1000950>



# Abstract

Climate change and continuous urbanization contribute to an increased urban vulnerability towards flooding. Only relying on traditional flood control measures is increasingly recognized as inadequate, since the damage would be extremely high in case of failure. The idea of a flood resilient city – that can withstand or adapt to a flood event without being harmed in its functionality – seems promising. But what does resilience actually mean when it is applied to urban environments exposed to flood risk, and how can resilience be achieved? While flood resilience is often described as an overly simplistic concept, this paper conceptualizes resilience as robustness, adaptability and transformability. By identifying measures, institutions as well as capacity-building as important strategy components for each of these resilience dimensions, the paper presents a heuristic framework to assess the flood resilience of cities. The focus on strategies adds an important aspect to current literature: it gives the resilience concept a new notion compared to the original ecological meaning – less descriptive, but more normative. The idea is that resilience can actively be achieved through intervention. The framework is illustrated with two case studies from Hamburg, showing that resilience, and particularly the underlying notions of adaptability and transformability, require first and foremost further capacity-building among public as well as private stakeholders. The case studies suggest that flood resilience is currently not enough motivation to move from traditional to more resilient flood protection schemes in practice; it rather needs to be integrated into a bigger urban agenda.

**Keywords:** Resilient cities; flood risk management; urban planning; resilience strategies

## 5.1 Introduction

Globally, the number of damaging flood events has increased throughout the last century (White, 2010). Expected climate changes such as rising sea levels, prolonged periods of precipitation and more intense rainfall will likely add to future flood risk. Particularly cities – accommodating a multitude of people, businesses and ecosystems – are at risk. Continuous urban growth and a lack of conscientious

planning even increase urban susceptibility towards flooding (Zevenbergen, Verbeek, Gersonius, & van Herk, 2008).

There is a general consensus that traditional flood control measures only are inadequate to dealing with growing risks (Vis, Klijn, de Bruijn, & van Buuren, 2003; Hooijer, Klijn, Pedrolì, Bas, & van Os, 2004). As a result, more holistic kinds of risk management approaches are being introduced, focusing on the consequences of a flood hazard. These newer approaches also include a shift from purely sectoral to integrated thinking, or, in other words, from pure water management to a more encompassing approach of integrating urban planning as a means to keep vulnerable land uses out of flood-prone areas (Woltjer & Al, 2007; Godschalk, 2003).

In this context, the concept of resilience is considered a promising framework to include risk and uncertainty into planning (White, 2010; Davoudi, 2012; Scott, 2013). While resilience once had a clear physical meaning ("resistance of a material to shocks"), today the concept is multi-interpretable and refers to an interdisciplinary field of research. It has been applied to ecology (Holling, 1973; Holling, 1996) as well as to the social sciences (Green, Kleiner, & Montgomery, 2007). Central to both applications is the idea that ecosystems or groups can withstand or adapt to stress without being harmed in their functionality. Translating this idea to cities and flooding, resilience implies to consider both: that a city takes necessary precautions to prevent flooding, but also adapts land-use to suffer less in case of a flood disaster. Addressing the required shift in flood risk management, resilience can thus be considered a promising approach to deal with the unpredictability of climate change and future flood risk in cities. However, due to the ambiguity of the concept 'resilience', research has largely focused on exploring the meaning of the concept, a few recent examples include: 'Resilience and regions: building understanding of the metaphor' (Pendall, Foster, & Cowell, 2010), 'Resilience: a bridging concept or a dead end?' (Davoudi, 2012), and 'Resilience and disaster risk reduction: an etymological journey' (Alexander, 2013). By focusing on strategies, we aim to move the 'resilience discussion' a step forward: from 'defining' resilience to 'doing' resilience – from concept to action.

The central aim of this paper is to convert the concept of resilience into an operational framework that can be used by both, scientists as well as policy and decision-makers, to evaluate the flood resilience of cities. For this purpose, we first discuss the main implications of a resilience approach within the context of cities and flooding, conceptualising resilience as robustness, adaptability and transformability (Galderisi, Ferrara, Ceudech, 2010; Davoudi, 2012; Scott, 2013). Subsequently, we develop and present a strategy-based framework for assessing the resilience of cities endangered by flood risk. Following Hutter (2006), we define

strategy as a multidimensional phenomenon composed of content, process and context parameters and develop resilience indicators for each dimension. Next, with the help of this strategy-based framework, we assess flood resilience patterns for the city of Hamburg in the north of Germany. Hamburg is a typical European delta city dominated by a traditional flood control approach and now shifting towards a more risk-based approach. We focus in particular on two specific urban development schemes: “Leap across the river Elbe” and “HafenCity”. While the first scheme predominately features a traditional flood-control approach, the latter displays much more resilience-oriented characteristics. We conclude with reflections on the framework used, and we suggest a series of lessons from the case necessary to implement a resilience strategy.

## **5.2 A more holistic perspective on flood resilience strategies**

### **Resistance vs. resilience strategies – a simplified dichotomy?**

Flood risk management literature commonly differentiates between resistance and resilience strategies (de Bruijn, 2005; Vis et al., 2003; Hooijer et al., 2004, Douven et al. 2012). The goal of a resistance strategy is to reduce the probability of a flood hazard whereas resilience aims at minimising the consequences of flooding. Hence, a resistance strategy is about keeping water away from land, e.g. by building embankments and raising them continuously. Oppositely, a resilience approach takes the possibility of flooding into account. Therefore, land-use is adapted to minimize the damage potential, for example by elevating housing structures. Resilience strategies “rely on risk management instead of on hazard control” (Vis et al., 2003, p. 33).

Though this dichotomy appeals through its simplicity, it contradicts the original understanding of resilience. Other scholars from the resilience field (Holling, 1973; Godschalk, 2003; Davoudi, 2012) suggest that resistance and resilience are not clear opposites. Indeed, one attribute of resilience is “persistence” (Holling, 1973), “the power to resist attack or other outside force” (Godschalk, 2003, p. 139), and “robustness” (Davoudi, 2012). Being synonyms of resistance, these terms indicate that resistance can be seen as one important aspect of resilience.

### **Resilience as robustness, adaptability and transformability**

Nonetheless, in order to be flood resilient, a city needs more than robustness.

Various authors suggest that two other important attributes of resilience are adaptability and transformability (Folke et al., 2010; Galderisi et al., 2010, Davoudi, 2012; Scott, 2013). While adaptability is about making adjustments within the system to make it less vulnerable, transformability is about a transition to a new system “when ecological, economic, or social structures make the existing system untenable” (Walker, Holling, Carpenter, & Kinzig, 2004). Applied to cities threatened by flooding, these three terms can be interpreted as follows.

*Robustness* means that a city has to be strong to withstand a flood event, for example by building and maintaining dikes, sluices and storm surge barriers. However, recent flood events in England, Germany and elsewhere have shown that only being strong is not enough. There can always be a flood event that overtops the first line of protection. Therefore, adaptability is crucial. *Adaptability* implies that the hinterland is adjusted to flooding so that a flood event may come without leaving substantial damage. For this purpose, an adjustment of the physical environment as well as the social sphere is required. Preparing the physical environment may include elevating houses with poles or compartmentalize the hinterland in such a way that areas with vital infrastructure have least chance of being flooded. Allowing controlled flooding, however, also adds a social dimension to flood risk management: people within the city have to know what to do to save their lives as well as their belongings. Changing the physical environment postulates a change in people’s mind-sets. Flood risk management becomes a societal task that asks for cross-disciplinary collaborations (water management, spatial planning and disaster management) as well as the willingness of citizens to actively participate in flood risk management. Only if both the physical environment as well as people’s mind-sets change can we speak of a transformation. At the moment, *transformability* can therefore be interpreted as the capacity of a city to make the often demanded shift from “fighting the water” to “living with the water”, also described as a shift from a “predict-and-control” to an “integrated-adaptive” regime (Pahl-Wostl, 2006). This shift has been triggered by climate change as well as recent flood disasters such as Hurricane Katrina in new Orleans in 2005. However, the future will doubtless bring new insights that will make another transformation necessary. Hence, transformability implies a capacity to change based on new insights, searching for the most appropriate way to deal with flood risk.

### **Implications of a resilience approach for strategy-making**

Acknowledging robustness, adaptability and transformability as prerequisites of

a flood resilient city has various implications for making better strategies. First, acknowledging that a resilient city also needs a certain robustness implies that measures attributed to a resistance strategy (technical measures such as dikes, dams, and sluices) may also make a city more resilient because they help a city to withstand a flood event. Thus, technical measures may or even have to be an inherent part of a resilience strategy. Second, as described above, a resilience approach implies a broadening of responsibilities among public as well as private stakeholders. Third, especially the aspect of transformability not only asks for a different understanding of responsibilities, but also requires strong human capacities: knowledge, creativity and envisioning are needed to create innovative solutions, while power, resources and public support is required for actual implementation.

Establishing flood resilient cities hence becomes a highly complex and challenging task. It needs more than a list of possible measures – it also requires framing mind-sets to make different disciplines collaborate and citizens recognize a role in flood risk management. Consequently, a broad view on strategy-making is needed. It would be a view beyond identifying potential measures alone. It acknowledges that building resilience is a long-term process depending on contextual factors. Such a broader perspective on strategy-making has been suggested by Hutter (2006), who pointed out that a strategy is a multidimensional phenomenon composed of content (what to do), process (how to do it) and context parameters (adjusted to internal and external conditions).

### **5.3 A strategy-based framework for assessing the flood resilience of cities**

The goal of this paper is to improve our understanding of flood resilience for two purposes. First, the ability to evaluate the flood resilience of cities, and second, the recognition of potential strategies to build flood resilience. We therefore take the concepts of 'resilience' and 'strategy' as a starting point to develop an operational framework for assessing urban flood resilience.

Based on the practical implications of resilience developed in section 5.2, we conceptualise the three dimensions of strategy specifically for flood resilience. Accordingly, in the content dimension, we focus on measures and policy instruments applied to reduce flood risk. In the context dimension, we look at key strategic issues as external conditions on the one hand, to identify motives for the strategy chosen. On the other hand, we analyse the institutional structure and legislation as internal conditions, to see how responsibilities between public and private stakeholders

are divided and shared from a legal and organizational point of view. The process dimension incorporates the idea of building human capacities among public as well as private stakeholders. By interpreting current literature about flood risk management, resilience, adaptive governance and capacity-building (see references in section 5.2 and 5.3), we identify measures, institutions as well as human capacities favourable for robustness, adaptability and transformability. Thereby, a heuristic model evolves that can be used to assess the resilience of cities endangered by flood risk (table 5.1). In the remainder of this section, we explain the framework in more detail.

	<b>Robustness</b> <i>'Reduce flood probability'</i>	<b>Adaptability</b> <i>'Reduce consequences of flooding'</i>	<b>Transformability</b> <i>'Foster societal change'</i>
<b>Content</b> Measures and policy instruments	<ul style="list-style-type: none"> <li>- technical measures (e.g. dikes, dams, barriers)</li> <li>- spatial measures (e.g. river widening)</li> </ul>	<ul style="list-style-type: none"> <li>- discourage vulnerable land use in flood-prone areas</li> <li>- flood-proofing existing buildings and infrastructure in flood-prone areas</li> <li>- warning and evacuation schemes</li> <li>- flood insurance / recovery funds</li> </ul>	<ul style="list-style-type: none"> <li>- risk communication and awareness raising among:                             <ul style="list-style-type: none"> <li>- private stakeholders (e.g. brochures, public campaigns, early education in school)</li> <li>- public stakeholders (e.g. consensus-building, partnership practices, decision support tools)</li> </ul> </li> </ul>
<b>Context</b> Strategic issues, Institutional structure and legislation	<ul style="list-style-type: none"> <li>- Water and climate: water as threat</li> <li>- strong public responsibility for water management</li> <li>- collaboration between water management and spatial planning on specific projects</li> </ul>	<ul style="list-style-type: none"> <li>- Land-use and socio-economic changes: need to create synergies</li> <li>- shared legal responsibility public – private</li> <li>- strong collaboration between water management, spatial planning and disaster management on all projects</li> </ul>	<ul style="list-style-type: none"> <li>- societal changes: need to establish water as asset</li> <li>- informal networks fostering a new 'water culture'</li> <li>- new interdisciplinary networks (e.g. 'think tanks') and learning organizations</li> </ul>
<b>Process</b> Intellectual capital	<ul style="list-style-type: none"> <li>- expert knowledge in engineering and planning</li> </ul>	<ul style="list-style-type: none"> <li>- expert knowledge and local knowledge (vulnerability reduction and adaptation options)</li> </ul>	<ul style="list-style-type: none"> <li>- creativity, openness towards new knowledge, learning</li> </ul>
Social capital	<ul style="list-style-type: none"> <li>- good relations among water managers and spatial planners</li> </ul>	<ul style="list-style-type: none"> <li>- good relations among water managers, spatial planners and disaster managers; civil awareness and willingness to invest in flood risk management measures</li> </ul>	<ul style="list-style-type: none"> <li>- mutual trust between public and private stakeholders and social acceptance of new interdisciplinary networks</li> </ul>
Political capital	<ul style="list-style-type: none"> <li>- strong political and financial support for bigger structures (public funds)</li> </ul>	<ul style="list-style-type: none"> <li>- strong political and financial support for adaptation and a risk-based approach</li> </ul>	<ul style="list-style-type: none"> <li>- change agents, leadership; financial support for informal and interdisciplinary networks</li> </ul>

Table 5.1: A strategy-based framework for assessing the flood resilience of cities.



## Content

Flood risk is often defined as the probability of a flood hazard times the consequences of that hazard (e.g. Jonkman et al., 2003). Measures and policy instruments to lower flood risk hence typically relate to either the first or the latter part of the equation. In this perspective, robustness refers to the first part, as reducing the probability of a flood event makes the city stronger to withstand a flood event. Adaptability refers to the latter part, as lowering the consequences of a flood event means that the hinterland is prepared for flooding. According to Meijerink & Dicke (2008), the probability of a flood event can be decreased by technical as well as spatial measures, whereby technical measures refer to dikes, dams and sluices and spatial measures can be understood as making more room for the river through, for example, river widening. On the other hand, the consequences of a flood event can be decreased by discouraging vulnerable land uses or flood-proofing existing buildings in flood-prone areas. Moreover, disaster management measures such as early warning and evacuation schemes can lower the impact of a flood event. Flood insurances and recovery funds help affected citizens to recover financially more quickly from flooding.

Transformability particularly asks for fostering societal change, as in our definition changing people's behaviour and mind-sets is a necessary precondition for the physical transformation of a city. The general understanding is that, only when different disciplines, such as water management, spatial planning and disaster management collaborate intensively, vulnerability of the hinterland can be reduced (Woltjer & Al, 2007). Moreover, flood risk management can no longer be seen as a purely public task, as property rights require private developers and land lords to flood-proof their houses themselves. Besides, well-informed citizens are likely to be less affected by a flood event, as they know how to rescue themselves and organize material belongings in their houses so that they are less damaged by flooding (Knieling, Schaerffer, & Tressl, 2009). Therefore, all kinds of measures aimed at raising awareness and empowerment of local residents, such as brochures, public campaigns, but also early education in school, may contribute to transformability. Similarly, among public stakeholders consensus-building and partnership practices as well as decision support tools, that for example help planners to assess flood risk in specific areas, may bring different disciplines together in order to design new, integrated solutions.

## Context

Contextual factors may explain why certain contents or process patterns in strategy-making are chosen (Hutter, 2006). Population development, economic performance, but also culture are generally given as important factors. A robustness strategy, for example, is likely to be favoured when water is more seen as a threat. Institutionally, this requires a strong water sector and collaboration of water managers and spatial planners on specific projects, such as making more space for water projects.

Land-use and socio-economic changes can be strategic factors for needing a more adaptive approach. Adaptability demands a stronger integration of both sectors, planning and water management, to flood-proof the hinterland. This could also be expressed in terms of legal rules, for example, when flood risk has to be considered in planning processes. Legal rules can also reveal if flood risk management is only seen as a public task, or also emphasises a responsibility of private stakeholders. Moreover, advanced disaster management arrangements show whether a city prepares for the possibility of a flood event.

The capacity to transform additionally asks for envisioning long-term futures and embedding a broader societal learning process how to deal with water. Woltjer and Al (2007) refer to this as a 'new water culture', in which water is understood as an asset for shaping places and identities, building social relations and informal networks. On a broader societal level, this can result in institutions such as "Learning and Action Alliances" as described by Van Herk, Zevenbergen, Ashley, and Rijke (2011). On a more strategic level, interdisciplinary think tanks could help to create long-term visions and foster innovative solutions on the one hand, but also to recognize changing circumstances and adjust strategies accordingly.

## Process

As argued before, the resilience concept generally implies a broader understanding of who is involved and what kind of capacities the stakeholders need to possess. Literature on adaptive capacity of society (e.g. Gupta et al., 2010) suggests that a flood resilient city requires capacities from organizations as well as individual citizens to cope with, adapt to, recover from and renew itself after a hazard. In the framework, we therefore operationalize the process dimension in terms of capacity-building. In capacity-building literature, three criteria – namely intellectual, social and political capital – are typically used for assessment (Healey, 1997; Khakee, 2002; Healey, Khakee, Motte, & Needham, 1999). All three criteria – when adjusted – also

play a role in establishing flood resilient cities.

Intellectual capital refers to 'knowledge resources' (Khakee, 2002). While robustness demands a high amount of expert knowledge in technical engineering and planning, adaptability requires expert knowledge about vulnerability reduction and adaptation options. Moreover, local knowledge can be very valuable, for example, to identify appropriate and socially accepted areas for water retention. Transformability, in turn, requires creativity to generate new and innovative solutions, openness towards new ideas to actually test them as well as the capacity to learn from these experiments.

Social capital is originally understood as 'relational resources' (Healey, 1997; Khakee, 2002); it is about trust relationships between all involved stakeholders. For robustness, good relations among water managers and spatial planners are sufficient. Adaptability additionally asks for good relations with disaster managers, but also a high civil awareness and willingness to participate in flood risk management. As other authors emphasize (Pelling, 2007, Kuhlicke & Steinführer, 2013, Pahl-Wostl, 2007), social capacity-building asks for a local and participatory approach aimed at empowerment, instead of purely information. Transformability requires mutual trust between public as well as private stakeholders, for example showing in participating and accepting new interdisciplinary networks.

Political capital is defined as the 'capacity for mobilisation' (Healey, 1997; Khakee, 2002), encompassing support by policy and decision-makers for a certain strategy as well as financial resources. Robustness, for example, requires high public funds to construct and maintain primary defences. Adaptability, on the contrary, needs political and financial support for a risk-based approach and a population that is willing to invest into own precautionary measures. Transformability, again, presumes financial support for establishing informal and interdisciplinary networks. Moreover, so-called change agents and leadership can help to make different actors collaborate and create long-term visions (see Gupta et al. 2010).

To conclude, even though resilience demands all three aspects, robustness, adaptability and transformability, these aspects might seem contradictory to a certain extent. For example, is it possible to have a strong water management sector and foster informal networks at the same time? In general, we regard it as one of the strengths of the resilience concept, that it combines these seeming paradoxes. Obviously, depending on the situation, some aspects might be more important than others and hence explain different resilience priorities. The framework can help to identify these priorities, and at the same time show which other measures, institutions and capacities can be used to build resilience for the long-term future.

## 5.4 Methodology

The developed framework has been applied to assess the flood resilience of Hamburg. We choose for Hamburg as a case study for three reasons. First, Hamburg is experienced in tidal as well as pluvial flooding, and both types of flood risk are likely to increase because of climate change (Storch & Woth, 2008; Daschkeit & Renken, 2009; KlimaCampus, 2010). Second, Hamburg's situation is similar to that of other big European cities such as London and Rotterdam, that have to handle a continuous urban growth on the one hand and increasing flood risks on the other, with a traditionally strong water management sector. Third, Hamburg has participated in various research projects emphasizing flood risk management and urban planning (e.g. FLOWS, RIMAX, MARE, SAWA, KLIMZUG-NORD), which make it assumingly a frontrunner in the debate. All three reasons make Hamburg a great case to create generic knowledge about flood resilient cities in Europe.

Within Hamburg, we specifically look at two current urban development projects, the "Leap across the river Elbe" and the "HafenCity". Both are located in flood prone areas (see figure 5.1). The "Leap across the river Elbe" project implies urban growth on the Elbe Island Wilhelmsburg – the former marshlands and the deepest part in Hamburg, which was flooded completely during the storm surge in 1962 causing more than 300 fatalities (FHH, 2005a). The HafenCity is an urban regeneration project on former port and industrial areas in the middle of the city, located outside of the main dike line. These two areas are interesting, as they show two different kinds of flood risk management strategies, one more based on robustness and the other one more based on adaptability.

The case studies are based on different sources to validate the findings. First, we carried out an in-depth analysis of various policy documents to identify current measures and policy instruments, including information about current urban development projects (Free and Hanseatic City Hamburg [FHH], n.d.; FHH, 2003; FHH, 2005b), Hamburg's flood protection concept (FHH, 2007), disaster management concept (FHH, 2005a) and brochures used for risk communication (FHH, 2004; FHH, 2008). In order to understand Hamburg's institutional structure, we looked at different national and Hamburg-specific legislation (for instance, Hamburg's water law), publications about disaster management in Hamburg (Gönnert & Triebner, 2004; Lange & Garrelts, 2008), as well as websites from pertinent agencies. We also scanned all land-use plans from the Elbe Island Wilhelmsburg (65 legally binding, five in a draft state) and the HafenCity (seven legally binding, six in a draft state) to what extent planners made usage of flood risk regulations in these plans. Last but not least, interviews with key stakeholders shed

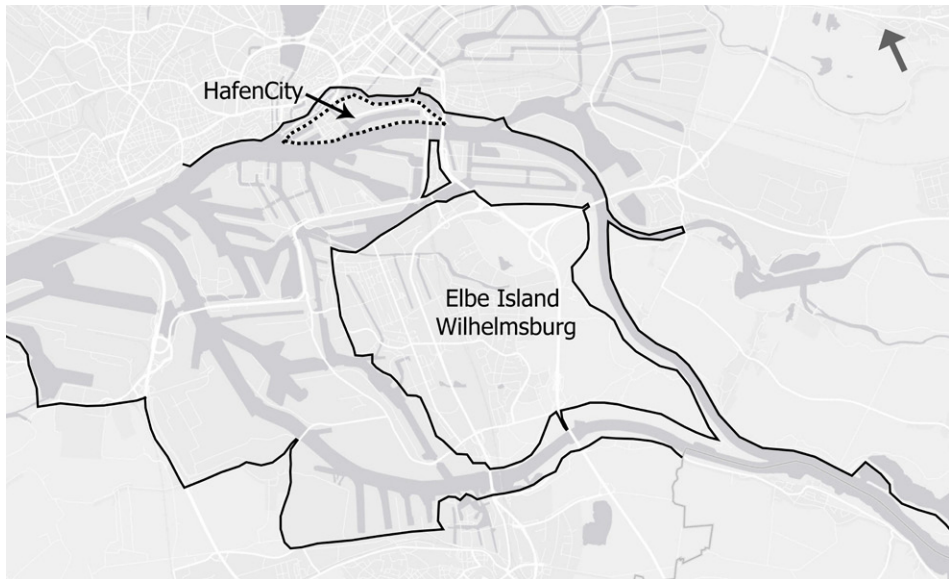


Figure 5.1: Locations of the HafenCity and the Elbe Island Wilhelmsburg, the thick line representing Hamburg's dike line. Source: designed by author; Basemap from ESRI OpenSource.

light on the process of the two urban development projects, revealing which capacities played a role and why certain solutions were favoured above others. In total, we interviewed 8 stakeholders, comprising planners, water managers, disaster managers, researchers as well as citizens. On a ministerial level, the governmental stakeholders come from the *BSU* (Ministry of Urban Development and Environment), *LSBG* (the operating water management authority) as well as *BIS* (Ministry of the Interior and Sports). On a district level, we spoke to representatives from the *Bezirksamt Mitte*, as they are responsible for both urban development projects from a planning as well as a disaster management perspective. Moreover, we spoke to a researcher involved in various research projects that try to embed a more resilience-oriented flood protection in Hamburg and a citizen of the HafenCity, who is at the same time the "*Flutschutzbeauftragter*" of his building, which means that he is responsible for operating the flood gates in case of a storm surge.

## 5.5 Case study: Hamburg – A flood resilient city?

The "Leap across the river Elbe" and the HafenCity are the two biggest urban development projects in Hamburg at the moment. The main idea of the "Leap across the river Elbe" project is to grow in the middle of the city and connect Hamburg's city

parts north and south of the Elbe. This implies new residential and commercial areas on the Elbe Islands (FHH, 2003; FHH, 2005b). The prognoses vary between 15,000 and 50,000 new citizens that will be allocated in the marshlands. Currently, there are 50,000 people living on the Elbe Island, so the implementation of the project could even imply a doubling of today's population. The HafenCity can be seen as the first stepping stone of the project, as it brings the inner city closer to the river Elbe. On 157 hectares of former port and industrial areas, more than 6,000 homes and 45,000 new jobs are supposed to be created (HCH, 2014). Thereby the inner city can be expanded by 40%. The goal is to create an attractive waterfront and a lively neighbourhood with retail, residential areas and office space.

### **“Leap across the Elbe” – Urban redevelopment on the Elbe island Wilhelmsburg**

#### ***Content – measures and policy instruments applied to lower flood risk***

Like the rest of Hamburg, the Elbe Island Wilhelmsburg is protected by a main dike line that gets continuously heightened and strengthened. The newest program for dike renewal, the so-called “*Bauprogramm Hochwasserschutz*”, dates back to 2007 and prescribes on average an elevation of 1m (FHH, 2007). The program ends in 2016. However, more elevations can be expected, as the design level for floods has been increased by another 80cm in 2012, among others due to the projected sea level rise. Although the dikes get higher and higher, Hamburg also attempts to be prepared for the case that a storm surge overtops the main dike line. For this purpose, detailed warning and evacuation schemes exist. The need for such schemes became obvious after a disastrous storm surge in 1962 when one sixth of the whole city was flooded, 20.000 people had to be evacuated and 300 people died (FHH, 2005a).

The population is informed about these schemes by so-called “*Sturmflut-Merkblätter*” (storm surge information sheets), that are distributed yearly among all concerned households. The storm surge information sheets vary per district, and apart from German they are disseminated in five foreign languages (Polish, Turkish, Serbo-Croatian, English, and Russian) to make sure that everyone can understand the provided information. They include advice for individuals and a list of important telephone numbers whom to contact in case of a storm surge. The second page of the information sheet is always a map of the district indicating the safe areas, areas that will be warned and areas that will possibly be evacuated. It also includes emergency shelters and bus stops that serve as meeting points in case of evacuation.

In recent years, two ideas were developed trying to create synergies between flood risk management and urban planning on the Elbe island: a ‘compartment

system' and a 'dike park'. Whereas the idea for a compartment system was developed by researchers from the Technical University of Hamburg within the research project RIMAX in 2007, the idea for a dike park was created by a consultancy firm in 2011 within the context of an International Architecture Exhibition taking place in Hamburg.

Although both ideas open up opportunities for "living with water", the compartment system would have implied a much more radical social and physical transformation than the dike park. It is based on the idea that different compartments are created by building dike rings instead of one dike line. The possibility of flooding would vary from compartment to compartment, so that there is a smoother transition between water and land. That also means that in some compartments more adaptation measures are needed than in others. The compartment system would be designed in such a way that most vulnerable areas have the lowest chance of being flooded (IBA Hamburg GmbH, 2009; Pasche, 2007; Helmholtz-Zentrum Potsdam, 2009). The dike park, in turn, works with the existing dike line. The goal is to make the dike more accessible for the public by seeing dike investments not only as a chance to maintain and heighten the dike, but also to create more open spaces at the waterfront, thereby improving the quality of life in the city (IBA Hamburg GmbH, 2011).

When the compartment system was introduced, it was rejected by policy- and decision-makers. According to the head of the department water management at the BSU, the compartment system will also not be part of Hamburg's future plans. A researcher involved in the project explains:

*Back then, the idea was considered to be inadequate. [...] Many people did not understand that the goal was to lower flood risk and offer chances for urban planning at the same time. [...] that they would still be protected – but according to the concept of resilience, not resistance. Most people still associate flood protection with huge walls. However, smooth transitions between water and city are better since they also improve the risk awareness among the population.*

Interestingly, the dike park project has partly been realized. When a piece of the dike line, the "Klütjenfelder Hauptdeich", had to be renewed anyways, stairs were included in the dike to make the waterfront more accessible. However, the dike park does not imply a real transformation: the flood risk management strategy of the Elbe Island Wilhelmsburg is still mainly built on the idea of robustness. The hinterland is not physically prepared for flooding, but disaster management arrangements are in place to lower the damage in case of a storm surge.

### **Context – institutional structure and legislation**

The choice of these measures and the rejection of others can partly be explained with the institutional structure. After the storm surge of 1962, flood risk management as well as disaster management have become high priority policy fields. In case of emergency, the Ministry of the Interior becomes the central disaster management institution that can instruct all other authorities. In that case, the privy council of the Ministry of Interior leads the disaster management organisation. He is even authorised to make decisions without the Senate then, which is normally not possible in Hamburg. This exemption allows urgent decisions like a ban on driving on specific roads to be made immediately and with little bureaucracy (FHH, 2005a; Lange & Garrelts, 2008; Gönnert & Triebner, 2004).

Using spatial planning to lower the potential damage is not yet common practice. This shows for example in the fact that the “Leap across the Elbe” policy documents (FHH, 2003, 2005b) published by the planning authority do not include any statement about flood risk management. Moreover, our analysis of all land-use plans from the Elbe island (65 legally binding plans, five in a draft version<sup>5</sup>) reveals that only four plans prescribe measures with respect to flood risk. Land-use plan *Wilhelmsburg 71* from 1994 forbids basements, *Wilhelmsburg 2* from 1964 only allows constructing if the whole parcel is elevated up to a minimum of 2.5m above mean sea level. While *Wilhelmsburg 18* and *Wilhelmsburg 72*, both from 1994, prescribe a fixed staircase to a permanently accessible level on 6m above mean sea level, if the building includes residential use. As legal changes in 2005 require flood risk to be considered as one concern that has to be balanced with other concerns in the act of plan-making (§1 VI no. 11 BauGB<sup>6</sup>), one would expect more regulations in recent land-use plans. While they do include more measures to deal with precipitation, for example greening roofs, there are no explicit building restrictions because of storm surges. Although projects like the dike park work on improving the relations between water managers and planners, the collaboration between both disciplines is overall still limited.

### **Process – intellectual, social and political capital**

The currently available intellectual, social and political capitals offer another explanation why a transformation from “fighting the water” to “living with the water” seems to be so difficult. On the one hand, Hamburg possesses capacities that support the current strategy. For example, Hamburg has high trust in the expert knowledge of water engineers. On a symposium dealing with water challenges

5) All land-use plans are publicly accessible on <http://www.hamburg.de/bebauungsplaene-online/>.

6) BauGB, short for Baugesetzbuch, is the German federal building code.



and climate change the former privy council of the BSU praises Hamburg's "high competencies in water engineering and flood control" (IBA Hamburg GmbH, 2009, p. 7). Preventing another disaster like the storm surge of 1962 has a high priority among policy and decision-makers. Therefore, they are also willing to spend much public money on flood protection. The latest dike renewal programme costs more than 600 million €, although partly covered by the Federal Government of Germany. In a ranking comparing different budget groups within the Ministry of Urban Development and Environment for the years 2013 and 2014, water management and flood protection score the 2nd position after housing. A fifth of the overall budget is spent on water management and flood protection. It has significantly more resources than urban planning, environmental or climate protection (FHH, 2012).

Experiences with the dike park, however, raise the question how money is spent and if the integration of urban planning and flood protection legitimizes extra costs. The integration of stairs into the *Klütjenfelder Hauptdeich* as a means to make it a multifunctional dike was more expensive than a normal dike renewal. Moreover, maintenance costs of the dike have increased because of the intense usage. A representative of the LSBG therefore states: "If urban planning and flood protection do something together, the city has to recognize, that this causes extra costs. You don't get it for free. However, that often does not work out." In the particular case of the *Klütjenfelder Hauptdeich*, the initial extra costs were covered by the International Architecture Exhibition. As this is only a temporary budget, it remains doubtful if other projects like this will also receive funding. In particular, as some water managers perceive that the multi-functionality of a dike goes at the expense of its safety. A water manager from the LSBG remarked: "I know a lot of colleagues of mine that say 'We want a dike as dike and at best fenced, so that no one has access to it, because this is our task.'" This may also explain why the compartment system was rejected. In general, a researcher from TUHH stated:

*There is still a rather low openness towards new ideas [...]. The reasons are manifold, mainly reflecting the "entrapment effect", i.e. the reluctance to change the current 'known' practices and accept something 'new' and as such 'unknown'. There is much concern about how those changes would fit into the existing legal frameworks and the internal rules and responsibilities established within and between institutions.*

Moving towards a more holistic resilience approach more based on the ideas of adaptability and transformability is not only difficult for public stakeholders, but also the broader population. Although national as well as Hamburg legislation acknowledges that flood risk management is not only a state's task, but also requires

individuals to take necessary precautions within their means (§52 no. 2 HWaG), only few people are willing to do so. Two different studies about the risk awareness in Hamburg's society (Heinrichs & Grunenberg, 2009; Knieling et al., 2009, the latter specifically about risk awareness on the Elbe island) come to the conclusion that most people are actually aware of the flood risk, but that the awareness does not translate into taking own precautionary measures. A practitioner from the BSU doubts a high risk perception among the population. He explains: "The topic water has only little meaning for the people. [...] People don't feel concerned. [...] Especially new citizens have no risk perception at all".

For the same interviewee, the low awareness for flood risk is also a reason why it is so difficult to achieve public participation:

*During a research project, we made an advertisement in the local newspaper 'Hamburger Abendblatt' that we are looking for people interested in participating in flood protection. The newspaper is read by more than 700000 people, 13 people answered, in the end 7 participated, all of them having already experienced a flood event.*

All in all, although ideas for changing the flood protection scheme of the Elbe Island exist, public as well as private stakeholders are reluctant to move from a robustness strategy towards a more adaptable approach. A transformation in future is not impossible, but barely in sight at the moment. This is mainly due to a lack of social and political capital. The question therefore arises what makes the HafenCity different and why was a more adaptable approach realized here?

## **The HafenCity – Urban regeneration in the heart of the city**

### ***Content – measures and policy instruments applied to reduce flood risk***

Originally, the areas of the HafenCity lay not only outside the dike line, but they were also rather low: the height varied between 4.4 – 7.2 m above mean sea level rise, which means that most parts would get regularly flooded. When the idea of the HafenCity was born, two possible solutions to deal with flood risk were discussed: the 'polder solution' and the 'dwelling mound solution'. Whereas the first solution would imply a protection line of 4.75 km and at least 5 flood barriers, the second solution required an elevation to a minimum height of 7.5 m above mean sea level rise. This level is considered flood-proof as it resembles the height of the flood wall protecting the inner city. Hamburg chose for the urban dwelling mounds, because it

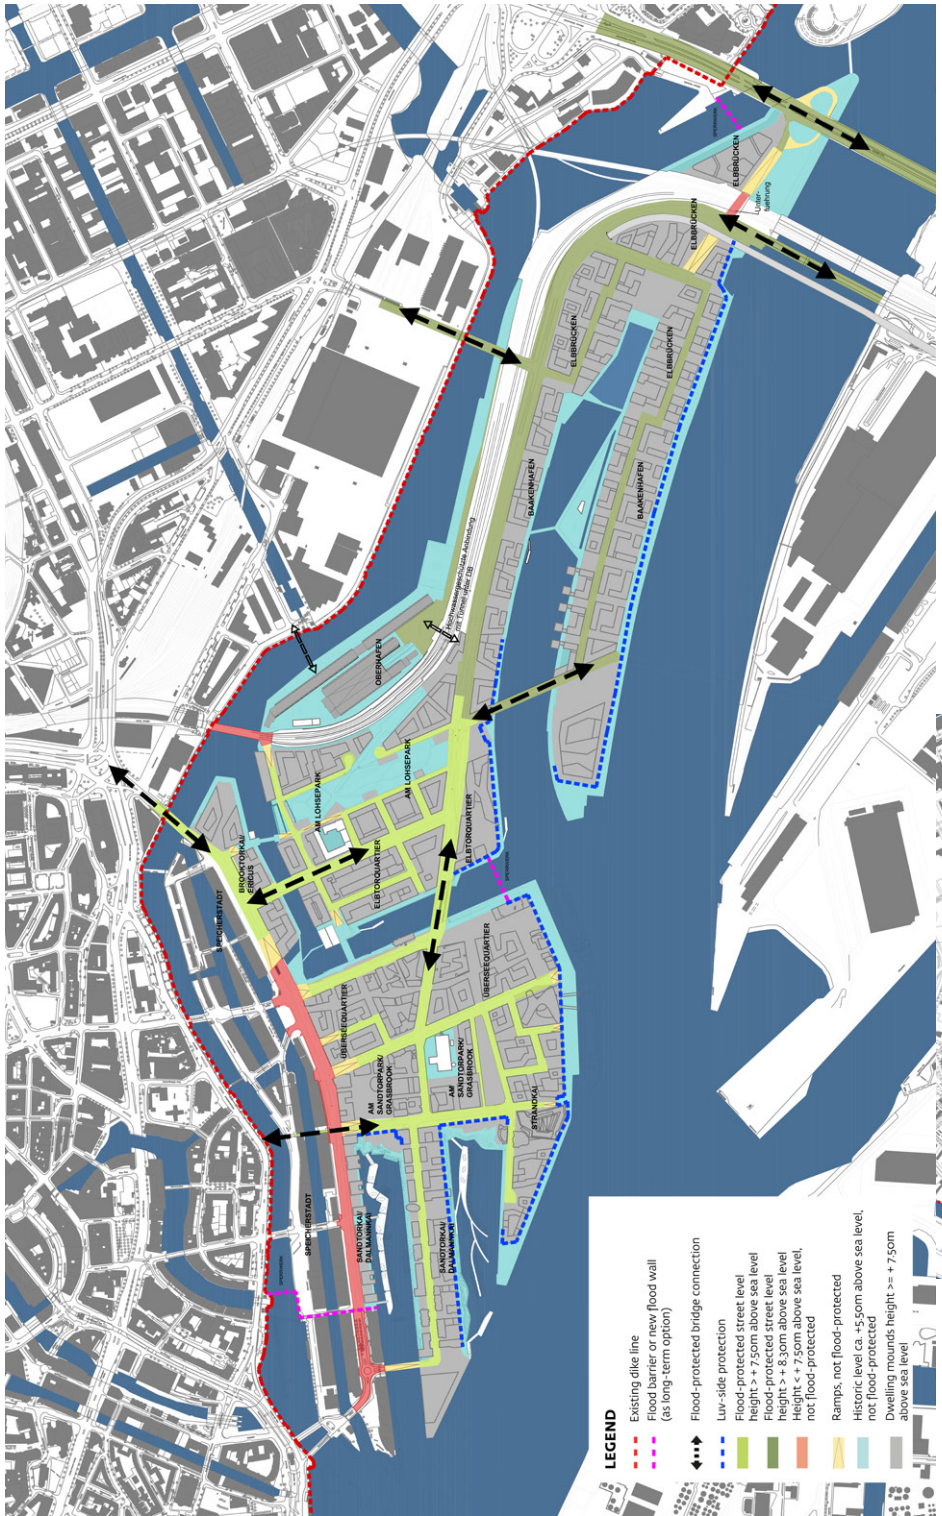


Figure 5.2: Flood protection concept of the HafenCity. Source: Hafencity Hamburg GmbH, translated by author.

was considered cheaper and it meant that they could start developing much earlier and step-by-step. With the first solution, developing could have only started when all flood walls and barriers would have been finalized (Bürgerschaft der Freien und Hansestadt Hamburg, Drucksache 15/7460, 1997).

Figure 5.2 shows the flood protection concept for the HafenCity. The dwelling mound solution means that bridges and streets are indeed elevated up to a minimum of 7.5 m, whereas buildings incorporate the dwelling mound in form of a basement (see figure 5.3 and 5.4). Some of the basements are designed as parking garages, others are used as shops. In case of a storm surge, all openings such as windows are protected by temporarily installable flood gates (FHH, n.d.).

The disaster management arrangement is similar to that of the Elbe Island Wilhelmsburg. The HafenCity also has storm surge information sheets to inform the residents about storm surge related risks. Two streets are built higher to serve as evacuation roads in case of a high storm surge.

### **Context**

The broader historic and economic context further motivates the choice for a quick development and hence the dwelling mound solution. The reunion of Germany in 1989 moved Hamburg from a marginal location to the middle of Germany and a bigger Europe. Already in the 1990s, the development of the HafenCity was considered an important project to position Hamburg as an economically viable harbour city in the core of Europe (Bürgerschaft der Freien und Hansestadt Hamburg, Drucksache 15/7460, 1997).

Before the dwelling mound solution could be realized, legal changes were necessary. Hamburg's harbour law had to be changed so that the Senate could convert areas of the HafenCity from harbour usage into a mixed urban neighbourhood. Hamburg's land use plan had to be changed accordingly. Moreover, a completely new act, the so-called Flutschutzverordnung, had to be passed by the Senate to allow living in the HafenCity. The HafenCity is now an exemption, as § 63 Abs. 1 HWaG usually prohibits living in areas outside of the main dike line.

Apart from legal changes, the HafenCity also establishes a new institution to operate the flood gates within the buildings, the so-called *Flutschutzgemeinschaften*. All property owners within a building complex are automatically part of it. Every *Flutschutzgemeinschaft* has a *Flutschutzbeauftragter* who is the main contact person and responsible for putting the flood gates in place, when a storm surge is expected.

To conclude, the HafenCity brought about various institutional changes and innovations as well as capacity-building.





Figure 5.3: Basements of buildings, usual situation. Source: ELBE&FLUT/Thomas Happel.



Figure 5.4: Basements of buildings during a storm surge in 2007. Source: ELBE&FLUT/Thomas Happel.

### Process

First of all, the urban dwelling mound solution shows high intellectual capital. The flood protection concept of the HafenCity is often praised for being very innovative. Indeed, Hamburg's water managers translated a concept that they have already used in the harbour area for years to the context of a mixed urban quarter. In the harbour area, it is common practice that property owners form *Poldergemeinschaften* that cover the costs for constructing, operating and maintaining flood protection schemes.

In the case of the HafenCity, private stakeholders cover the costs for constructing, operating and maintaining the basements as well as the flood gates, whereas public money is spent on elevating the whole area and building evacuation roads. As this is not a common agreement for residential areas, the question is why private developers accepted these conditions. One private developer explained his motives to live and work in the HafenCity:

*It's the location. Working at the waterfront increases the productivity of your employees by at least 25%, you can feel that. Where can you find a nicer location than here, where you have a direct view on the river Elbe, a view on the cruise liners? Just this morning a cruise liner has again arrived. It is just a preferred location.*

Apparently, living at the waterfront makes up for extra costs. Of course, it also requires the financial capacity among private stakeholders. As Menzl (2010) points out, the HafenCity is one of the highest-price areas in Hamburg, for renters and buyers alike. It can therefore be assumed people living in the HafenCity have the financial capacity to cover these costs. Interestingly, our interviewee doubted that the flood protection scheme leads to a higher civil awareness among residents:

*To be honest, people here are rarely aware of flood risk. Of course it is visible, for example the storm surge last year December, but the HafenCity is safe. What I always say: If we are flooded here, the rest is already.*

Hence the willingness to invest into flood protection seems less driven by flood risk awareness or the idea of being 'resilient' than the location.

Similarly, public stakeholders did not opt for the flood protection concept because it was more flood resilient, but because it was politically wanted to develop as quickly as possible. The idea to develop a mixed quarter – first uttered by the Chief Planning Officer – was taken over by the mayor during the 1990s and even became a main issue of the mayor's election campaign in 1997, as an interviewee

from the BSU explains. The political priority of the project is also expressed in the fact that the HafenCity got its own development agency, the HafenCity GmbH. Because of the strong political will, legal changes as described in the previous section became possible. Some documents (e.g. FHH, n.d. and the master plan of the HafenCity) promote that the HafenCity might be included in the main dike line by installing flood barrages and flood walls at a later stage. This shows that the flood protection scheme was not about resilience per se, but instead a means towards a purely economic and political end: positing Hamburg as a harbour metropolis within Europe as quickly as possible.

## 5.6 Conclusions

This paper set out to develop a framework for assessing the flood resilience of cities, for scientists and policy- and decision-makers alike. The framework presented is a heuristic one made for qualitative assessment. It enriches the current literature on flood resilience in two ways. First, the framework overcomes the resistance–resilience dichotomy often used in flood risk management (De Bruijn, 2005; Douven et al., 2012; Hooijer et al., 2004; Vis et al., 2003). The paper argues that technical measures usually attributed to a “resistance strategy” are not contradictory to a resilience strategy, because robustness and the ability to withstand a flood event are inherent characteristics of resilience itself (Holling, 1973; Davoudi et al., 2012; Scott, 2013; Galderisi et al., 2010). Second, it clarifies resilience and the meaning of its three key characteristics – robustness, adaptability and transformability – for the specific context of flooding in cities. By identifying important components for implementing resilience strategies, the paper goes beyond predominantly conceptualizing resilience (e.g. Pendall et al., 2010; Davoudi et al., 2012; Alexander, 2013). These components comprise content, context and process factors for decreasing flood probability, reducing consequences of flooding and fostering societal change (see Figure 5.1). The focus on strategies gives the resilience concept a new notion compared to the original ecological meaning – it is no longer descriptive, but a normative concept that can actively be achieved through intervention.

While the framework is derived from a literature review in this field, the two case studies from Hamburg add important practical insights into both the current barriers to implementing a resilience strategy and the chances to achieve such a strategy. The first case – the Elbe island of Wilhelmsburg – shows that building up social and political capital remains one of the main challenges to moving to a holistic resilience approach. This includes a better integration of urban planning and

water management as well as the willingness of private developers and citizens to contribute to flood risk management. Raising awareness among both public as well as private stakeholders is therefore key to making a shift to more resilient approaches likely in future. For this purpose, the framework suggests measures for capacity-building; such as consensus-building practices and decision support tools among public stakeholders, as well as public campaigns and early education in school among private stakeholders. The HafenCity teaches us another important lesson in this respect: spatial transformation processes offer the chance to embed flood resilience into a bigger urban agenda. While flood resilience alone is not enough motivation to change the flood risk management strategy, it has the potential to link into a broader political and economic agenda and thereby create win-win situations. Moreover, political capital is extremely important in the shift towards a resilience strategy. Leadership and key agents, as in this case the mayor, made lots of legal changes possible. Moreover, the location convinced private developers to invest in the area, even though they had to carry the costs for flood protection.

Overall, we conclude with three suggestions for urban policy and research:

- The Wilhelmsburg case shows that urban policy-makers are relatively unaware of the potential of a holistic approach for improving safety. In particular, that a resilience approach does not only create added value (e.g. water view instead of a fenced dike), but also may increase the safety of an area. Shifting to resilience approaches therefore requires a new framing of mind-sets among both public as well as private stakeholders. How this can effectively be done will require further research.
- A holistic resilience approach requires a redistribution of responsibilities between public and private stakeholders. The HafenCity is a high-end urban development, where private developers as well as inhabitants have generally sufficient (financial) capacity to cover extra costs and efforts for flood protection. The case teaches us that public authorities can create incentives (i.e. living at the waterfront) for increasing the willingness among private stakeholders to take a more active role in flood risk management. Resilience, however, does not merely imply the advancement of “rich” individuals or organizations (i.e. those holding higher levels of capacities and resources such as knowledge, relations and support). Therefore, it is important that policy-makers consider social justice and equity aspects. Further research is needed to clarify how and to what extent public authorities can set the boundary conditions for a socially just “public-private divide” in flood risk management.



- Often, more holistic resilience approaches are associated with higher costs. The example of the HafenCity shows, however, that resilience is not more costly per se. The financial aspect again strengthens the need to create synergies with other fields: flood resilience should not be a separate policy, but integrated into a broader urban agenda.

## References

- Alexander, D. E., 2013. Resilience and disaster risk reduction: an etymological journey. *Natural Hazards and Earth Systems Sciences Discussions*, 1, 1257-1284. doi:10.5194/nhess-13-2707-2013
- Bürgerschaft der Freien und Hansestadt Hamburg, 1997. *Hamburg's Standort- und Hafenentwicklung im 21. Jahrhundert*. Drucksache 15/7460. Hamburg, 16p.
- Daschkeit, A. & Renken, A.L., 2006. *Klimaänderung und Klimafolgen in Hamburg – Fachlicher Orientierungsrahmen*, 38p. Retrieved from <http://www.hamburg.de/contentblob/3956444/data/orientierungsrahmen.pdf>, accessed on 27 September 2013.
- Davoudi, S., 2012. Resilience: A bridging concept or a dead end?, *Planning Theory and Practice*, 13, 299-307. doi: 10.1080/14649357.2012.677124
- De Bruijn, K.M., 2005. *Resilience and flood risk management – a system's approach applied to lowland rivers* (Doctoral dissertation). Technical University of Delft, Delft.
- Douven, W., Buurman, J., Beevers, L., Verheij, H., Goichot, M., Nguyen, N.A., Truong, H.T., & Ngoc, H.M., 2012. Resistance versus resilience approaches in road planning and Design in delta areas: Mekong floodplains in Cambodia and Vietnam. *Journal of Environmental Planning and Management*, 55, 1289-1310. doi:10.1080/09640568.2011.644848
- FHH (Ed.), n.d. *Informationen zum Flutschutz im Bereich der HafenCity Hamburg*, [Information about flood protection in the HafenCity Hamburg], 1–5. Hamburg: BSU.
- FHH (Ed.). (2003). *Sprung über die Elbe [Leap across the Elbe]*, published by BSU, Hamburg, 72p.
- FHH (Ed.). (2004). *Elvis und Bär unterwegs – Hochwasserschutz in Hamburg [Elvis and Bär on the road – flood protection in Hamburg]*, 1–28. Hamburg: BSU.
- FHH (Ed.). (2005a). *Katastrophenschutz in Hamburg – für Hamburg [Disaster management in Hamburg – for Hamburg]*, 1–17. Hamburg: BIS.
- FHH (Ed.). (2005b). *Sprung über die Elbe – Hamburg auf dem Weg zur internationalen Bauausstellung – IBA 2013 [Leap across the Elbe – Hamburg on its way to the International Architecture Exhibition – IBA 2013]*, 1–94. Hamburg: BSU.
- FHH (Ed.). (2007). *Hochwasserschutz in Hamburg – Bauprogramm 2007 [Flood protection in Hamburg – building programme 2007]*, 1–18. Hamburg: LSBG.
- FHH (Ed.). (2008). *Sturmflutschutz in Hamburg – für Hamburg: Tipps und Hinweise für den Sturmflut- Und Hochwasserfall [Storm surge protection in Hamburg – for Hamburg: Tips and Hints for a storm surge or flood situation]*, 1–15. Hamburg: BIS.
- FHH (Ed.). (2012). *Haushaltsplan 2013/2014 – Einzelplan 6 Behörde für Stadtentwicklung und Umwelt [Budget plan 2013/2014 of the Ministry of Urban Development and Environment]*, Hamburg: BSU. Retrieved from <http://www.hamburg.de/contentblob/3540268/data/einzelplan-6-o.pdf>, accessed on 27 August 2014.
- Folke, C.; Carpenter, S.R.; Walker, B.; Scheffer, M.; Chapin, T.; & Rockström, J., 2010. Resilience Thinking: Integrating Resilience, Adaptability and Transformability. *Ecology and Society*, 15(4): 20.
- Galderisi, A., Ferrara, F.F., & Ceudech, A., 2010. Resilience and/or vulnerability? Relationships and roles in risk mitigation strategies. *Paper presented at the 24th AESOP annual conference*. Helsinki.

Godschalk, D.R., 2003. Urban hazard mitigation: creating resilient cities. *Natural Hazards Review*, 4, 136-143. doi: 10.1061/(ASCE)1527-6988(2003)4:3(136)

Gönnert, G. & Triebner, J., 2004. *Hochwasserschutz in Hamburg* [Coastal Protection in Hamburg]. In: Schernewski G. and Dolch T. (Eds.), *Geographie der Meere und Küsten, Coastline Reports*, 1, 119-126. ISSN 0928-2734.

Green, J.J., Kleiner, A.M., & Montgomery, J.P. (2007). The texture of local disaster response: service provider's views following Hurricane Katrina. *Southern Rural Sociology* 22(2), 28-44.

Gupta, J., Termeer, C., Klostermann, J., Meijerink, S. Brink, M. van den Jong, P., Nooteboom, S. & Bergsma, E., 2010. The Adaptive Capacity Wheel: a method to assess the inherent characteristics of institutions to enable the adaptive capacity of society. *Environmental Science & Policy*, 13(6), pp.459–471. doi: 10.1016/j.envsci.2010.05.006

Healey, P., 1997. Building institutional capacity through collaborative approaches to urban planning. *Environment and Planning A*, 30, 1531-1546.

Healey, P., Khakee, A., Motte, A. & Needham, B., 1999. European Developments in Strategic Spatial Planning, *European Planning Studies*, 7, 339-355.

Heinrichs, H., & Grunenberg, H. (2009). *Klimawandel und Gesellschaft: Perspektive Adaptionskommunikation* [Climate change and society: perspective adaptation communication]. Wiesbaden: VS Verlag für Sozialwissenschaften GmbH.

Helmholtz-Zentrum Potsdam (Ed.), 2009. *RIMAX – Risikomanagement extremer Hochwasserereignisse: Ergebnisse aus der Hochwasserforschung* [RIMAX – Risk management of extreme flood events: Results of the flood research]. Potsdam: Brandenburgische Universitätsdruckerei. Retrieved from [http://www.fona.de/mediathek/pdf/B\\_5\\_1\\_5\\_RIMAX\\_Broschuer\\_e\\_2009.pdf](http://www.fona.de/mediathek/pdf/B_5_1_5_RIMAX_Broschuer_e_2009.pdf), accessed on 27 September 2013.

Holling, C.S., 1973. Resilience and stability of ecological systems. *Annual Review of Ecology and Systematics*, 4, 1-23.

Holling, C.S., 1996. Engineering resilience versus ecological resilience. In: Schulze, P.C. (Ed.), *Engineering within ecological constraints* (pp. 31-43). Washington, D.C.: National Academy Press.

Hooijer, A., Klijn, F., Pedroli, G., Bas, M. & Os, A. G. van, 2004. Towards sustainable flood risk management in the Rhine and Meuse River Basins: Synopsis of the findings of IRMA-SPONGE, *River Research and Applications*, 20, 343-357. doi: 10.1002/rra.781

Hutter, G., 2006. Strategies for flood risk management – a process perspective. In: Schanze, J.; Zeman, E. & Marsalek, J. (Eds.), *Flood risk management: hazards, vulnerability and mitigation measures* (pp. 229 – 246). Dordrecht: Springer.

IBA Hamburg GmbH (Ed.), 2009. *IBA-Labor Klimafolgenmanagement: Herausforderung Wasser*. Documentation of a symposium taking place 19 – 21 February 2009, Hamburg. Retrieved from [http://www.iba-hamburg.de/fileadmin/Mediathek/Buecher/labor\\_KFM.pdf](http://www.iba-hamburg.de/fileadmin/Mediathek/Buecher/labor_KFM.pdf), accessed on 27 September 2013.

IBA Hamburg GmbH (Ed.), 2011. *IBA-Machbarkeitsstudie Deichpark Elbinsel* [IBA feasibility study]. Retrieved from: [http://www.iba-hamburg.de/fileadmin/Slideshows\\_post2013/02\\_Wissen/03\\_Buecher/Machbarkeitsstudie\\_DeichparkElbinsel\\_web\\_1\\_.pdf](http://www.iba-hamburg.de/fileadmin/Slideshows_post2013/02_Wissen/03_Buecher/Machbarkeitsstudie_DeichparkElbinsel_web_1_.pdf), accessed on 27 September 2013.

Jonkman, S.N., Gelder, P.H.A.J. van & Vrijling, J.K., 2003. An overview of quantitative risk measures for loss of life and economic damage. *Journal of Hazardous Materials*, 99(1), 1–30. doi:10.1016/S0304-3894(02)00283-2

- Khakee, A., 2002. Assessing institutional capital building in a local Agenda 21 process in Göteborg, *Planning Theory and Practice*, 3, 53-68. doi: 10.1080/14649350220117807
- Klein, R.J.T., Nicholls, R.J. & Thomalla, F., 2004. *Resilience to natural hazards: how useful is this concept?* EVA working paper no. 9, DINAS-COAST working paper no. 14, Potsdam Institute for Climate Impact Research, Potsdam.
- KlimaCampus, 2010. *Klimabericht für die Metropolregion Hamburg – ein Auszug* [Climate report for the metropolitan region of Hamburg – an excerpt], Hamburg, 62p. Retrieved from [http://www.klimacampus.de/fileadmin/user\\_upload/klimacampus/1\\_Dokumente/6\\_Magazin/klimabericht\\_booklet.pdf](http://www.klimacampus.de/fileadmin/user_upload/klimacampus/1_Dokumente/6_Magazin/klimabericht_booklet.pdf), accessed on 27 September 2013.
- Knieling, J., Schaeffer, M. & Tressl, S., 2009. *Klimawandel und Raumplanung – Flächen- und Risikomanagement überschwemmungsgefährdeter Gebiete am Beispiel der Hamburger Elbinsel* [Climate change and spatial planning – Land use and risk management of flood prone areas exemplified by the Elbe Island Hamburg]. *Coastline Reports*, 14. Retrieved from <http://www.eucc-d.de/coastline-reports-14-2009.html>, accessed on 27 September 2013.
- Kuhlicke, C. & Steinführer, A., 2013. Searching for resilience or building social capacities for flood risk? *Planning Theory and Practice*, 14, 114-118. doi: 10.1080/14649357.2012.761904
- Lange, H. & Garrelts, H., 2008. Integriertes Hochwasserrisikomanagement in einer individualisierten Gesellschaft (INNIG) [Integrated flood risk management in an individualized society], *artec-paper no. 152*, Bremen: artec Forschungszentrum Nachhaltigkeit.
- Menzl, M., 2010. Reurbanisierung? Zuzugsmotive und lokale Bindungen der neuen Innenstadtbewohner – das Beispiel der HafenCity Hamburg [Reurbanisation? Motives for moving and local ties of the new inner city residents - the example of the HafenCity]. In: Dittrich-Wesbuer, A., Knapp, W. u. Osterhage, F. (Eds.): *Post-Suburbanisierung und die Renaissance der Innenstädte – neue Entwicklungen in der Stadtregion*, Dortmund: Rohn.
- Meijerink, S. and Dicke, W., 2008. Shifts in the Public-Private Divide in Flood Management, *International Journal of Water Resources Development*, 24, 499-512. doi: 10.1080/07900620801921363
- Oosterberg, W., Drimmelen, C. van, & Vlist, M. van der, 2005. Strategies to harmonize urbanization and flood risk management in deltas, *European Regional Science Association*, Amsterdam. Retrieved from <http://www.ersa.org>.
- Pahl-Wostl, C., 2007. Transitions towards adaptive management of water facing climate and global change. *Water Resources Management* (21), 49-62. doi: 10.1007/s11269-006-9040-4
- Pasche, E., 2007. Risikomanagement statt Hochwasserschutz von Küstenstädten in Zeiten des Klimawandels [Risk management instead of flood protection in coastal cities in times of climate change]. *Science Allemagne*, 04/2007, 4p.
- Pelling, M., 2007. Learning from others: The scope and challenges for participatory disaster risk assessment. *Disasters*, 31, 373-385. doi: 10.1111/j.1467-7717.2007.01014.x
- Pendall, R., Foster, K.A., & Cowell, M., 2010. Resilience and regions: building understanding of the metaphor. *Cambridge Journal of Regions, Economy and Society*, 3, 71-84. doi: 10.1093/cjres/rsp028
- Scott, M., 2013. Living with flood risk. *Planning Theory and Practice*, 14, 103-106. doi: 10.1080/14649357.2012.761904
- Storch, H. von & Woth, K., 2008. Storm surges: perspectives and options. *Sustainability Science*, 3, 33-43. doi: 10.1007/s11625-008-0044-2

Van Herk, S., Zevenbergen, C., Ashley, R. & Rijke, J., 2011. Learning and Action Alliances for the integration of flood risk management into urban planning: a new framework from empirical evidence from The Netherlands. *Environmental Science & Policy*, 14(5), 543–554. doi: 10.1016/j.envsci.2011.04.006

Vis, M., Klijn, F., Bruijn, K.M. de, & Buuren, M. van, 2003. Resilience strategies for flood risk management in the Netherlands. *International Journal of River Basin Management*, 1, 33-40. doi: 10.1080/15715124.2003.9635190

Walker, B., Holling, C.S., Carpenter, S.R. & Kinzig, A., 2004. Resilience, Adaptability and Transformability in Social-Ecological Systems. *Ecology and Society*, 9(2): 5. Retrieved from <http://www.ecologyandsociety.org/vol9/iss2/art5/>.

White I., 2010. *Water and the city: Risk, resilience and planning for a sustainable future*. The Natural and Built Environment Series, London and New York: Routledge.

Woltjer, J. & Al, N., 2007. Integrating Water Management and Spatial Planning – Strategies based on the Dutch Experience. *Journal of the American Planning Association*, 73, 211-222. doi: 10.1080/01944360708976154

Zevenbergen, C., Veerbeek, W., Gersonius, B. & Herk, S. van, 2008. Challenges in urban flood management: travelling across spatial and temporal scales, *Journal of Flood Risk Management*, 1, 81-88. doi: 10.1111/j.1753-318X.2008.00010.x