
Research Report
KTC-89-10

EARTHQUAKE HAZARD MITIGATION OF
TRANSPORTATION FACILITIES
FOR BALLARD COUNTY

by

L. John Fleckenstein
Engineering Geologist

David L. Allen
Chief Research Engineer

and

Vincent P. Drnevich
Professor of Civil Engineering

Kentucky Transportation Center
College of Engineering
University of Kentucky
Lexington, Kentucky

in cooperation with
Transportation Cabinet
Commonwealth of Kentucky

and

Federal Highway Administration
U.S. Department of Transportation

The contents of this report reflect the views of the authors who are responsible for the facts and accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the University of Kentucky, the Kentucky Transportation Cabinet, nor the Federal Highway Administration. This report does not constitute a standard, specification, or regulation. The inclusion of manufacturer names and tradenames are for identification purposes and are not to be considered as endorsements.

May 1989

Technical Report Documentation Page

1. Report No. KTC-89-10		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Earthquake Hazard Mitigation of Transportation Facilities for Ballard County			5. Report Date May 1989		
			6. Performing Organization Code		
7. Author(s) L. J. Fleckenstein, David L. Allen, Vince P. Drnevich			8. Performing Organization Report No.6 KTC-89-10		
9. Performing Organization Name and Address Kentucky Transportation Center College of Engineering University of Kentucky Lexington, KY 40506-0043			10. Work Unit No. (TRAIS)		
			11. Contract or Grant No. KYHPR-87-116		
12. Sponsoring Agency Name and Address Kentucky Transportation Cabinet State Office Building Frankfort, KY 40622			13. Type of Report and Period Covered		
			14. Sponsoring Agency Code		
15. Supplementary Notes Publication of this report was sponsored by the Kentucky Transportation Cabinet with the U.S. Department of Transportation, Federal Highway Administration					
16. Abstract Concern has grown in recent years over the seismic activity of the New Madrid seismic zone in Western Kentucky. Ballard County, Kentucky is located in this region. To permit emergency medical, supply, and equipment traffic into this area after an earthquake has occurred, the Kentucky Transportation Cabinet is interested in the possibility of keeping selected routes passable. This report lists the routes that have been investigated and recommended as being the routes in Ballard County that should be maintained in a passable condition. The recommended routes, US 60 and KY 121, have been visually surveyed and all seismically significant features cataloged. These features are logged by their location on strip maps contained in Appendix A and a detailed listing of all the potentially critical features is given in Appendix B.					
17. Key Words Earthquake Alluvium Seismic Analyses Modified Mercalli Scale			18. Distribution Statement		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 32	22. Price

INTRODUCTION

An awareness of earthquakes and their possible effects upon the nation's infrastructure is critically important to the public, and in particular, to public officials. The nation's highway system is one of the most important components of the infrastructure. After the occurrence of an earthquake, the highway system is the primary mode of transporting emergency supplies and services into an affected area. Thus, it is important to catalog the important components of the highway system and attempt to anticipate the possible damage to these components from an earthquake.

Western Kentucky in general and Ballard County in particular are in a high risk earthquake zone. In 1811-1812, three of the most severe earthquakes in American history shook the country. The location of these quakes was not on the infamous San Andreas fault nor anywhere along the well-known fault laden Pacific coast but was near a small town on the Mississippi River where the states of Kentucky and Missouri share a border (Figure 1). It is this river town, New Madrid, Missouri, that is the namesake of a region now regarded by seismologists and disaster response planners as the most hazardous earthquake zone east of the Rocky Mountains -- the New Madrid seismic zone.

In addition to these three great earthquakes, there are several other well documented factors demonstrating the susceptibility of the New Madrid region to the recurrence of major earthquakes. Through a decade of extensive research, an ancient crustal rift has

been found to underlie the relatively shallow sediments comprising the region's surface. This type of geologic structure is prone to seismic activity. The New Madrid rift has been identified as being of sufficient size to generate major earthquakes. Further evidence of the area's seismicity is the record of over 2,000 earthquakes detected in the zone since 1974. Though most have been of a magnitude below the threshold of human perception, their existence clearly indicates the high level of seismic activity occurring in the zone.

Seismologists have calculated the probabilities of recurrence of sizeable earthquakes in the New Madrid rift zone. The probability of a magnitude 6.3 earthquake (Richter scale) within 50 years is from 86 to 97 percent. The probability (1) of that same earthquake occurring within the next 15 years is from 40 to 63 percent. For comparison, the 1971 San Fernando earthquake (magnitude 6.6) killed 58 people and caused \$480 million worth of damage. The 1988 Armenian earthquake of similar magnitude killed approximately 25,000 to 30,000 people.

The probability of a magnitude 7.6 earthquake occurring within 50 years is from 19 to 29 percent. The probability for this size earthquake occurring within 15 years drops to a range of 5.4 to 8.7 percent. On February 4, 1975, the Haicheng earthquake in China had a magnitude of 7.3 and destroyed or damaged about 90 percent of the structures in a city of 90,000 people.

When comparing historical earthquakes of similar magnitude, one must take into consideration

that death totals and damage estimates will vary greatly due to the geology, population density, types of building, and quality of construction.

For a given earthquake, effects at a given location are described by the Modified Mercalli Intensity (MMI) scale (2) which ranges from I (no damage and felt only by instruments) to XII (total destruction). Details of the MMI scale are given in Table 1. Values of MMI associated with the 1811-1812 earthquakes are shown in Figure 1. The potential for damage and destruction from earthquakes in the region is significant.

In 1982, the Governor's Task Force on Earthquake Hazards and Safety was created to evaluate Kentucky's earthquake risk and to make recommendations for responding to those risks. This task force recommended increased public awareness and education programs, improved emergency response planning and training, improved building codes and seismic restraint designs, evaluation of other mitigation measures, and participation in national and regional earthquake forums and funding programs.

In 1984, Governor Collins created the Governor's Earthquake Hazards and Safety Technical Advisory Panel (GEHSTAP) to analyze scientific and engineering data regarding seismic risks in Kentucky and to make specific recommendations on mitigation, public awareness, response planning, and policy development for public health and safety. The States are dependent on their highway systems for the movement of goods and services. Due

to the possible adverse effects a major earthquake could have on this system, the Earthquake Stability and Transportation Subcommittee (ESTS) of GEHSTAP was formed.

ESTS has encouraged the Kentucky Transportation Cabinet to secure funding for generating and implementing an earthquake hazard mitigation plan in an attempt to safeguard the highway system against catastrophic earthquake failure. As a result, the Cabinet commissioned the Kentucky Transportation Center at the University of Kentucky to analyze and assess the possible effects of an earthquake on highway facilities. The study area includes the 26 western-most counties in Kentucky that are adjacent to the New Madrid seismic zone (Figure 1). To date, one of the results of that study has been the recommendation that over 1,000 miles of highways in the study area be utilized as emergency or "priority" routes. These would be the primary routes used for transporting emergency supplies and personnel after an earthquake. Also, it is anticipated that these would be the first routes repaired after an earthquake.

The initial task in identifying these priority routes was to decide where they should begin; that is, in the event of a major earthquake, the point at which the transport of goods and services would originate. Ideally, the city chosen should possess the following attributes:

1. Sufficient size to contain all necessary personnel, supplies, and facilities to respond quickly to a major emergency;
2. Proximity to the high hazard

area to speed the relief effort but not so close as to suffer the same high risk potential;

3. Easy access from other major cities in the State; and
4. Sufficient routes to provide relatively direct access to all 26 high-risk counties.

The city best fitting these criteria is Bowling Green. Located at the eastern edge of the earthquake zone in Warren County, Bowling Green meets both the size criterion (population 40,450) and the accessibility criterion (Louisville and Nashville via I 65 and Lexington via the Bluegrass Parkway). Bowling Green provides access to the 26-county area via US 68/KY 80; this road was chosen as the main east-west artery because it crosses Lake Barkley and Kentucky Lake upstream from the dams impounding those bodies of water.

As a first step towards establishing an overall policy for earthquake hazard mitigation in the highway system, these priority routes have been visually surveyed and all natural and man-made features along these routes that are considered seismically significant were cataloged. With this information, a realistic and cost-effective plan for "hardening" these routes against earthquakes can be established. Such efforts are currently under way.

PRIORITY ROUTE IN BALLARD COUNTY

Ballard County is located approximately 31 miles northeast of the center of the New Madrid Seismic Zone. Figure 1 indicates that

Ballard County is located in the X band of the MMI scale. This indicates major damage could occur in Ballard County in the event of a major earthquake.

US 60 and KY 121 have been designated as the priority routes for Ballard County. US 60 starts at the Ballard County-McCracken County line and continues south for 16.86 miles, ending at the junction of US 51, US 62, and US 60 in the City of Wickliffe. KY 121 starts at Ballard County-Carlisle County line and continues north for 8.0 miles, ending at the junction of US 51, US 62, and US 60.

A number of features along the priority routes could potentially hamper rescue and relief efforts. These features included bridges, soil fills, cut slopes, gas pipelines, power lines, geologic faults, large trees, and underground mines. These features are logged by their location on strip maps contained in Appendix A and a detailed listing of all potentially critical features is given in Appendix B.

BRIDGES

Bridges are the most significant and important features on the priority route. With few exceptions, existing highway bridges in the study area have not been designed to resist motions and forces that may be generated by earthquakes. Bridges located within the seismic zone could possibly be damaged, thus reducing their load-carrying ability. In some cases, damage could be sufficiently great to cause complete collapse. Several types of damage could occur:

1. A bridge could fail at the bearing which supports the

main spans, causing the spans to fall from the bearings and possibly from the piers or abutments.

2. Failure could occur in the columns, piers, or footings which would reduce the load-carrying capacity of the bridge, if the bridge was still in place.
3. An abutment could tilt allowing the entire span to fall.
4. Soil movement or slumping could affect the bridge approach fills, damaging the abutments or piers, or making the bridge inaccessible.

There are nine bridges located on US 60, and three bridges located on KY 121 in Ballard County. The bridges are located over:

US 60

1. South Fork of Cane Creek,
2. Big Cane Creek,
3. Buzzards Branch,
4. Little Shawnee Creek,
5. Shawnee Creek,
6. West Fork of Humphrey Creek,
7. Fork of Humphrey Creek,
8. Humphrey Creek,
9. Humphrey Creek.

KY 121

1. Mayfield Creek,

2. Stovall Creek,
3. Shelton Creek.

Research is currently under way studying the effects that an earthquake could have on these bridges and their approach fills.

FILLS

Highway fills are particularly important because of their tendency to fail from seismically induced motions. Fills fail in one of two major modes. The first is a generalized circular or wedge-shaped failure resulting in one or both traffic lanes moving down and out. If both lanes failed, this would certainly render the route impassable and immediate repairs would be necessary. The second mode of failure is a general slumping or settling of the embankment. The roadway would probably remain passable if settlement or slumping were not severe but reduced speed limits would be required for safety.

Large fills on US 60 and KY 121 in Ballard County are located as follows:

US 60

1. Approach fills for the bridge over the South Fork of Cane Creek,
2. Approach fills for the bridge over Big Cane Creek,
3. Approach fills for the bridge over Buzzards Branch,
4. Approach fills for the bridge over Little Shawnee Creek,

5. Approach fills for the bridge over Shawnee Creek,
6. Approach fills for the bridge over the West Fork of Humphrey Creek,
7. Approach fills for the bridge over Fork of Humphrey Creek,
8. Approach fills for the two bridges over Humphrey Creek,
9. 0.75, 0.80, 1.00, 1.15, 1.25, and 1.85 miles north of the junction of US 51, US 62, and US 60,
10. 0.40, and 0.60 mile north of the Big Cane Creek bridge,
11. 0.43, 0.25, 0.13, and 0.08 mile south of the Buzzards Branch bridge,
12. 0.69 mile north of the Humphrey Creek bridge.

KY 121

1. Approach fills for the bridge over Mayfield Creek,
2. Approach fills for the bridge over Stovall Creek,
3. Approach fills for the bridge over Shelton Creek,
4. 1.30, 0.70, and 0.30 miles south of the junction of US 62, US 51, and US 60 in the City of Wickliffe.

CUT SLOPES

Most cut slopes cataloged during surveys of US 60 and KY 121 were in soil and were less than 20 feet in height. Should any of these slopes

fail, both lanes of the roadway probably would not be closed, thus permitting passage around the slide. Cut slopes that have a history of failure and those that have steep slopes should be considered as problem areas.

The most critical cut slope appears to be one located on US 60 0.75 mile north of the junction of US 62, US 51, and US 60 in the City of Wickliffe.

GAS PIPELINES

Several gas pipelines cross under US 60. It is possible that pipelines could fail under or near a priority route causing a temporary closure. If a pipeline failed, an explosion might destroy a section of the priority route. Repair could be delayed by further gas leaks, fire, and/or additional explosions.

It appears that most of the pipelines in Ballard County were constructed with little or no seismic considerations. Gas pipelines cross under US 60 at the following locations:

1. 0.75 and 1.35 mile north of the junction of KY 705 (heading north) and US 60,
2. 0.53 mile south of the bridge over the West Fork of Humphrey Creek,
3. 2.25 miles south of the junction of KY 473 (heading south) and US 60.

POWER LINES

High voltage power lines also were cataloged during the route surveys. The heights of the lines above the

roadway were estimated visually. Power company officials speculated that a number of breaks along each power line would occur during a major earthquake. In most cases, fallen lines would not be transmitting power because power would be automatically cut off within a few seconds in the event of a break.

Additionally, power line support towers could potentially fall across a priority route.

Power lines cross at the following locations on US 60 and KY 121.

US 60

1. 0.80 mile north of the junction of US 51, US 62, and US 60.

KY 121

1. 1.10 and 0.50 miles south of the junction of US 51, US 62, and US 60.

GEOLOGIC FAULTS

There are numerous geologic faults (breaks in the bedrock where movement has occurred in the past) in the study area. The faults are seismically significant since a large earthquake could trigger additional movement along one or more old slip planes. There are no precautionary measures that can be taken to reduce hazards from faults except that construction of bridges and other facilities over or near such faults requires special consideration. The faults are included for informational purposes only. A fault cross under US 60 approximately 0.10 mile north of junction KY 358 (heading east) and US 60.

MINES

There are several open pit sand and gravel quarry's in Ballard County. A major earthquake could collapse portions of the quarry walls and could temporarily block or destroy a section of a priority route. Several of the quarry's were logged from geologic quadrangle maps and are not visible from the priority route. Further inspection should be conducted to determine if there is a possible threat to a priority route. Quarry's were logged at the following locations:

KY 121

1. 0.88 and 0.65 mile south of the Stovall Creek bridge,
2. 1.65 miles north of the Stovall Creek bridge,
3. 1.00 and 0.73 mile north of Shelton Creek bridge.

TREES

The behavior of trees during an earthquake depends upon many factors including their condition, type, height, and size. Local soil conditions, geometry of the ground surface, and characteristics of the earthquake can also be important. Violent ground motions accompanied by surface rupture and perhaps permanent displacement of the soil surface produce sudden surface accelerations of the ground which can snap and uproot large trees (3).

Trees are so numerous that, if many of them fell, US 60 and KY 121 could effectively be blocked for several hours or days before emergency crews could clear the debris. Groups of large trees are

located near the road at the following sites:

US 60

1. 0.10 mile north of junction US 52, US 62, and US 60 in the City of Wickliffe,
2. 0.44 mile south of the bridge over the South Fork of Cane Creek,
3. 0.20 mile south of Big Cane Creek bridge,
4. 0.60 and 0.90 mile north of Big Cane Creek bridge,
5. 0.12 mile north of Buzzards Branch bridge,
6. 0.08 mile north of Little Shawnee Creek,
7. 0.36 mile north of Shawnee Creek in the City of Barlow,
8. 0.75, 2.35, and 2.85 miles north of junction of KY 705 (heading north) and US 60,
9. 0.59 and 1.24 miles north of Humphrey Creek bridge,
10. 1.65 and .50 miles south of junction of KY 473 (heading south) and US 60,
11. 0.60 mile north of junction of KY 473 (heading north) and US 60.

KY 121

1. 0.90 mile from the Ballard County-Carlisle County line,
2. 0.05, 1.35 and 1.45 miles north of the Stovall Creek

3. bridge, 0.45 mile south of the Shelton Creek bridge,
4. 0.0, 0.40, 0.90, 1.10, and 1.30 miles north of the Shelton Creek bridge.

ALLUVIUM

Soil maps for Ballard County indicate that there are large amounts of alluvium present throughout the county. Alluvium is a loose, fine-grain soil which is deposited by flowing water such as creeks and rivers. Due to the nature of the alluvium, ground motions at the surface of the soil can be many times greater than those within the underlying bedrock and temporary liquefaction can occur (Figure 2). An alluvium map for Ballard County is shown in Figure 3.

CONCLUSIONS

In 1984, ESTS developed a fivefold plan of action for formulating and implementing a seismic mitigation policy for the western Kentucky seismic zone. To date, the Kentucky Transportation Center has established priority routes for all 26 counties in the western Kentucky seismic zone and developed seismic risk maps of all natural and man-made features that are susceptible to earthquake damage that could jeopardize the priority routes.

Current work is being conducted to analyze these features and make recommendations for hardening them against earthquake damage.

Future work involves training key personnel in the Transportation Cabinet in hazard mitigation and seismic safety; which includes bridge

inspectors, district engineers, construction inspectors, designers, and maintenance personnel.

Following the education of key personnel, the mitigation plan proposed by the Kentucky Transportation Center will be reviewed by the Kentucky Transportation Cabinet and a program will be established for implementation. The final step involves the use of relevant seismic codes for all new construction, repair, and maintenance.

REFERENCES

1. Johnson, Arch C., "A Brief Overview of the Geology, Seismicity and Seismic Hazard of the Central Mississippi Valley Area," Proceedings, A Regional Seminar on Earthquake Fundamentals for the Mississippi Valley, Earthquake Engineering Research Institute, Memphis, Tennessee, October 29, 1985.
2. Green, N. B., "Earthquake Resistant Building Design and Construction," Third Edition, Elsevier, 1987, Page No. 179-180.
3. Keller, Edward A., "Environmental Geology," Charles E. Merrill Publishing Company, A Bell and Howell Company, 1979, Page No. 157.

Additional Information

The Commonwealth of Kentucky has prepared a State Emergency Operations Procedures (State EOP) manual that is produced by the Division of Disaster and Emergency Services (DES), Department of Military Affairs, Frankfort, 40601. Annexes H. on Transportation and DD on Earthquakes give additional information on disaster preparedness and response.

A copy of the State EOP and information on local hazard mitigation activities and response preparedness are available from the AREA 1 Office of DES which is located in Mayfield. The phone numbers at this office are (502) 564-8601 and (502) 247-9712.

Additional information about the study discussed in this report should be directed to David L. Allen, Project Director, at the Kentucky Transportation Center, (606) 257-4513. Requests to be placed on the mailing list for updated information should be submitted on your company or agency letterhead to the Kentucky Transportation Center at the University of Kentucky, Lexington Kentucky 40506-0043.



MMI SCALE REGIONAL INTENSITY
BOUNDARY ZONES



NEW MADRID SEISMIC
ZONE

10

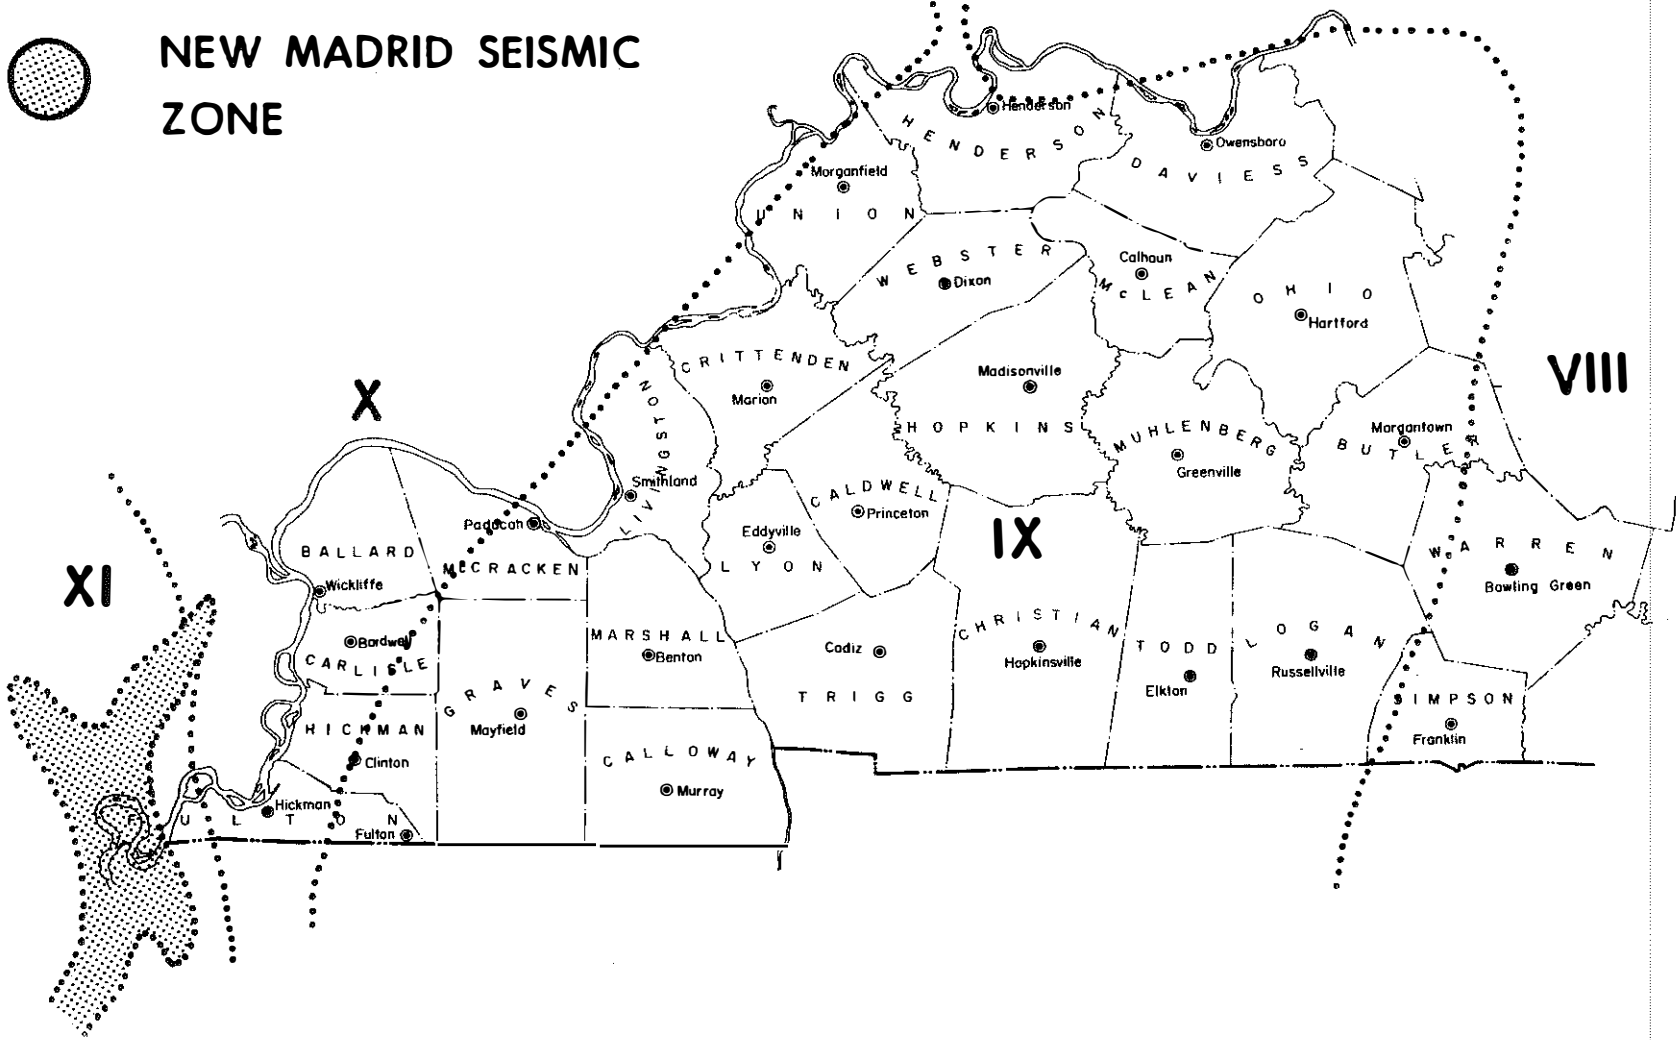


Figure 1: The twenty-six counties included in this study area.

Table 1: MODIFIED MERCALLI INTENSITY SCALE

Modified Mercalli Intensity Scale, 1956 Version

The following comments by Dr. Richter precede the published statement of the intensity scale:

...Each effect is named at the level of intensity at which it first appears frequently and characteristically. Each effect may be found less strongly, or in fewer instances, at the next lower grade of intensity; more strongly or more often at the next higher grade. A few effects are named at two successive levels to indicate a more gradual increase.

Masonry A, B, C, D. To avoid ambiguity of language, the quality of masonry, brick or otherwise, is specified by the following lettering.

Masonry A. Good workmanship, mortar, and design; reinforced, especially laterally, and bound together by using steel, concrete, etc.; designed to resist lateral forces.

Masonry B. Good workmanship and mortar, reinforced by not designed in detail to resist lateral forces.

Masonry C. Ordinary workmanship and mortar; no extreme weakness like failing to tie corners, but neither reinforced nor designed against horizontal forces.

Masonry D. Weak materials, such as adobe; poor mortar; low standards of workmanship; weak horizontally.

The following list represents the twelve grades of the scale.

- I. Not felt. Marginal and long-period effects of large earthquakes.
- II. Felt by persons at rest, on upper floors, or favorable placed.
- III. Felt indoors, Hanging objects swing. Vibration like passing of light trucks. Duration estimated. May not be recognized as an earthquake.
- IV. Hanging objects swing. Vibration like passing of heavy trucks; or sensation of a jolt like a heavy ball striking the walls. Standing motor cars rock. Windows, dishes, doors rattle. Glasses clink. Crockery clashes. In the upper range of IV wooden walls and frame creak.
- V. Felt outdoors; direction estimated. Sleepers awakened. Liquids disturbed, some spilled. Small unstable objects displaced or upset. Doors swing, close, open. Shutters, pictures move. Pendulum clocks stop, start, change rate.
- VI. Felt by all. Many frightened and run outdoors. Persons walk unsteadily. Windows, dishes, glassware broken, Knickknacks, books, etc., off shelves. Pictures off walls. Furniture moved or overturned. Weak plaster and masonry D cracked. Small bells ring (church, school). Trees, bushes shaken.
- VII. Difficult to stand. Noticed by drivers of motor cars. Hanging objects quiver. Furniture broken. Damage to masonry D, including cracks. Weak chimneys broken at roof line. Fall of plaster, loose bricks, stones, tiles, cornices. Same cracks in masonry C. Waves on ponds; water turbid with mud. Small slides and caving in along sand or gravel banks. Large bells ring. Concrete irrigation ditches damaged.
- VIII. Steering of motor cars affected. Damage to masonry C; partial collapse. Some damage to masonry B; none to masonry A. Fall of stucco and some masonry walls. Twisting, fall of chimneys, factory stacks, monuments, towers, elevated tanks. Frame houses moved on foundation if not bolted down; loose panel walls thrown out. Decayed piling broken off. Branches broken from trees. Changes in flow or temperature of springs and wells. Cracks in wet ground and on steep slopes.
- IX. General panic. Masonry D destroyed; masonry C heavily damaged, sometimes with complete collapse; masonry B seriously damaged. Frame structures, if not bolted, shifted off foundations. Frames cracked. Serious damage to reservoirs. Underground pipes broken. Conspicuous cracks in ground. In alluviated areas sand and mud ejected, earthquake fountains, sand crater.
- X. Most masonry and frame structures destroyed with their foundations. Some well-built wooden structures and bridges destroyed. Serious damage to dams, dikes, embankments. Large land slides. Water thrown on banks of canals, river, lakes, etc. Sand and mud shifted horizontally on beaches and flat lands. Rails bent slightly.
- XI. Rails bent greatly. Underground pipelines completely out of service.
- XII. Damage nearly total. Large rock masses displaced. Lines of sight and level distorted. Objects thrown in the air.

AMPLIFICATION OF SHAKING AND DAMAGE DUE TO SHAKING

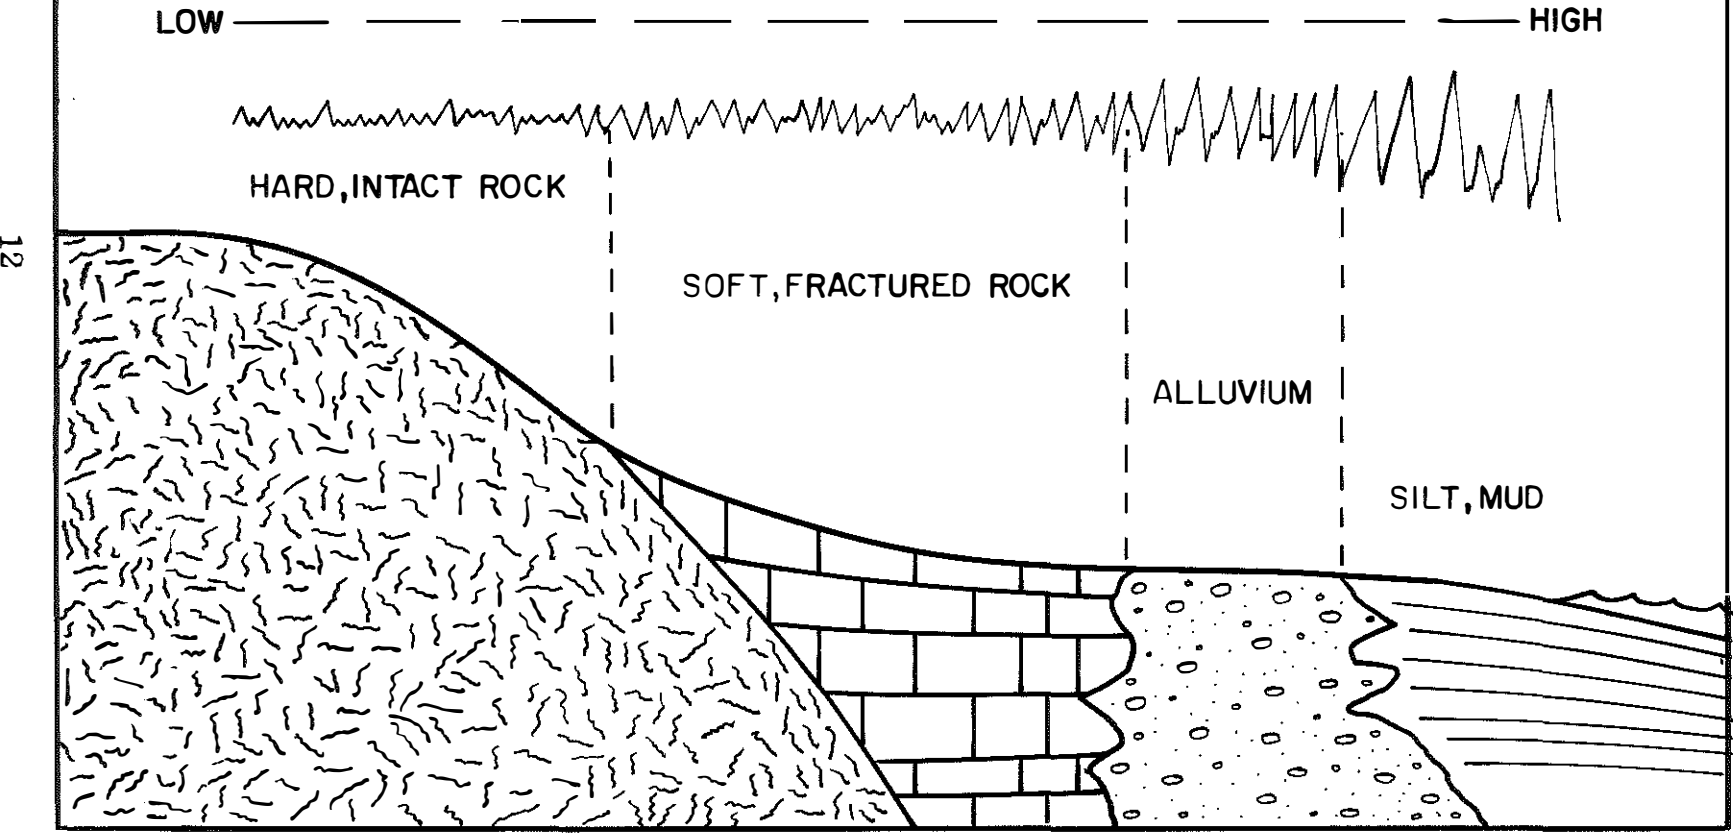
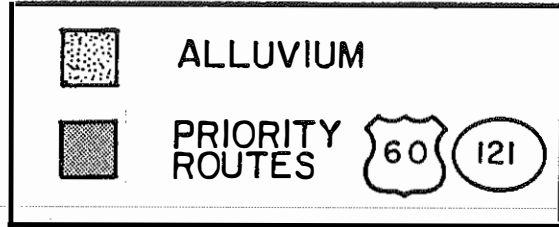




Figure 2 : Amplification of shaking in softer rock & soil during an earthquake.


 ALLUVIUM
 PRIORITY ROUTES  

GENERAL HIGHWAY MAP BALLARD COUNTY KENTUCKY

PREPARED BY THE
 KENTUCKY TRANSPORTATION CABINET
 DEPARTMENT OF HIGHWAYS
 DIVISION OF PLANNING
 IN COOPERATION WITH THE
 U.S. DEPARTMENT OF TRANSPORTATION
 FEDERAL HIGHWAY ADMINISTRATION

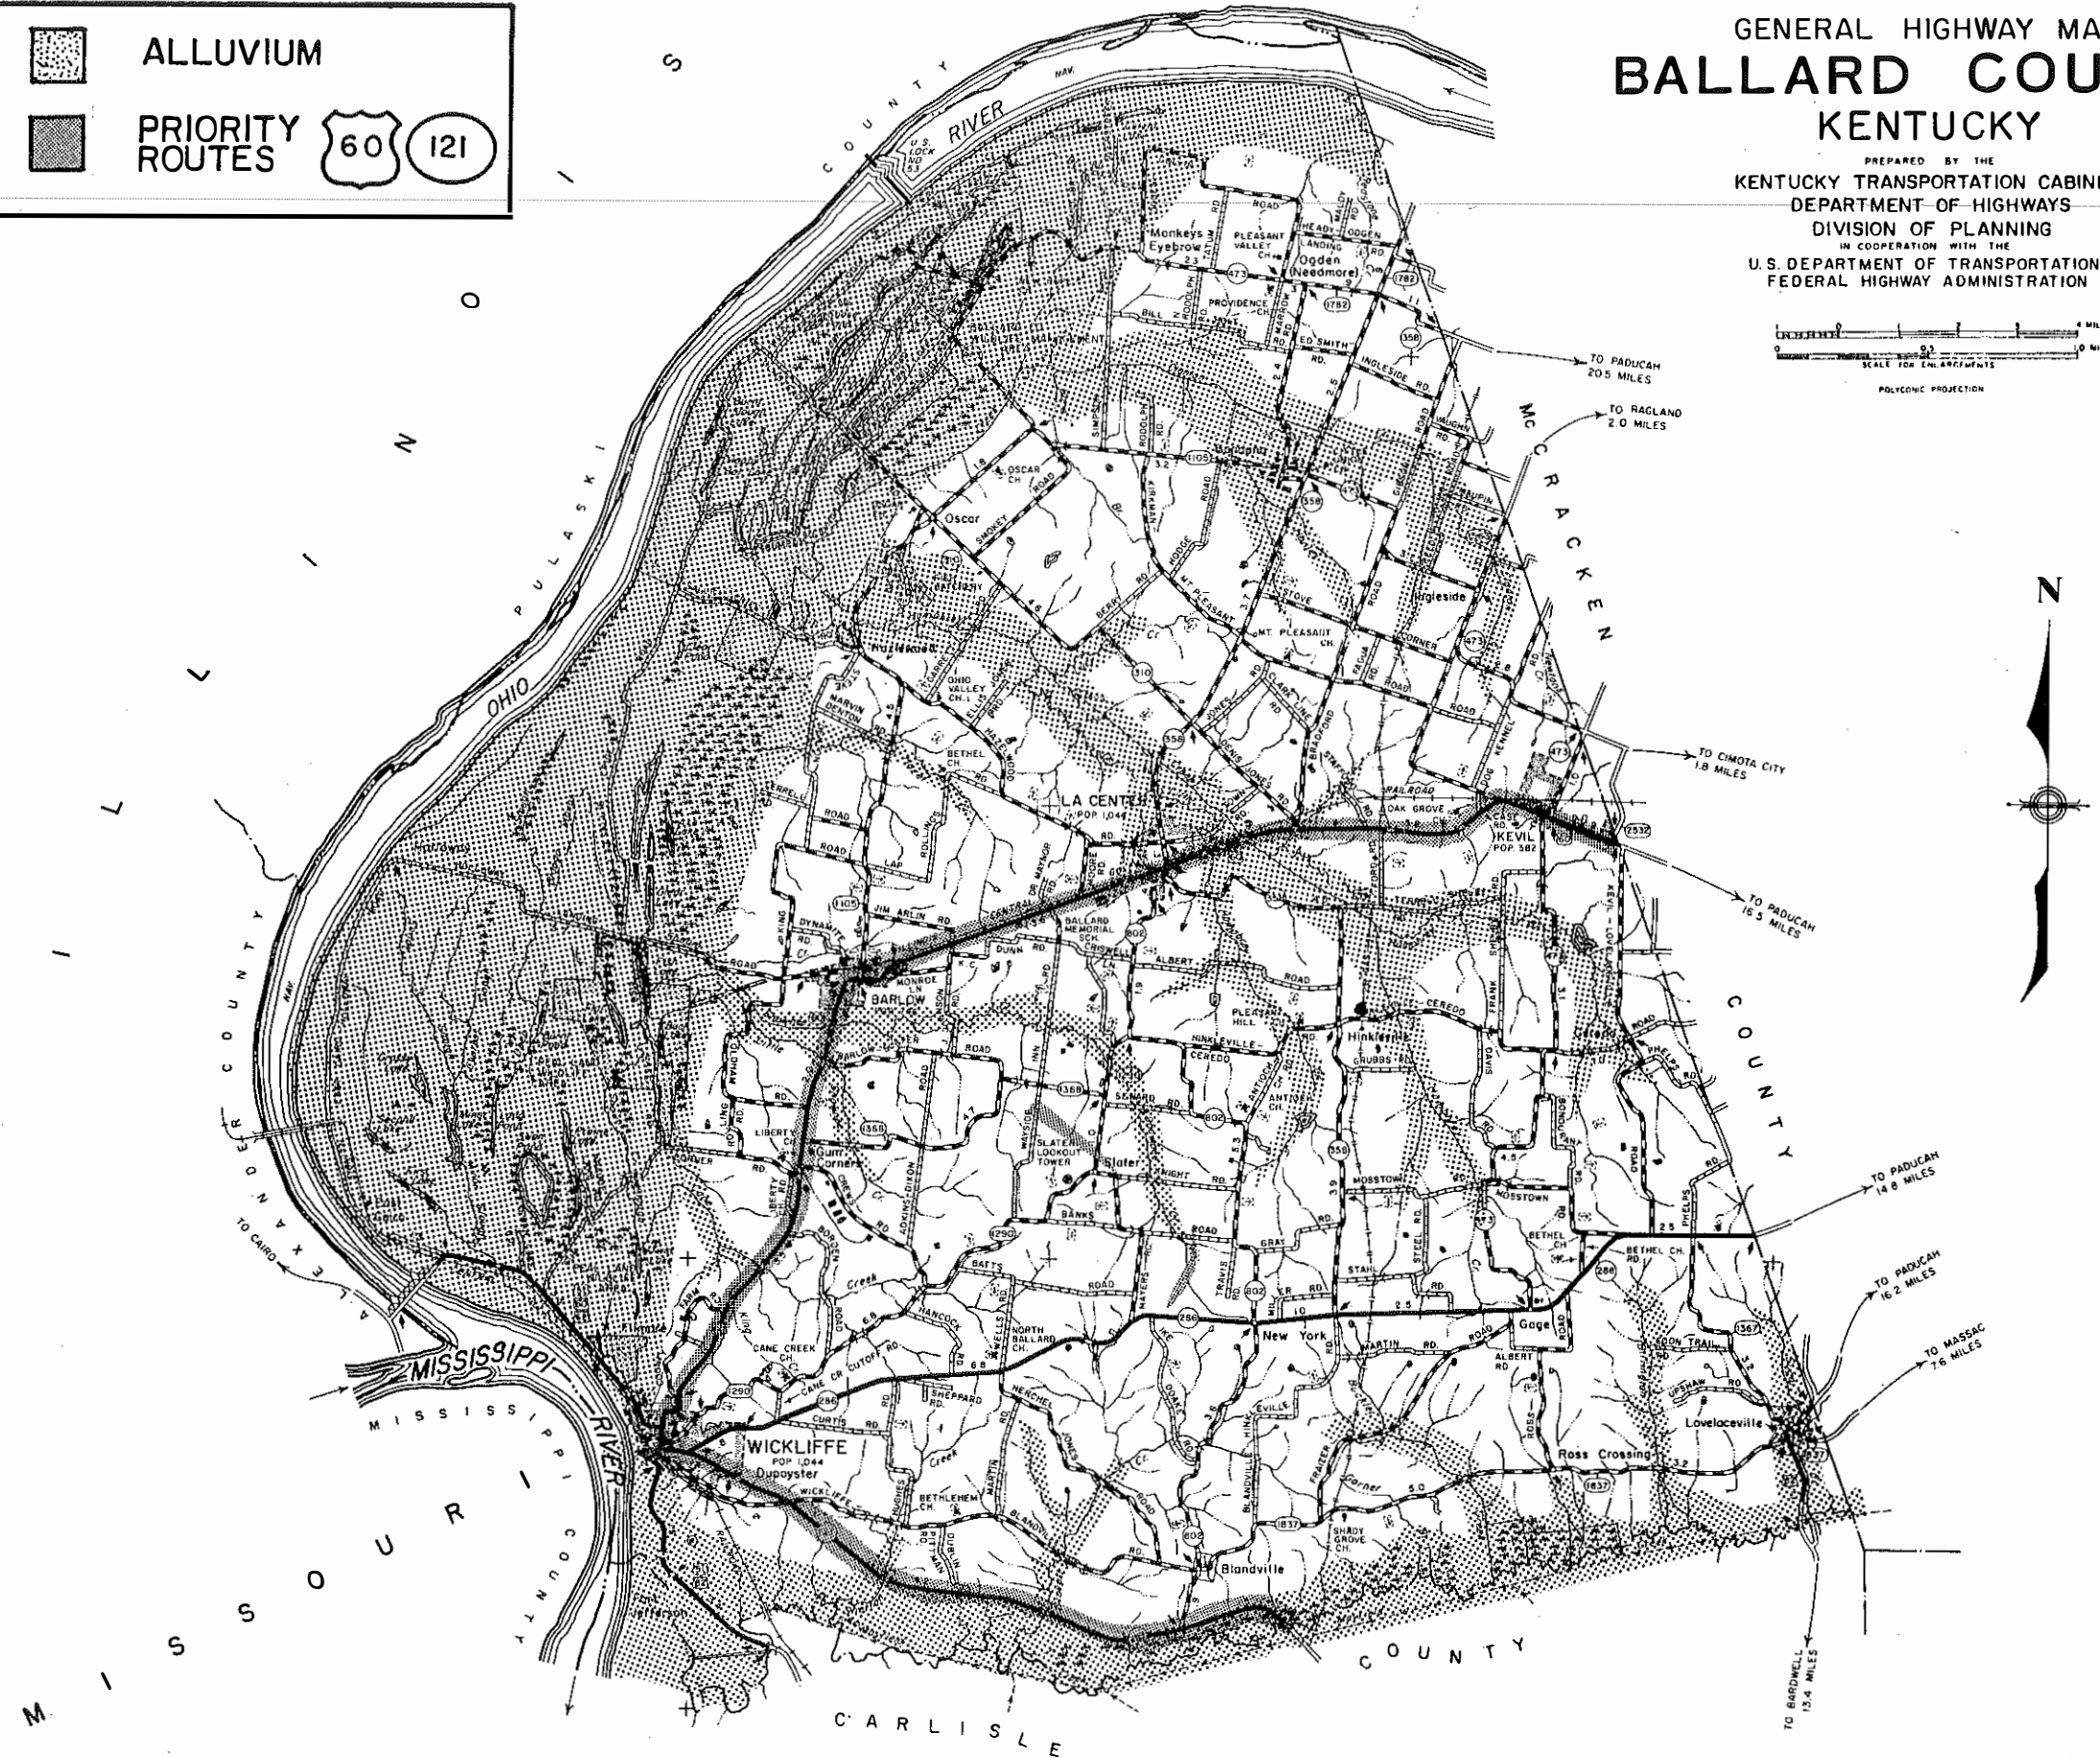



Figure 3. Alluvium map for Ballard County.

APPENDIX A
STRIP MAP FOR BALLARD COUNTY
US 60 and KY 121

US60

BALLARD

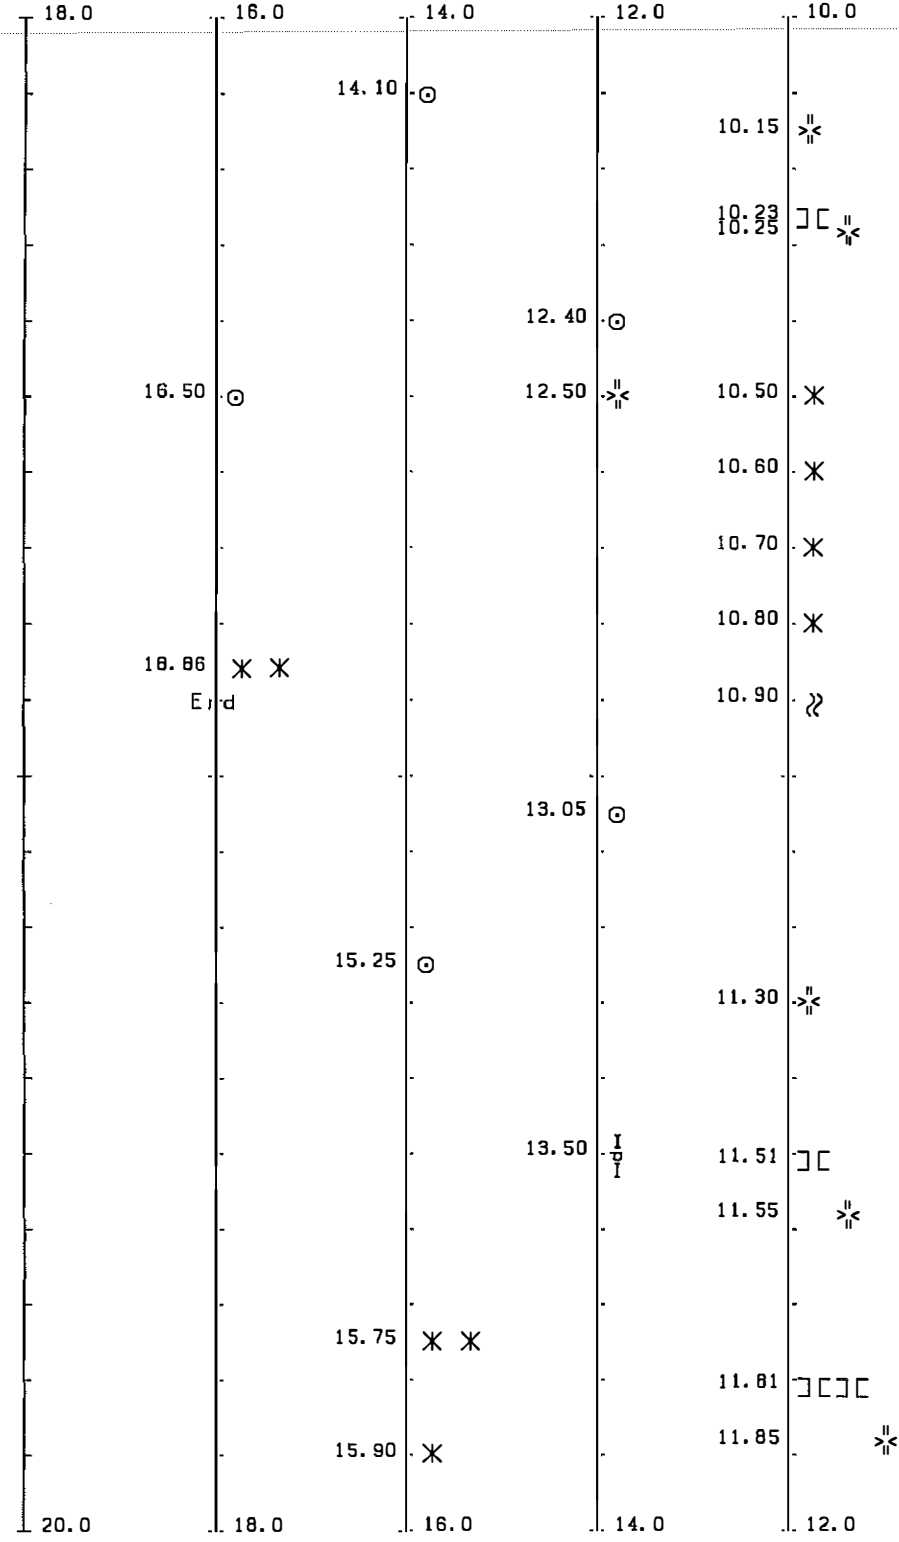Continued




LEGEND OF FEATURES

⌋	BRIDGE	△	BUILDING	≠	FILL	✖	OTHER
⊙	TREE	⊠	SIGN	≈	FAULT		
— —	PIPELINE	⊕	TANK	≡	DRM		
√	CUT SLOPE						
⌌	POWER LINE						
□	MINE						

SEE REPORT FOR DESCRIPTIONS OF OTHER


US60

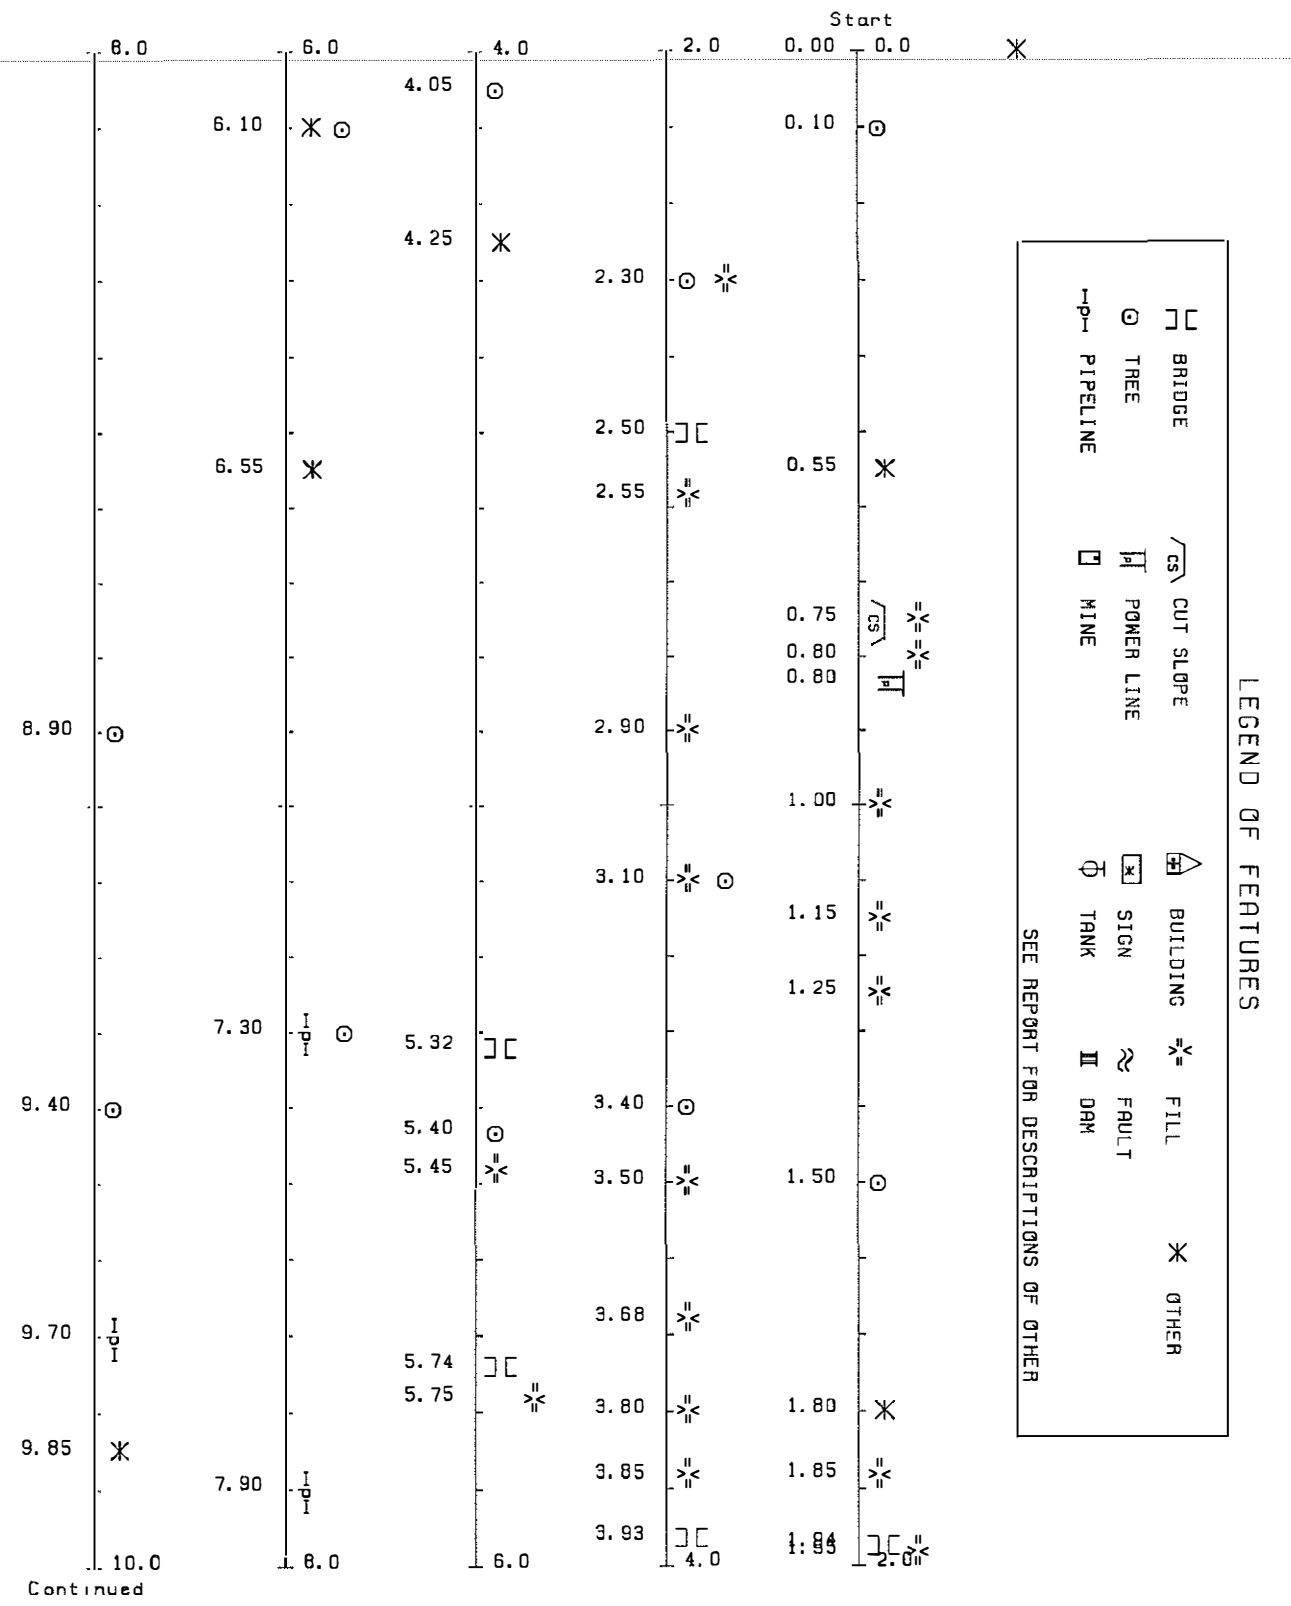BALLARD



KY121

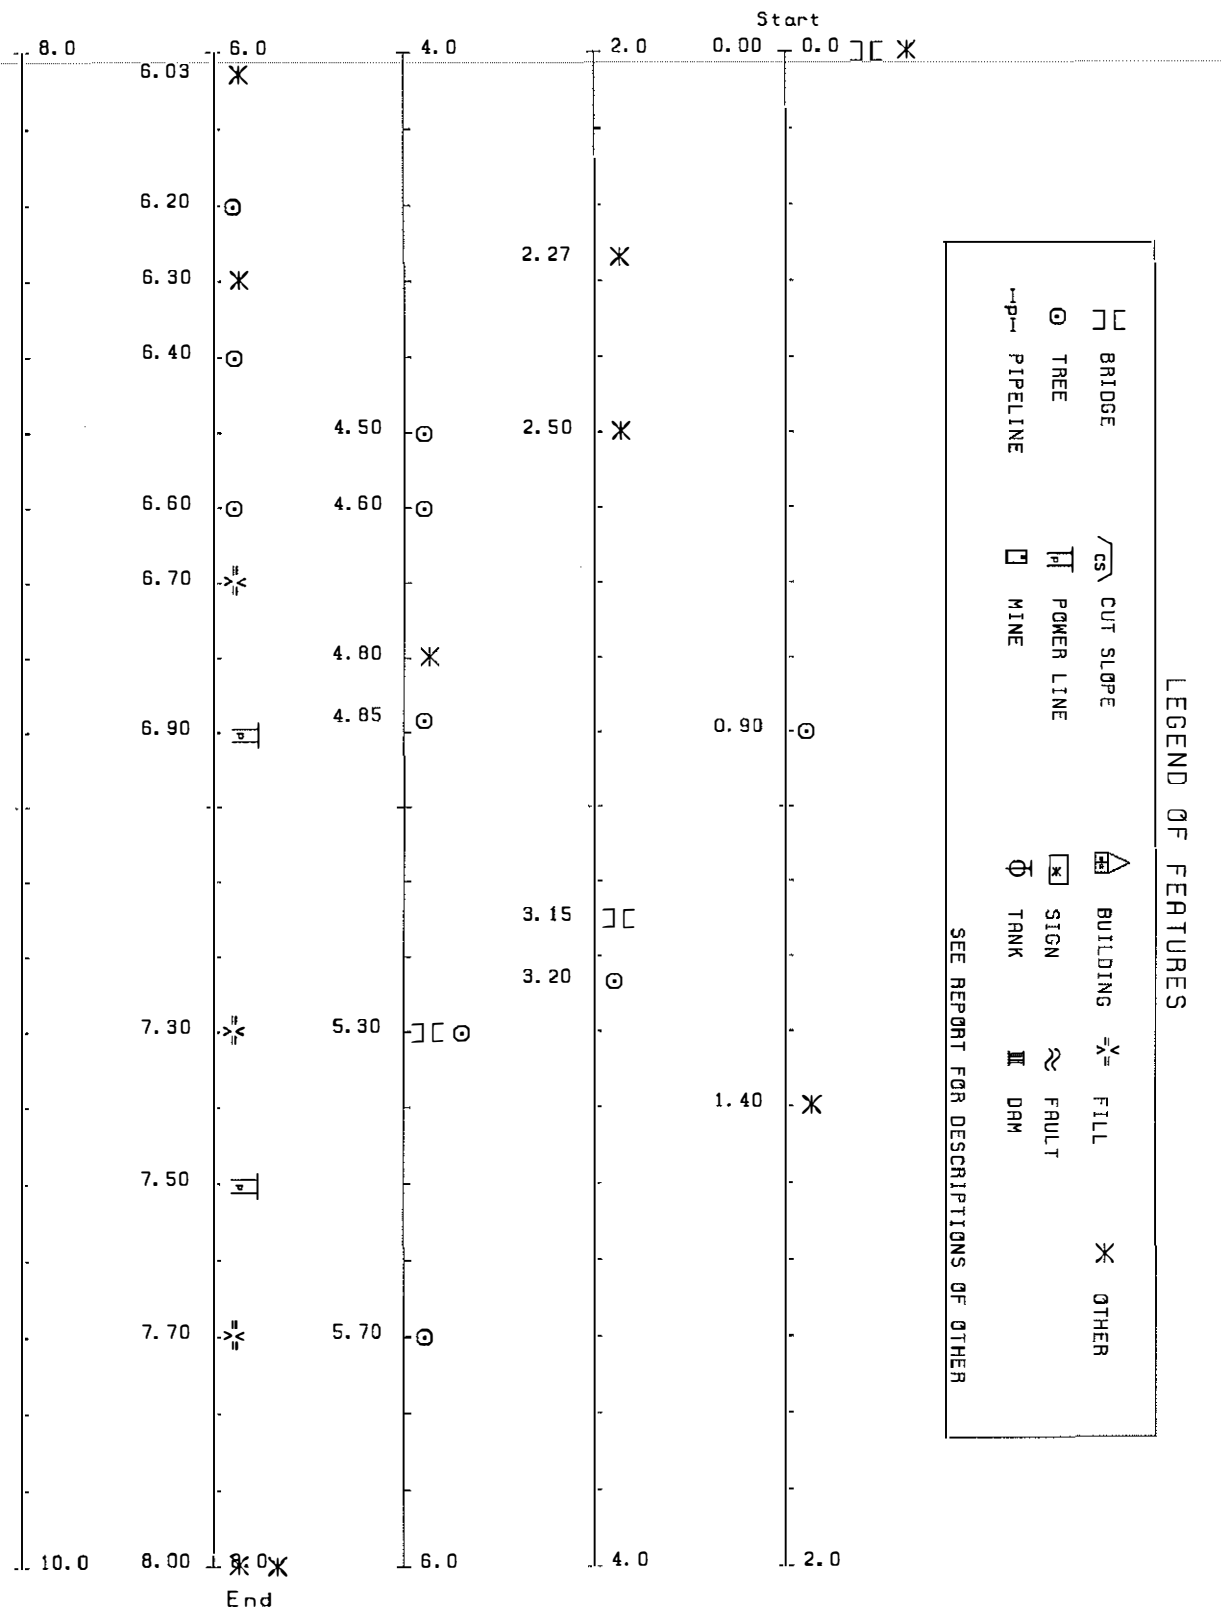BALLARD



APPENDIX B
SEISMICALLY SIGNIFICANT FEATURES

Report by Road and Milepoint
for Ballard County - Kentucky
KY 121

Milepoint	Feature	Data
0.00	Bridge	Number of Spans 21 Over Stream Concrete T-Beam Bridge Bearing Type Unknown Deck Type - Concrete Length 693 feet Width 28 feet Pier Type - Open SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Full End 2 Substructure - Full Foundation Type - Unknown
0.00	Other	Ballard Co - Carlisle Co Boundary Road Surface Type - Flexible
0.90	Trees	Number of Trees 200 Height 35 feet Diameter 16 in. Ending Milepoint 1.90 Distance From Road 18 feet Road Surface Type - Flexible
1.40	Other	Junction KY 802 Heading North Road Surface Type - Flexible
2.27	Other	Gravel Pit Road Surface Type - Flexible
2.50	Other	Gravel Pit Road Surface Type - Flexible
3.15	Bridge	Number of Spans 9 Over Stream Concrete T-Beam Bridge Bearing Type Unknown Deck Type - Concrete Length 293 feet Width 25 feet Pier Type - Solid SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Full End 2 Substructure - Full Foundation Type - Unknown

Report by County and Milepoint
for Ballard County - Kentucky

KY 121

Milepoint	Feature	Data
3.20	Trees	Number of Trees 20 Height 65 feet Diameter 13 in. Ending Milepoint 3.21 Distance From Road 20 feet Road Surface Type - Flexible
4.50	Trees	Number of Trees 5 Height 45 feet Diameter 15 in. Ending Milepoint 4.51 Distance From Road 15 feet Road Surface Type - Flexible
4.60	Trees	Number of Trees 5 Height 45 feet Diameter 15 in. Ending Milepoint 4.61 Distance From Road 15 feet Road Surface Type - Flexible
4.80	Other	Open Pit Sand Quarry Road Surface Type - Flexible
4.85	Trees	Number of Trees 50 Height 45 feet Diameter 15 in. Ending Milepoint 5.00 Distance From Road 15 feet Road Surface Type - Flexible
5.30	Bridge	Number of Spans 3 Over Stream Concrete T-Beam End 1 Fixed Pier 1 Fixed Pier 2 Fixed End 2 Fixed Deck Type - Concrete Length 99 feet Width 25 feet Pier Type - Open SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Full End 2 Substructure - Full Foundation Type - Unknown
5.30	Trees	Number of Trees 70 Height 45 feet Diameter 15 in. Ending Milepoint 5.60 Distance From Road 15 feet Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky
KY 121

Milepoint	Feature	Data
5.70	Trees	Number of Trees 50 Height 35 feet Diameter 18 in. Ending Milepoint 5.90 Distance From Road 15 feet Road Surface Type - Flexible
6.03	Other	Gravel Pit Road Surface Type - Flexible
6.20	Trees	Number of Trees 10 Height 45 feet Diameter 15 in. Ending Milepoint 6.21 Distance From Road 15 feet Road Surface Type - Flexible
6.30	Other	Gravel Pit Road Surface Type - Flexible
6.40	Trees	Number of Trees 1 Height 45 feet Diameter 15 in. Ending Milepoint 6.41 Distance From Road 15 feet Road Surface Type - Flexible
6.60	Trees	Number of Trees 200 Height 45 feet Diameter 18 in. Ending Milepoint 7.90 Distance From Road 20 feet Road Surface Type - Flexible
6.70	Fill	Material Type - Soil Height 25 feet Side slope 2:1 Length 25 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
6.90	Power Line	Electrical Power Line 3 Lines Height 30 feet Wood Support Structure Unknown Volts Road Surface Type - Flexible
7.30	Fill	Material Type - Soil Height 40 feet Side slope 2:1 Length 500 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky

KY 121

Milepoint	Feature	Data
7.50	Power Line	Electrical Power Line 6 Lines Height 30 feet Wood Support Structure Unknown Volts Road Surface Type - Flexible
7.70	Fill	Material Type - Soil Height 20 feet Side slope 2:1 Length 500 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
8.00	Other	City of Wickliffe Road Surface Type - Flexible
8.00	Other	Junction US 60, 62, & 51

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
0.00	Other	Junction US 51/62 & Wickliffe City Limits Road Surface Type - Flexible
0.10	Trees	Number of Trees 100 Height 35 feet Diameter 12 in. Ending Milepoint 1.00 Distance From Road 10 feet Road Surface Type - Flexible
0.55	Other	Junction KY 1186 Road Surface Type - Flexible
0.75	Cut Slope	Cut Slope Type - Soil Height 20 feet Length 75 feet Backslope 2:1 Road Surface Type - Flexible
0.75	Fill	Material Type - Soil Height 20 feet Side slope 3:1 Length 300 feet Crest 35 feet Type Fill - Side Hill Road Surface Type - Flexible
0.80	Power Line	Electrical Power Line 3 Lines Height 40 feet Wood Support Structure Unknown Volts Road Surface Type - Flexible
0.80	Fill	Material Type - Soil Height 40 feet Side slope 3:2 Length 100 feet Crest 30 feet Type Fill - Other Road Surface Type - Flexible
1.00	Fill	Material Type - Soil Height 20 feet Side slope 1:1 Length 60 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
1.15	Fill	Material Type - Soil Height 15 feet Side slope 1:1 Length 75 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
1.25	Fill	Material Type - Soil Height 20 feet Side slope 1:1 Length 75 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
1.50	Trees	Number of Trees 100 Height 40 feet Diameter 15 in. Ending Milepoint 1.70 Distance From Road 18 feet Road Surface Type - Flexible
1.80	Other	Junction KY 1186 Road Surface Type - Flexible
1.85	Fill	Material Type - Soil Height 10 feet Side slope 2:1 Length 100 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
1.94	Bridge	Number of Spans 2 Over Stream Concrete I-Beam End 1 Neoprene Pier 1 Neoprene End 2 Neoprene Deck Type - Concrete Length 118 feet Width 40 feet Pier Type - Unknown SPC Rating - D Surface Type - Flexible Expansion Type - Poured Compression End 1 Substructure - Unknown End 2 Substructure - Unknown Foundation Type - Unknown
1.95	Fill	Material Type - Soil Height 10 feet Side slope 2:1 Length 1,000 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
2.30	Trees	Number of Trees 30 Height 70 feet Diameter 18 in. Ending Milepoint 2.50 Distance From Road 25 feet Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
2.30	Fill	Material Type - Soil Height 10 feet Side slope 3:2 Length 1,000 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
2.50	Bridge	Number of Spans 2 Over Stream Concrete Box Beam End 1 Fixed Pier 1 Fixed End 2 Fixed Deck Type - Concrete Length 85 feet Width 25 feet Pier Type - Unknown SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Stub End 2 Substructure - Stub Foundation Type - Unknown
2.55	Fill	Material Type - Soil Height 10 feet Side slope 2:1 Length 100 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
2.90	Fill	Material Type - Soil Height 10 feet Side slope 2:1 Length 75 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
3.10	Fill	Material Type - Soil Height 20 feet Side slope 1:1 Length 100 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
3.10	Trees	Number of Trees 50 Height 60 feet Diameter 16 in. Ending Milepoint 3.20 Distance From Road 15 feet Road Surface Type - Flexible
3.40	Trees	Number of Trees 4 Height 65 feet Diameter 36 in. Ending Milepoint 3.42 Distance From Road 25 feet Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
3.50	Fill	Material Type - Soil Height 20 feet Side slope 2:1 Length 75 feet Crest 24 feet Type Fill - Other Road Surface Type - Flexible
3.68	Fill	Material Type - Soil Height 20 feet Side slope 1:1 Length 75 feet Crest 24 feet Type Fill - Other Road Surface Type - Flexible
3.80	Fill	Material Type - Soil Height 20 feet Side slope 2:1 Length 75 feet Crest 24 feet Type Fill - Other Road Surface Type - Flexible
3.85	Fill	Material Type - Soil Height 15 feet Side slope 2:1 Length 75 feet Crest 24 feet Type Fill - Other Road Surface Type - Flexible
3.93	Bridge	Number of Spans 1 Type Unknown Concrete T-Beam End 1 Fixed End 2 Fixed Deck Type - Concrete Length 29 feet Width 23 feet Pier Type - Solid SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Full End 2 Substructure - Full Foundation Type - Unknown
4.05	Trees	Number of Trees 50 Height 65 feet Diameter 18 in. Ending Milepoint 4.15 Distance From Road 15 feet Road Surface Type - Flexible
4.25	Other	Junction KY 1368 Heading East Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
5.32	Bridge	Number of Spans 1 Over Stream Concrete Box Beam End 1 Fixed End 2 Fixed Deck Type - Concrete Length 39 feet Width 25 feet Pier Type - Unknown SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Full End 2 Substructure - Full Foundation Type - Unknown
5.40	Trees	Number of Trees 20 Height 40 feet Diameter 12 in. Ending Milepoint 5.50 Distance From Road 20 feet Road Surface Type - Flexible
5.45	Fill	Material Type - Soil Height 8 feet Side slope 2:1 Length 1,500 feet Crest 24 feet Type Fill - Other Road Surface Type - Flexible
5.74	Bridge	Number of Spans 3 Over Stream Concrete Box Beam End 1 Fixed Pier 1 Fixed Pier 2 Fixed End 2 Fixed Deck Type - Concrete Length 104 feet Width 19 feet Pier Type - Solid SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Stub End 2 Substructure - Stub Foundation Type - Unknown
5.75	Fill	Material Type - Soil Height 8 feet Side slope 2:1 Length 150 feet Crest 24 feet Type Fill - Other Road Surface Type - Flexible
6.10	Other	City of Barlow Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
6.10	Trees	Number of Trees 20 Height 50 feet Diameter 36 in. Ending Milepoint 7.10 Distance From Road 15 feet Road Surface Type - Flexible
6.55	Other	Junction KY 705 Heading North Road Surface Type - Flexible
7.30	Other	Gas Pipeline Road Surface Type - Flexible
7.30	Trees	Number of Trees 50 Height 60 feet Diameter 16 in. Ending Milepoint 7.50 Distance From Road 20 feet Road Surface Type - Flexible
7.90	Other	Gas Pipeline Road Surface Type - Flexible
8.90	Trees	Number of Trees 10 Height 55 feet Diameter 16 in. Ending Milepoint 8.92 Distance From Road 15 feet Road Surface Type - Flexible
9.40	Trees	Number of Trees 10 Height 55 feet Diameter 16 in. Ending Milepoint 9.42 Distance From Road 15 feet Road Surface Type - Flexible
9.70	Other	Gas Pipeline Road Surface Type - Flexible
9.85	Other	La Center City Limits Road Surface Type - Flexible
10.15	Fill	Material Type - Soil Height 15 feet Side slope 1:1 Length 60 feet Crest 24 feet Type Fill - Other Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky
US 60

Milepoint	Feature	Data
10.23	Bridge	Number of Spans 1 Over Stream Concrete Box Beam End 1 Fixed End 2 Fixed Deck Type - Concrete Length 43 feet Width 27 feet Pier Type - Unknown SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Full End 2 Substructure - Full Foundation Type - Unknown
10.25	Fill	Material Type - Soil Height 15 feet Side slope 1:1 Length 60 feet Crest 24 feet Type Fill - Other Road Surface Type - Flexible
10.50	Other	Ferrel Gas Company (Natural Gas or Oil) Road Surface Type - Flexible
10.60	Other	Junction KY 802 Heading South Road Surface Type - Flexible
10.70	Other	Junction KY 358 Heading North Road Surface Type - Flexible
10.80	Other	Junction KY 358 Heading East Road Surface Type - Flexible
10.90	Fault	Fault Road Surface Type - Flexible
11.30	Fill	Material Type - Soil Height 10 feet Side slope 2:1 Length 1,000 feet Crest 35 feet Type Fill - Other Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
11.51	Bridge	Number of Spans 3 Over Stream Concrete Box Beam End 1 Fixed Pier 1 Fixed Pier 2 Fixed End 2 Fixed Deck Type - Concrete Length 90 feet Width 40 feet Pier Type - Solid SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Stub End 2 Substructure - Stub Foundation Type - Unknown
11.55	Fill	Material Type - Soil Height 10 feet Side slope 2:1 Length 1,500 feet Crest 35 feet Type Fill - Other Road Surface Type - Flexible
11.81	Bridge	Number of Spans 3 Over Stream Concrete I-Beam End 1 Fixed Pier 1 Fixed Pier 2 Fixed End 2 Fixed Deck Type - Concrete Length 128 feet Width 19 feet Pier Type - Solid SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Stub End 2 Substructure - Stub Foundation Type - Unknown
11.81	Bridge	Number of Spans 4 Type Unknown Concrete Box Beam End 1 Fixed Pier 1 Fixed Pier 2 Fixed Pier 3 Fixed End 2 Fixed Deck Type - Concrete Length 152 feet Width 40 feet Pier Type - Solid SPC Rating - D Surface Type - Flexible Expansion Type - Other End 1 Substructure - Full End 2 Substructure - Full Foundation Type - Unknown

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
11.85	Fill	Material Type - Soil Height 10 feet Side slope 2:1 Length 750 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
12.40	Trees	Number of Trees 30 Height 40 feet Diameter 12 in. Ending Milepoint 12.50 Distance From Road 15 feet Road Surface Type - Flexible
12.50	Fill	Material Type - Soil Height 10 feet Side slope 2:1 Length 75 feet Crest 25 feet Type Fill - Other Road Surface Type - Flexible
13.05	Trees	Number of Trees 1 Height 80 feet Diameter 40 in. Ending Milepoint 13.05 Distance From Road 20 feet Road Surface Type - Flexible
13.50	Other	3 Gas Lines - Junction Station Road Surface Type - Flexible
14.10	Trees	Number of Trees 20 Height 70 feet Diameter 20 in. Ending Milepoint 14.45 Distance From Road 20 feet Road Surface Type - Flexible
15.25	Trees	Number of Trees 20 Height 60 feet Diameter 16 in. Ending Milepoint 15.60 Distance From Road 20 feet Road Surface Type - Flexible
15.75	Other	City of Kevil Road Surface Type - Flexible
15.75	Other	Junction KY 473 Heading South Road Surface Type - Flexible

Report by County and Milepoint
for Ballard County - Kentucky

US 60

Milepoint	Feature	Data
15.90	Other	Junction KY 473 Heading North Road Surface Type - Flexible
16.50	Trees	Number of Trees 20 Height 45 feet Diameter 16 in. Ending Milepoint 16.54 Distance From Road 20 feet Road Surface Type - Flexible
16.86	Other	Junction KY 2532 Headed North Road Surface Type - Flexible
16.86	Other	Ballard Co - McCracken Co Boundary Road Surface Type - Flexible