



University of Kentucky
UKnowledge

Agricultural Engineering Energy Series

Biosystems and Agricultural Engineering

10-1978

Energy in the Home: Grain Drying Performance Evaluation

Otto J. Loewer
University of Kentucky

Thomas C. Bridges
University of Kentucky, tom.bridges2@uky.edu

G. M. White
University of Kentucky

Robert L. Fehr
University of Kentucky, robert.fehr@uky.edu

Right click to open a feedback form in a new tab to let us know how this document benefits you.

Follow this and additional works at: https://uknowledge.uky.edu/aees_reports

 Part of the [Bioresource and Agricultural Engineering Commons](#)

Repository Citation


Loewer, Otto J.; Bridges, Thomas C.; White, G. M.; and Fehr, Robert L., "Energy in the Home: Grain Drying Performance Evaluation" (1978). *Agricultural Engineering Energy Series*. 33.
https://uknowledge.uky.edu/aees_reports/33

This Report is brought to you for free and open access by the Biosystems and Agricultural Engineering at UKnowledge. It has been accepted for inclusion in Agricultural Engineering Energy Series by an authorized administrator of UKnowledge. For more information, please contact UKnowledge@lsv.uky.edu.

ENERGY IN THE HOME

GRAIN DRYING PERFORMANCE EVALUATION

Otto J. Loewer, T. C. Bridges, G. M. White,
and Robert L. Fehr

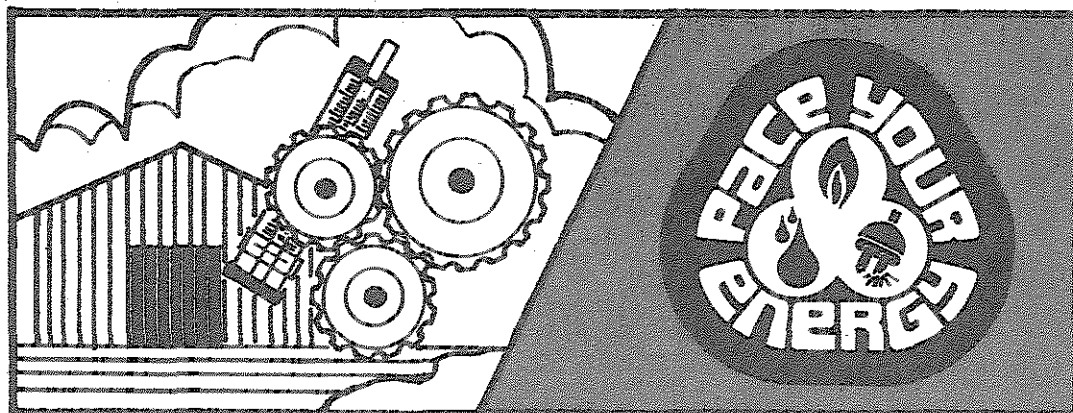

UNIVERSITY of KENTUCKY
COLLEGE of AGRICULTURE
DEPT. of AGRIC. ENGINEERING
COOPERATIVE EXTENSION SERVICE

in
cooperation
with

KENTUCKY
DEPARTMENT
of
ENERGY

7.

--	--	--	--	--	--	--

PERCENT MOISTURE CONTENT OF GRAIN AT HARVEST OR BEFORE DRYING BEGINS.

8.


--	--	--	--	--	--	--

DESIRED FINAL PERCENTAGE MOISTURE CONTENT OF GRAIN AFTER DRYING.

A sample computer analysis is shown below followed by a listing of terms.

CORN, MILO, OR STOP

(?CORN)-1



DRYING AIR		CROSS FLOW		TEMPERATURE		MOISTURE	
1-CORN	2-TEMP	3-CFM/BU	4-WBO	5-WBF	6-HO	7-HMAX	8-50°F
9-TIME	10-MIN	11-AVE	12-MAX	13-MAX	14-AVE	15-MIN	16-EFF
2.320	17.27	23.87	25.45	108.0	75.5	66.8	63.32
4.640	13.78	22.26	25.62	128.0	87.0	72.8	75.14
6.960	11.53	20.47	25.66	133.3	94.8	74.1	80.92
9.280	9.95	18.58	25.66	135.3	101.6	74.3	84.08
11.600	8.77	16.59	24.40	136.4	107.9	74.5	85.98
13.920	7.96	14.79	21.57	137.1	113.9	81.8	85.16
17-BTU/LB WATER		18-BU/HR-FT ²					

- CORN—Type of grain to be dried (Question 4).
- TEMP—Temperature of the drying air, °F, (Question 5).
- CFM/BU—The cubic feet of heated air delivered to each bushel of grain in the dryer (Question 6).
- WBO—Percentage moisture content of the grain before drying begins (Question 7).
- WBF—Desired average percent moisture content of grain after drying (Question 8).
- HO—Absolute humidity of air, lb of water per lb of dry air.
- HMAX—Absolute humidity of the drying air as it exits the grain.
- 50°F—Assumed outside air temperature before the air is heated.
- TIME—The 1st column is time in hours from when drying begins.
- MIN—The percent moisture content of the grain next to where the drying air enters the grain mass for specified times.
- AVE—The average percent moisture content in the grain for specified times.
- MAX—The percent moisture content of the grain where the drying air exits the grain mass for specified times.
- MAX—The temperature of the grain next to where the drying air enters the grain mass for given times.
- AVE—The average temperature of the grain for given times.
- MIN—The temperature of the grain where the drying air exits the grain mass for given times.
- EFF—The efficiency of the drying air in removing the moisture in the grain over given drying times.
- BTU/LB WATER—The heat in BTU's required to heat the drying air divided by the amount of water in pounds that was removed from the grain.
- BU/HR-FT²—This is the bushels dried per hour for each square ft of dryer's surface area for each 1.25 ft of grain depth.

ESTIMATING ENERGY USAGE:**a. L.P. gas or natural gas**

The quantity of water removed from each bushel of grain may be calculated using the following equation:

$$\left(\begin{array}{c} \text{lb of water} \\ \text{removed} \end{array} \right) = \left(\begin{array}{c} \text{bulk density of} \\ \text{grain, lb/bu} \end{array} \right) \times \left(\frac{\text{IM} - \text{FM}}{100 - \text{FM}} \right)$$

where IM = the initial moisture content of the grain before it was dried, %.

FM = the final moisture content of the grain after it was dried, %.

The bulk density of corn and milo is 56 pounds per bushel.

The amount of energy used per bushel for heating the air is:

$$(\text{BTU's per bu}) = \left(\begin{array}{c} \text{BTU/lb of water} \\ \text{[Item No. 17]} \end{array} \right) \times (\text{lb of water removed})$$

The total energy used for heating the air is found by

$$(\text{Total BTU's}) = (\text{BTU's per bu}) \times (\text{total bu dried})$$

It may be converted to gallons of LP gas or 1000 cubic feet of natural gas from the following relationships:

$$1 \text{ gal of L.P. gas} = 92,000 \text{ BTU}$$

$$1000 \text{ cubic ft of Natural Gas} = 1,000,000 \text{ BTU}$$

The combustion efficiency of each fuel is approximately 80%.

To illustrate how the energy usage and cost might be estimated, suppose a farmer has 30,000 bu. of corn he wishes to dry from 25 percent to 14.79 percent moisture content in a 24 ft bin with 4 ft of grain. He uses L.P. gas at a cost of \$0.50 per gallon. His operating conditions are the same as those presented with the sample output; that is, the drying air temperature is 140°F and 10 CFM per bushel is supplied by a 10 hp fan. This would be very typical of a batch-in-bin drying system.

To determine energy usage, the amount of water to be removed would be calculated:

$$\left(\begin{array}{c} \text{lb of water} \\ \text{removed} \\ \text{per bushel} \end{array} \right) = \left(56 \frac{\text{lb}}{\text{bu}} \right) \times \left(\frac{25 - 14.79}{100 - 14.79} \right) = 6.71 \text{ lb/bu}$$

The energy to heat the drying air would be computed:

$$(\text{BTU's per bu}) = \left(\begin{array}{c} 1807 \text{ BTU/lb} \\ \text{[Item 17]} \end{array} \right) \times (6.71 \text{ lb/bu}) = 12,125 \text{ BTU/bu}$$

The total energy for heating the air to dry the grain is

$$(\text{BTU's, total}) = (30,000 \text{ bu}) \times (12,125 \text{ BTU/BU}) = 363,750,000 \text{ BTU}$$

This is converted to gallons of L.P. gas assuming a burning efficiency of 80 percent:

$$(\text{L.P. gas, gallons}) = \frac{363,750,000 \text{ BTU}}{(92,000 \text{ BTU/gal}) \times (0.8)} = 4942 \text{ gal}$$

The cost would be \$2471 or 8.24¢ per bushel.

b. Fan Energy

The fan energy may be estimated using one of the other programs available. However, if it is assumed that for the example problem 10 hp is required to deliver the air through the grain at 10 CFM per bushel, the energy requirements would be

$$\left(\begin{array}{c} \text{Fan Energy} \\ \text{KW-hr} \end{array} \right) \approx \left(\begin{array}{c} \text{hours of} \\ \text{operation} \end{array} \right) \times (\text{fan horsepower})$$

where 1000 watts \approx 1 hp-hr when the efficiency of the motor is taken into account.

The area of the drying floor is:

$$(\text{Square ft of dryer floor}) = 3.1416 \times (\text{BIN DIAMETER})^2 / 4 = 3.1416 \times (24)^2 / 4 = 452 \text{ ft}^2$$

From the analysis, the drying rate is 0.073 bu per hour per 1.25 ft of grain depth for each square ft. of dryer surface area (Item 18). Therefore, the total time required to dry the grain is:

$$\begin{aligned} \text{(total drying time)} &= \frac{(\text{Bu to be dried}) \times 1.25 \text{ ft}}{\left(\frac{\text{BU}}{\text{hr-ft}^2}\right) \times \left(\frac{\text{grain depth}}{\text{in bin}}\right) \times \left(\frac{\text{drying surface}}{\text{area}}\right)} \\ &= \frac{30,000 \text{ bu} \times 1.25 \text{ ft}}{\left(\frac{0.073 \text{ bu}}{\text{hr-ft}^2}\right) \times (4 \text{ ft}) \times (452 \text{ ft}^2)} = 284 \text{ hr} \end{aligned}$$

The drying time could also be estimated by determining how many batches would be dried and multiplying this factor by the time required for each batch. For example:

$$\begin{aligned} \text{No. of batches} &= \frac{\text{total bu to be dried}}{\left(\frac{\text{floor area}}{\text{of bin, ft}^2}\right) \times \left(0.8 \frac{\text{bu}}{\text{ft}^3}\right) \times \left(\frac{\text{Depth of}}{\text{grain, ft}}\right)} \\ &= \frac{30,000 \text{ bu}}{(452 \text{ ft}^2) \times (0.8 \text{ bu/ft}^3) \times 4 \text{ ft}} \\ &= 20.74 \text{ batches} \\ \text{(Total hours to} &= \left(\frac{\text{hours per}}{\text{dry the grain}}\right) = \left(\frac{\text{batch (Item 9)}}{\text{batch (Item 9)}}\right) \times (\text{No of batches}) \\ &= (13.92 \text{ hr}) \times (20.74 \text{ batches}) \\ &= 289 \text{ hr} \end{aligned}$$

The difference in the answers using the two approaches is because of round-off error. The drying rate is bu / (hr-ft²-1.25 ft), the inverse of drying time; that is, (1/13.92) = 0.0718 rather than 0.073, the value given in Item 18.

If we use the drying time figure of 289 hours, the electrical energy consumption estimate would be:

$$\left(\frac{\text{Fan Energy}}{\text{KW-hr}}\right) (289 \text{ hr}) \times (10 \text{ hp}) = 2890 \text{ KW-hr}$$

If electricity may be purchased for 3.5¢/KW-hr, the electrical cost for drying would be approximately \$101 or 0.34¢ per bushel. To this figure, we would have to add the cost of fan operation time for cooling the grain, typically 2 hr per batch or for this example, an additional 42 hr.

AVAILABLE PROGRAMS:

1. BNDZN: Computer analysis of economics, energy consumption and engineering design for a grain storage system.
2. CHASE: Computer model that evaluates and compares costs of selected methods of harvesting, handling, drying and storage of corn for an individual farmstead. Energy consumption is also estimated.
3. CACHE: Computer model for economic analysis of farm drying and processing systems.
4. SQUASH: Computer simulation of the harvesting-delivery-drying system used to determine bottlenecks in the system.
- *5. ESTIMATING FAN SIZES FOR GRAIN DRYING SYSTEMS
- *6. GRAIN DRYING PERFORMANCE EVALUATION
- *7. DRYERATION PERFORMANCE EVALUATION
- *8. NATURAL AIR-LOW TEMPERATURE DRYING PERFORMANCE EVALUATION
- *9. FAN PERFORMANCE ON GRAIN DRYING BINS

ACKNOWLEDGEMENTS:

*These programs were developed by:

Dr. Thomas L. Thompson, Professor
Agricultural Engineering Department
University of Nebraska
Lincoln, Nebraska

The College of Agriculture is an Equal Opportunity Organization with respect to education and employment and is authorized to provide research, educational information and other services only to individuals and institutions that function without regard to race, color, national origin, sex, religion, age and handicap. Inquiries regarding compliance with Title VI and Title VII of the Civil Rights Act of 1964, Title IX of the Educational Amendments, Section 504 of the Rehabilitation Act and other related matters should be directed to Equal Opportunity Office, College of Agriculture, University of Kentucky, Room S-105, Agricultural Science Building-North, Lexington, Kentucky 40546

Issued in furtherance of Cooperative Extension work, Acts of May 8 and June 30, 1914, in cooperation with the U.S. Department of Agriculture. Charles E. Barnhart, Director of Cooperative Extension Service, University of Kentucky College of Agriculture, Lexington, and Kentucky State University, Frankfort.