



2005

# Generalized Geologic Map for Land-Use Planning: Kenton County, Kentucky

Richard A. Smath

*University of Kentucky*, [rsmath@uky.edu](mailto:rsmath@uky.edu)

Bart Davidson

*University of Kentucky*, [bdavidson@uky.edu](mailto:bdavidson@uky.edu)

Daniel I. Carey

*University of Kentucky*, [daniel.carey@uky.edu](mailto:daniel.carey@uky.edu)

John D. Kiefer

*University of Kentucky*, [john.kiefer@uky.edu](mailto:john.kiefer@uky.edu)

**Right click to open a feedback form in a new tab to let us know how this document benefits you.**

Follow this and additional works at: [https://uknowledge.uky.edu/kgs\\_mc](https://uknowledge.uky.edu/kgs_mc)

 Part of the [Geology Commons](#)

## Repository Citation

Smath, Richard A.; Davidson, Bart; Carey, Daniel I.; and Kiefer, John D., "Generalized Geologic Map for Land-Use Planning: Kenton County, Kentucky" (2005). *Kentucky Geological Survey Map and Chart*. 116.

[https://uknowledge.uky.edu/kgs\\_mc/116](https://uknowledge.uky.edu/kgs_mc/116)

This Map and Chart is brought to you for free and open access by the Kentucky Geological Survey at UKnowledge. It has been accepted for inclusion in Kentucky Geological Survey Map and Chart by an authorized administrator of UKnowledge. For more information, please contact [UKnowledge@lsv.uky.edu](mailto:UKnowledge@lsv.uky.edu).



# Generalized Geologic Map for Land-Use Planning: Kenton County, Kentucky

Richard A. Smath, Bart Davidson, Daniel I. Carey, and John D. Kiefer

## Acknowledgments

Geology adapted from Harper (2002), Harper and Sparks (2002), Nelson (2002), Sparks (2002a,b), and Tyra (2002). Landslide illustrations after Potter (1996).

## For Planning Use Only

This map is not intended to be used for selecting individual sites. Its purpose is to inform land-use planners, government officials, and the public in a general way about geologic bedrock conditions that affect the selection of sites for various purposes. The properties of thick soils may supercede those of the underlying bedrock and should be considered on a site-to-site basis. At any site, it is important to understand the characteristics of both the soils and the underlying rock. For further assistance, contact the Kentucky Geological Survey, 859.257.5500. For more information, and to make custom maps of your local area, visit our Land-Use Planning Internet Mapping Web Site at [kgsmap.uky.edu/website/kyuplanviewer.htm](http://kgsmap.uky.edu/website/kyuplanviewer.htm).

## Residential and Commercial Development



This area of new residential and commercial construction is located on Ky. 17 near Independence. Photo by Richard Smath, Kentucky Geological Survey.

## EXPLANATION


- School
- Water Wells
- Domestic
- Industrial
- Monitoring
- Public
- Incorporated city boundaries
- Watershed boundary
- Wetlands > 1 acre (U.S. Fish and Wildlife Service, 2003)
- Source-water protection area, zone 1
- Wildlife management area
- Artificial fill
- 40-foot contour interval
- Photo location

## Source-Water Protection Areas

Source-water protection areas are those in which activities are likely to affect the quality of the drinking-water source. For more information, see [kgsweb.uky.edu/download/water/swapp/swapp.htm](http://kgsweb.uky.edu/download/water/swapp/swapp.htm).

### Swelling Shales


A problem of considerable concern in this area is the swelling of some of the clay minerals in shale units 2 and 3. Expanding shale can cause backfill to swell, and concrete to crack and crumble. It can heave the foundation, the slab, and interior partitions resting on it, and damage upper floors and interior partitions. This phenomenon has been responsible for extensive damage to schools, homes, and businesses in Kentucky. During times of drought, these same shales may shrink causing foundations to drop. We strongly suggest that anyone planning construction on these shales seek professional advice from a geologist or engineer familiar with the problem.

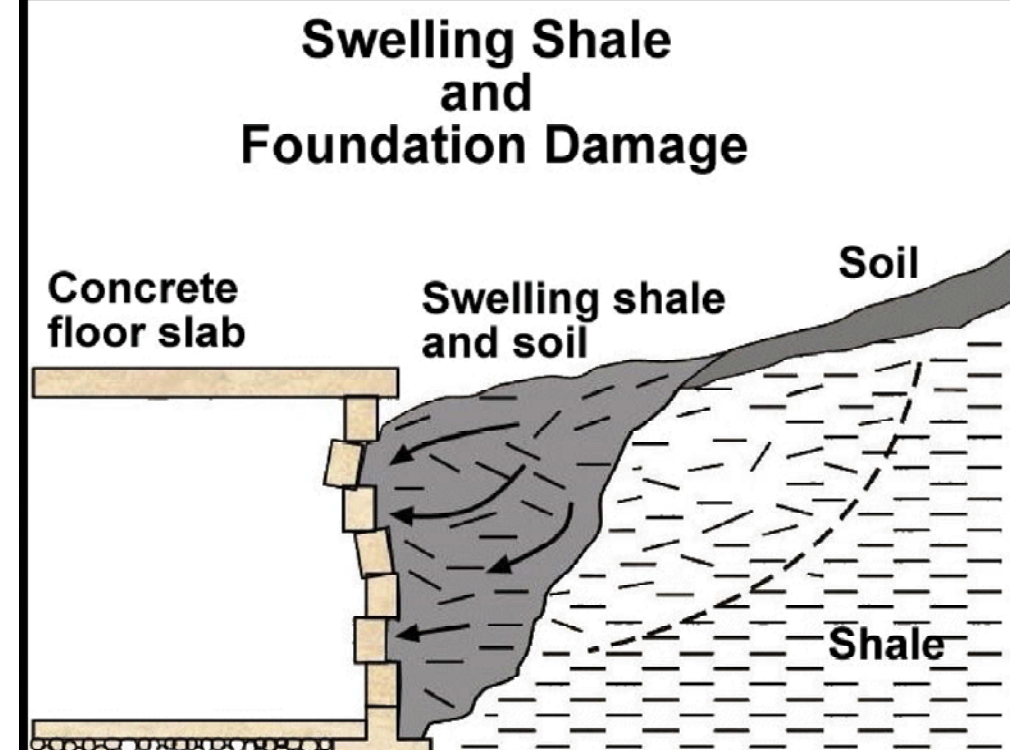

Some shales, and the soils derived from them, swell when exposed to water or air. These swelling shales and soils can have severe impacts on building foundations and other structures (e.g., bridges, dams, roads). Photo by John Kiefer, Kentucky Geological Survey.



Limestone and shale (unit 3), the 500-million-year-old (Ordovician-age) Fairview Formation, is common as bedrock in Kenton County, and can cause problems for builders because the shales in the unit can swell when exposed to water. Photo by Richard Smath, Kentucky Geological Survey.

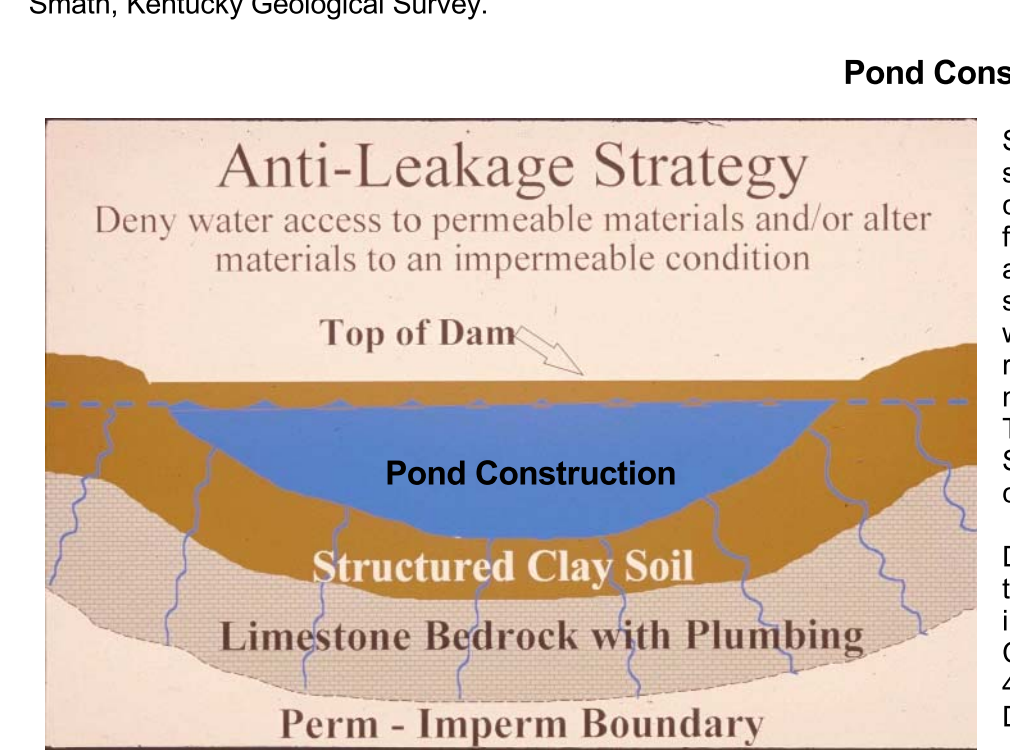

Successful pond construction must prevent water from seeping through structured soils into limestone solution channels below. A compacted clay liner or artificial liner may prevent pond failure. Getting the basin filled with water as soon as possible after construction prevents drying and cracking, and possible leakage, of the clayey soil liner. Ponds constructed in dry weather are more apt to leak than ponds constructed in wet weather. A geotechnical engineer or geologist should be consulted regarding the requirements of a specific site. Other leakage prevention measures include synthetic liners, bentonite, and asphaltic emulsions. The U.S. Department of Agriculture-Natural Resources Conservation Service can provide guidance on the application of these liners to new construction, and for treatment of existing leaking ponds.

### Groundwater

The alluvium along the Ohio River is the best source of groundwater in the county. Many properly constructed drilled wells will produce several hundred gallons per minute from the alluvium; most wells produce enough for a domestic supply at depths of less than 100 feet. Water is hard or very hard, but otherwise of good quality.

In the Licking River Valley and the lower sections of the larger creek valleys in Kenton County, most drilled wells will produce enough water for a domestic supply at depths of less than 100 feet. Some wells located in the smaller creek valleys will produce enough water for a domestic supply, except during dry weather.

In the upland areas of Kenton County (approximately 60 percent of the county), most drilled wells will not produce enough water for a dependable domestic supply. Wells along drainage lines may produce enough for a domestic supply except during dry weather. Groundwater in these areas is hard or very hard and may contain salt or hydrogen sulfide, especially at depths greater than 100 feet.

For more about the groundwater resources of the county, see Carey and Stickney (2005).

## LAND-USE PLANNING TABLE DEFINITIONS

### FOUNDATION AND EXCAVATION

The terms "earth" and "rock" excavation are used in the engineering sense; earth can be excavated by hand tools, whereas rock requires heavy equipment or blasting to remove. The term "rippable" means excavation by a ripper attachment on a bulldozer.

### LIMITATIONS

Slight--A slight limitation is one that commonly requires some corrective measure but can be overcome without a great deal of difficulty or expense.

Moderate--A moderate limitation is one that can normally be overcome but the difficulty and expense are great enough that completing the project is commonly a question of feasibility.

Severe--A severe limitation is one that is difficult to overcome and commonly is not feasible because of the expense involved.

### LAND USES

Septic tank disposal system--A septic tank disposal system consists of a septic tank and a filter field. The filter field is a subsurface tile system laid in such a way that effluent from the septic tank is distributed with reasonable uniformity into the natural soil.

Residences--Residences are made for residences with and without basements because the degree of limitation is dependent upon ease and required depth of excavation. For example, excavation in limestone has greater limitation than excavation in shale for a house with a basement.

Highways and streets--Refers to paved roads in which cuts and fills are made in hilly topography, and considerable work is done preparing subgrades and bases before the surface is applied.

Access roads--These are low-cost roads, driveways, etc., usually surfaced with crushed stone or a thin layer of blacktop. A minimum of cuts and fills are made, little work is done preparing a subgrade, and generally only a thin base is used. The degree of limitation is based on year-around use and would be less severe if not used during the winter and early spring. Some types of recreation areas would not be used during these seasons.

Light industry and malls--Ratings are based on developments having structures or equivalent load limit requirements of three stories or less, and large paved areas for parking lots. Structures with greater load limit requirements would normally need footings in solid rock, and the rock would need to be core drilled to determine presence of caverns, cracks, etc.

Intensive recreation--Athletic fields, stadiums, etc.

Extensive recreation--Camp sites, picnic areas, parks, etc.

Reservoir areas--The floor of the area where the water is impounded. Ratings are based on the permeability of the rock.



Reservoir embankments--The rocks are rated on limitations for embankment material.

Underground utilities--Included in this group are sanitary sewers, storm sewers, water mains, and other pipes that require fairly deep trenches.


## Planning Guidance by Rock Unit Type

| Rock Unit   | Foundation and Excavation   | Septic Tank Disposal System  | Residence with Basement  | Highways and Streets   | Access Roads  | Light Industry and Malls   | Intensive Recreation  | Extensive Recreation  | Reservoir Areas   | Reservoir Embankments   | Underground Utilities   |
|---|---|--|--|--|---|--|---|---|---|---|---|
| 1. Clay, silt, sand, and gravel                                     | Fair to good foundation material. Easily excavated.   | Severe limitations. Failed septic systems can contaminate groundwater. Refer to soil report (Weisenberger and others, 1989). | Water in alluvium may be in direct contact with basements. Refer to soil report (Weisenberger and others, 1989). | Slight limitations. Refer to soil report (Weisenberger and others, 1989).  | Slight to moderate limitations. Refer to soil report (Weisenberger and others, 1989).   | Slight to moderate limitations. Avoid construction in flood-prone areas. Refer to soil report (Weisenberger and others, 1989).   | Refer to soil report (Weisenberger and others, 1989).   | Refer to soil report (Weisenberger and others, 1989).   | Not recommended. Refer to soil report (Weisenberger and others, 1989).                        | Not recommended. Refer to soil report (Weisenberger and others, 1989).                        | Refer to soil report (Weisenberger and others, 1989).   |
| 2. Shale, limestone   | Fair to good foundation material. Difficult to excavate. Slumps when wet. Avoid steep slopes. | Slight to severe limitations. Swelling of soil cover and depth to impermeable rock.  | Severe to moderate limitations. Rock excavation may be required. Slumps when wet. Avoid steep slopes.            | Moderate to severe limitations. Rock excavation possible. Local drainage problems, especially on shale. Sink common. Caves possible. | Moderate limitations. Rock excavation possible. Local drainage problems, especially on shale. Sink common. Local drainage problems. Groundwater contamination possible. | Slight to severe limitations, depending on topography. Rock excavation. Sinks common. Local drainage problems. Groundwater contamination possible.                         | Slight to moderate limitations, depending on topography. Possible steep wooded slopes. Slight limitations for nature or forest preserve.    | Slight to moderate limitations, depending on topography. Possible steep wooded slopes. Slight limitations for nature or forest preserve.    | Moderate to slight limitations. Reservoir may leak where rocks are fractured. Sinks possible. | Moderate to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible. | Moderate limitations. Highly variable amount of rock and earth excavation. Susceptible to landslides. |
| 3. Limestone, shale   | Good to excellent foundation material. Difficult to excavate.                                 | Slight to severe limitations. Swelling of soil cover and depth to impermeable rock.  | Severe to moderate limitations. Rock excavation may be required.   | Moderate limitations. Rock excavation possible. Local drainage problems, especially on shale. Sink common. Caves possible.           | Moderate limitations. Rock excavation possible. Local drainage problems. Groundwater contamination possible.  | Slight to severe limitations, depending on topography. Rock excavation. Sinks common. Local drainage problems. Groundwater contamination possible.                         | Slight to moderate limitations, depending on topography. Possible steep wooded slopes. Slight limitations for nature or forest preserve.    | Slight to moderate limitations, depending on topography. Possible steep wooded slopes. Slight limitations for nature or forest preserve.    | Moderate to slight limitations. Reservoir may leak where rocks are fractured. Sinks possible. | Moderate to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible. | Severe to moderate limitations. Possible rock excavation.   |
| 4. Limestone  | Excellent foundation material. Difficult to excavate.   | Severe limitations. Impermeable rock. Locally fast drainage through fractures, danger of ground-water contamination.         | Severe to moderate limitations. Rock excavation may be required.   | Severe limitations. Rock excavation possible. Steep slopes.  | Severe to moderate limitations. Rock excavation possible. Steep slopes. Sink common. Local drainage problems. Groundwater contamination possible.                       | Slight to moderate limitations, depending on topography. Rock excavation possible. Steep slopes. Sink common. Local drainage problems. Groundwater contamination possible. | Moderate to slight limitations, depending on activity and topography. Possible steep wooded slopes. Slight limitations for nature preserve. | Severe to slight limitations, depending on activity and topography. Possible steep wooded slopes. Slight limitations for nature preserve.   | Slight to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible.   | Slight to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible.   | Severe to moderate limitations. Possible rock excavation.   |
| 5. Clay, silt, sand, and gravel (berm deposits and glacial outwash) | Fair foundation material. Easily excavated.   | Slight to severe limitations, depending on amount of soil cover.   | Moderate to slight limitations, depending on slope.  | Slight limitations.  | Slight limitations, depending on degree of slope.   | Slight limitations, depending on degree of slope.  | Moderate to slight limitations, depending on activity and topography. Possible steep wooded slopes. Slight limitations for nature preserve. | Moderate to slight limitations, depending on activity and topography. Possible steep wooded slopes. Slight limitations for nature preserve. | Not recommended. Pervious material.   | Severe to slight limitations. Unstable steep slopes.  | Slight limitations.   |

\*Some of these shales can shrink during dry periods and swell during wet periods, and cause cracking of foundations. On hillsides, especially where springs are present, they can also be susceptible to landslides.

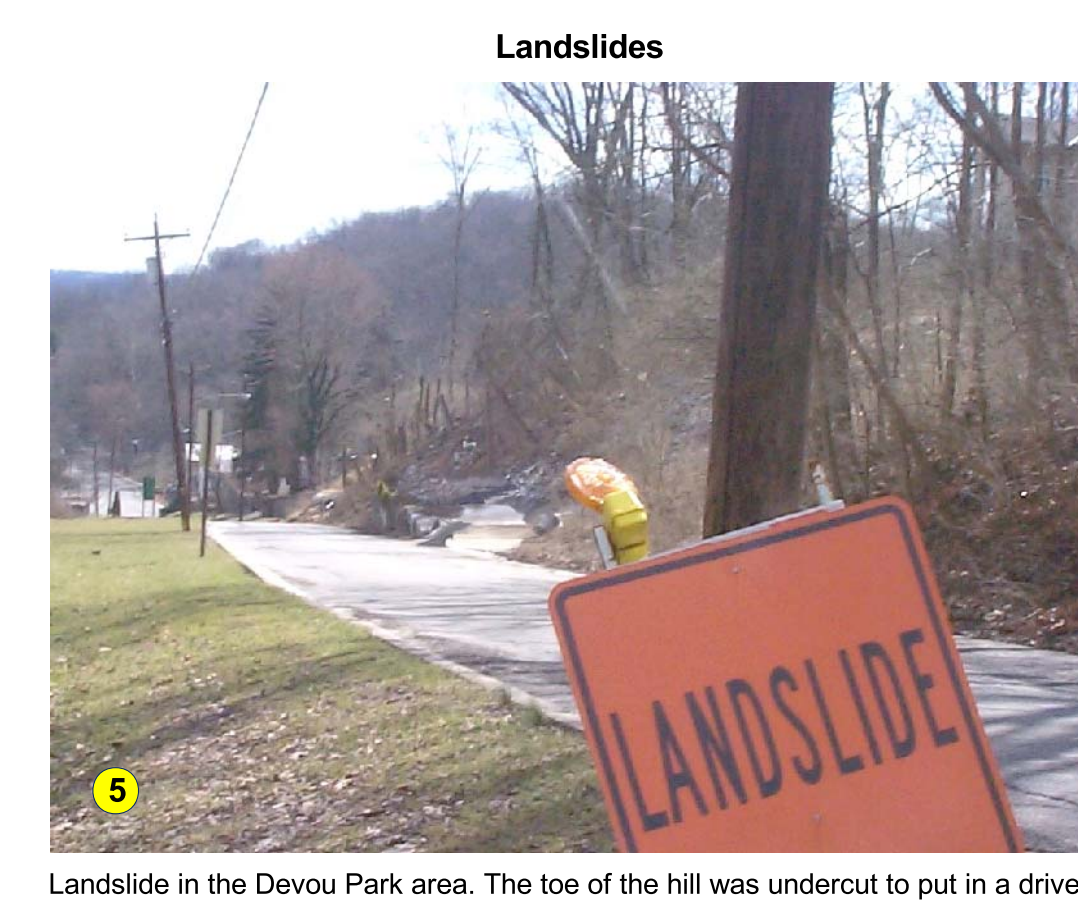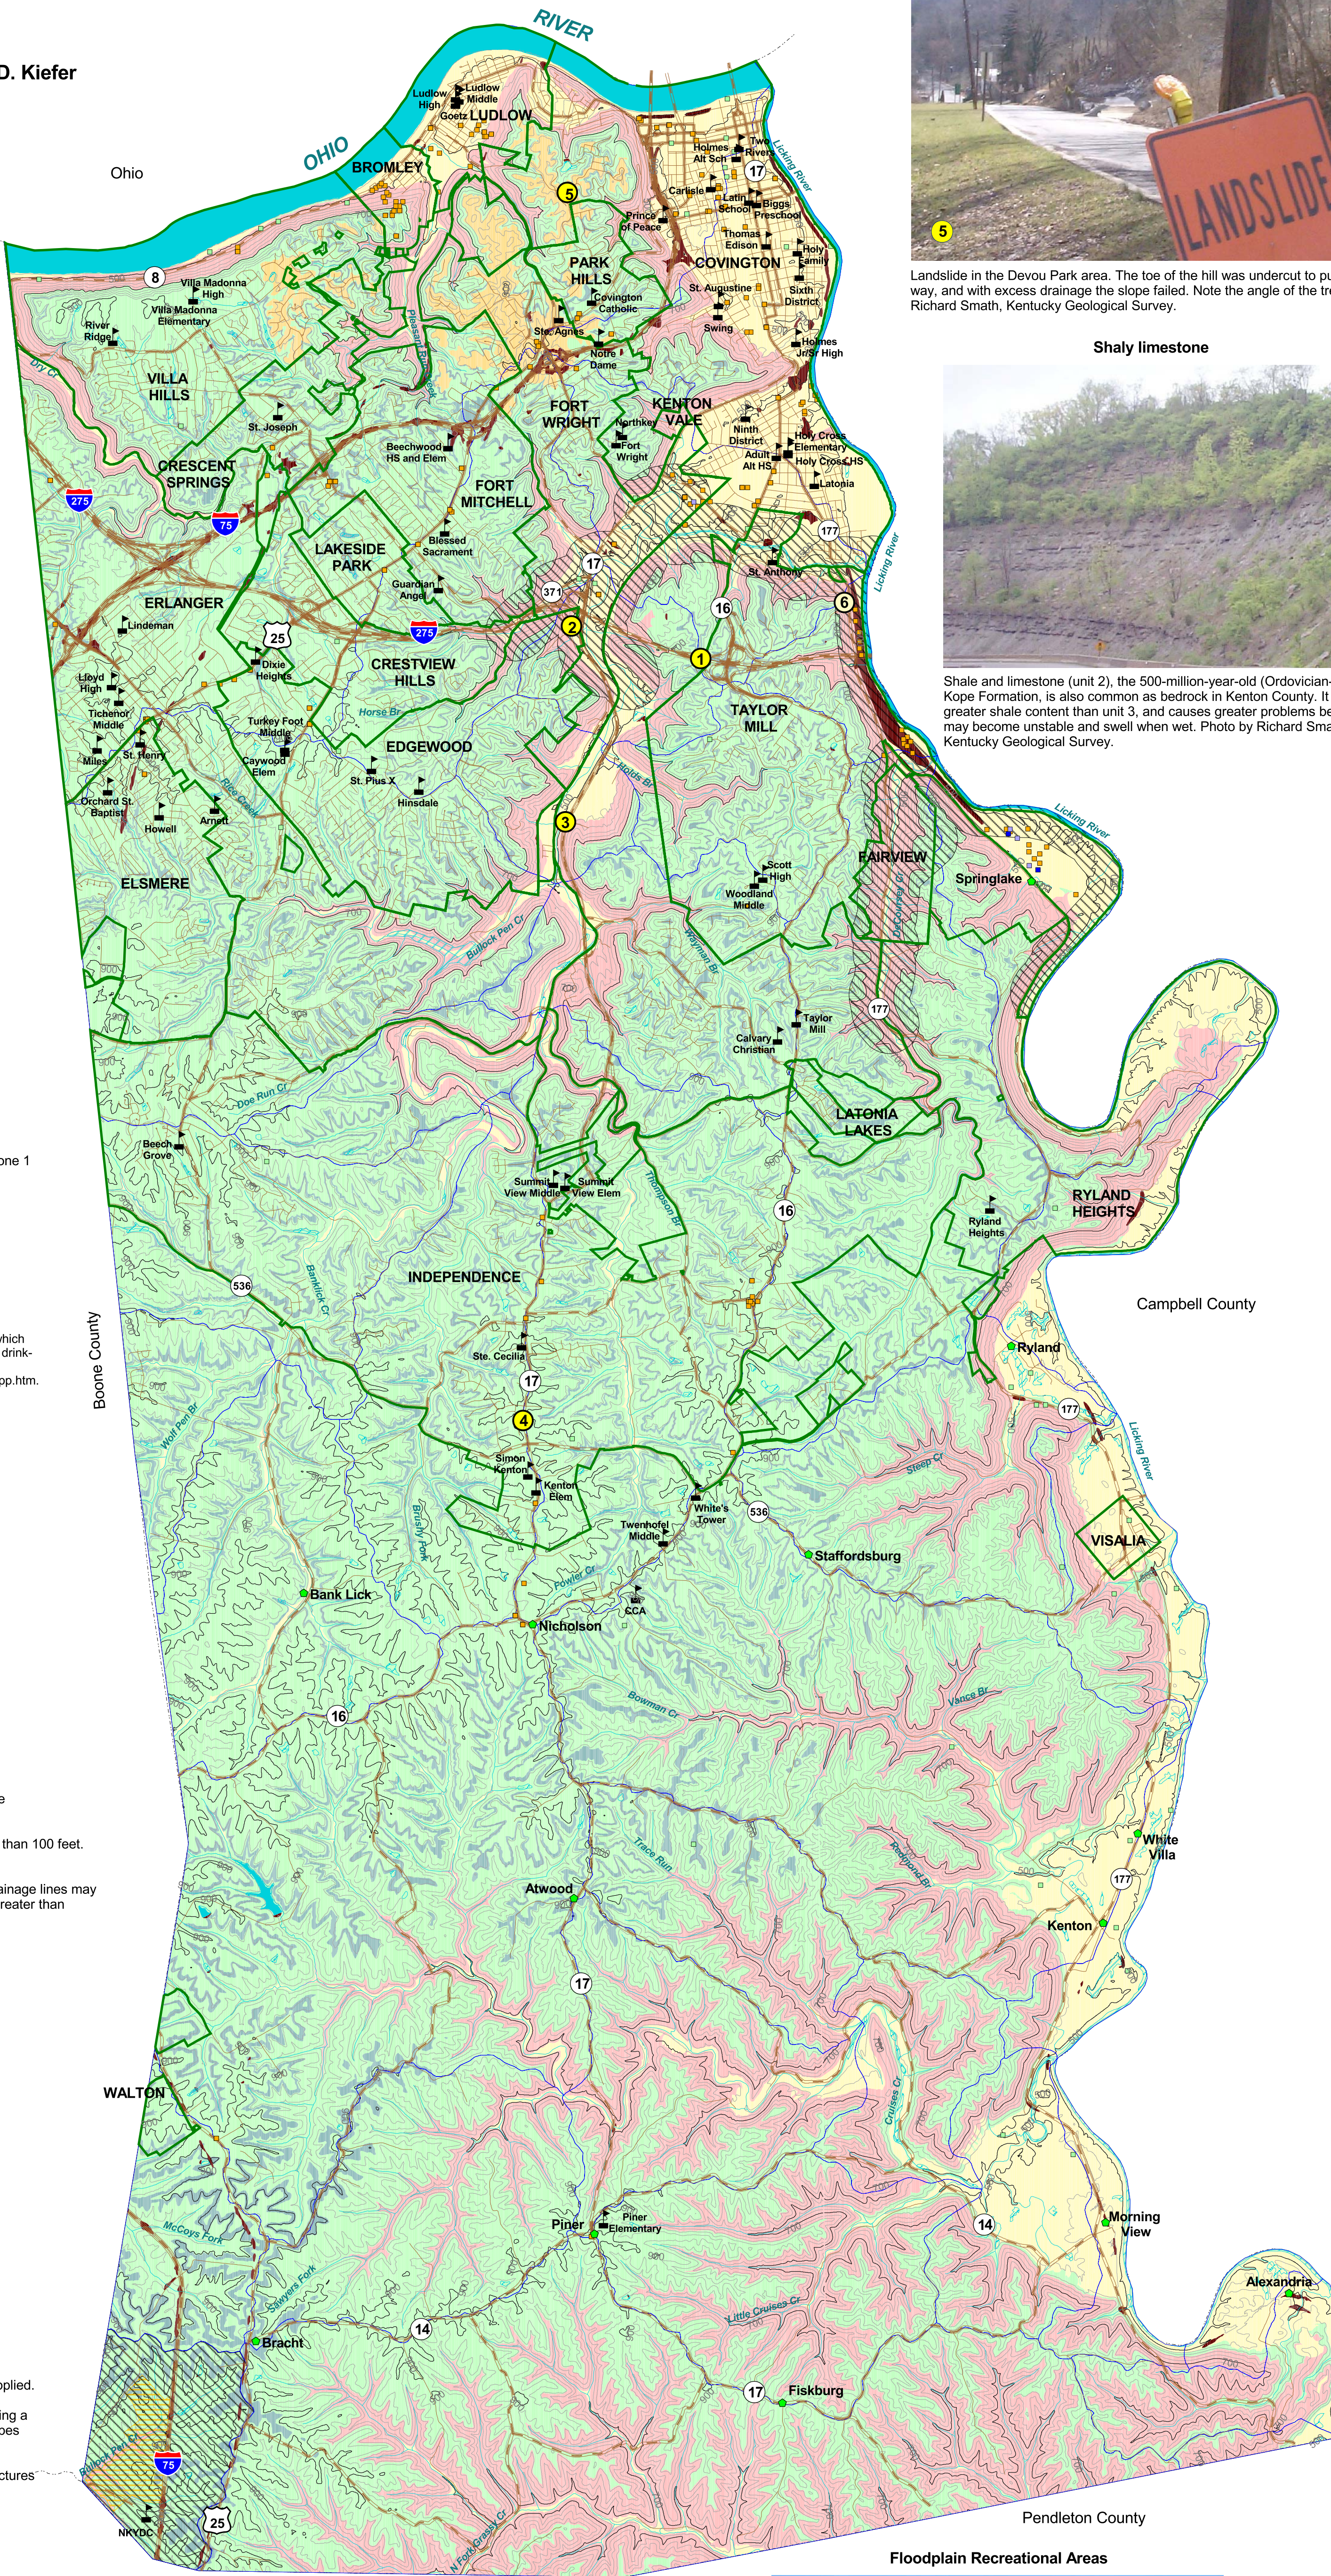

Landslide in the Devou Park area. The toe of the hill was undercut to put in a driveway, and with excess drainage the slope failed. Note the angle of the trees. Photo by Richard Smath, Kentucky Geological Survey.

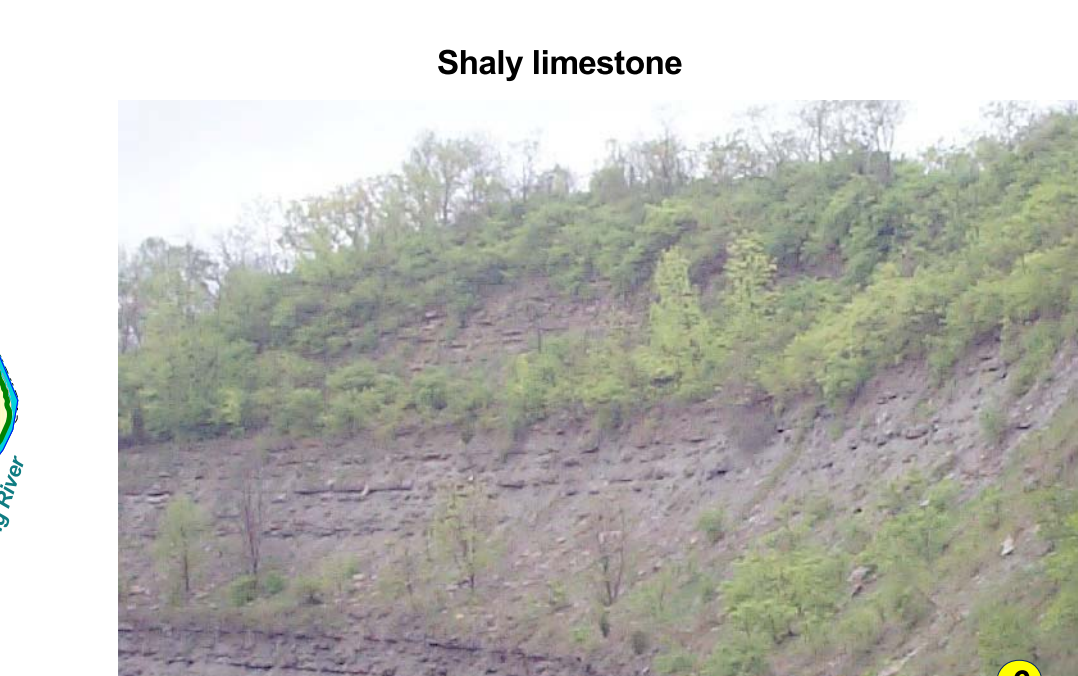

Shale and limestone (unit 2), the 500-million-year-old (Ordovician-age) Kope Formation, is also common as bedrock in Kenton County. It has a greater shale content than unit 3, and causes greater problems because it may become unstable and swell when wet. Photo by Richard Smath, Kentucky Geological Survey.

### Slope Failures

Mass movements or landslides of surficial materials are by far the most frequent and most costly geologic hazards in the northern Kentucky area. Northern Kentucky has the greatest monetary loss per capita caused by landslides in the country. The failure of the slope may be rapid, but more commonly is a slow, almost imperceptible movement, called creep, of a few inches per year. Whether rapid or slow, the end results and damage are similar and costly, broken plumbing, cracked walls and foundations, cracked streets and sidewalks, and commonly total loss of the structures.

Virtually all of the mass movements in northern Kentucky occur in colluvium--the weathered soil and rock materials that crumble from the bedrock as it weathers. The lower slopes of unit 2 are commonly thickly mantled with colluvium.


Shales of unit 2 and adjacent unit 3 will break down and weather rapidly when exposed to air and water. These shaly units tend to swell considerably when exposed to water. For this reason, plumbing trenches under walls and foundations should be prevented from accumulating water. Units 2 and 3 may share a translational landslide.

Gravity is the main driving force, but water nearly always plays a critical role by adding weight and lubricating the particles in the colluvium. Cutting into or overloading a slope with structures and fill can also be major contributing factors.


Precautions include taking care of all surface-water runoff by making certain that all runoff from roofs, gutters, patios, sidewalks, and driveways is carried well away from and not toward the house, diverting drainage from areas sloping toward the house, cutting into natural slopes as little as possible and avoiding the use of fill, and trying to place the foundation of the structure on undisturbed bedrock.

When in doubt, consult an engineering geologist or a geotechnical engineer. Old relic landslides can also be easily reactivated. Look for unusual bulges or cracks in the slope, tilted or curved trees, springs coming out onto the hillside, and tilted and cracked sidewalks, streets, and retaining walls.


For more information, see Potter (1996).

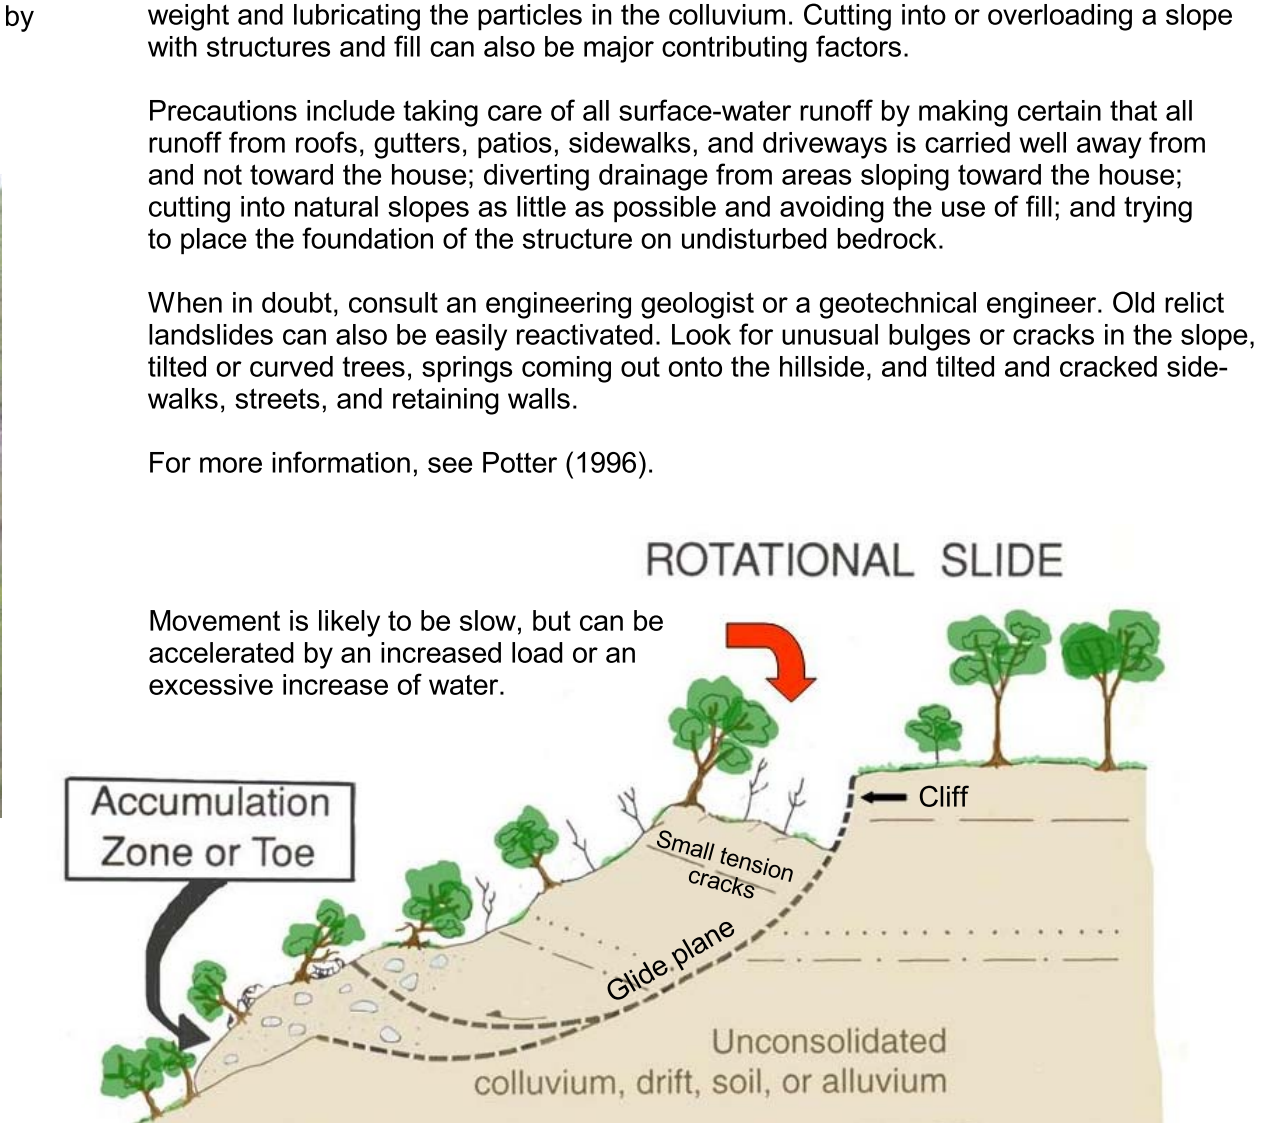

Rotational landslides occur in both the thicker colluvium of unit 2 and in glacial deposits. The head or top area has tension cracks or small cliffs; the toe or bottom has transverse ridges or bulges. A principal glide plane connects the top to the bottom. Small tension cracks in the top become large scars or cliffs as material moves downslope and small bulges in the bottom become larger ones. After Potter (1996).

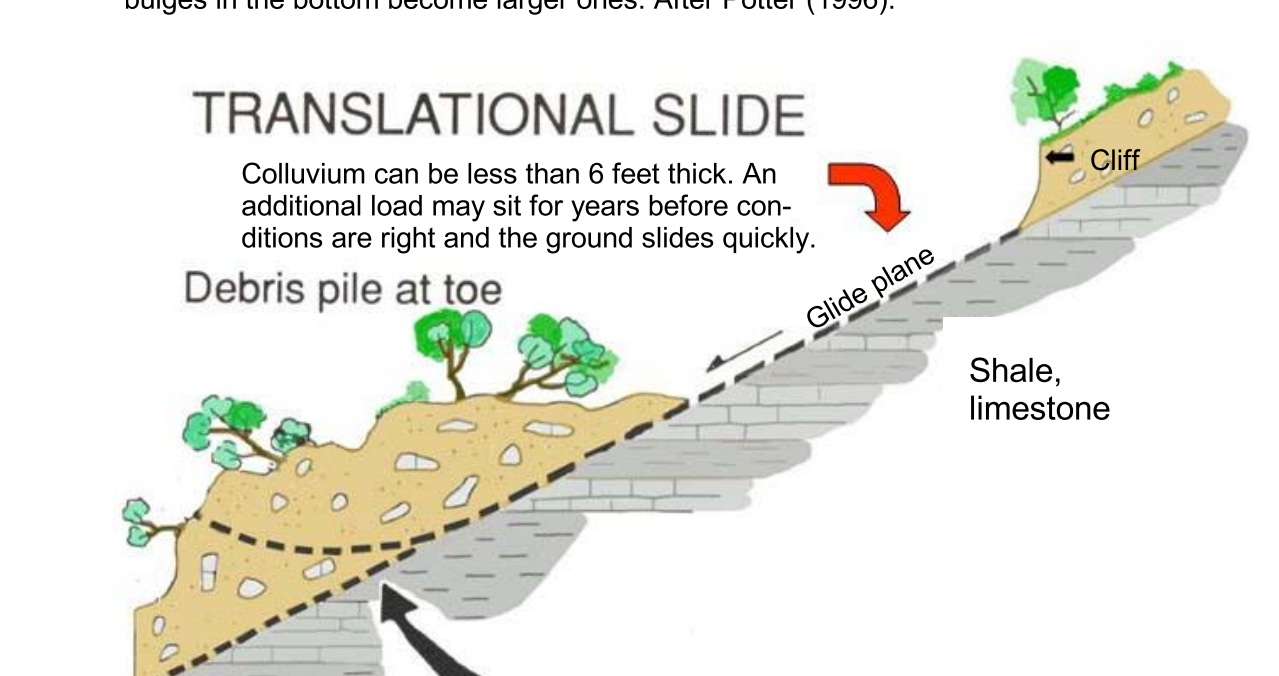

A translational landslide is a relatively thin sheet of colluvium that separates from the underlying bedrock and slides catastrophically downslope, more or less as a coherent sheet, until it abruptly stops and becomes a crumbled, disorganized pile of debris. Such failures are common on steeper slopes of shale-dominated units (units 2 and 3) when both colluvium and the weathered, more permeable bedrock below become fully saturated with water. After Potter (1996).

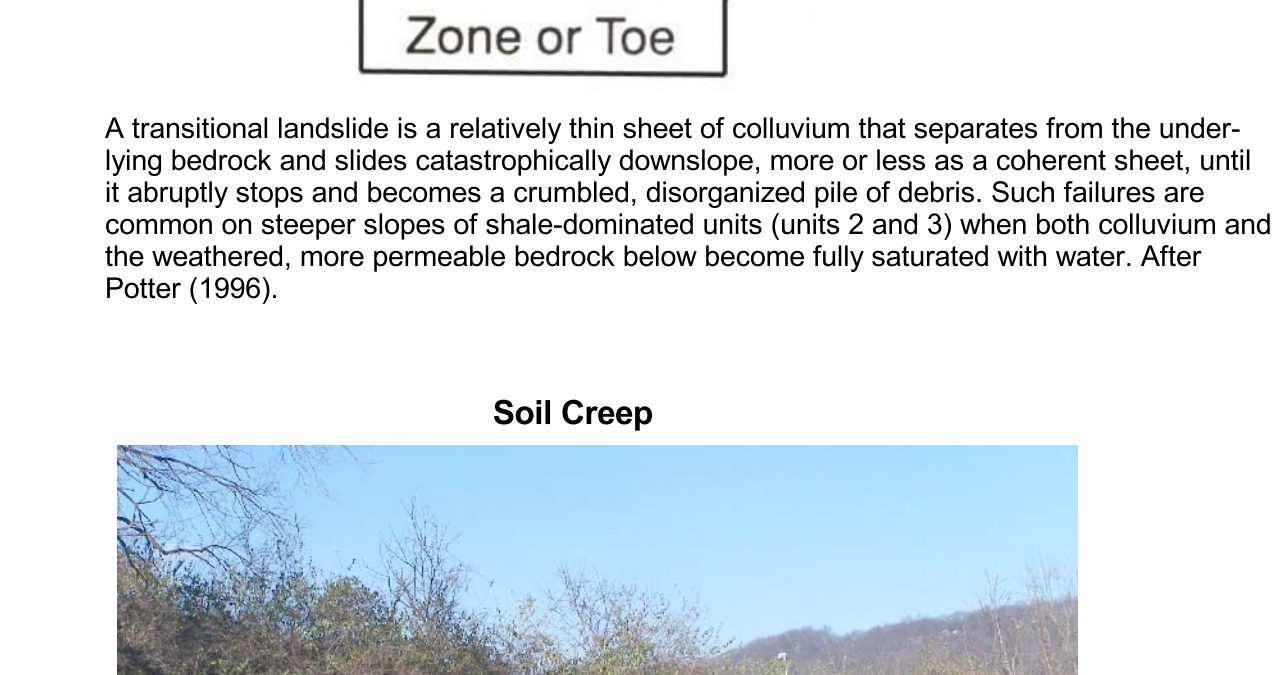

This picture of the Holy Guardian Angels Cemetery on Ky. 17 near Independence shows how creep--the downward movement of soils on hillsides--has caused gravestones to tilt downhill. The northern Kentucky area is especially prone to landslides, in part because of creep in areas of steep slopes. Photo by Richard Smath, Kentucky Geological Survey.

### Earthquake Hazard

Ground shaking (peak-particle accelerations) due to an earthquake in or near the county is minimal for structures situated on or tied into the bedrock foundation. For sites underlain by poorly consolidated soils, site-specific investigations should be conducted to assure that the building codes will conform to any ground deformation such as liquefaction, landslides, or surface fault ruptures. For more information, see [www.uky.edu/kgs/geologic/hazards/eqhazards.htm](http://www.uky.edu/kgs/geologic/hazards/eqhazards.htm).

### References Cited

Carey, D.I., and Stickney, J.F., 2005. Groundwater resources of Kenton County, Kentucky. Kentucky Geological Survey, ser. 12, County Report 59. [www.uky.edu/kgs/water/library/gwatas/Kenton/Kenton.htm](http://www.uky.edu/kgs/water/library/gwatas/Kenton/Kenton.htm) [accessed 11/22/05].

Harper, A.S., 2002. Spatial database of the Alexandria quadrangle, Campbell and Kenton Counties, Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVQG-926. Adapted from Gibbons, A.B., 1971. Geologic map of the Alexandria quadrangle, Campbell and Kenton Counties, Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-908, scale 1:24,000.

Harper, A.S., and Sparks, T.N., 2002. Spatial database of the DeMossville quadrangle, north-central Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVQG-862. Adapted from Luft, S.J., 1970. Geologic map of the DeMossville quadrangle, north-central Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-862, scale 1:24,000.

Nelson, H.L., Jr., 2002. Spatial database of the Walton quadrangle, north-central Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVQG-1080. Adapted from Luft, S.J., 1973. Geologic map of the Walton quadrangle, north-central Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-1080, scale 1:24,000.

Potter, P.E., 1996. Exploring the geology of the Cincinnati region. Kentucky Geological Survey, ser. 12, Special Publication 22, 115 p.

Sparks, T.N., 2002a. Spatial database of the Covington quadrangle, northern Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVQG-955. Adapted from Luft, S.J., 1971. Geologic map of the Covington quadrangle, northern Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-955, scale 1:24,000.

Sparks, T.N., 2002b. Spatial database of the Newport and Withamsville quadrangles, Campbell and Kenton Counties, Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVQG-1072. Adapted from Gibbons, A.B., 1973. Geologic map of the Newport and Withamsville quadrangles, Campbell and Kenton Counties, Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-1072, scale 1:24,000.

Tyra, M.A., 2002. Spatial database of the Independence quadrangle, Kenton and Boone Counties, Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVQG-785. Adapted from Luft, S.J., 1969. Geologic map of the Independence quadrangle, Kenton and Boone Counties, Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-785, scale 1:24,000.

U.S. Fish and Wildlife Service, 2003. National Wetlands Inventory. [www.nwi.fws.gov](http://www.nwi.fws.gov) [accessed 11/22/05].

Weisenberger, B.C., Dowell, C.W., Leathers, T.R., Odor, H.B., and Richardson, A.J., 1989. Soil survey of Boone, Campbell, and Kenton Counties, Kentucky. U.S. Department of Agriculture, Soil Conservation Service, 69 p.

### Additional Resources for Kenton County

Listed below are Web sites for several agencies and organizations that may be of assistance with land-use planning issues in Kenton County:

[ces.ca.uky.edu/kenton/](http://ces.ca.uky.edu/kenton/) University of Kentucky Cooperative Extension Service

[www.nkadd.org](http://www.nkadd.org/) Northern Kentucky Area Development District

[www.thinkkentucky.com/edis/cmny/cw049](http://www.thinkkentucky.com/edis/cmny/cw049) Detailed county statistics


[www.uky.edu/kentucky/areas/2117.html](http://www.uky.edu/kentucky/areas/2117.html) Kentucky Atlas area gazetteer

[census.gov/states/22/2117.html](http://census.gov/states/22/2117.html) U.S. census data



[www.kentuckycounty.org](http://www.kentuckycounty.org/) Official county site

[kgsweb.uky.edu/download/kgsplanning.htm](http://kgsweb.uky.edu/download/kgsplanning.htm) Kentucky Geological Survey planning information site

### 7.5-Minute Quadrangles

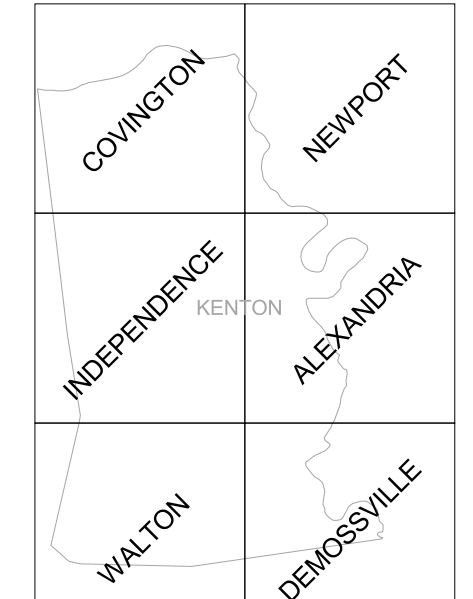

### Kentucky Geology

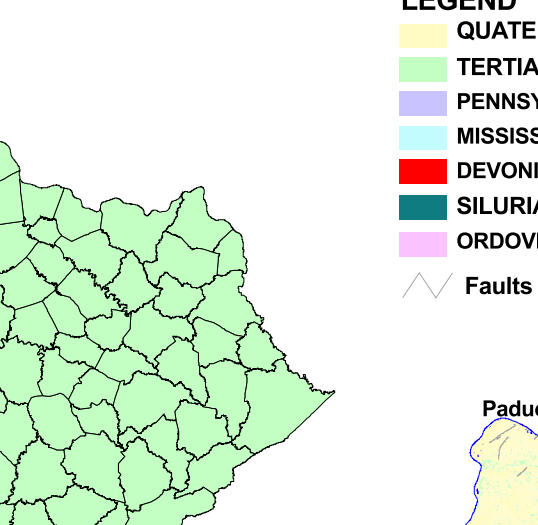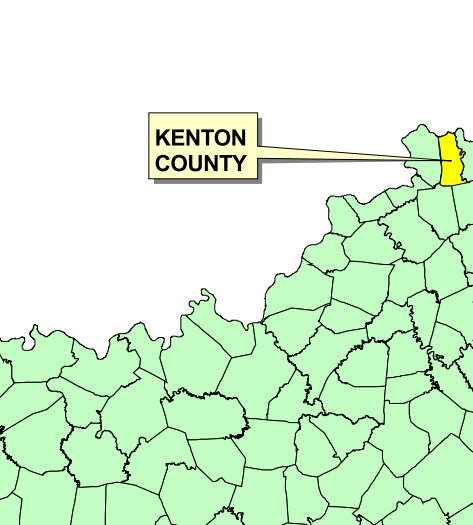

This city park in Edgewood is situated on the floodplain of Banklick Creek. Recreational areas such as these are one of the few land uses that are suitable for floodplains, since any damages from floods would be minimal. Photo by Richard Smath, Kentucky Geological Survey.

