



2005

# Generalized Geologic Map for Land-Use Planning: Boone County, Kentucky

Richard A. Smath

*University of Kentucky, rsmath@uky.edu*

Bart Davidson

*University of Kentucky, b davidson@uky.edu*

Daniel I. Carey

*University of Kentucky, daniel.carey@uky.edu*

John D. Kiefer

*University of Kentucky, john.kiefer@uky.edu*

Ken Daniels

*University of Kentucky*

**Right click to open a feedback form in a new tab to let us know how this document benefits you.**

Follow this and additional works at: [https://uknowledge.uky.edu/kgs\\_mc](https://uknowledge.uky.edu/kgs_mc)



Part of the [Geology Commons](#)

## Repository Citation

Smath, Richard A.; Davidson, Bart; Carey, Daniel I.; Kiefer, John D.; and Daniels, Ken, "Generalized Geologic Map for Land-Use Planning: Boone County, Kentucky" (2005). *Kentucky Geological Survey Map and Chart*. 118.

[https://uknowledge.uky.edu/kgs\\_mc/118](https://uknowledge.uky.edu/kgs_mc/118)

This Map and Chart is brought to you for free and open access by the Kentucky Geological Survey at UKnowledge. It has been accepted for inclusion in Kentucky Geological Survey Map and Chart by an authorized administrator of UKnowledge. For more information, please contact [UKnowledge@lsv.uky.edu](mailto:UKnowledge@lsv.uky.edu).

# Generalized Geologic Map for Land-Use Planning: Boone County, Kentucky

Richard A. Smath, Bart Davidson,  
Daniel I. Carey, and John D. Kiefer

Kentucky Geological Survey  
Ken Daniels  
University of Kentucky

## Acknowledgments

Geology adapted from Nelson (2002a-c), Sparks (2002a,b), Thompson (2002a,b) and Tyra (2002a,b). Sinkholes from Taylor and others (2004).

## For Planning Use Only

This map is not intended to be used for selecting individual sites. Its purpose is to inform land-use planners, government officials, and the public in a general way about geologic bedrock conditions that affect the selection of sites for various purposes. The properties of thick soils may supercede those of the underlying bedrock and should be considered on a site-by-site basis. At any site, it is important to understand the characteristics of both the soils and the underlying rock. For further assistance, contact the Kentucky Geological Survey, 859.257.5500. For more information, and to make custom maps of your area, visit the KGS Land-Use Planning Internet Mapping Web Site at [kgsmapping.uky.edu/webviewer/kyplanviewer.htm](http://kgsmapping.uky.edu/webviewer/kyplanviewer.htm).

## Slope Failure

Mass movements or landslides of surficial materials are by far the most frequent and most costly geologic hazards in the northern Kentucky area. Northern Kentucky has the greatest monetary loss per capita caused by landslides in the country. The failure of the slope may be rapid, but more commonly is a slow, almost imperceptible movement, called creep, of a few inches per year. Whether rapid or slow, the end results and damage are similar and costly: broken plumbing, cracked walls and foundations, cracked streets and sidewalks, and commonly total loss of the structures.

Virtually all of the mass movements in northern Kentucky occur in colluvium—the weathered soil and rock materials that crumble from the bedrock as it weathers. The lower slopes of unit 2 are commonly thickly mantled with colluvium.

Shales of unit 2 and adjacent unit 3 will break down and weather rapidly when exposed to air and water. These shaly units tend to swell considerably when exposed to water. For this reason, plumbing trenches under walls and foundations should be prevented from accumulating water. Units 2 and 3 may share a transitional landslide.


Gravity is the main driving force, but water nearly always plays a critical role by adding weight and lubricating the particles in the colluvium. Cutting into or overloading a slope with structures and fill can also be major contributing factors.

Precautions include taking care of all surface water runoff by making certain that all runoff from roofs, gutters, patios, sidewalks, and driveways is kept well away from and not toward the house; diverting drainage from areas sloping toward the house; cutting into natural slopes as little as possible and avoiding the use of fill, and trying to place the foundation of the structure on undisturbed bedrock.

When in doubt, consult an engineering geologist or a geotechnical engineer. Old creek landslides can also be easily reactivated. Look for unusual bulges or cracks in the slope, tilted or curved trees, springs coming out onto the hillside, and tilted and cracked sidewalks, streets, and retaining walls.


For more information, see Potter (1996).

## ROTATIONAL SLIDE

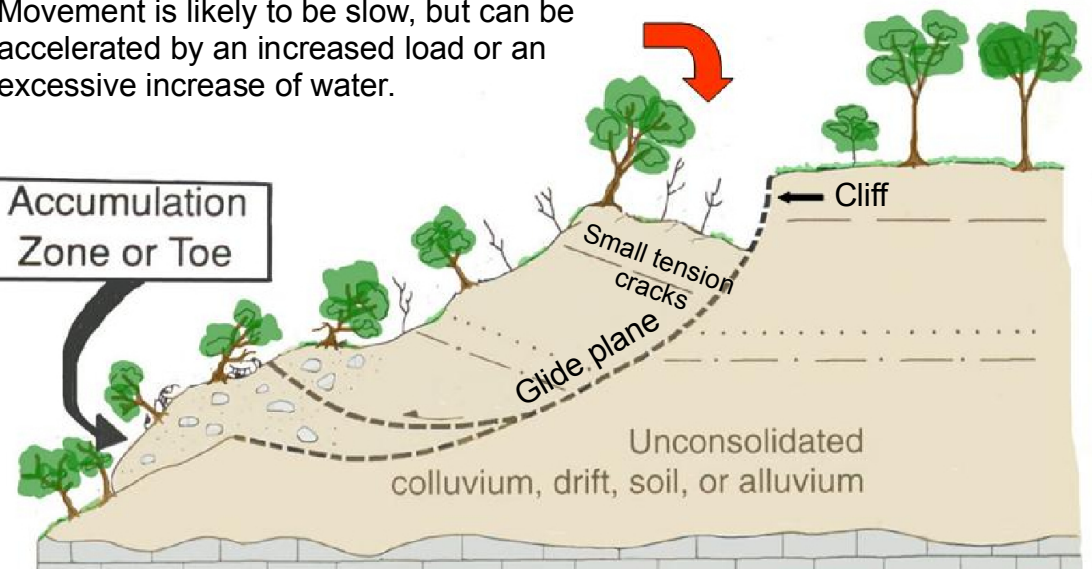

Rotational landslides occur in both the thicker colluvium of unit 2 and in glacial deposits. The head or top area has tension cracks or small cliffs; the toe or bottom has tension cracks and becomes a crumpled, disorganized pile of debris. Such failures are common on steeper slopes of shale-dominated units (units 2 and 3) when both colluvium and the weathered, more permeable bedrock below become fully saturated with water. After Potter (1996).

## TRANSLATIONAL SLIDE

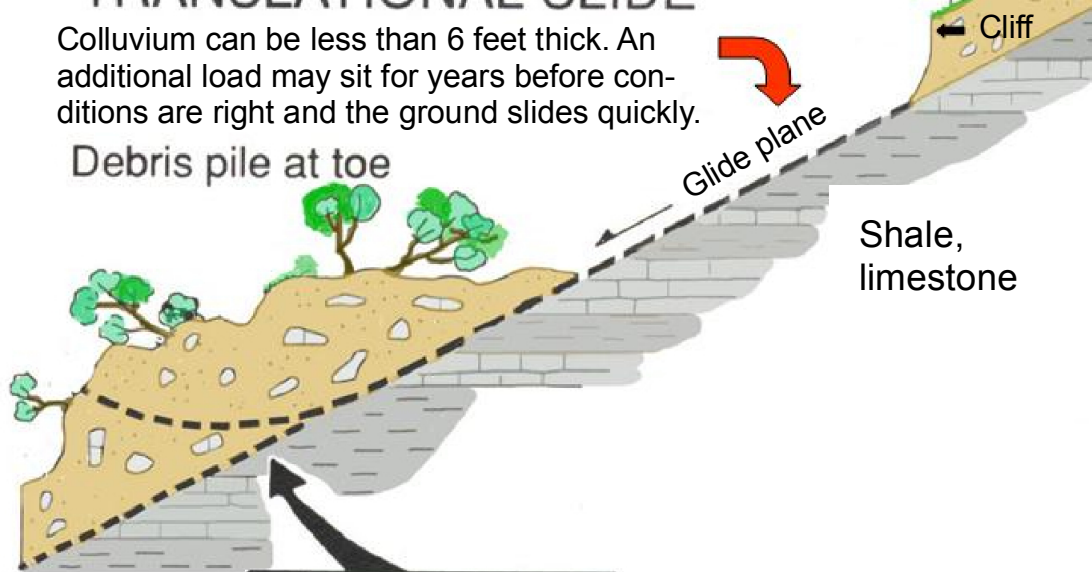

A translational landslide is a relatively thin sheet of colluvium that separates from the underlying bedrock and slides catastrophically downslope more or less as a coherent sheet until it abruptly stops and becomes a crumpled, disorganized pile of debris. Such failures are common on steeper slopes of shale-dominated units (units 2 and 3) when both colluvium and the weathered, more permeable bedrock below become fully saturated with water. After Potter (1996).

## Residential Development



New subdivision under construction on Ky. 338 near Burlington. Northeastern Boone County is being rapidly developed for both residential and industrial use. Photo by Richard Smath, Kentucky Geological Survey.

## Cincinnati/Northern Kentucky International Airport



The airport employs more than 15,000 people and provides an economic impact of \$4.5 billion annually. Airport activities support more than 55,000 jobs in the region. Imagery from the U.S. Department of Agriculture, National Agricultural Imagery Program.

## FOUNDATION AND EXCAVATION

The terms "earth" and "rock" excavation are used in the engineering sense; earth can be excavated by hand tools, whereas rock requires heavy equipment or blasting to remove.

## LIMITATIONS

**Slight**—A slight limitation is one that commonly requires some corrective measure but can be overcome without a great deal of difficulty or expense.  
**Moderate**—A moderate limitation is one that a normally be overcome but the difficulty and expense are great enough that completing the project is commonly a question of feasibility.  
**Severe**—A severe limitation is one that is difficult to overcome and commonly is not feasible because of the expense involved.

## LAND USES

**Septic tank disposal system**—A septic tank disposal system consists of a septic tank and a filter field. The filter field is a subsurface pipe system laid in such a way that effluent from the septic tank is distributed with reasonable uniformity into the soil.  
**Residences**—Ratings are made for residences with basements because the degree of limitation is dependent upon ease and required depth of excavation. For example, excavation in limestone has greater limitation than excavation in shale for a house with a basement.  
**Highways and streets**—Refers to paved roads in which cuts and fills are made in hilly topography, and considerable work is done preparing subgrades and bases before the surface is applied.  
**Access roads**—These are low-cost roads, driveways, etc., usually surfaced with crushed stone or a thin layer of backtop. A minimum of cuts and fills are made, little work is done preparing a subgrade, and generally only a thin base is used. The degree of limitation is based on year-around use and would be less severe if not used during the winter and early spring. Some types of recreation areas would not be used during these seasons.  
**Light industry and malls**—Ratings are based on developments having structures or equivalent load limit requirements of three stories or less, and large paved areas for parking lots. Structures with greater load limit requirements would normally need footings in solid rock, and the rock would need to be core drilled to determine the presence of caverns, cracks, etc.  
**Intensive recreation**—Athletic fields, stadiums, etc.  
**Extensive recreation**—Camp sites, picnic areas, parks, etc.  
**Reservoir areas**—The floor of the area where the water is impounded. Ratings are based on the permeability of the rock.  
**Reservoir embankments**—The rocks are rated on limitations for embankment material.  
**Underground utilities**—Included in this group are sanitary sewers, storm sewers, water mains, and other pipes that require fairly deep trenches.

## Planning Guidance by Rock Unit Type

Rock Unit	Karst Potential	Foundation and Excavation	Septic System	Residence with Basement	Highways and Streets	Access Roads	Light Industry and Malls	Intensive Recreation	Extensive Recreation	Reservoir Areas	Reservoir Embankments	Underground Utilities
1. Clay, silt, sand, gravel, and loess (terrace deposits)	None, but on-site karst investigation recommended where less than 25 feet thick over soluble rock	Fair foundation material, easy to excavate.	Severe limitations. Failed septic systems common. Refer to soil report (Wesenberg and others, 1989).	Water in alluvium may be in direct contact with basements. Refer to soil report (Wesenberg and others, 1989).	Slight limitations. Refer to soil report (Wesenberg and others, 1989).	Slight to moderate limitations. Refer to soil report (Wesenberg and others, 1989).	Slight to moderate limitations. Refer to soil report (Wesenberg and others, 1989).	Refer to soil report (Wesenberg and others, 1989).	Refer to soil report (Wesenberg and others, 1989).	Refer to soil report (Wesenberg and others, 1989).	Not recommended. Refer to soil report (Wesenberg and others, 1989).	Not recommended. Refer to soil report (Wesenberg and others, 1989).
2. Shale, limestone	Medium to low.	Poor to fair foundation material. Avoid steep slopes.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Severe to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to slight limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Moderate to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Moderate to severe limitations. Possible rock excavation. Susceptible to landslides.
3. Limestone, shale	High to medium.	Good to excellent foundation material, difficult to excavate.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Severe to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to slight limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Moderate to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Slight to moderate limitations. Possible rock excavation.
4. Limestone	High.	Excellent foundation material, difficult to excavate.	Severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Severe to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to slight limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Moderate to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Slight to moderate limitations. Possible rock excavation.
5. Clay, silt, sand, gravel, and loess (terrace deposits)	None, but on-site karst investigation recommended where less than 25 feet thick over soluble rock	Fair foundation material, easy to excavate.	Moderate to slight limitations, depending on amount of soil cover.	Moderate to slight limitations, depending on slope.	Slight limitations.	Slight limitations, depending on degree of slope.	Slight limitations, depending on degree of slope.	Moderate to slight limitations, depending on activity and topography. Possible steep wooded slopes.	Slight limitations, depending on activity and topography. Possible steep wooded slopes. No limitations for nature preserve.	Permeable material. Not recommended.	Severe to slight limitations. Unstable. Sinks possible.	Slight limitations.

\*Some of these shales can shrink during dry periods and swell during wet periods, and cause cracking of foundations. Shale units are generally associated with steep slopes and, especially where springs are present, they are susceptible to landslides.

## Boone County Cliffs State Nature Preserve



The Boone County Cliffs State Nature Preserve is a 75-acre old growth forest that provides habitat for species and plants that are uncommon in Kentucky. The cliffs were formed by a glacier 250-500,000 years ago. Photo by Richard Smath, Kentucky Geological Survey.

## Diorama at Big Bone Lick State Park





During the Pleistocene Epoch, over 15-thousand years ago, a huge ice sheet covered the ground all the way from Canada down to the Ohio River. On the edges of the ice sheet, great herds of giant mastodons, woolly mammoths and ground sloths were attracted to the warm salt springs that still bubble from the earth at Big Bone Lick State Park.

The salty marsh that attracted these prehistoric visitors sometimes proved to be a fatal attraction. Animals became trapped and perished in what the early pioneers called "jelly ground," leaving skeletons and interesting clues about life in prehistoric Kentucky.

The scientific community recognizes the site as the "Birthplace of American Vertebrate Paleontology" (Kentucky State Parks—parks.ky.gov/stateparks/). Photo by Richard Smath, Kentucky Geological Survey.

## Swelling and Shrinking Shales

A problem of considerable concern in this area is the swelling of some of the clay minerals in shale units 2 and 3. Expanding shale can cause backfill to swell, and concrete to crack and crumble. It can heave the foundation, the slab, and interior partitions resting on it, and damage upper floors and interior partitions. This phenomenon has been responsible for extensive damage to schools, homes, and businesses in Kentucky. During times of drought, these same shales may shrink, causing foundations to drop. Anyone planning construction on these shales should seek professional advice from a geologist or engineer familiar with the problem.

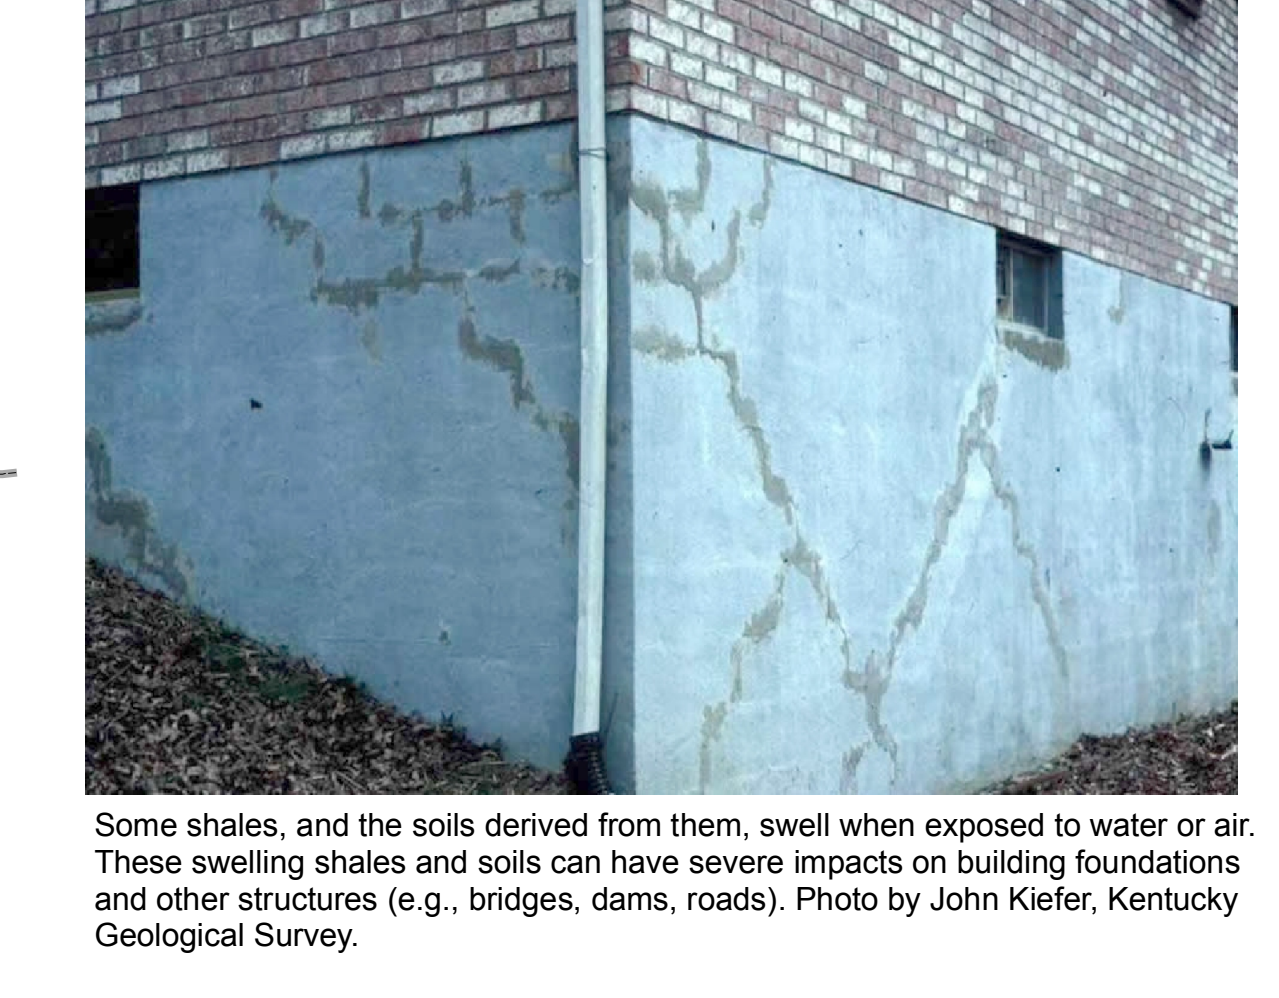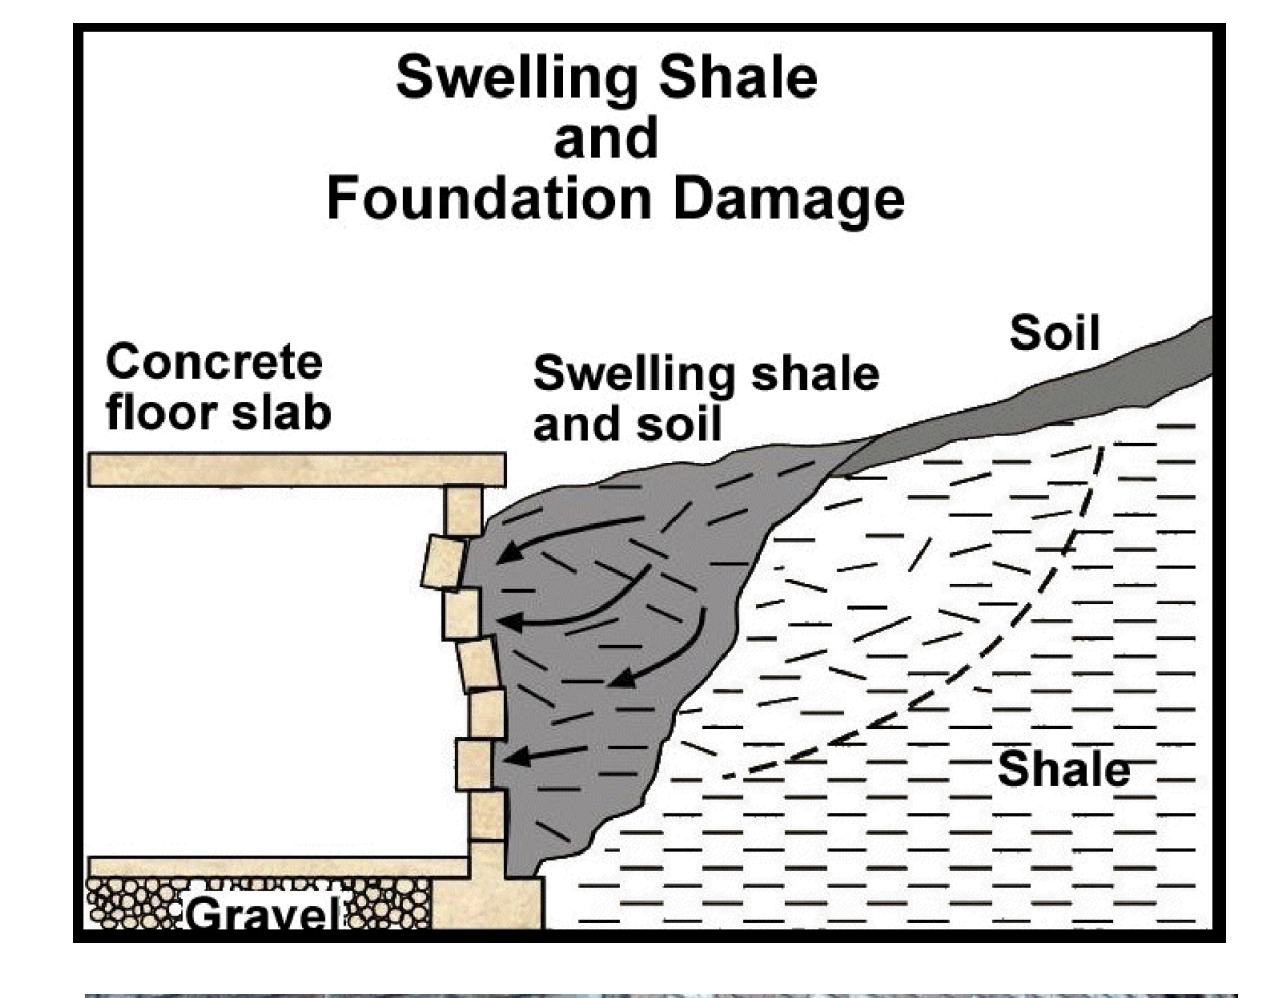

Some shales, and the soils derived from them, swell when exposed to water or air. These swelling shales and soils can have severe impacts on building foundations and other structures (e.g., bridges, dams, roads). Photo by John Kiefer, Kentucky Geological Survey.


## Mineral Resources



Front-end loader works in the glacial outwash at the Bellevue Sand and Gravel Inc. pit. Photo by Richard Smath, Kentucky Geological Survey.




## Pond Construction

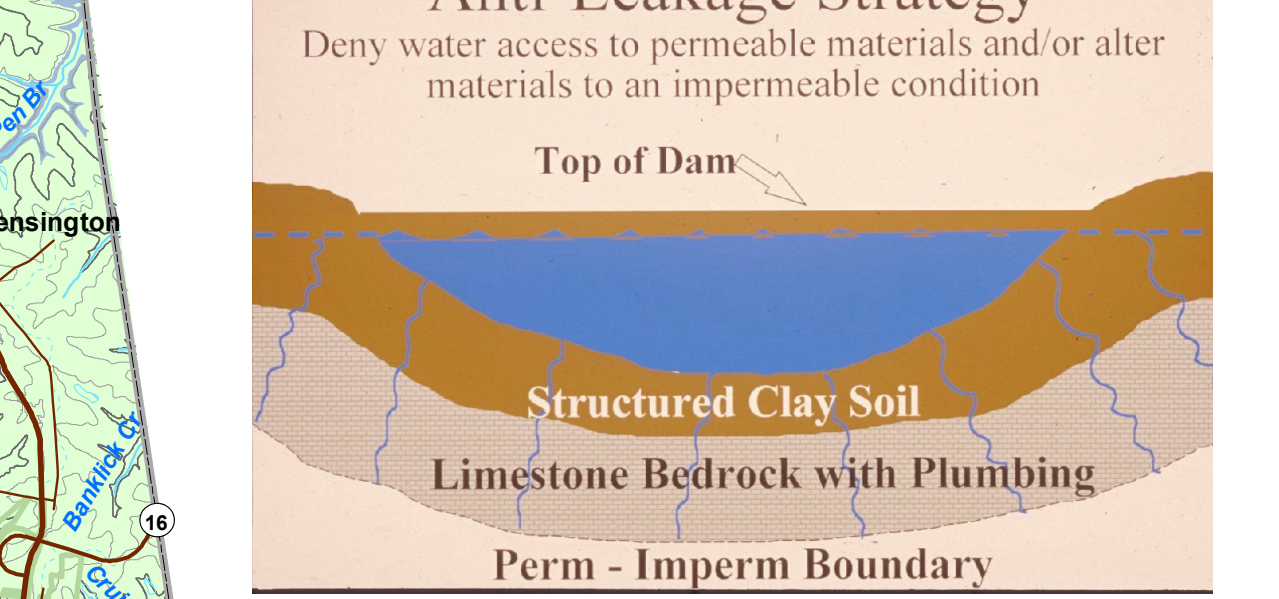

Successful pond construction must prevent water from seeping through structured soils into limestone solution channels below. A compacted clay liner or artificial liner may prevent pond failure. Getting the basin filled with water as soon as possible after construction prevents drying and cracking, and possible leakage of the clayey soil liner. Ponds constructed in dry weather are more apt to leak than ponds constructed in wet weather. A geotechnical engineer or geologist should be consulted regarding the requirements of a specific site. Other leakage prevention measures include synthetic liners, bentonite, and asphaltic emulsions. The U.S. Department of Agriculture-Natural Resources Conservation Service can provide guidance on the application of these liners to new construction, and for treatment of existing leaking ponds.

## Agriculture

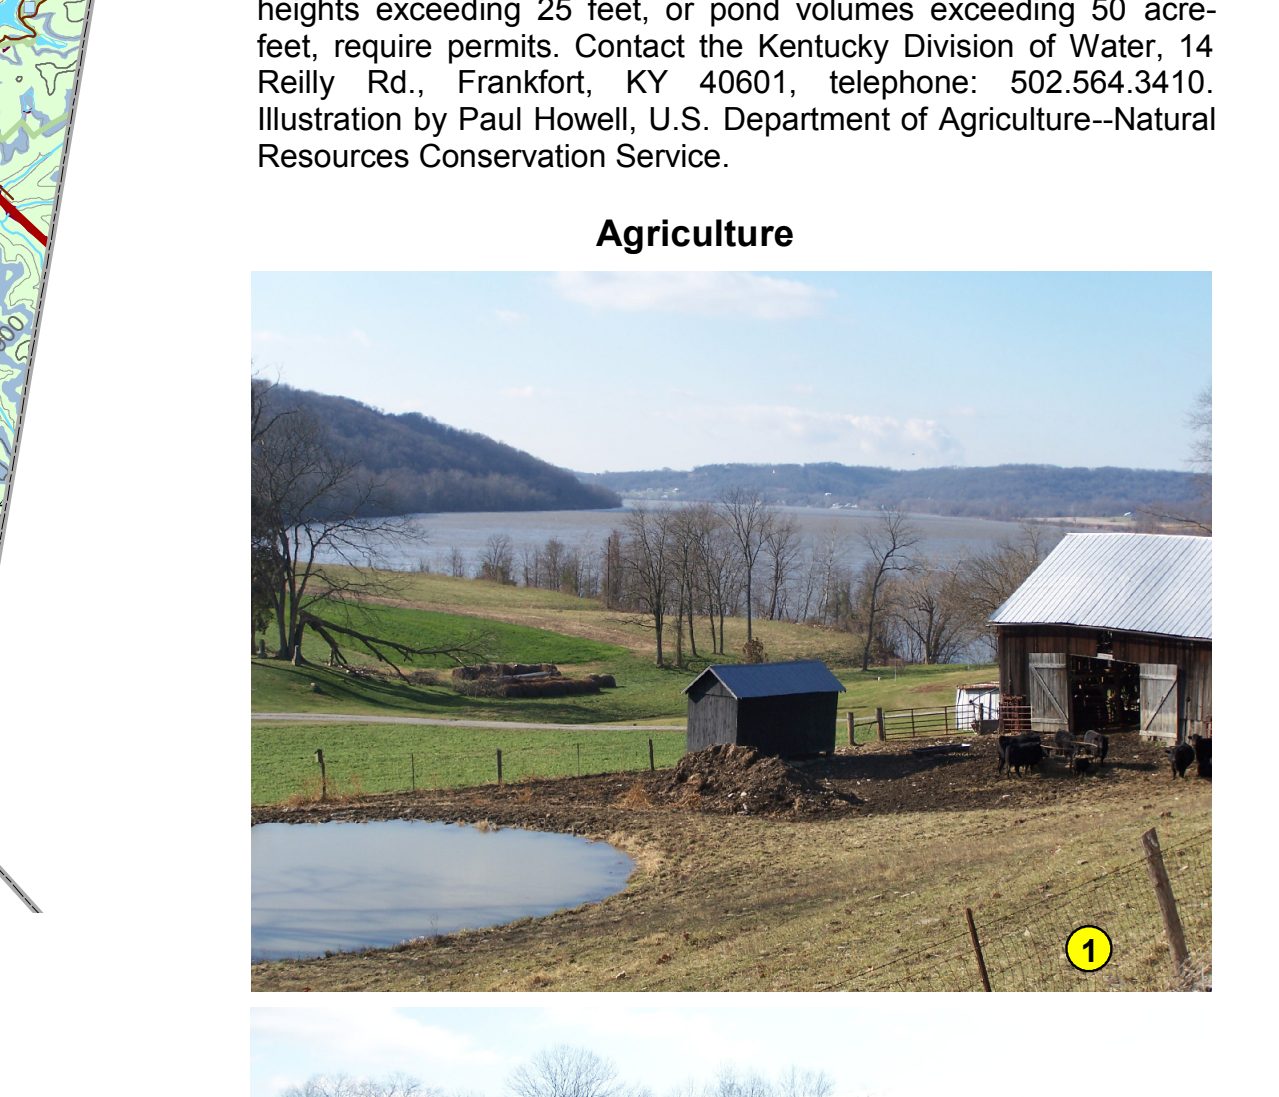

Farms on Rye Road near the Ohio River and Big Bone Lick State Park. Much land use remains agricultural, although residential and commercial construction is growing, especially in the northern part of the county. Photo by Richard Smath, Kentucky Geological Survey.

**FOUNDATION AND EXCAVATION**  
The terms "earth" and "rock" excavation are used in the engineering sense; earth can be excavated by hand tools, whereas rock requires heavy equipment or blasting to remove.


**LIMITATIONS**  
**Slight**—A slight limitation is one that commonly requires some corrective measure but can be overcome without a great deal of difficulty or expense.  
**Moderate**—A moderate limitation is one that a normally be overcome but the difficulty and expense are great enough that completing the project is commonly a question of feasibility.  
**Severe**—A severe limitation is one that is difficult to overcome and commonly is not feasible because of the expense involved.

**LAND USES**  
**Septic tank disposal system**—A septic tank disposal system consists of a septic tank and a filter field. The filter field is a subsurface pipe system laid in such a way that effluent from the septic tank is distributed with reasonable uniformity into the soil.  
**Residences**—Ratings are made for residences with basements because the degree of limitation is dependent upon ease and required depth of excavation. For example, excavation in limestone has greater limitation than excavation in shale for a house with a basement.  
**Highways and streets**—Refers to paved roads in which cuts and fills are made in hilly topography, and considerable work is done preparing subgrades and bases before the surface is applied.  
**Access roads**—These are low-cost roads, driveways, etc., usually surfaced with crushed stone or a thin layer of backtop. A minimum of cuts and fills are made, little work is done preparing a subgrade, and generally only a thin base is used. The degree of limitation is based on year-around use and would be less severe if not used during the winter and early spring. Some types of recreation areas would not be used during these seasons.  
**Light industry and malls**—Ratings are based on developments having structures or equivalent load limit requirements of three stories or less, and large paved areas for parking lots. Structures with greater load limit requirements would normally need footings in solid rock, and the rock would need to be core drilled to determine the presence of caverns, cracks, etc.  
**Intensive recreation**—Athletic fields, stadiums, etc.  
**Extensive recreation**—Camp sites, picnic areas, parks, etc.  
**Reservoir areas**—The floor of the area where the water is impounded. Ratings are based on the permeability of the rock.  
**Reservoir embankments**—The rocks are rated on limitations for embankment material.  
**Underground utilities**—Included in this group are sanitary sewers, storm sewers, water mains, and other pipes that require fairly deep trenches.


## Planning Guidance by Rock Unit Type

Rock Unit	Karst Potential	Foundation and Excavation	Septic System	Residence with Basement	Highways and Streets	Access Roads	Light Industry and Malls	Intensive Recreation	Extensive Recreation	Reservoir Areas	Reservoir Embankments	Underground Utilities
1. Clay, silt, sand, gravel, and loess (terrace deposits)	None, but on-site karst investigation recommended where less than 25 feet thick over soluble rock	Fair foundation material, easy to excavate.	Severe limitations. Failed septic systems common. Refer to soil report (Wesenberg and others, 1989).	Water in alluvium may be in direct contact with basements. Refer to soil report (Wesenberg and others, 1989).	Slight limitations. Refer to soil report (Wesenberg and others, 1989).	Slight to moderate limitations. Refer to soil report (Wesenberg and others, 1989).	Slight to moderate limitations. Refer to soil report (Wesenberg and others, 1989).	Refer to soil report (Wesenberg and others, 1989).	Refer to soil report (Wesenberg and others, 1989).	Refer to soil report (Wesenberg and others, 1989).	Not recommended. Refer to soil report (Wesenberg and others, 1989).	Not recommended. Refer to soil report (Wesenberg and others, 1989).
2. Shale, limestone	Medium to low.	Poor to fair foundation material. Avoid steep slopes.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Severe to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to slight limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Moderate to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Moderate to severe limitations. Possible rock excavation. Susceptible to landslides.
3. Limestone, shale	High to medium.	Good to excellent foundation material, difficult to excavate.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Severe to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to slight limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Moderate to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Slight to moderate limitations. Possible rock excavation.
4. Limestone	High.	Excellent foundation material, difficult to excavate.	Severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Severe to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to severe limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight to moderate limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Slight limitations. Rock excavation may be required. Slopes may be steep. Avoid steep slopes.	Moderate to slight limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Moderate to severe limitations. Reservoir may leak where rocks are fractured. Sinks possible.	Slight to moderate limitations. Possible rock excavation.
5. Clay, silt, sand, gravel, and loess (terrace deposits)	None, but on-site karst investigation recommended where less than 25 feet thick over soluble rock	Fair foundation material, easy to excavate.	Moderate to slight limitations, depending on amount of soil cover.	Moderate to slight limitations, depending on slope.	Slight limitations.	Slight limitations, depending on degree of slope.	Slight limitations, depending on degree of slope.	Moderate to slight limitations, depending on activity and topography. Possible steep wooded slopes.	Slight limitations, depending on activity and topography. Possible steep wooded slopes. No limitations for nature preserve.	Permeable material. Not recommended.	Severe to slight limitations. Unstable. Sinks possible.	Slight limitations.

\*Some of these shales can shrink during dry periods and swell during wet periods, and cause cracking of foundations. Shale units are generally associated with steep slopes and, especially where springs are present, they are susceptible to landslides.

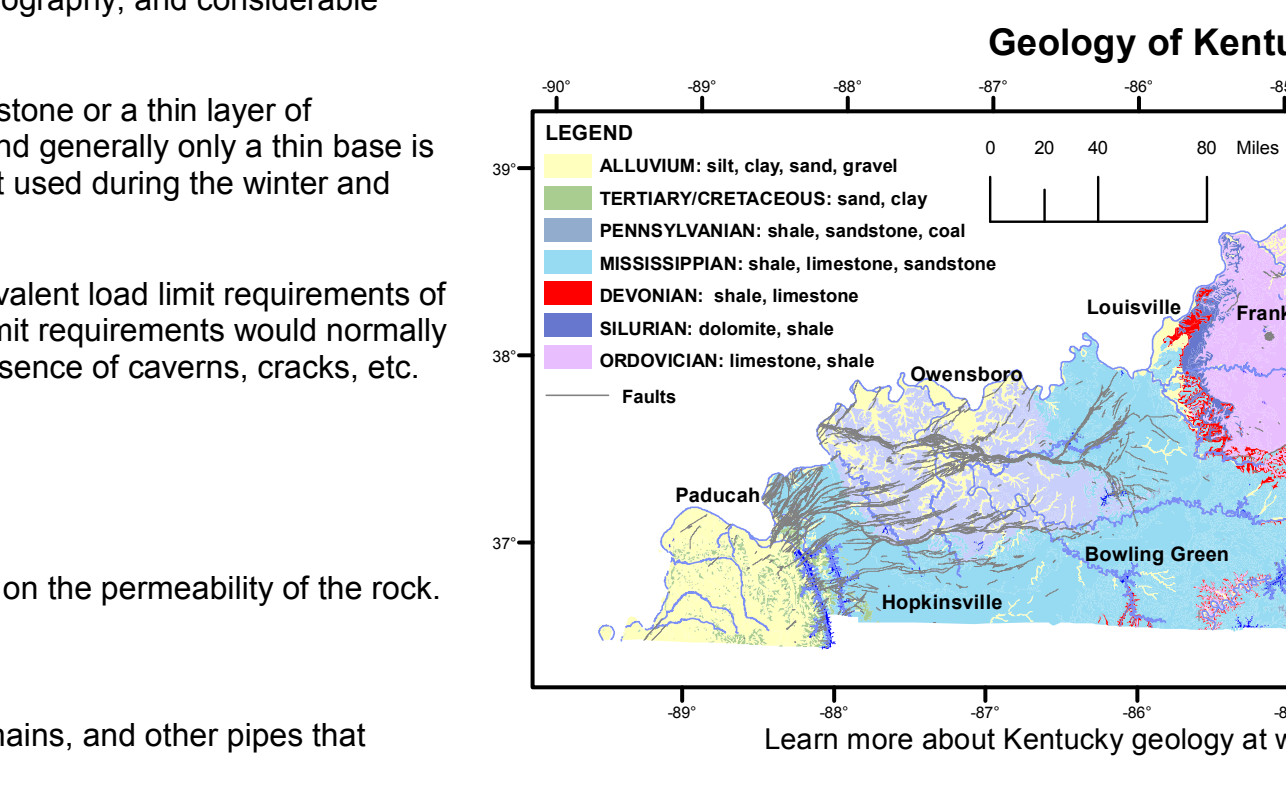

The Rabbit Hash General Store is located on the Ohio River in Lower River Road off of Ky. 338, north of the East Bend Power Station. Established in 1831, the store is a popular tourist destination in the area. Photo by Richard Smath, Kentucky Geological Survey.

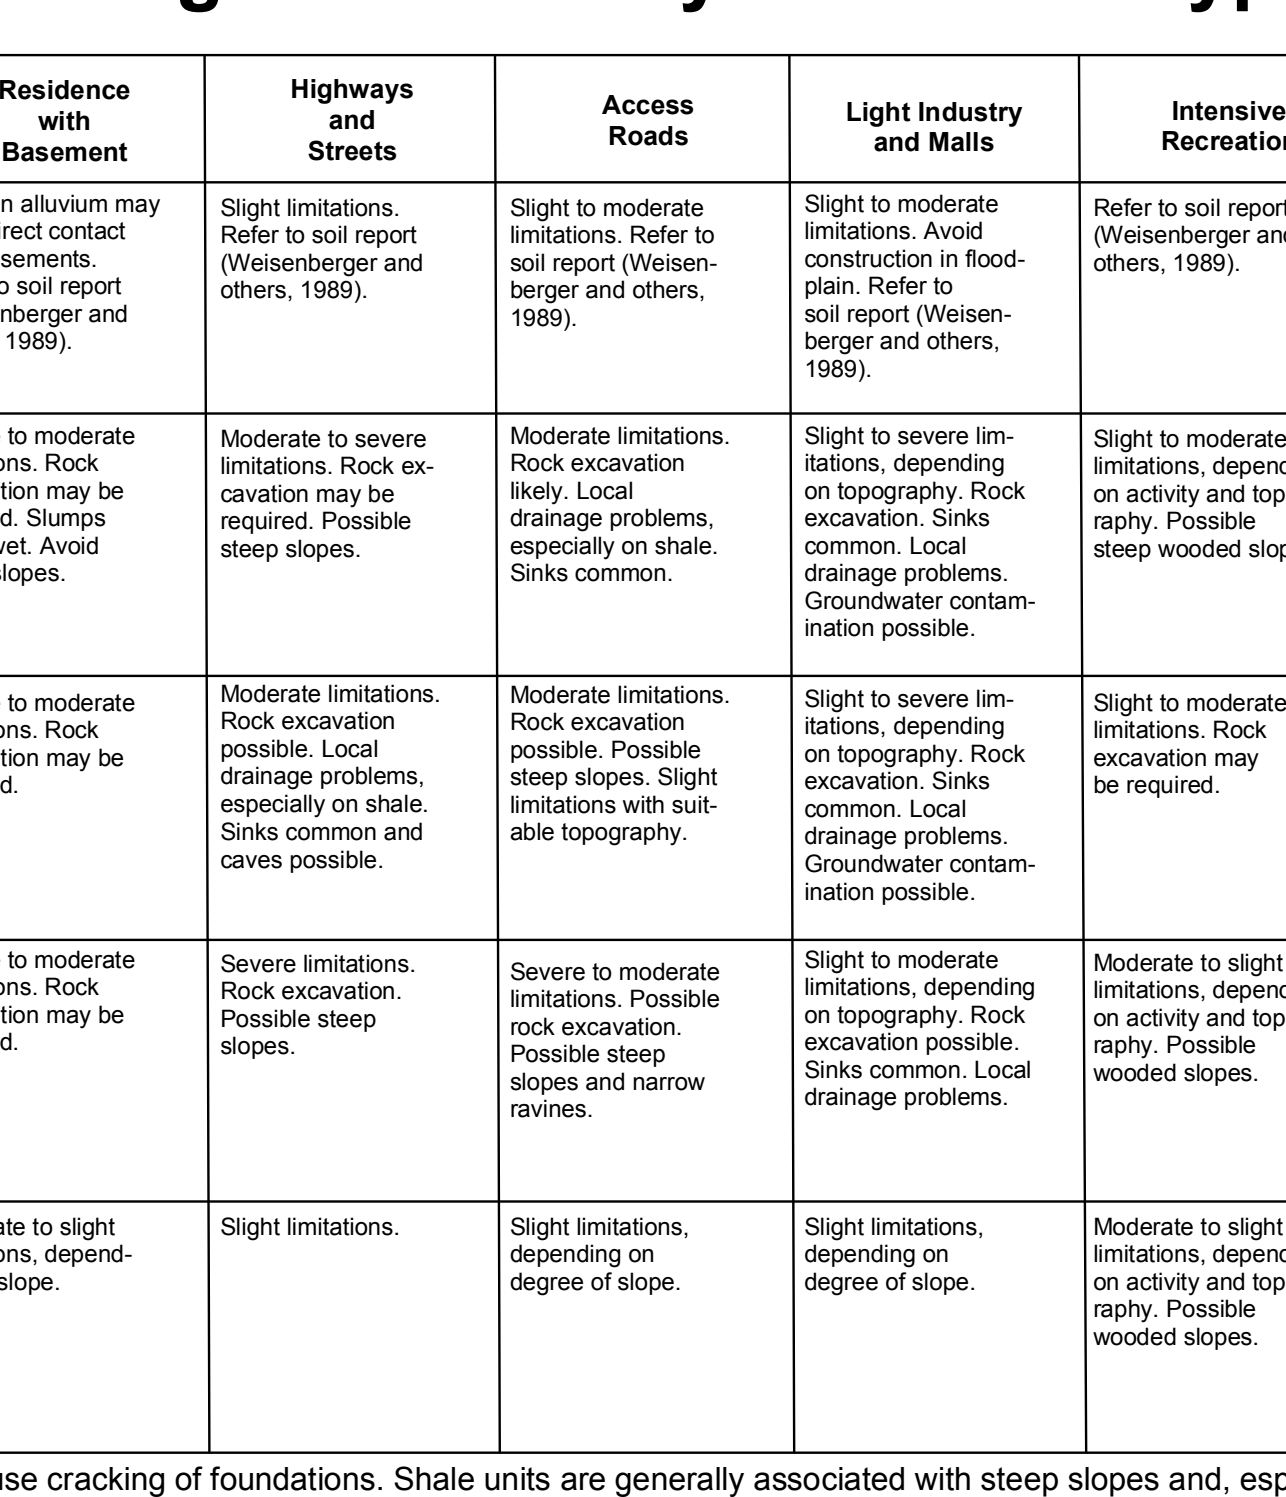

Learn more about Kentucky geology at [www.uky.edu/KGS/geology/](http://www.uky.edu/KGS/geology/)


## Groundwater

The alluvium along the Ohio River is the best source of groundwater in the county. Many properly constructed drilled wells will produce several hundred gallons per minute from the alluvium, most wells produce enough for a domestic supply at depths less than 100 feet. Water is hard or very hard, but otherwise of good quality.

In the lower sections of the larger creek valleys, most drilled wells will produce enough water for a domestic supply at depths less than 100 feet. Some wells located in the smaller creek valleys will produce enough water for a domestic supply except during dry weather.

In the upland areas of Boone County (approximately 70 percent of the county), most drilled wells will not produce enough water for a dependable domestic supply except along drainage lines; these may produce enough water except during dry weather. Groundwater in these areas is hard or very hard and may contain salt or hydrogen sulfide, especially at depths greater than 100 feet.

For more information on groundwater in the county, see Carey and Stockton (2004).

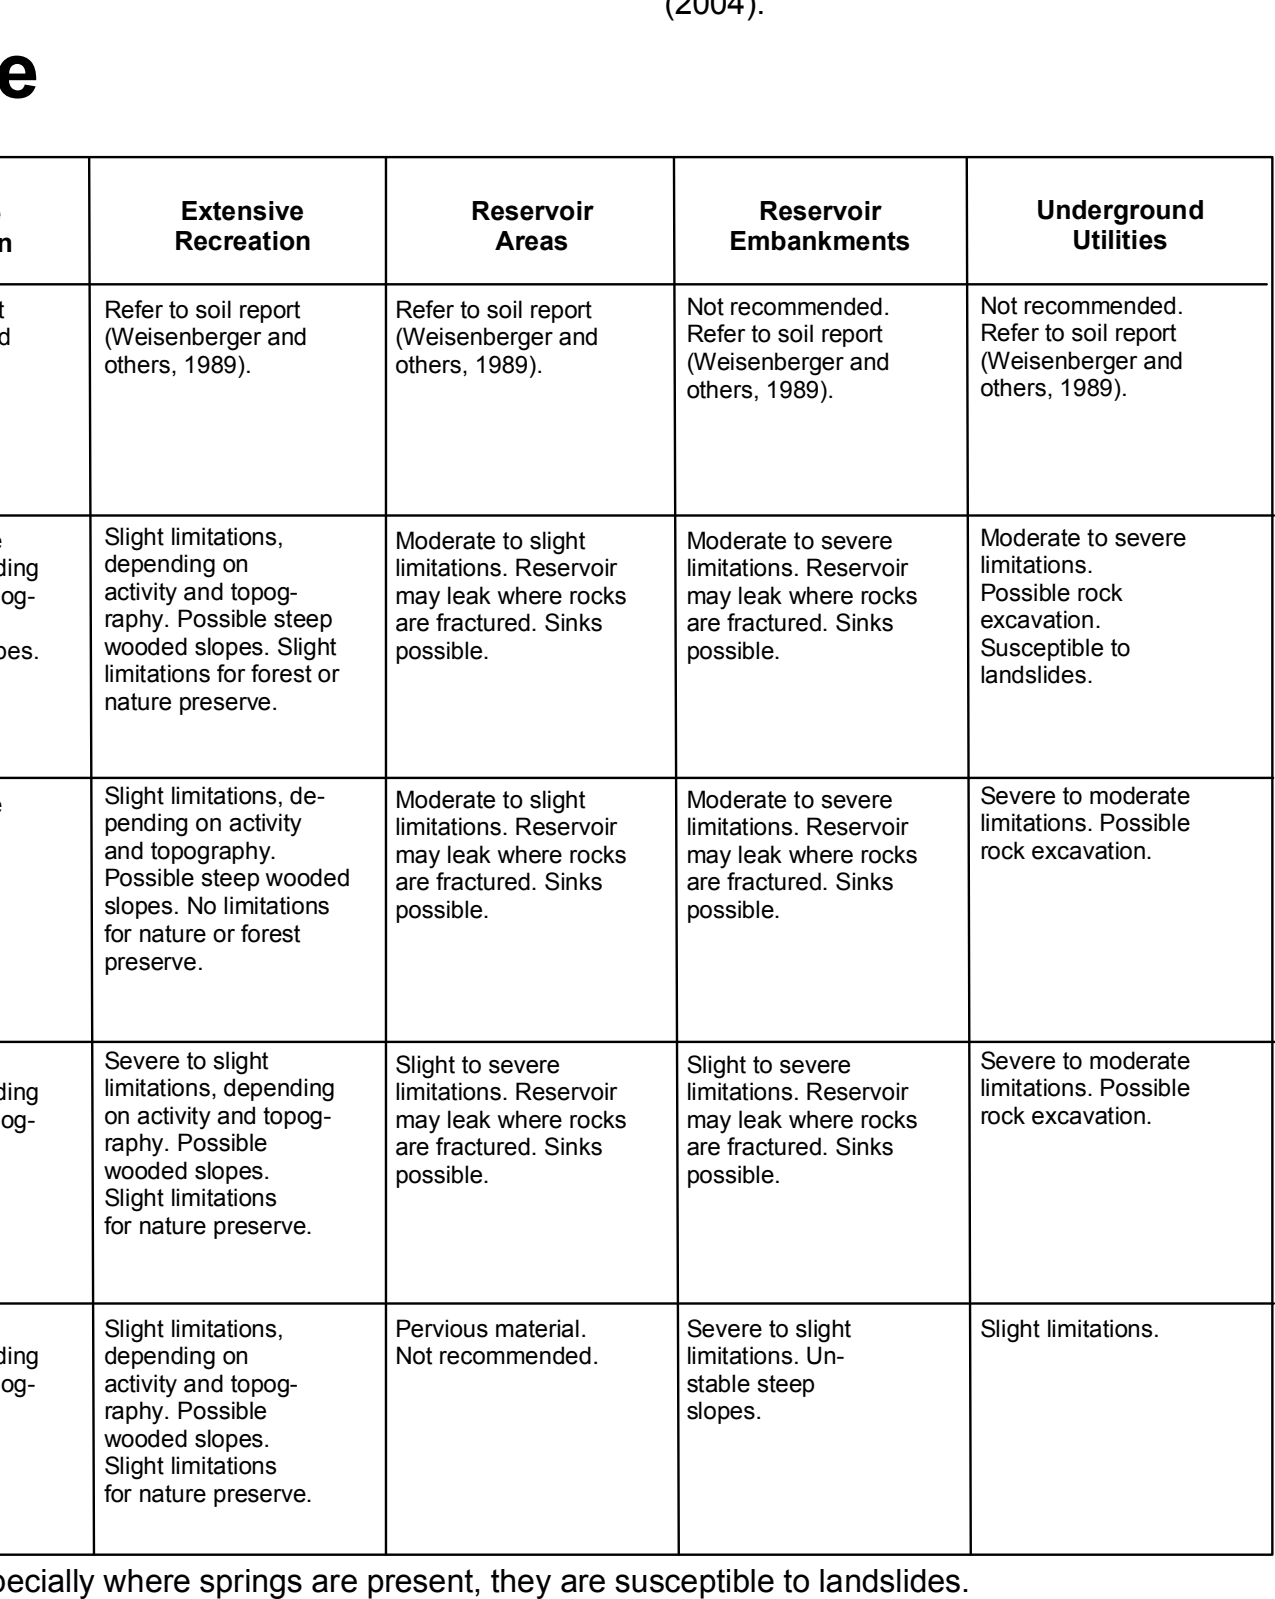

Copyright 2005 by the University of Kentucky, Kentucky Geological Survey. For information on obtaining copies of this map and other Kentucky Geological Survey maps and publications call our Public Information Center at 859.257.3888 or 877.778.7827 ( toll free). Visit the KGS World Wide Web site at: [www.uky.edu/kggs](http://www.uky.edu/kggs).

## Earthquake Hazard

Ground shaking (peak particle accelerations) caused by an earthquake in or near the county is minimal for structures situated on or tied into the bedrock foundation. In areas underlain by poorly consolidated soils, site-specific investigations should be conducted to assure that the building codes will conform to any ground motion information for such liquefaction, landslides, or surface fault ruptures. See [www.uky.edu/KGS/geology/hazard/geohazards.htm](http://www.uky.edu/KGS/geology/hazard/geohazards.htm) for more information.

## References Cited

Carey, D.I., and Stockton, J.F., 2004. Groundwater resources of Boone County, Kentucky. Kentucky Geological Survey, ser. 12, County Report 5. [www.uky.edu/KGS/waterlibrary/jwelles/BooneBoone.htm](http://www.uky.edu/KGS/waterlibrary/jwelles/BooneBoone.htm) (accessed 11/18/05).  
Federal Emergency Management Agency, 2005. [www.fema.gov](http://www.fema.gov) (accessed 10/21/05).  
Nelson, H.L., Jr., 2002a. Spatial database of the Lawrenceburg, Aurora, and Hooven quadrangles, Boone County, Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-889. Adapted from Swalley, W.C., 1972. Geologic map of the Lawrenceburg, Aurora, and Hooven quadrangles, Boone County, Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-819, scale 1:24,000.  
Nelson, H.L., Jr., 2002b. Spatial database of the Verona quadrangle, north-central Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-819. Adapted from Swalley, W.C., 1972. Geologic map of the Verona quadrangle, north-central Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-819, scale 1:24,000.  
Nelson, H.L., Jr., 2002c. Spatial database of the Walton quadrangle, north-central Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-1080. Adapted from Luff, S.J., 1973. Geologic map of the Walton quadrangle, north-central Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-1080, scale 1:24,000.  
Potter, R.L., Florida, L., Caudill, M., and Curran, J.C., 2004. A GIS coverage of karst sinkholes in Kentucky. Kentucky Geological Survey, ser. 12, Digital Publication 5, 1 CD-ROM.  
Poyler, P.E., 1996. Exploring the geology of the Cincinnati region. Kentucky Geological Survey, ser. 12, Special Publication 22, 115 p.  
Sparks, N., 2002a. Spatial database of the Burlington and Adytton quadrangles, Boone County, Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-829. Adapted from Swalley, W.C., 1972. Geologic map of the Burlington and Adytton quadrangles, Boone County, Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-929, scale 1:24,000.  
Sparks, N., 2002b. Spatial database of the Covington quadrangle, northern Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-955. Adapted from Luff, S.J., 1971. Geologic map of the Covington quadrangle, northern Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-955, scale 1:24,000.  
Thompson, M.F., 2002a. Spatial database of the Rising Sun quadrangle, Boone County, Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-829. Adapted from Swalley, W.C., 1971. Geologic map of the Rising Sun quadrangle, Boone County, Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-929, scale 1:24,000.  
Thompson, M.F., 2002b. Spatial database of the Union quadrangle, Boone County, Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-775. Adapted from Luff, S.J., 1968. Geologic map of the Independence quadrangle, Kenton and Boone Counties, Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-775, scale 1:24,000.  
Tyra, M.A., 2002a. Spatial database of the Independence quadrangle, Kenton and Boone Counties, Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-785. Adapted from Luff, S.J., 1968. Geologic map of the Independence quadrangle, Kenton and Boone Counties, Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-785, scale 1:24,000.  
Tyra, M.A., 2002b. Spatial database of the Painton and Florence quadrangles, north-central Kentucky. Kentucky Geological Survey, ser. 12, Digitally Vectorized Geologic Quadrangle Data DVGQ-846. Adapted from Swalley, W.C., 1969. Geologic map of the Painton and Florence quadrangles, north-central Kentucky. U.S. Geological Survey Geologic Quadrangle Map GQ-846, scale 1:24,000.  
U.S. Fish and Wildlife Service, 2003. National Wetlands Inventory. [www.nwi.fws.gov](http://www.nwi.fws.gov) (accessed 11/18/05).  
Wesenberg, S.C., Dowell, C.W., Leathers, T.R., Oser, H.B., and Richardson, A.L., 1989. Soil survey of Boone, Campbell, and Kenton Counties, Kentucky. U.S. Department of Agriculture, Soil Conservation Service, 69 p.

Listed below are Web sites for several agencies and organizations that may be of assistance with land-use planning issues in Boone County.

[www.uky.edu/Boone/](http://www.uky.edu/Boone/) University of Kentucky Cooperative Extension Service  
[www.kentucky.gov/](http://www.kentucky.gov/) Kentucky Area Development District  
[www.thinkkentucky.com/pds/mnny/mnnyindex.htm](http://www.thinkkentucky.com/pds/mnny/mnnyindex.htm) Detailed county statistics  
[www.uky.edu/KentuckyAtlas/21015.htm](http://www.uky.edu/KentuckyAtlas/21015.htm) Kentucky Atlas and Gazetteer  
[www.census.gov/states/21015.html](http://www.census.gov/states/21015.html) U.S. census data  
[kgsweb.uky.edu/download/ksplan.htm](http://kgsweb.uky.edu/download/ksplan.htm) Planning Information Center  
Kentucky Geological Survey