1993

# Available Coal Resoures of the Handshoe 7.5–Minute Quadrangle, Knott County, Kentucky

Gerald A. Weisenfluh
*University of Kentucky*, jerryw@uky.edu

Robert E. Andrews
*University of Kentucky*

John K. Hiett
*University of Kentucky*, hiett@uky.edu

Richard E. Sergeant
*University of Kentucky*, richard.sergeant@uky.edu

**Right click to open a feedback form in a new tab to let us know how this document benefits you.**

# AVAILABLE COAL RESOURCES OF THE HANDSHOE 7.5–MINUTE QUADRANGLE, KNOTT COUNTY, KENTUCKY

Gerald A. Weisenfluh, Robert E. Andrews, John K. Hiett, and Richard E. Sergeant

Prepared for:

U.S. Geological Survey

Branch of Coal Geology

Under:

| Cover Illustration |
| --- |
| Three-dimensional topography of the Handshoe Quadrangle viewed from the southeast. |

# AVAILABLE COAL RESOURCES OF THE HANDSHOE 7.5-MINUTE QUADRANGLE, KNOTT COUNTY, KENTUCKY

## Gerald A. Weisenfluh, Robert E. Andrews, John K. Hiett, and Richard E. Sergeant

## SUMMARY

Coal resources available for mining have been estimated for the Handshoe Quadrangle within the Hazard Coal Reserve District of the Eastern Kentucky Coal Field. Twelve coal beds within the quadrangle are potentially mineable and comprise the basis of these resource estimates. Seven of these beds have been commercially developed, but only four have produced more than 1 million tons: the Tiptop, Hazard No. 8, Hazard No. 4, and Upper Elkhorn No. 3. A computerized Geographic Information System was used to calculate estimates of original, mined–out, and remaining resources, restrictions to mining, and available resources.

### Original Coal Resources

The total original coal resources for the Handshoe Quadrangle were **644.7** million short tons. Three beds, the Hazard No. 4, Upper Elkhorn No. 3, and Upper Elkhorn No. 1 comprise 63 percent of this amount. Approximately **63 percent** of the total original resources are in the greater–than–28–inch thickness category. Given a maximum overburden height of 100 feet for surface mining, **85 percent** of the resources lie in the deep–mineable category. The average reliability of the estimates based on the density of data points is **31 percent measured, 55 percent indicated, and 14 percent inferred.**

### Mined–Out and Remaining Coal Resources

Total mined–out and lost–in–mining tonnages are **11.6** million tons. Surface mining accounts for **57 percent** of this amount. The remaining resources are **633.1** million tons or **98 percent** of the original. These resources are distributed similarly to the original resources with respect to overburden and thickness categories.

### Restrictions and Available Coal Resources

The total restricted coal for the area is **230** million tons or **36 percent** of the remaining resources. Coal too thin to mine by underground methods (technological restriction) accounts for **92 percent** of this amount. The available coal resources are estimated as **403** million tons, which is **62.5 percent** of original and **64 percent** of remaining resources. Deep–mineable coal represents **81 percent** of the available resources. The Hazard No. 4, Upper Elkhorn No. 3, and Upper Elkhorn No. 1 coal beds comprise **75 percent** of available resources.

# CONTENTS

Page

# ILLUSTRATIONS

# TABLES

# INTRODUCTION

One of the primary functions of the Federal and state geological surveys is to estimate the amount and character of the Nation's mineral resources. Understanding these estimates and their inherent levels of uncertainty is crucial for policy makers involved with long-term economic planning. In Kentucky, one of the most important energy resources is coal, which occurs in two regions of the State: the Eastern and Western Kentucky Coal Fields.

About 6.6 billion tons of coal have been mined in these two regions since the beginning of the nineteenth century. The amount of coal remaining in Kentucky is estimated to be about 90 billion tons (Brant and others, 1983; annual production figures). Given present production levels of about 160 million tons per year, there is an apparently endless supply of coal in the Commonwealth. There may, however, be significant portions of this resource that are not available for mining, due both to regulatory statutes and adverse engineering or geological conditions (Eggleston and others, 1990). Quantification of the degree to which these factors restrict the resource is important for making projections of the amounts of coal resources available for future mining.

The objective of this program is to measure, for selected areas, the magnitude of past mining and potential restrictions to future mining. Mined-out tonnages are discriminated on the basis of surface or underground mining. Restrictions fall under two categories: land-use and technological. Land-use restrictions are those that are specified by local, State, or Federal regulations and generally apply to surface mining. Examples are streams, roads, cemeteries, powerlines, municipalities, and the applicable buffer zones of each. Technological factors that restrict the development of coal, such as deep mine buffers and adverse geological conditions, generally apply to underground mining.

Each analysis for this program is performed for one 7.5-minute quadrangle, a map area of about 55 square miles or 38,000 acres. Estimates are presented for original, mined-out, remaining, restricted, and available resources. This report describes the results for the eighth project area, the Handshoe Quadrangle, in Knott, Floyd, Breathitt, and Magoffin Counties, eastern Kentucky.

# LOCATION, GEOLOGY, AND MINING HISTORY

The Handshoe Quadrangle is located between the towns of Hazard and Prestonsburg in eastern Kentucky. Most of the quadrangle lies in Knott County, with small areas in Breathitt, Floyd, and Magoffin Counties. No major municipalities are within the area and the only major access road is Kentucky Highway 80.

The Handshoe Quadrangle lies along the eastern flank of the Eastern Kentucky Syncline (MacFarlan, 1943), and is largely within the Hazard Coal Reserve District (Fig. 1). Regional structural dip in the area is to the northwest at a rate of about 30 feet per mile. No major drainages are within the quadrangle, and maximum topographic relief is about 1,000 feet.

The principal coal beds of the area, as shown by Danilchik (1977), range stratigraphically upward from the Upper Elkhorn No. 1 to the Tiptop (mistakenly identified as Skyline by Danilchik). The thickness of this interval is about 1,000 feet (Fig. 2). The major coal beds occur in three coal groups, which are separated by thick marine sequences. The lower group contains the Upper Elkhorn coal beds and is overlain by the Elkins Fork and Kendrick Shales. The Amburgy coal zone lies between these two marine intervals, but there are no mineable Amburgy coal beds in the Handshoe Quadrangle. The middle coal group contains the Whitesburg coals, the Hazard No. 4 coal zone, and the Hamlin/Copland coal zone. These coals are overlain by the Magoffin marine shale. The upper coal group contains five coal beds between and including the Hazard and Tiptop coals.

Historically, the coal beds of greatest economic importance have been the Upper Elkhorn No. 3 and the Hazard No. 4, which have been developed by underground methods, the Tiptop, and, to a lesser degree, the Hazard No. 8, which have been developed by surface-mining methods. However, the level of production has been relatively minor compared to surrounding quadrangles, such as the Noble Quadrangle, summarized later in this report.

# METHODS
## Approach

In order to estimate the tonnage of coal present within a given area, its volume must be known. The two factors necessary for calculating volume are area, which is defined by the outcrop of the coal bed, and thickness, which is estimated from point measurements along the outcrop and in subsurface boreholes. The various resource categories, mined-out areas, and restrictions described below make up some part of the whole area of each coal bed. Because the primary task is one of determining and measuring map areas, a computerized Geographic Information System (GIS) approach was selected to perform the analysis. This type of system allows for the storage of digital map information and automated comparisons and calculations on one or more maps. The primary effort is preparing analog point-

1 Boltsfork
2 Noble
3 Millard
4 Matewan
5 Hoskinston
6 Middlesboro N
7 Booneville
8 Handshoe
9 Salyersville S
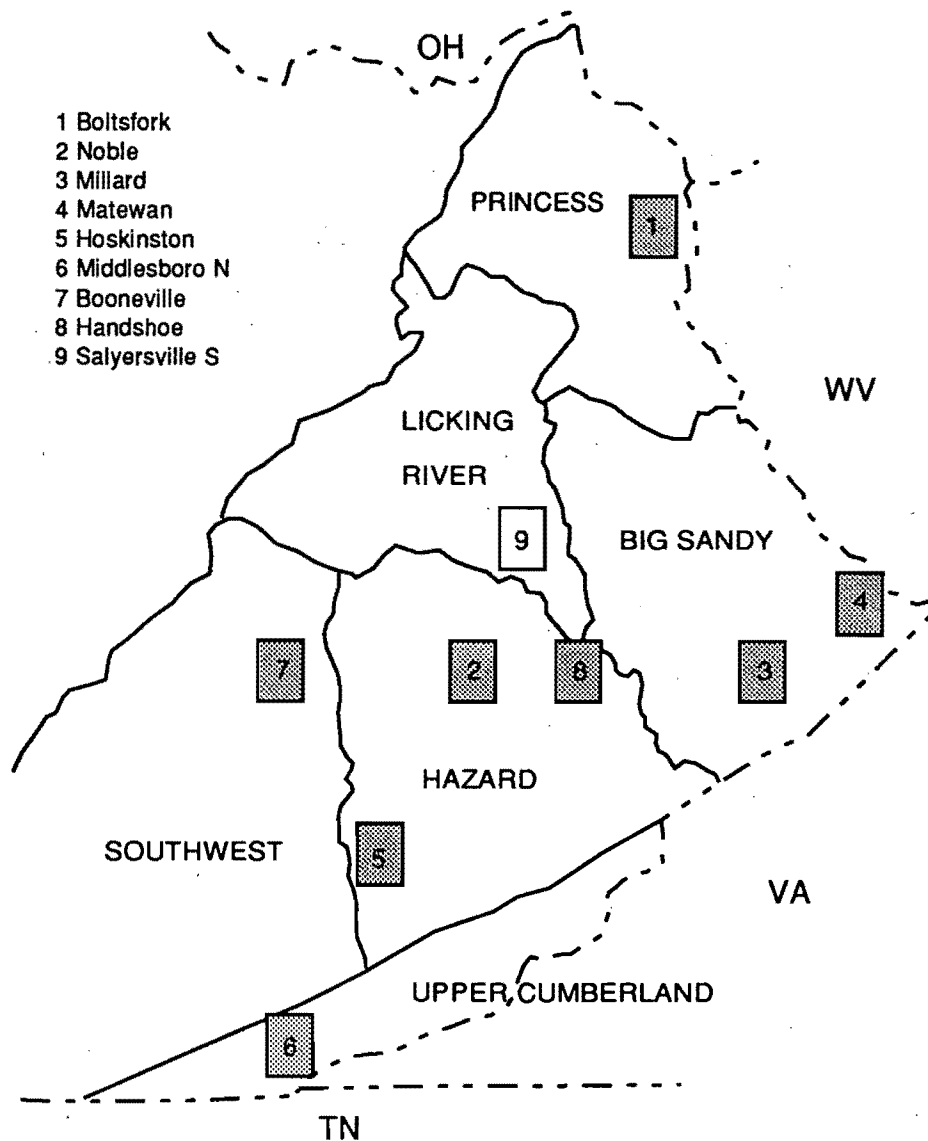
Figure 1. Location of the Handshoe Quadrangle within the Eastern Kentucky Coal Field. Completed (stippled) and proposed Coal Availability Quadrangles shown relative to the six coal reserve districts.

source data and map information and rendering them in digital form.

## Data Preparation
### *Point Data*

Most of the data relevant to the thickness of coal beds within the Handshoe Quadrangle were derived from measurements made by geologists and engineers from exploration core holes. These measurements include a coal bed's thickness, rock partings if present, elevation (calculated from surveyed collar elevations), and the stratigraphic position of the coal. These data were processed and extracted using the CMASTER system, a

borehole data-base software product. Additional information about the thickness and elevation of coal beds was obtained from surface-mine permits from the Kentucky Natural Resources and Environmental Protection Cabinet. All data were re-examined in order to verify correlations and accuracy in measurement. The locations and measurements were then extracted into data files in which coordinates were expressed in the Universal Transverse Mercator System, thicknesses in whole inches, and elevations in feet above sea level.

### *Map Data*
The various types of map information were digitized from stable map media (mylar tracings or photo repro-

TIPTOP (TPT)

HAZARD NO.9 (HZ9)

⎫
Hazard

HAZARD  NO.8 (HZ8)

Coal

HAZARD NO.7 (HZ7)

Group

HAZARD (HZD)

⎭

100 FT

Magoffin Marine Zone

HAMLIN (HAM)

⎫
Hazard No.4 / Whitesburg

HAZARD NO.4  RIDER (FCR)

HAZARD NO.4 (HZ4)

Coal

LOWER WHITESBURG (WHI)

Group
⎭

Kendrick Marine Zone

Elkins Fork Marine Zone

UPPER ELKHORN NO.3 (UE3)

⎫
Upper Elkhorn

UPPER ELKHORN NO.2 (UE2)

Coal Group

UPPER ELKHORN NO.1 (UE1)

⎭
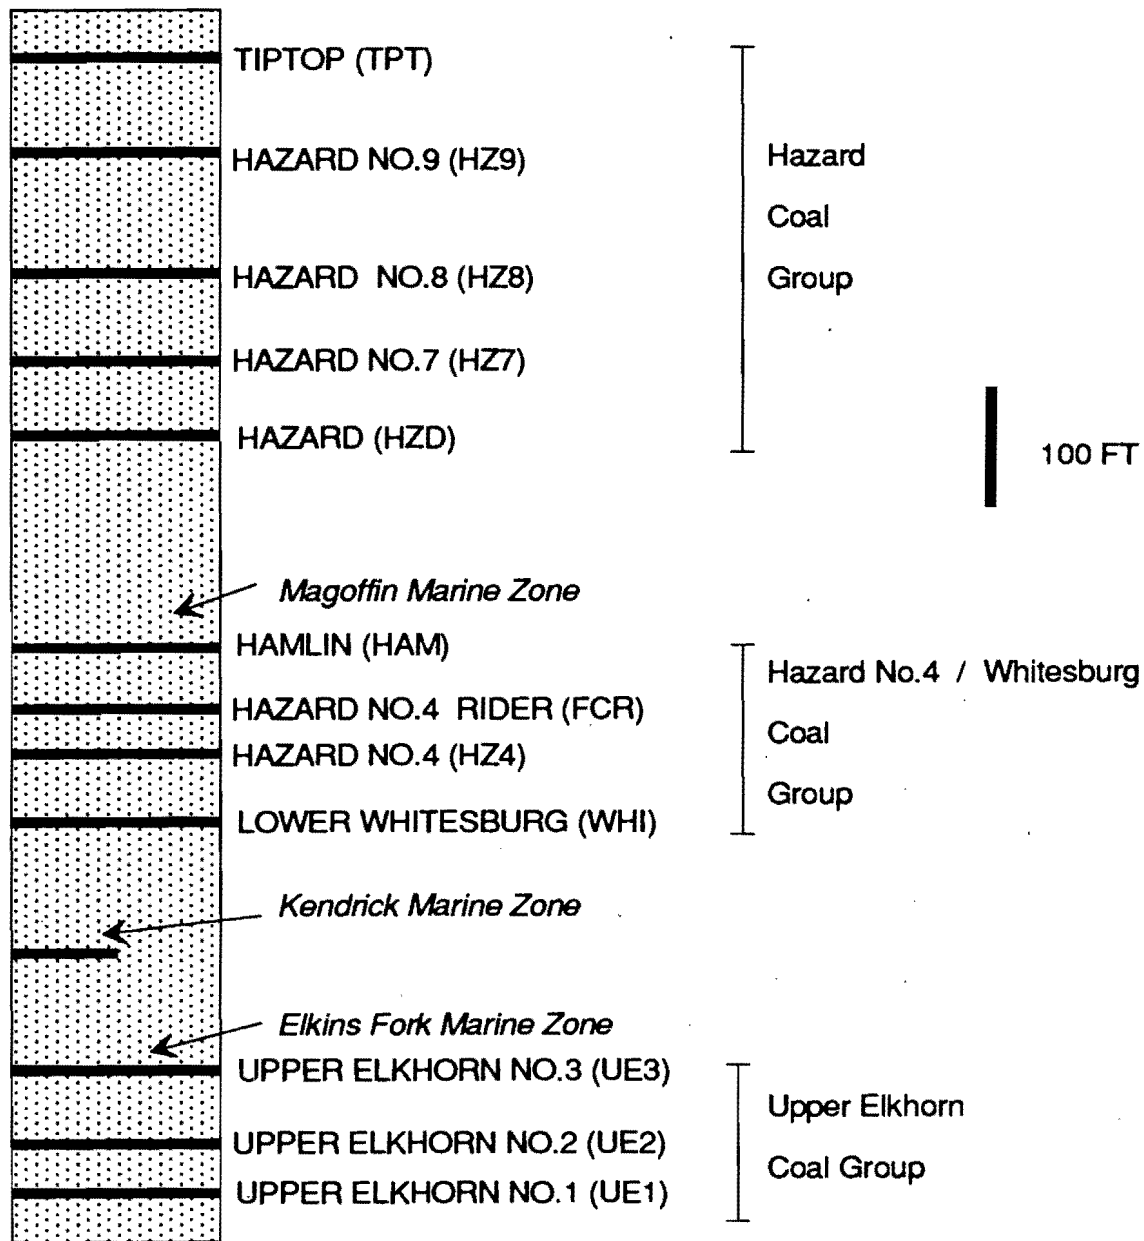
Figure 2. Stratigraphic section of the principal coal-producing portion of the Handshoe Quadrangle. Bed names and three-letter abbreviations given only for those coal beds for which resource estimates were prepared. Bed abbreviations are those used in subsequent figures in text. Coal groups are informal designations used only for the purpose of summarizing the coal resources of this quadrangle.

ductions) using the program GSMAP version 7.2. Coalbed outcrops were determined from the Handshoe 7.5-minute geologic quadrangle map (Danilchik, 1977) and from surface and underground mine maps obtained from the Kentucky Division of Permits and the Kentucky Department of Mines and Minerals. Land-use restrictions were digitized from U.S. Geological Survey 7.5-minute topographic base maps. The locations of oil and gas wells were obtained from the Kentucky Geological Survey's Oil and Gas Well Repository. The digital elevation model (D.E.M.) was obtained from the U.S. Geological Survey and consists of a rectilinear grid of surface elevations at 30 meter intervals within the map area. Restrictions and mined-out areas were field checked for accuracy.

### Restrictions to Mining

Most land-use restrictions are outlined under Kentucky Natural Resources and Environmental Protection Cabinet Document 405 KAR (Kentucky Administrative

Register) 24:040, "Permit Application Review." This document relates to KRS (Kentucky Revised Statutes) 350.465 and 350.610, which defines the regulatory program for surface mining in Kentucky. These restrictions and their applicable buffers (areas where mining is not permitted) are given in Table 1. Seven of the restriction categories apply to the Handshoe Quadrangle. Except for Federally funded highways, nationally protected lands, and cemeteries, variances are granted for many of the listed restrictions.

Technological restrictions, also listed in Table 1, include barriers around existing underground mines, mining or potential mining within 40 vertical feet of a seam, oil and gas wells, and coal too thin (less than 28 inches) for underground mining methods.

## Data Analysis

The Geographic Information System software utilized for this phase of the project was GRASS, a U.S. Government software package developed primarily by the U.S. Army Corps of Engineers, the Soil Conservation Service, and the U.S. Geological Survey. GRASS is a raster-based GIS, which means that map data are rendered as matrices of equal-sized grid cells. Maps stored in a GRASS data base must be oriented to a particular coordinate system. The Universal Transverse Mercator System, based on the Clark 1866 spheroid, was chosen for this study. The size of grid cells for each map must be specified, but can vary between maps (see Table 2). In order to utilize map information for calculations, the original vector data (points, lines, or areas) must be converted to raster (gridded) data files.

**Table 1.—Potential Restrictions with Applicable Buffer Zones and Categories to Which They Apply. Restrictions Found in Handshoe Quadrangle Indicated by Asterisk.**

| Restrictions | Buffer | Land-Use | Technological | Surface | Deep |
|---|---|---|---|---|---|
| Airports | area + 100' | X | | X | X |
| Bridges | area + 100' | X | | X | |
| Cemeteries* | area + 100' | X | | X | |
| Faults | area + 100' | X | X | X | X |
| Public Lands | area | X | | X | X |
| Pipelines | area + 100' | X | | X | |
| Powerlines* | area + 100' | X | | X | |
| Railroads | area + 100' | X | | X | |
| Roads* | area + 100' | X | | X | |
| Streams* | area + 100' | X | | X | X |
| Parks, National | area | X | | X | |
| Parks, State | area | X | | X | |
| Towns* | area + 300' | X | | X | X |
| Oil & Gas Wells* | 200' | X | X | X | X |
| Coal Too Deep | area | | X | | X |
| Mine Buffers* | 50' | | X | | X |
| Interburden < 40'* | area | | X | | X |
| Mining Within 40'* | area | | X | | X |
| Coal Too Thin* | area | | X | | X |

**Table 2.—List of Map Types Used for GRASS Data Analysis. Data Source, Method of Generation, GRASS Cell Resolution, and Other Pertinent Information Given.**

| Map Type | Data Source | Method | Resolution | Comments |
|---|---|---|---|---|
| Map Boundary | corner points | | 5 meters | used as data mask |
| Outcrops | 1:24,000 USGS GQ | digitized | 5 meters | used for original resource maps |
| Mines | Dept. of Mines & Minerals | digitized | 5 meters | used for remaining resource calculations |
| Land–Use Restrictions | 1:24,000 topographic map | digitized | 5 meters | used for available resource calculations |
| Oil & Gas Wells | KGS data base | s. poly output | 5 meters | restriction |
| Reliability Arcs | KGS coal data base | s. poly output | 5 meters | reliability categories |
| DEM | 1:24,000 USGS digital file | | 30 meters | used for creating overburden maps |
| Structure contour | KGS data base | s.surf.pln | 30 meters | used for overburden maps |
| Overburden isopach | derived | r.mapcalc | 30 meters | |
| Thickness isopach | KGS data base | s.surf.pln or s.surf.idw | 30 meters | used for thickness maps |

In the case of thickness and elevation point data, a gridding algorithm was used to interpolate cell nodes between data points. Two algorithms were utilized. The first, "s.surf.pln," accepts unequally spaced data and applies a first-order trend surface fit to the nearest neighbors found by the specified search. This program works best on structural data, which have a large first-order component. It also works adequately on thickness data that are relatively closely spaced. Interpolation prob-

lems occur in areas of sparse data and in the vicinity of closely spaced points that differ substantially in thickness. The second algorithm, "s.surf.idw," uses a simple inverse-distance weighting function. This program is efficient at honoring data points, but is inaccurate farther away from the points. It was implemented for seams where few data were available and the area of outcrop was limited (uppermost seams). A summary of data associated with each coal bed is given in Table 3.

**Table 3.—Summary of Data Associated with Each Coal Bed Used in Resource Calculations.**

| Coal Bed | Area (acres) | % > 14" | Data Points | Surface-Mine Acreage | Deep-Mine Acreage |
|---|---|---|---|---|---|
| Tiptop | 531 | 97 | 52 | 363 | — |
| Hazard No. 9 | 4,699 | 43 | 89 | 138 | — |
| Hazard No. 8 | 10,168 | 99 | 105 | 168 | 1.1 |
| Hazard No. 7 | 14,703 | 58 | 97 | 13 | 0.5 |
| Hazard | 19,835 | 28 | 93 | — | — |
| Hamlin | 31,963 | 14 | 109 | — | — |
| Hazard No. 4 Rider | 33,000 | 13 | 122 | — | — |
| Hazard No. 4 | 33,331 | 70 | 189 | 124 | 307 |
| Lower Whitesburg | 34,532 | 50 | 151 | — | — |
| Upper Elkhorn No. 3 | 37,366 | 99 | 159 | — | 704 |
| Upper Elkhorn No. 2 | 37,500 | 46 | 107 | — | — |
| Upper Elkhorn No. 1 | 37,805 | 61 | 104 | — | 0.7 |

Once all maps were prepared, the USGS program "resources" used GRASS commands to calculate areas (in square meters) for all resource categories and for those portions of the original resource that were mined out or restricted. These data were then converted to acres, and tons were calculated using an average specific gravity figure for bituminous coal in the following equations:

*1 acre=4,047 square meters*

*1 acre/foot of coal=1,800 short tons*

## Resource Categories

Tonnage estimates for each bed are reported by categories of coal thickness, overburden thickness, and reliability of the estimate. Standard U.S. Geological Survey procedures (Wood and others, 1983) stipulate thickness categories in multiples of 14 inches up to 42 inches, and multiples of 42 inches up to 168 inches. Categories above 168 inches are aggregated. For the Coal Availability studies, only two categories are used: 14 to 28 inches and greater than 28 inches. This division is based on the constraint that coal less than 28 inches in thickness is generally not mineable by underground methods.

Overburden categories are also based on the potential effect on mining method. Three categories are defined: surface mineable, deep mineable, and too deep to mine with current technology. The footages for these categories can vary depending on topographic relief and seam and interburden thicknesses, but are generally 100 or 200 feet for maximum surface-mine depths, and 1,000 feet for maximum underground overburden. Coal at depths greater than 1,000 feet is generally considered unmineable. For this study, 100 feet is used for surface mining and no overburden thicknesses were found that exceeded the limit for underground mining. It is common in eastern Kentucky underground mines for overburden to locally exceed 1,000 feet under the crests of ridges. Because these areas are generally small, this condition is generally not considered a restriction to underground mining. In practice, maximum overburden height for surface mining is generally determined by a ratio of overburden to coal thickness. The fixed footage used in these studies only provides an estimate of surface-mineable area.

Reliability categories are derived from areas determined by distances from coal-thickness measure-ments. "Measured" resources lie within $1/4$ mile (1,320 feet or 402 meters) of a data point, "indicated" resources between $1/4$ and $3/4$ miles (3,960 feet or 1,207 meters), "inferred" resources between $3/4$ and 3 miles (15,840 feet or 4,828 meters), and "hypothetical" resources beyond 3 miles. It is generally accepted that the rate of thickness variation differs for most coal beds; hence, "reliability" can only be interpreted in this context. The reliability categories do provide an indication of data spacing.

## RESULTS

### Overview

Original, mined-out, remaining, restricted, and available coal resources were calculated for 12 coal beds in the Handshoe Quadrangle. In ascending stratigraphic order, they are the Upper Elkhorn Nos. 1, 2, and 3, Lower Whitesburg, Hazard No. 4 (Fireclay), Hazard No. 4 Rider (Fireclay Rider), Hamlin, Hazard (Hazard No. 5A), Hazard Nos. 7, 8, and 9, and Tiptop (Fig. 2). All of the beds outcrop within the quadrangle and are accessible by surface and underground mining methods. Resource estimates, mining, and restrictions are reported for each bed by categories of coal thickness (14–28 inches or greater than 28 inches), overburden (surface mineable=0–100 feet, deep mineable=greater than 100 feet), and reliability (measured=$1/4$ mile, indicated=$3/4$ mile, inferred=3 miles), and are detailed completely in Appendix A.

The aggregated results of the Coal Availability investigation for each coal bed in the Handshoe Quadrangle are shown as proportions in Figures 3 and 4. Tonnages are summarized in Table 4, which lists the original, remaining, and available resources for each bed and totals for mined-out and restricted coal. Results of this study indicate that 403 million tons (62.5 percent) of the original resources (644.7 million tons) are available for future economic development. A total of 11.6 million tons (2 percent) of the original resources have been mined out, equally by surface and underground methods. A total of 230 million tons (36 percent) of the remaining resources are restricted from mining. Technological restrictions (mainly coal too thin to mine by underground methods) account for 96 percent of the total restrictions.
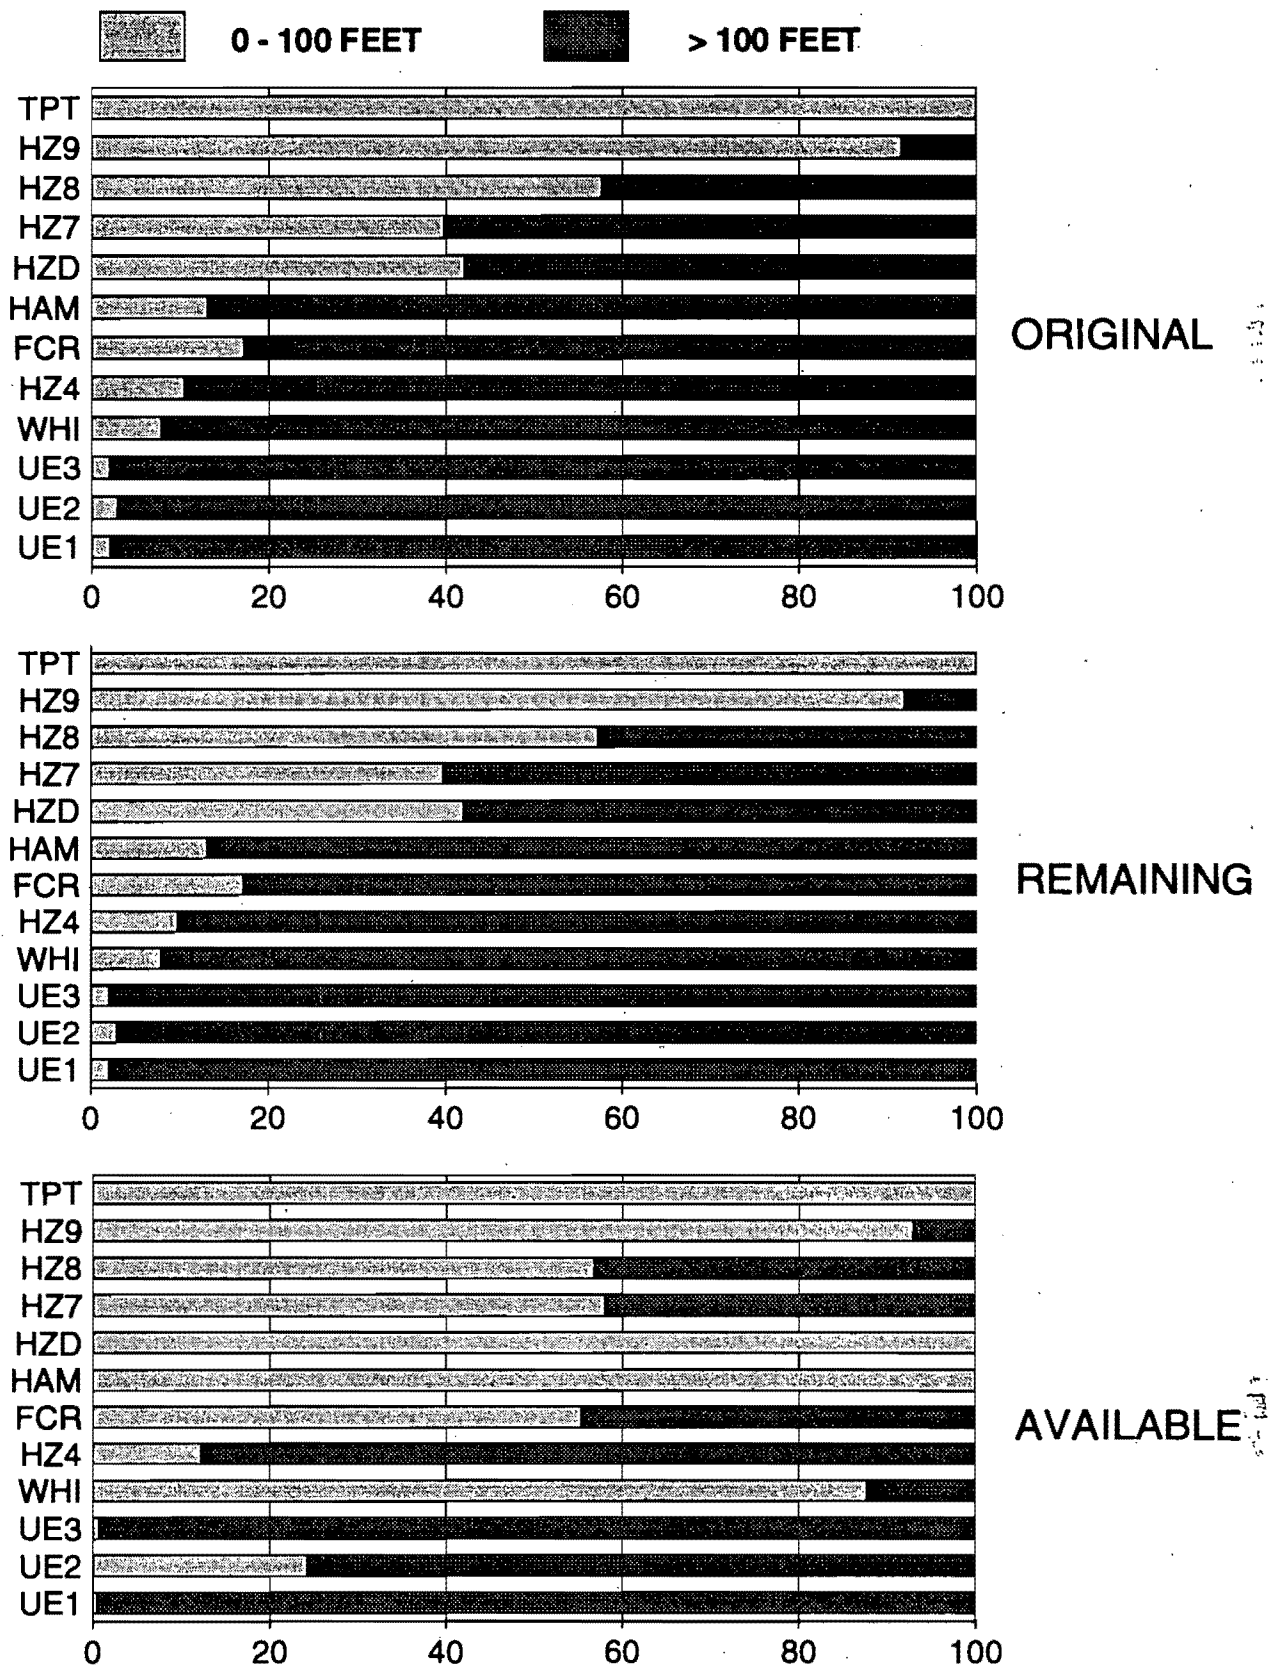
Figure 3. Proportional tonnages of original, remaining, and available coal resources by overburden categories.
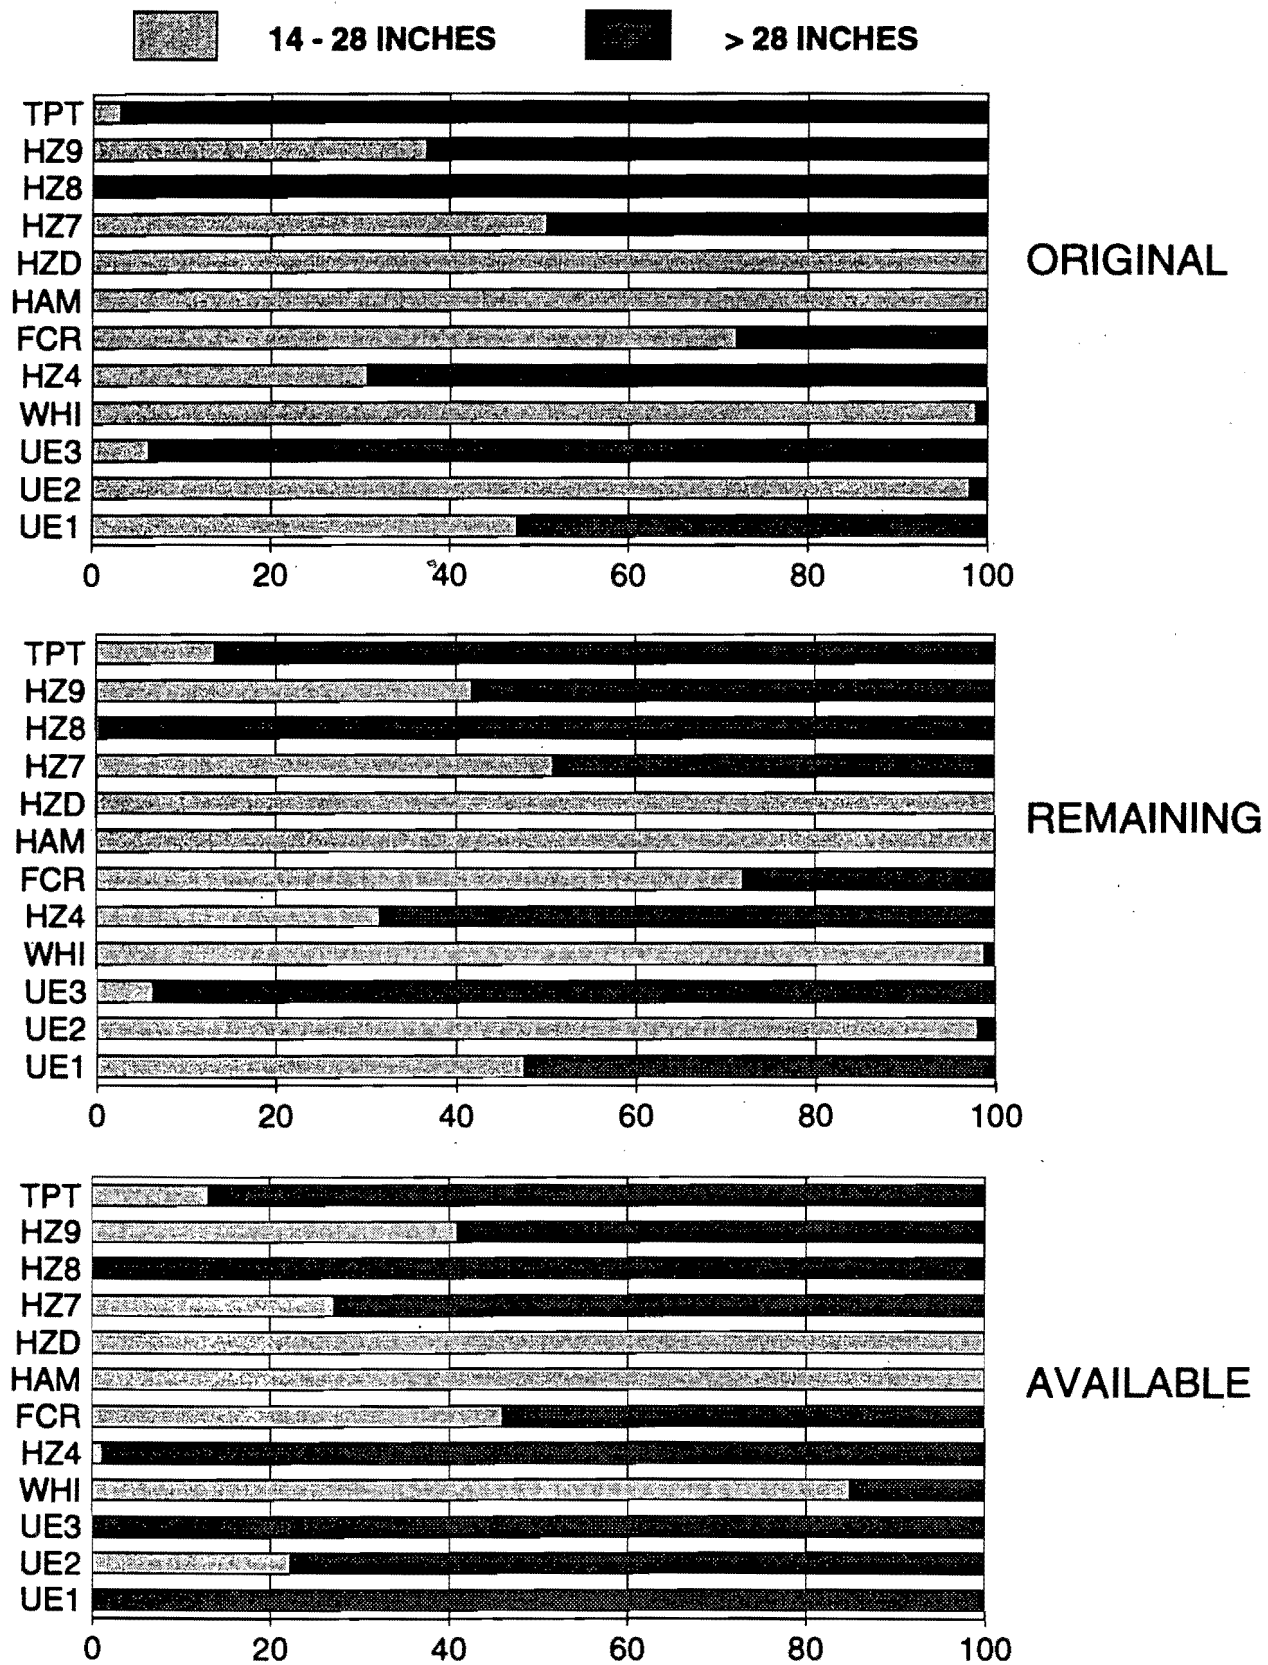
Figure 4. Proportional tonnages of original, remaining, and available coal resources by thickness categories.

Table 4.—Summary of Total Tonnage Estimates for Original, Mined-Out, Remaining, Restricted, and Available Coal Resources (Millions of Short Tons).

| | Original | Mined-Out | Remaining | Land-Use Restricted | Technical Restricted | Available |
|---|---|---|---|---|---|---|
| Tiptop | 4.8 | 3.7 | 1.1 | 0.0 | 0.0 | 1.1 |
| Hazard No. 9 | 8.9 | 0.9 | 8.0 | 0.3 | 0.1 | 7.7 |
| Hazard No. 8 | 59.9 | 1.0 | 58.9 | 0.9 | 0.3 | 57.7 |
| Hazard No. 7 | 33.5 | 0.0 | 33.5 | 0.3 | 10.8 | 22.3 |
| Hazard | 13.9 | 0.0 | 13.9 | 0.2 | 8.0 | 5.7 |
| Hamlin | 12.2 | 0.0 | 12.2 | 0.5 | 10.6 | 1.1 |
| Hazard No. 4 Rider | 13.9 | 0.0 | 13.9 | 0.4 | 9.9 | 3.6 |
| Hazard No. 4 | 105.6 | 2.6 | 103.0 | 1.6 | 31.8 | 69.6 |
| Lower Whitesburg | 44.5 | 0.0 | 44.5 | 0.5 | 40.5 | 3.5 |
| Upper Elkhorn No. 3 | 205.6 | 3.3 | 202.3 | 2.8 | 15.9 | 183.6 |
| Upper Elkhorn No. 2 | 50.0 | 0.0 | 50.0 | 1.3 | 47.8 | 1.0 |
| Upper Elkhorn No. 1 | 92.0 | 0.0 | 92.0 | 1.7 | 44.0 | 46.3 |
| TOTAL | 644.7 | 11.6 | 633.1 | 10.3 | 219.8 | 403.0 |

Restrictions to mining that are not included in this study include surface and mineral ownership divisions not conducive to mineral development, economic considerations, recoverability, and undocumented geologic problems such as channel cutouts, seam splitting, or poor coal quality. Although these types of restrictions are beyond the scope of the present study, some are currently being investigated by the U.S. Bureau of Mines.

## Original Resources

Original coal resources represent estimates of the total amount of coal greater than 14 inches in thickness prior to any mining. The 14-inch limit is arbitrary, but very little coal less than this thickness has been mined. The total original resources for all beds in this study are estimated as 644.7 million tons. The distribution of original coal resources aggregated by thickness and overburden categories is given in Table 5 and illustrated on Figures 5 through 8. The previous estimate for the same beds (Brant and others, 1983) was 498.2 million tons, a difference of 23 percent. However, on a bed-by-bed basis the differences were on the order of 30 to 140 percent. Compared to the present study, the Upper Elkhorn Nos. 1 and 3 coal beds were underestimated by Brant and others and the Hazard No. 4 coal bed was overestimated, each by more than 50 percent. These differences in resource estimates occurred because different thickness data sets were used. Brant and others also estimated an additional 48 million tons for other beds in the quadrangle. However, these estimates were based on few data or data located outside the map area. The present data set did not confirm the presence of mineable coal for these other beds. Consequently, they were not included in this study.

### Distribution of Original Resources
STRATIGRAPHIC

The relative stratigraphic position of each coal bed and the occurrence of the coals in three distinct coal groups are shown on Figure 5. This figure also shows the total outcrop area of each bed and the proportion of outcrop areas containing coal greater than 14 inches. The total tonnages, given in Table 5, indicate that the resources are not distributed uniformly with respect to stratigraphic position. The lower coal group (Upper Elkhorn No. 1 to No. 3 beds) contains 54 percent of original resources, the middle group (Lower Whitesburg to Hamlin beds) 27 percent, and the upper group (Hazard to Tiptop beds) 19 percent. This upward decrease in resources is a function of the diminished area of outcrop for the topographically higher seams. However, Figure 5 shows that the rate of decrease in outcrop area is relatively small in the lower two coal groups and substantially greater for the upper coal group. This relationship, which has a significant impact on total resources, is the inverse of that found in the previous study (Booneville Quadrangle). Moreover, the upper seams, which have the greatest rate of area decrease and hence the more gentle surface slopes, are associated with resistant, sandstone-rich interburdens. This association suggests that factors other than the character of the interburden control the surface slopes. This hypothesis will be a subject for future analysis.
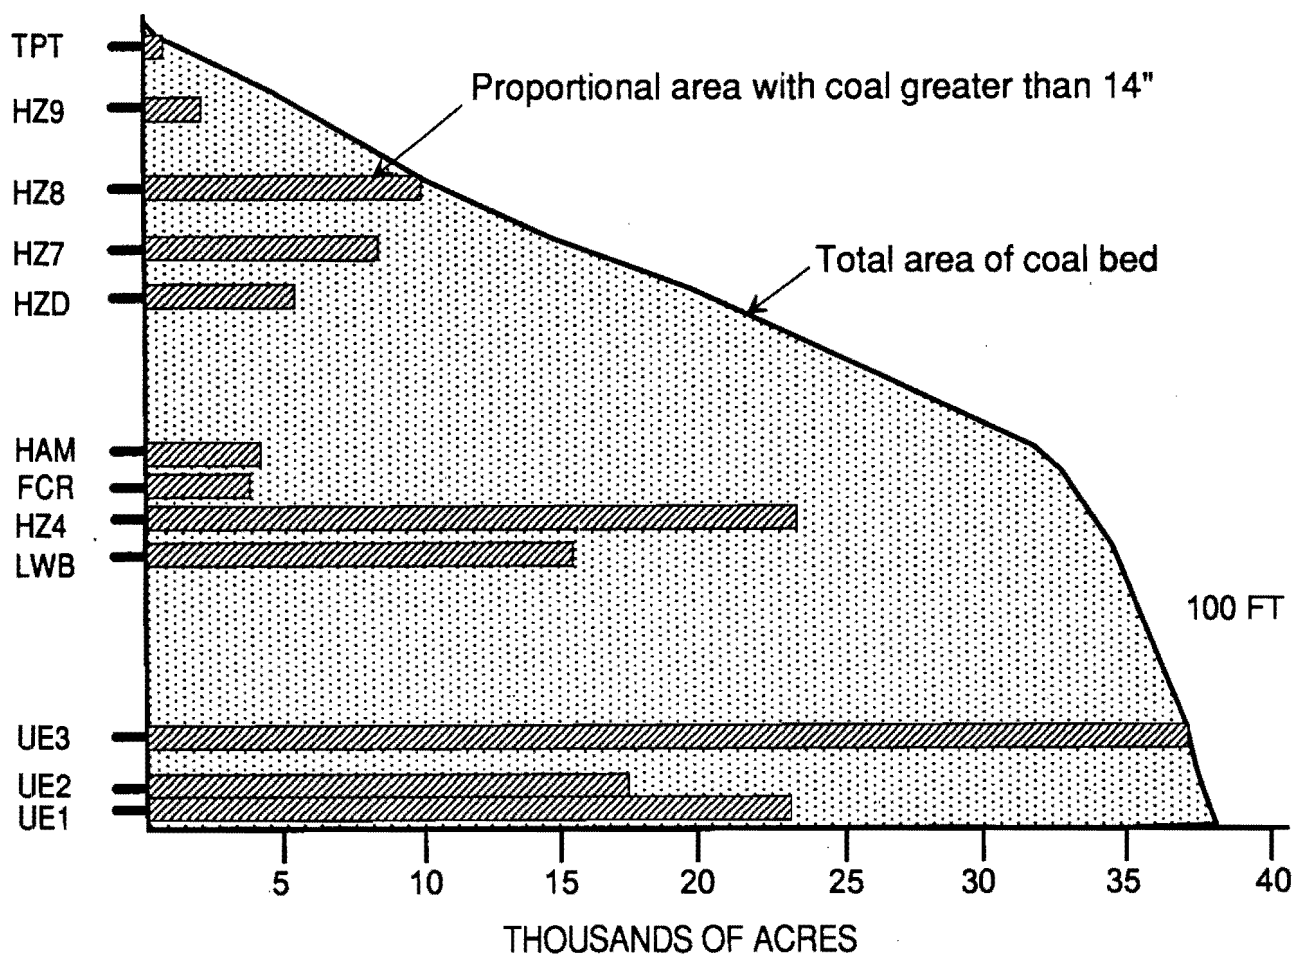
Figure 5. Outcrop area of each coal bed and the proportional amount of area that contains measurable resources (greater than 14 inches). Total area shaded and area with original resources shown as horizontal bars.

**Table 5.—Original Coal Resources Reported by Overburden and Thickness Categories (Thousands of Short Tons).[1]**

| Coal Bed | Surface (0–100') | | | Deep (> 100') | | | Thickness Totals | | TOTALS |
|---|---|---|---|---|---|---|---|---|---|
| | 14–28" | >28" | Total | 14–28" | >28" | Total | 14–28" | >28" | |
| Tiptop | 156 | 4,625 | 4,780 | 0 | 0 | 0 | 156 | 4,625 | 4,780 |
| Hazard No. 9 | 3,248 | 4,943 | 8,191 | 107 | 646 | 753 | 3,355 | 5,589 | 8,944 |
| Hazard No. 8 | 220 | 34,345 | 34,565 | 36 | 25,311 | 25,347 | 256 | 59,656 | 59,912 |
| Hazard No. 7 | 6,306 | 7,040 | 13,347 | 10,778 | 9,401 | 20,179 | 17,085 | 16,441 | 33,526 |
| Hazard | 5,829 | 0 | 5,829 | 8,023 | 0 | 8,023 | 13,851 | 0 | 13,851 |
| Hamlin | 1,594 | 0 | 1,594 | 10,560 | 0 | 10,560 | 12,154 | 0 | 12,154 |
| Hazard No. 4 Rider | 1,943 | 447 | 2,390 | 8,079 | 3,432 | 11,511 | 10,023 | 3,879 | 13,901 |
| Hazard No. 4 | 1,756 | 9,379 | 11,136 | 30,803 | 63,661 | 94,464 | 32,560 | 73,040 | 105,600 |
| Lower Whitesburg | 3,426 | 98 | 3,524 | 40,524 | 430 | 40,954 | 43,950 | 528 | 44,478 |
| Upper Elkhorn No. 3 | 699 | 3,690 | 4,389 | 12,448 | 188,756 | 201,204 | 13,147 | 192,446 | 205,593 |
| Upper Elkhorn No. 2 | 1,369 | 127 | 1,495 | 47,655 | 838 | 48,493 | 49,023 | 965 | 49,988 |
| Upper Elkhorn No. 1 | 851 | 1,094 | 1,945 | 42,966 | 47,098 | 90,064 | 43,817 | 48,192 | 92,009 |
| TOTAL | 27,397 | 65,788 | 93,185 | 211,979 | 339,573 | 551,552 | 239,377 | 405,361 | 644,736 |

[1] Totals may not equal sum of components because of independent rounding.
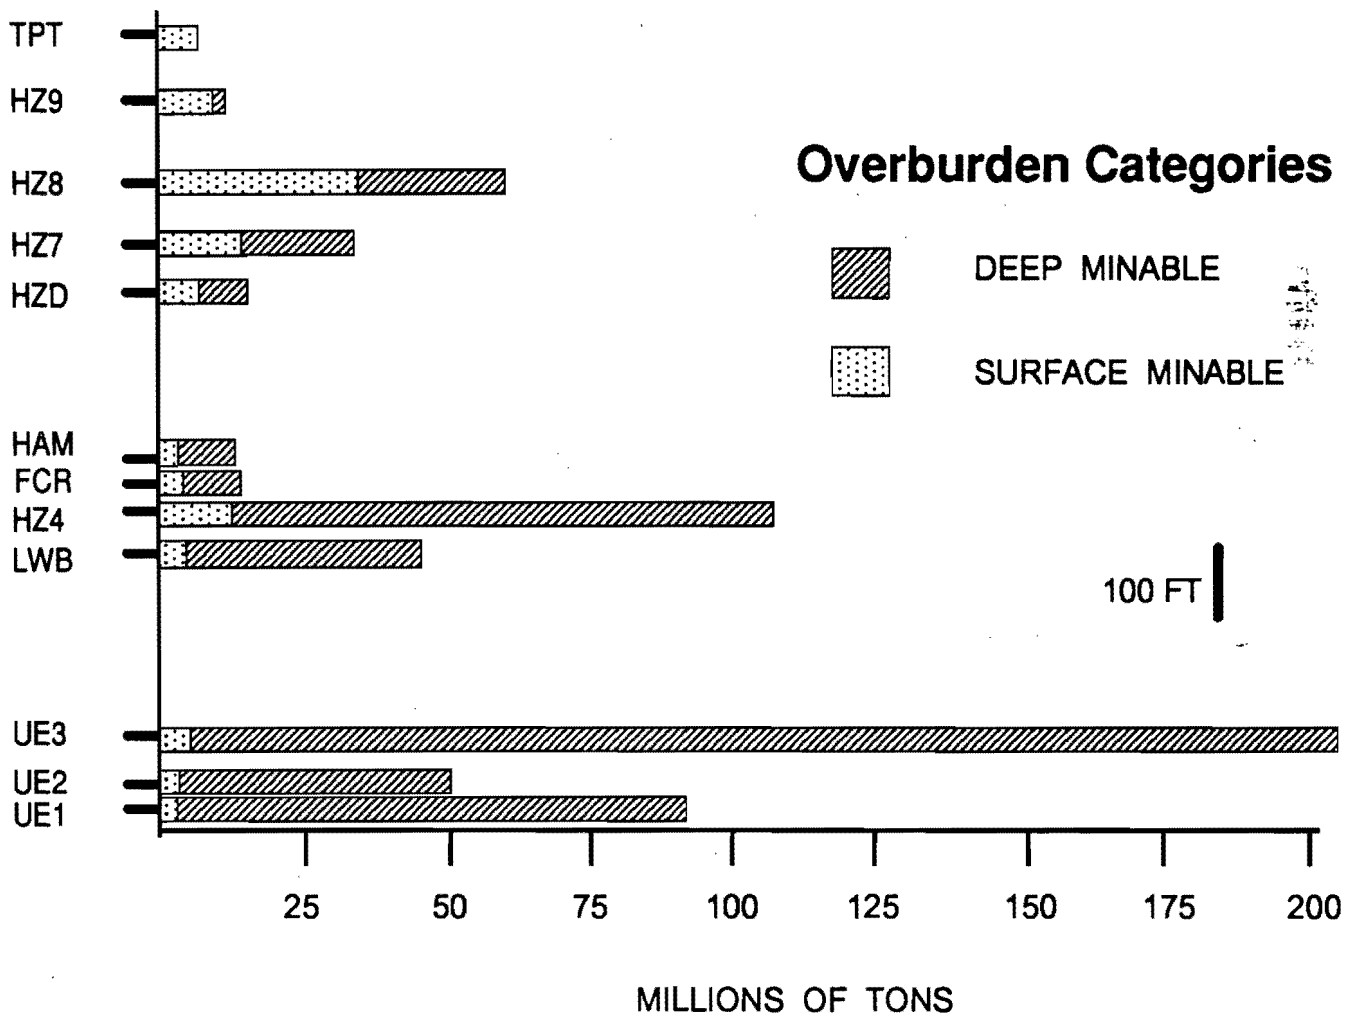
Figure 6. Stratigraphic distribution of resource tonnages differentiated by overburden category.

## OVERBURDEN

The distribution of coal resources on the basis of overburden categories is illustrated on Figures 3 and 6 and tabulated in Table 5. The greater-than-100-feet category (deep-mineable) comprises 85 percent of the total estimate. The proportion of deep-mineable coal to surface-mineable coal for individual seams increases, as expected, from the topographically higher to lower seams (Fig. 3). Figure 7 represents the stripping potential or outcrop access for each bed as measured by the total length of the outcrop perimeter. In eastern Kentucky, mining potential is, in part, a function of outcrop access, because few shaft or slope mines have been developed. Figure 7 shows that the coal beds within the upper coal group have the greatest potential outcrop access. The lower two coal groups have limited outcrop access, and are therefore dominantly deep-mineable resources. However, the only underground development that has taken place for beds in these coal groups is near the outcrop (Appendix A). Large areas of the low-er coal beds remain undeveloped, mainly because of limited outcrop access.

## THICKNESS

The distribution of coal resources on the basis of thickness categories is given in Table 5 and Figures 4 and 8. In addition, Appendix A contains maps showing the areal distribution of thickness categories accompanied by frequency distributions and summary statistics for coal-thickness data. Figure 8 shows that the coals fall into three distinct groups: (1) beds containing dominantly greater-than-28-inch coal, (2) beds containing dominantly less-than-28-inch coal, and (3) beds with roughly equal proportions of each. These groups are composed of the following coal beds:

*Greater than 28":*
   Tiptop
   Hazard No. 8
   Upper Elkhorn No. 3
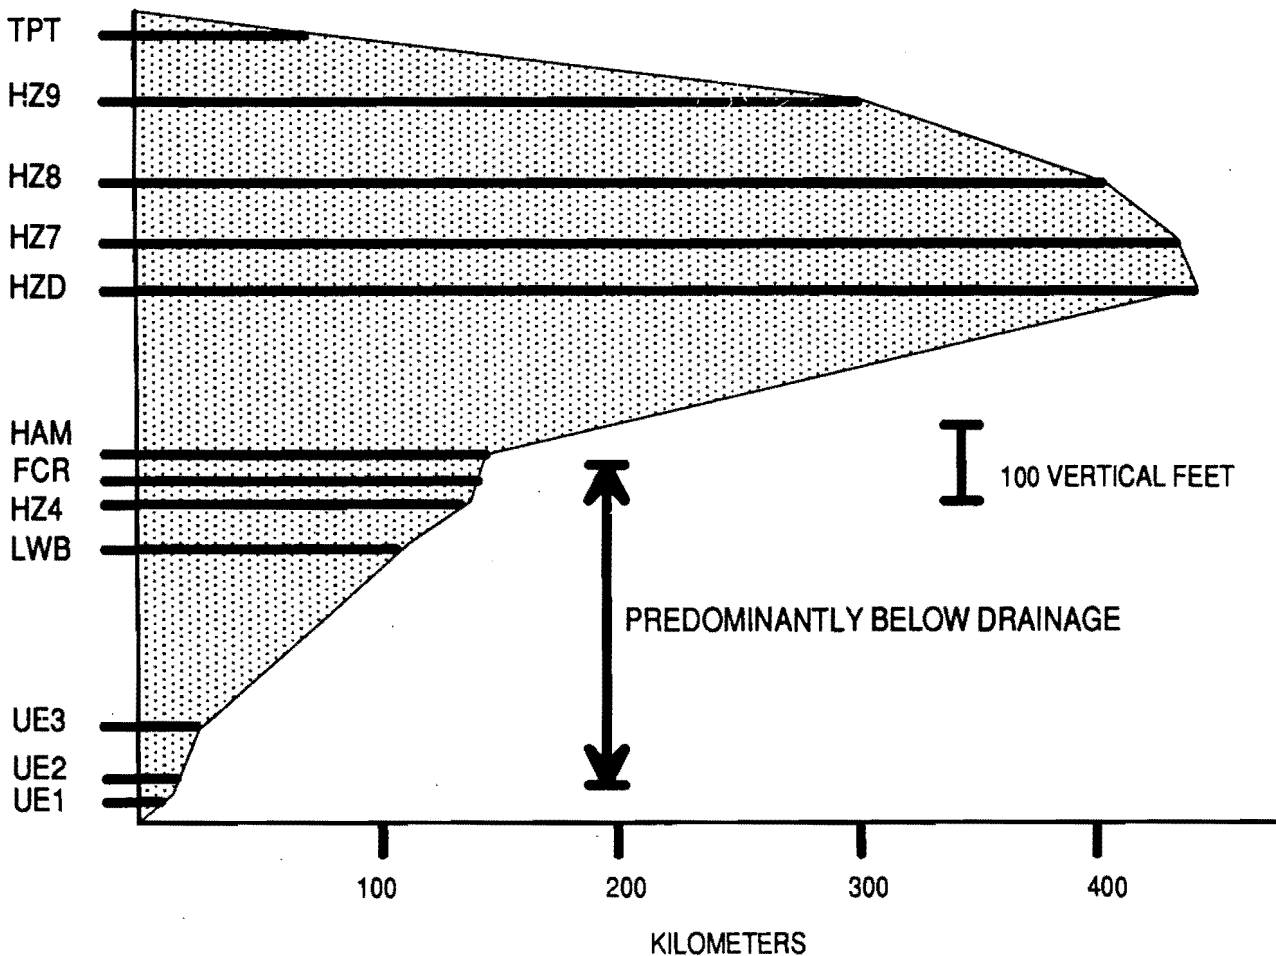
Figure 7. Total linear distance of outcrop for coal beds in the Handshoe Quadrangle.

*Mixed:*
    Hazard No. 9
    Hazard No. 7
    Hazard No. 4
    Upper Elkhorn No. 1
*Less than 28":*
    Hazard
    Hamlin
    Hazard No. 4 Rider
    Lower Whitesburg
    Upper Elkhorn No. 2

Those coal beds with the most resources and the most historical production fall only within the first two groups. Coal beds within the last group (dominantly less than 28 inches) comprise 21 percent of the original resources, and it is unlikely that they will be developed to any significant extent in the future.

## GEOGRAPHIC

The geographic arrangement of coal resources is illustrated by maps in Appendix A that show the thickness distribution and the outcrop area of each bed. Several relationships can be observed that affect coal-resource potential in the Handshoe Quadrangle. First, the outcrop access for the lower two coal groups is limited to the eastern part of the quadrangle. Also, surface access is relatively small for the Upper Elkhorn beds. Consequently, most of the development for these coals has been by underground methods. Conversely, outcrop areas for the upper coal group (Hazard coals) is limited to the western two-thirds of the map area, and mine access is entirely above drainage.

One of the factors that favors extensive surface mining in adjoining quadrangles is geographic coincidence of thick, stratigraphically sequent coal beds, particularly for the topographically highest beds. Areas of greatest thickness development for beds in each coal group are inconsistent within the Handshoe Quadrangle. Figure 9 shows those areas where one or more of the Hazard Nos. 7, 8, and 9 beds are greater than 28 inches in thickness. These coals are extensively mined in nearby quadrangles, largely by contour-strip and mountaintop-

removal mining methods. All three beds are thick only in the south-central part of the Handshoe Quadrangle, where the outcrop areas are relatively small (*see* Appendix A). In the northern portion of the quadrangle, only the Hazard No. 8 coal is thick, and for a substantial part of this area both the No. 7 and No. 9 are entirely missing. These relationships partially account for the lack of surface mining in the Handshoe Quadrangle.

Figure 10 shows a similar relationship for the Upper Elkhorn No. 1, Upper Elkhorn No. 3, and Hazard No. 4 coal beds, which comprise 63 percent of the original resources. The area where all three coals are thick is confined to the northeastern quarter of the quadrangle. Fortunately, this is also where there is outcrop access to the beds. Both the Upper Elkhorn No. 1 and Hazard No. 4 thin and split in a westerly and southerly direction as these beds dip into the subsurface. Only the Upper Elkhorn No. 3 is persistent in thickness over most of the quadrangle.

### *Reliability of the Estimates*

The reliability of resource estimates is expressed by

the categories of measured, indicated, and inferred, which are tabulated for each bed in Appendix A and illustrated in Figure 11. These designations are based on the density of thickness data points; data density is also quantified in Table 3, where the total acreage and number of points per bed are given. For all beds, approximately 31 percent of the resource is estimated as measured, 55 percent as indicated, and 14 percent as inferred.

## Mined-Out and Remaining Resources

Estimates of mined-out tonnages and remaining resources are aggregated by thickness and overburden categories in Tables 6, 7, and 8 and by all categories in Appendix A. Mined-out areas for each bed are shown on maps in Appendix A. In this study, mined-out tonnages are estimated from mine acreages and extrapolated coal thicknesses interpolated from discrete thickness measurements. Production data are not used because they are difficult to associate with specific map areas and they do not account for coal lost in mining.

**Table 6.—Mined-Out and Lost-in-Mining Tonnages from Surface Mines Reported by Overburden and Thickness Categories (Thousands of Short Tons).[1]**

| Coal Bed | Surface (0–100') | | | Deep (> 100') | | | Thickness Totals | | TOTALS |
|---|---|---|---|---|---|---|---|---|---|
| | 14–28" | >28" | Total | 14–28" | >28" | Total | 14–28" | >28" | |
| Tiptop | 8 | 3,661 | 3,669 | 0 | 0 | 0 | 8 | 3,661 | 3,669 |
| Hazard No. 9 | 0 | 826 | 826 | 0 | 108 | 108 | 0 | 934 | 934 |
| Hazard No. 8 | 0 | 850 | 850 | 0 | 164 | 164 | 0 | 1,014 | 1,014 |
| Hazard No. 7 | 20 | 31 | 51 | 4 | 1 | 4 | 24 | 32 | 55 |
| Hazard No. 4 | 11 | 814 | 825 | 0 | 52 | 52 | 11 | 866 | 877 |
| TOTAL | 39 | 6,182 | 6,221 | 4 | 325 | 328 | 43 | 6,507 | 6,549 |

[1] Totals may not equal sum of components because of independent rounding.

**Table 7.—Mined-Out and Lost-in-Mining Tonnages from Underground Mines Reported by Overburden and Thickness Categories (Thousands of Short Tons).[1]**

| Coal Bed | Surface (0–100') | | | Deep (> 100') | | | Thickness Totals | | TOTALS |
|---|---|---|---|---|---|---|---|---|---|
| | 14–28" | >28" | Total | 14–28" | >28" | Total | 14–28" | >28" | |
| Hazard No. 8 | 0 | 6 | 6 | 0 | 0 | 0 | 0 | 6 | 6 |
| Hazard No. 7 | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 |
| Hazard No. 4 | 20 | 170 | 190 | 19 | 1,541 | 1,560 | 39 | 1,711 | 1,749 |
| Upper Elkhorn No. 3 | 29 | 94 | 123 | 147 | 3,034 | 3,180 | 176 | 3,128 | 3,304 |
| Upper Elkhorn No. 1 | 0 | 3 | 3 | 0 | 0 | 0 | 0 | 3 | 3 |
| TOTAL | 50 | 273 | 323 | 166 | 4,575 | 4,740 | 216 | 4,848 | 5,063 |

[1] Totals may not equal sum of components because of independent rounding.
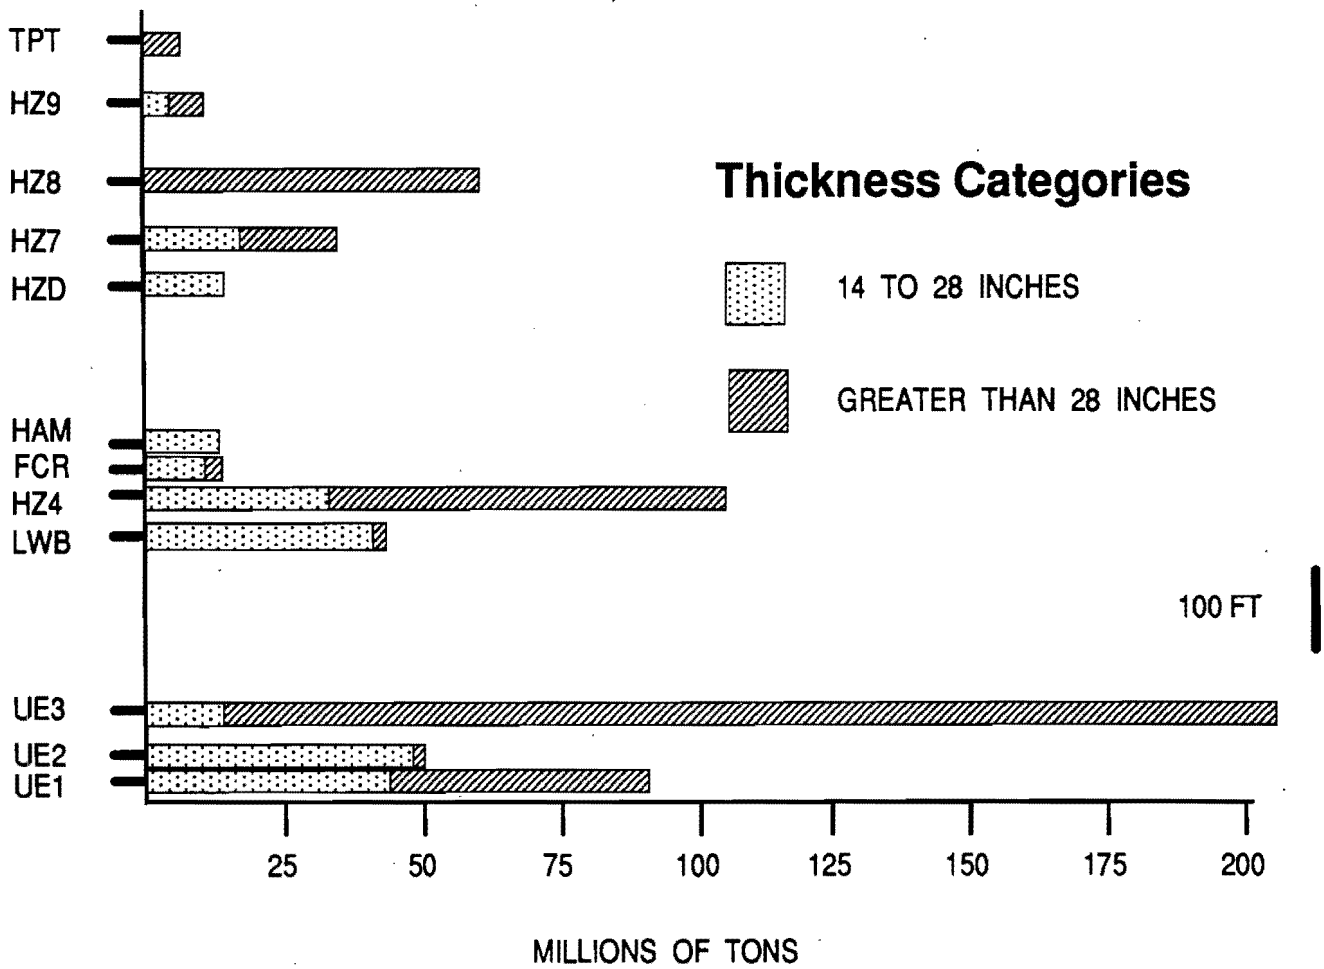
Figure 8. Stratigraphic distribution of resource tonnages differentiated by thickness category.

**Table 8.—Remaining Coal Resources Reported by Overburden and Thickness Categories (Thousands of Short Tons).[1]**

| Coal Bed | Surface (0–100') | | | Deep (> 100') | | | Thickness Totals | | TOTALS |
|---|---|---|---|---|---|---|---|---|---|
| | 14–28" | >28" | Total | 14–28" | >28" | Total | 14–28" | >28" | |
| Tiptop | 148 | 964 | 1,111 | 0 | 0 | 0 | 148 | 964 | 1,111 |
| Hazard No. 9 | 3,248 | 4,117 | 7,364 | 107 | 538 | 645 | 3,355 | 4,655 | 8,010 |
| Hazard No. 8 | 220 | 33,489 | 33,709 | 36 | 25,147 | 25,184 | 256 | 58,637 | 58,893 |
| Hazard No. 7 | 6,285 | 7,010 | 13,294 | 10,775 | 9,400 | 20,175 | 17,059 | 16,410 | 33,469 |
| Hazard | 5,829 | 0 | 5,829 | 8,023 | 0 | 8,023 | 13,851 | 0 | 13,851 |
| Hamlin | 1,594 | 0 | 1,594 | 10,560 | 0 | 10,560 | 12,154 | 0 | 12,154 |
| Hazard No. 4 Rider | 1,943 | 447 | 2,390 | 8,079 | 3,432 | 11,511 | 10,023 | 3,879 | 13,901 |
| Hazard No. 4 | 1,726 | 8,395 | 10,121 | 30,784 | 62,068 | 92,853 | 32,510 | 70,463 | 102,973 |
| Lower Whitesburg | 3,426 | 98 | 3,524 | 40,524 | 430 | 40,954 | 43,950 | 528 | 44,478 |
| Upper Elkhorn No. 3 | 670 | 3,596 | 4,266 | 12,302 | 185,722 | 198,024 | 12,972 | 189,318 | 202,290 |
| Upper Elkhorn No. 2 | 1,369 | 127 | 1,495 | 47,655 | 838 | 48,493 | 49,023 | 965 | 49,988 |
| Upper Elkhorn No. 1 | 851 | 1,091 | 1,942 | 42,966 | 47,098 | 90,064 | 43,817 | 48,189 | 92,006 |
| TOTAL | 27,309 | 59,334 | 86,639 | 211,811 | 334,673 | 546,486 | 239,118 | 394,008 | 633,124 |

[1] Totals may not equal sum of components because of independent rounding.

Number of seams with thickness greater than 28"

1    2    3

Figure 9. Areas where one or more of the Hazard Nos. 7, 8, and 9 coal beds are greater than 28 inches in thickness. 1. Hazard No.8 bed. 2. Hazard No.8 and 9 beds.

The total amount of mining in the Handshoe Quadrangle has been a modest 11.6 million tons, only 2 percent of the original resource. Slightly more than half of this amount has been by surface methods. Most of the surface tonnage has come from the Tiptop coal, which is largely mined out. Only 1 million tons have been mined from the Hazard No. 8 bed, possibly because of its high ash yield and sulfur content. Underground reserves totaling 5 million tons have been mined from the Hazard No. 4 and Upper Elkhorn No. 3 coal beds.
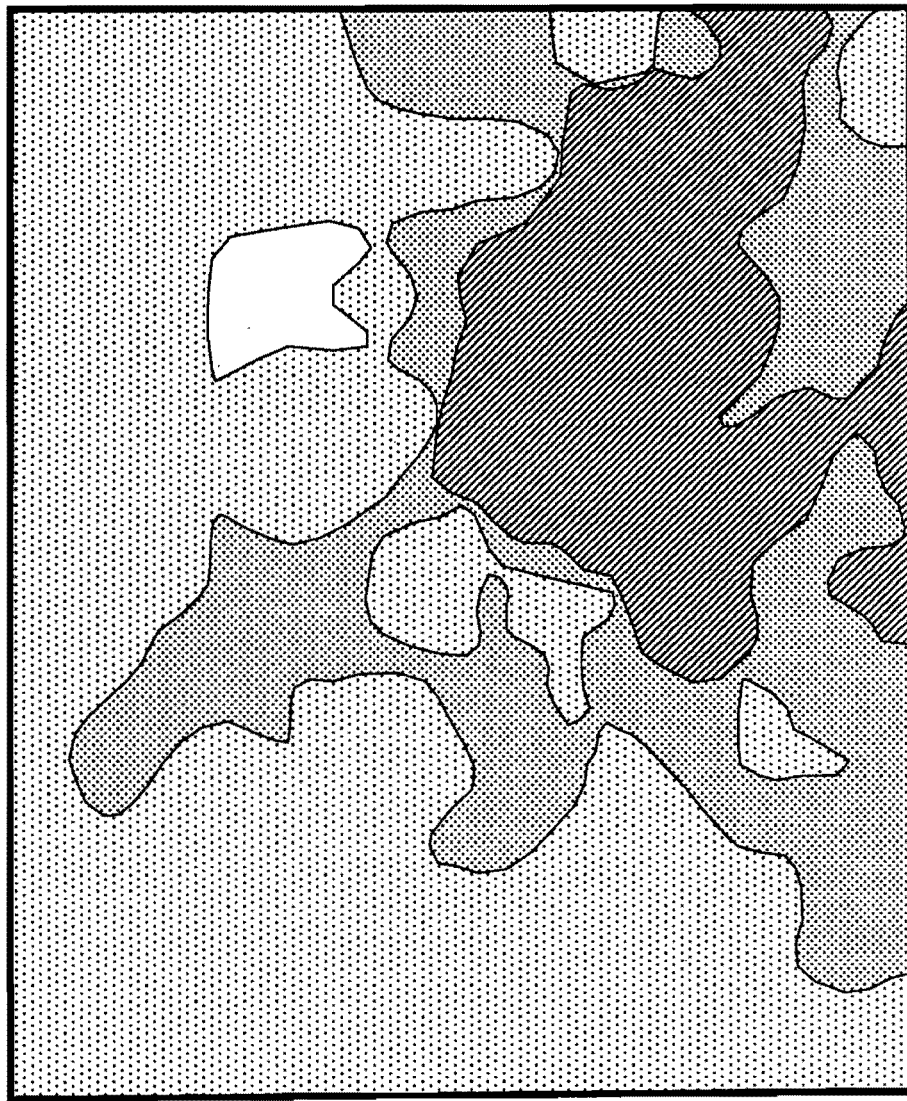
Number of seams with thickness greater than 28"

Figure 10. Areas where one or more of the Upper Elkhorn Nos. 1 and 3 and Hazard No. 4 coal beds are greater than 28 inches in thickness. 1. Upper Elkhorn No. 3 bed. 2. Upper Elkhorn No. 3 and Hazard No. 4 beds.

Total remaining resources are estimated as 633.1 million tons or 98 percent of the original. These resources are distributed similarly to the original estimates with respect to thickness and overburden categories (Figs. 3–4). About 62 percent are in the greater-than-28-inches thickness category and 86 percent are in the greater-than-100-feet overburden category. Three seams, the Hazard No. 4 and Upper Elkhorn Nos. 1 and 3, comprise 63 percent of the remaining resources, 95 percent of which is in the deep-mineable category.
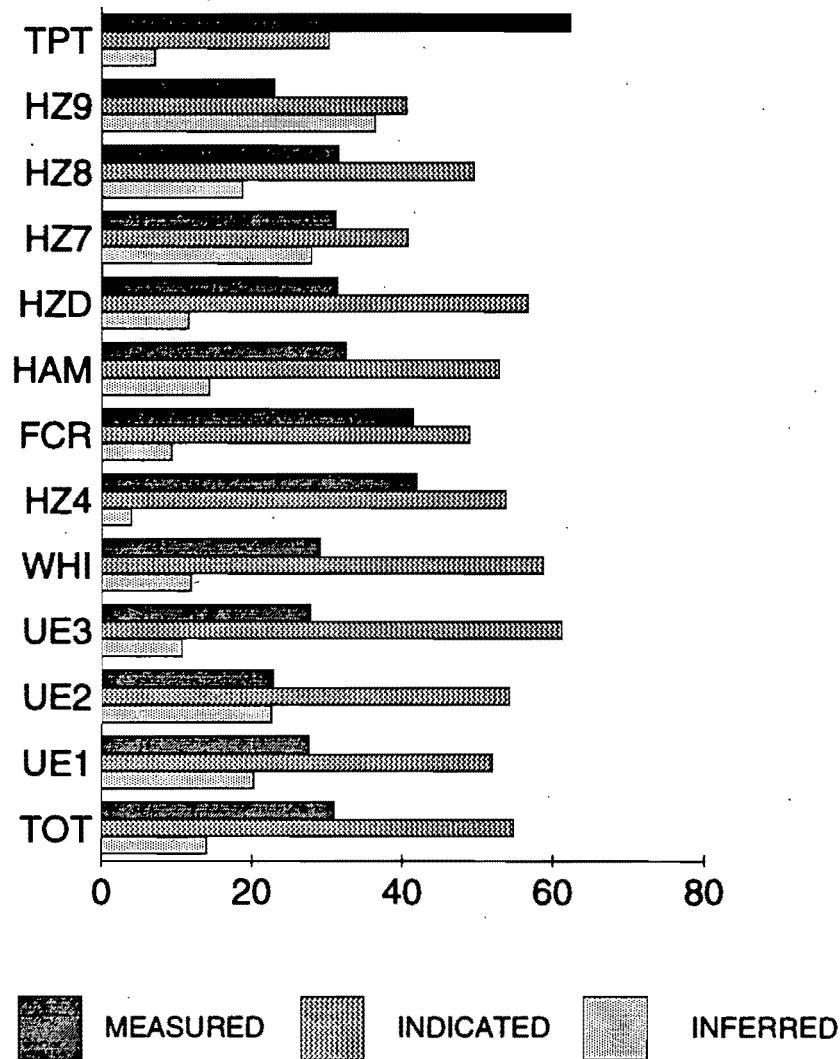
Figure 11. Proportional amount of original resources by reliability category for the Handshoe Quadrangle.

## Restrictions and Available Resources

Tonnages for restricted coal are reported in two formats. In order to calculate the available resources, the unique area of each restriction is subtracted from remaining resources. This is necessary because of overlapping buffers for some restrictions. In many areas, for example, roads, streams, and municipal areas occupy the same general space in valley bottoms. These results (total restriction tonnages by resource category) are shown in Table 9. Table 10 and Appendix A give the total tonnages associated with each restriction and its buffer without accounting for overlap. In most cases the sum of these restriction tonnages will exceed the totals used for calculating available resources.

The total amount of restrictions for the Handshoe Quadrangle is 230 million tons or 36 percent of the remaining resource. Technological restrictions (largely coal too thin to mine by underground methods) account for 96 percent of this total. Only about 10 million tons are associated with land-use restrictions, and most of the restricted coal is a result of streams and municipal areas.

**Table 9.—Total Restrictions Reported by Overburden and Thickness Categories (Thousands of Short Tons).[1]**

| Coal Bed | Surface (0–100') | | | Deep (> 100') | | | Thickness Totals | | TOTALS |
|---|---|---|---|---|---|---|---|---|---|
| | 14–28" | >28" | Total | 14–28" | >28" | Total | 14–28" | >28" | |
| Tiptop | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hazard No. 9 | 109 | 142 | 251 | 107 | 0 | 107 | 216 | 142 | 358 |
| Hazard No. 8 | 1 | 913 | 914 | 36 | 281 | 317 | 3 | 1,19 | 1,232 |
| Hazard No. 7 | 184 | 159 | 343 | 10,775 | 21 | 10,796 | 10,959 | 181 | 11,139 |
| Hazard | 147 | 0 | 147 | 8,023 | 0 | 8,023 | 8,170 | 0 | 8,170 |
| Hamlin | 465 | 0 | 465 | 10,560 | 0 | 10,560 | 11,025 | 0 | 11,025 |
| Hazard No. 4 Rider | 297 | 114 | 411 | 8,079 | 1,836 | 9,915 | 8,377 | 1,950 | 10,326 |
| Hazard No. 4 | 779 | 776 | 1,555 | 30,784 | 1,023 | 31,807 | 31,563 | 1,799 | 33,362 |
| Lower Whitesburg | 447 | * | 447 | 40,524 | 0 | 40,524 | 40,971 | * | 40,971 |
| Upper Elkhorn No. 3 | 347 | 2,485 | 2,832 | 12,302 | 3,596 | 15,898 | 12,649 | 6,081 | 18,730 |
| Upper Elkhorn No. 2 | 1,156 | 109 | 1,265 | 47,655 | 119 | 47,774 | 48,811 | 228 | 49,039 |
| Upper Elkhorn No. 1 | 779 | 910 | 1,689 | 42,966 | 1,080 | 44,046 | 43,744 | 1,990 | 45,735 |
| TOTAL | 4,711 | 5,608 | 10,319 | 211,811 | 7,956 | 219,767 | 216,522 | 13,565 | 230,087 |

[1] Totals may not equal sum of components because of independent rounding.

* Indicates measurements less than the reported precision.

**Table 10.—Total Tonnages Associated with Individual Restriction Categories (Thousands of Short Tons). Does Not Account for Overlapping Areas.**

| Coal Bed | Land Use | | | | | | | Technological | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Ceme-teries | Oil & Gas | Pipe-line | Power-line | Roads | Streams | Towns | Barri-ers | Inter-burden < 40' | Mining Within 40' | Oil & Gas | Coal Too Thin |
| Tiptop | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hazard No. 9 | 0 | 5 | 99 | 130 | 17 | 0 | 0 | 0 | 0 | 0 | 1 | 107 |
| Hazard No. 8 | 0 | 248 | 101 | 453 | 112 | 5 | 0 | * | 0 | 0 | 281 | 36 |
| Hazard No. 7 | * | 119 | 21 | 99 | 88 | 16 | 1 | 0 | 0 | 0 | 122 | 10,775 |
| Hazard | 0 | 49 | 0 | 38 | 2 | 50 | 10 | 0 | 0 | 0 | 76 | 8,023 |
| Hamlin | 0 | 75 | 0 | 23 | 0 | 414 | 0 | 0 | 0 | 0 | 141 | 10,560 |
| Hazard No. 4 Rider | 21 | 46 | 6 | 20 | 63 | 82 | 338 | 0 | 0 | 60 | 116 | 8,079 |
| Hazard No. 4 | 19 | 223 | 8 | 86 | 184 | 706 | 721 | 261 | 0 | 0 | 1,237 | 30,784 |
| Lower Whitesburg | 9 | 102 | 0 | 45 | 61 | 139 | 161 | 0 | 0 | 0 | 686 | 40,524 |
| Upper Elkhorn No. 3 | 120 | 181 | 21 | 60 | 437 | 929 | 2,269 | 312 | 0 | 0 | 3,530 | 12,302 |
| Upper Elkhorn No. 2 | 32 | 69 | 38 | 12 | 274 | 471 | 1,148 | 0 | 119 | 0 | 923 | 47,655 |
| Upper Elkhorn No. 1 | 59 | 117 | 17 | 53 | 355 | 682 | 1,370 | 0 | 0 | 0 | 1,924 | 42,966 |

* Indicates measurements less than the reported precision.

The amount of coal available for mining in the Handshoe Quadrangle is 403 million tons (Table 11). This amount represents 62.5 percent of original and 64 percent of remaining resources. An estimated 326.7 million tons (81 percent) of available coal resources are in the deep-mineable (greater than 100 feet) category and 380.4 million tons (94 percent) are in the greater-than-28-inches category. The Hazard Nos. 4 and 8 and the Upper Elkhorn Nos. 1 and 3 coals account for 89 percent of the available resources, and again, most of these resources are accessible by deep-mining methods only.

**Table 11.—Available Coal Resources Reported by Overburden and Thickness Categories (Thousands of Short Tons).[1]**

| Coal Bed | Surface (0–100') | | | Deep (> 100') | | | Thickness Totals | | TOTALS |
|---|---|---|---|---|---|---|---|---|---|
| | 14–28" | >28" | Total | 14–28" | >28" | Total | 14–28" | >28" | |
| Tiptop | 148 | 964 | 1,111 | 0 | 0 | 0 | 148 | 964 | 1,111 |
| Hazard No. 9 | 3,139 | 3,975 | 7,114 | 0 | 538 | 538 | 3,139 | 4,513 | 7,652 |
| Hazard No. 8 | 219 | 32,576 | 32,795 | 0 | 24,867 | 24,867 | 219 | 57,442 | 57,661 |
| Hazard No. 7 | 6,101 | 6,851 | 12,951 | 0 | 9,378 | 9,378 | 6,101 | 16,229 | 22,330 |
| Hazard | 5,682 | 0 | 5,682 | 0 | 0 | 0 | 5,682 | 0 | 5,682 |
| Hamlin | 1,129 | 0 | 1,129 | 0 | 0 | 0 | 1,129 | 0 | 1,129 |
| Hazard No. 4 Rider | 1,646 | 334 | 1,979 | 0 | 1,596 | 1,596 | 1,646 | 1,929 | 3,575 |
| Hazard No. 4 | 947 | 7,619 | 8,566 | 0 | 61,045 | 61,045 | 947 | 68,665 | 69,612 |
| Lower Whitesburg | 2,979 | 98 | 3,077 | 0 | 430 | 430 | 2,979 | 528 | 3,507 |
| Upper Elkhorn No. 3 | 323 | 1,111 | 1,434 | 0 | 182,126 | 182,126 | 323 | 183,237 | 183,560 |
| Upper Elkhorn No. 2 | 212 | 18 | 230 | 0 | 719 | 719 | 212 | 737 | 949 |
| Upper Elkhorn No. 1 | 72 | 181 | 253 | 0 | 46,018 | 46,018 | 72 | 46,199 | 46,271 |
| TOTAL | 22,597 | 53,727 | 76,321 | 0 | 326,717 | 326,717 | 22,597 | 380,443 | 403,039 |

[1] Totals may not equal sum of components because of independent rounding.

# COMPARISON TO PREVIOUS STUDIES

The Handshoe Quadrangle has a moderate amount of original resources compared to the seven quadrangles completed previously (Table 12). Of all quadrangles, Handshoe and Hoskinston have the least amount of prior mining. The range of the proportional amount of land-use versus technological restrictions is large for all quadrangles. This discrepancy is caused by the presence of large public lands in some of the quadrangles. Handshoe has relatively few land-use restrictions, primarily because most of the remaining coal resources are in the deep-mineable category. It has a moderate proportion of technological restrictions and, like the other quadrangles, this is due to one restriction, "coal too thin to be mined by underground methods." The proportion of available coal for Handshoe is somewhat greater than the average of 54 percent for all quadrangles.

**Table 12.—Summary of Nine Eastern Kentucky Coal Availability Quadrangles Giving Total Tonnages (Millions of Short Tons) and Proportions.***

| Quadrangle | Original Resources | | Remaining Resources[2] | | Land-Use Restrictions[3] | | Technological Restrictions[3] | | Available Resources[2] | |
|---|---|---|---|---|---|---|---|---|---|---|
| Appalachia[1] | 1,349 | 100% | 1,005 | 75% | 26 | 3% | 277 | 28% | 703 | 52% |
| Boltsfork† | 243 | 100% | 231 | 95% | 15 | 7% | 43 | 19% | 173 | 71% |
| Booneville | 80 | 100% | 70 | 88% | 1 | 1% | 29 | 41% | 40 | 50% |
| Handshoe | 645 | 100% | 633 | 98% | 10 | 2% | 220 | 35% | 403 | 63% |
| Hoskinston† | 342 | 100% | 332 | 98% | 19 | 6% | 171 | 52% | 142 | 42% |
| Matewan | 987 | 100% | 858 | 87% | 17 | 2% | 226 | 26% | 616 | 62% |
| Middlesboro North | 339 | 100% | 328 | 97% | 36 | 11% | 138 | 42% | 155 | 46% |
| Millard† | 843 | 100% | 777 | 92% | 30 | 4% | 400 | 52% | 347 | 41% |
| Noble† | 460 | 100% | 399 | 86% | 58 | 15% | 71 | 18% | 270 | 59% |

* All tonnages and percentages rounded to nearest whole number.

† Results updated in 1993.

[1] Data from Virginia Division of Mineral Resources.

[2] Percentage of original.

[3] Percentage of remaining.

Comparison with the Noble Quadrangle is illustrative as the two quadrangles are located near each other, lie in the same Coal Reserve District, and include the same stratigraphic interval. In many respects, though, the restriction and availability results for these two studies are markedly different. The original resources for the Noble Quadrangle are heavily weighted toward surface-mineable coal, whereas the Handshoe Quadrangle contains mostly deep-mineable coal. This discrepancy is probably because the lower coals (Hazard No. 4 and below) are poorly documented in the Noble Quadrangle. The thickness trends for adjoining areas of these seams are thinning toward the direction of Noble, so, despite the lack of data, there may not be significant resources for these seams in the Noble Quadrangle.

Noble also contains a large public land, Robinson Forest, and this, combined with the fact that much of the resources are surface mineable, resulted in a disproportionately large percentage of land-use restrictions.

## ACKNOWLEDGMENTS

## REFERENCES CITED

Brant, R. A., Chesnut, D. R., Frankie, W. T., and Portig, E. R., 1983, Coal resources of the Princess District, Kentucky: University of Kentucky Institute for Mining and Minerals Research, Energy Resource Series, 49 p.

Danilchik, Walter, 1977, Geologic map of the Handshoe Quadrangle, eastern Kentucky: U.S. Geological Survey Geologic Quadrangle Map GQ-1372.

Eggleston, J. R., Carter, M. D., and Cobb, J. C., 1990, Coal resources available for development—A methodology and pilot study: U.S. Geological Survey Circular 1055, 15 p.

MacFarlan, A. C., 1943, Geology of Kentucky: Lexington, University of Kentucky, 513 p.

Wood, G. H., Jr., Kehn, T. M., Carter, M. D., and Culbertson, W. C., 1983, Coal resource classification system of the U.S. Geological Survey: U.S. Geological Survey Circular 891, 65 p.

# APPENDIX A:
# Coal Availability Results, Area of Outcrop, and Total Coal Thickness

# TIPTOP COAL BED

## Coal Availability Results
### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
| Original | 70 | 85 | * | 2,918 | 1,365 | 342 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Surface | 0 | 8 | 0 | 2,364 | 1,108 | 189 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 70 | 77 | * | 553 | 257 | 153 | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Restrictions | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Total Available | 70 | 77 | * | 553 | 257 | 153 | 0 | 0 | 0 | 0 | 0 | 0 |
| Land-Use Restrictions[2] | | | | | | | | | | | | |
| Cemeteries | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Technological Restrictions[2] | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

* Indicates measurements less than reported precision.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

# Tiptop Bed



Left: Extent of Tiptop bed within the Handshoe Quad-
rangle (stippled) and interpolated thickness iso-
lines. Tick marks on isolines indicate decreased
thickness. Data points shown by dots and mined-
out areas by black areas.

Below: Histogram of total coal thickness with summary sta-
tistics. Includes data from the margins of adjoining
quadrangles.

42



N = 51
Range = 0 - 158.5 in
Mean = 56.39
SD = 27.92
Var = 779.384

frequency

8

6

4

2

28      56      84      112     140     168

inches

# HAZARD NO. 9 COAL BED

**Coal Availability Results**

**(Thousands of Short Tons)[1]**

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
| Original | 576 | 1,689 | 983 | 1,205 | 1,747 | 1,990 | 19 | 42 | 46 | 256 | 149 | 241 |
| Mined-Out Surface | 0 | 0 | 0 | 90 | 300 | 436 | 0 | 0 | 0 | 10 | 71 | 27 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 576 | 1,689 | 983 | 1,115 | 1,448 | 1,554 | 19 | 42 | 46 | 246 | 77 | 214 |
| Total Restrictions | 26 | 63 | 19 | 15 | 39 | 88 | 19 | 42 | 46 | 0 | 0 | 0 |
| Total Available | 549 | 1,627 | 963 | 1,100 | 1,409 | 1,466 | 0 | 0 | 0 | 246 | 77 | 214 |
| *Land-Use Restrictions[2]* | | | | | | | | | | | | |
| Cemeteries | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 8 | 59 | 19 | 15 | 29 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 13 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions[2]* | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 19 | 42 | 46 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

Available Coal Resources of the Handshoe 7.5-Minute Quadrangle

# Hazard No. 9 Bed

Left: Extent of Hazard No. 9 bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

Below: Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.



N = 88
Range = 0 - 57 In
Mean = 12.75
SD = 14.41
Var = 207.76
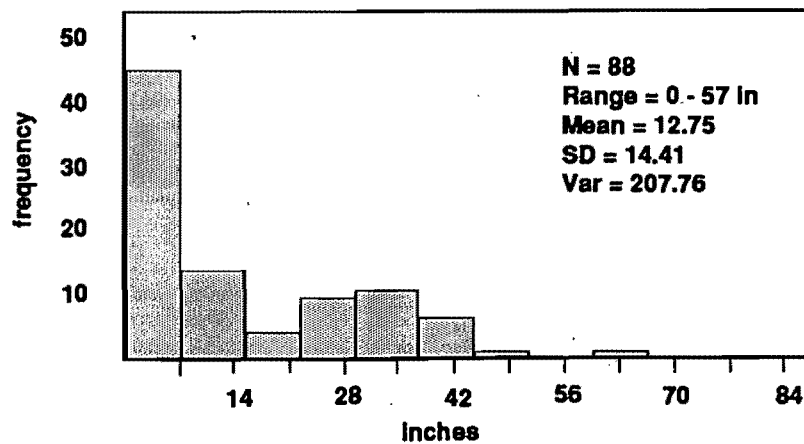
# HAZARD NO. 8 COAL BED

## Coal Availability Results

### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
| Original | 9 | 31 | 179 | 9,869 | 17,889 | 6,587 | 0 | 15 | 21 | 9,031 | 11,794 | 4,487 |
| Mined-Out Surface | 0 | 0 | 0 | 52 | 299 | 499 | 0 | 0 | 0 | 23 | 75 | 66 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 3 | 3 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 9 | 31 | 179 | 9,817 | 17,588 | 6,085 | 0 | 15 | 21 | 9,008 | 11,719 | 4,421 |
| Total Restrictions | 1 | 0 | 0 | 315 | 511 | 87 | 0 | 15 | 21 | 65 | 191 | 25 |
| Total Available | 8 | 31 | 179 | 9,501 | 17,077 | 5,998 | 0 | 0 | 0 | 8,943 | 11,528 | 4,396 |
| *Land-Use Restrictions*[2] | | | | | | | | | | | | |
| Cemeteries | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 90 | 122 | 36 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 1 | 0 | 0 | 145 | 275 | 32 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 0 | 0 | 0 | 61 | 50 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 0 | 0 | 0 | 1 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions*[2] | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | * | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 65 | 191 | 25 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 15 | 21 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

* Indicates measurements less than reported precision.

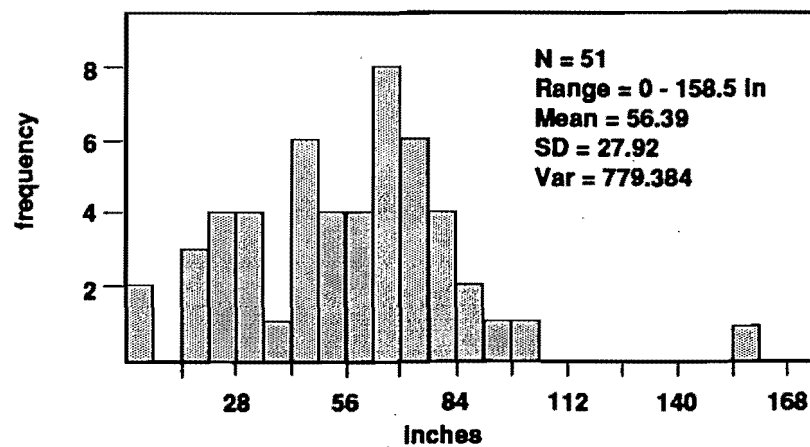[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

# Hazard No. 8 Bed

Left:   Extent of Hazard No. 8 bed within the Handshoe
        Quadrangle (stippled) and interpolated thickness
        isolines. Tick marks on isolines indicate decreased
        thickness. Data points shown by dots and mined-
        out areas by black areas.

Below: Histogram of total coal thickness with summary sta-
       tistics. Includes data from the margins of adjoining
       quadrangles.



N = 105
Range = 6.5 - 68
Mean = 40.90
SD = 7.88
Var = 62.14
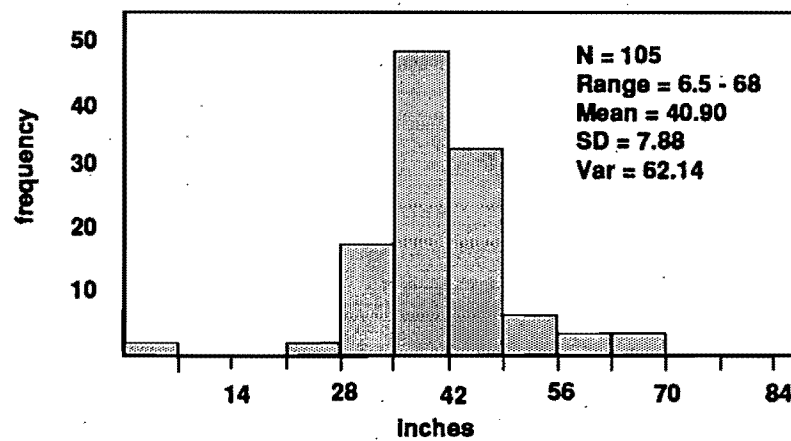
# HAZARD NO. 7 COAL BED
## Coal Availability Results
### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
| Original | 1,845 | 3,314 | 1,147 | 1,661 | 2,688 | 2,692 | 3,781 | 4,908 | 2,089 | 3,179 | 2,767 | 3,455 |
| Mined-Out Surface | 16 | 4 | 0 | 17 | 14 | 0 | 2 | 1 | 0 | 1 | * | 0 |
| Mined-Out Deep | * | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 1,830 | 3,308 | 1,147 | 1,644 | 2,674 | 2,692 | 3,779 | 4,907 | 2,089 | 3,178 | 2,766 | 3,455 |
| Total Restrictions | 64 | 114 | 6 | 30 | 88 | 41 | 3,779 | 4,907 | 2,089 | 4 | 5 | 12 |
| Total Available | 1,765 | 3,194 | 1,141 | 1,614 | 2,586 | 2,650 | 0 | 0 | 0 | 3,174 | 2,761 | 3,443 |
| *Land-Use Restrictions*[2] | | | | | | | | | | | | |
| Cemeteries | 0 | * | 0 | 0 | * | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 19 | 18 | 3 | 11 | 41 | 27 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 14 | 42 | 3 | 19 | 14 | 6 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 23 | 33 | 0 | 0 | 32 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 8 | 7 | 0 | 0 | * | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions*[2] | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 51 | 41 | 8 | 4 | 5 | 12 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 3,779 | 4,907 | 2,089 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

* Indicates measurements less than reported precision.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

# Hazard No. 7 Bed



Left: Extent of Hazard No. 7 bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

Below: Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.



N = 97
Range = 0 - 56
Mean = 15.05
SD = 13.49
Var = 181.98
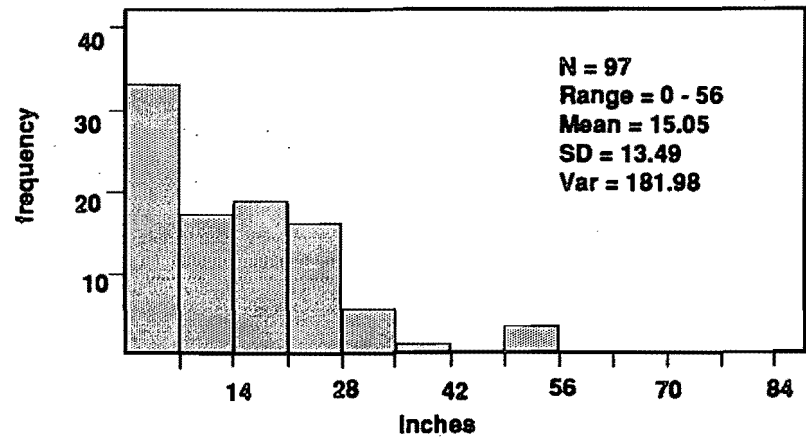
# HAZARD COAL BED
## Coal Availability Results
### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
| Original | 1,632 | 3,411 | 785 | 0 | 0 | 0 | 2,726 | 4,470 | 826 | 0 | 0 | 0 |
| Mined-Out Surface | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 1,632 | 3,411 | 785 | 0 | 0 | 0 | 2,726 | 4,470 | 826 | 0 | 0 | 0 |
| Total Restrictions | 30 | 92 | 25 | 0 | 0 | 0 | 2,726 | 4,470 | 826 | 0 | 0 | 0 |
| Total Available | 1,602 | 3,319 | 761 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Land-Use Restrictions*[2] | | | | | | | | | | | | |
| Cemeteries | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 8 | 34 | 7 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 1 | 25 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | * | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 21 | 28 | * | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 0 | 5 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions*[2] | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 21 | 55 | 1 | 0 | 0 | 0 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 2,726 | 4,470 | 826 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

* Indicates measurements less than reported precision.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

# Hazard Bed
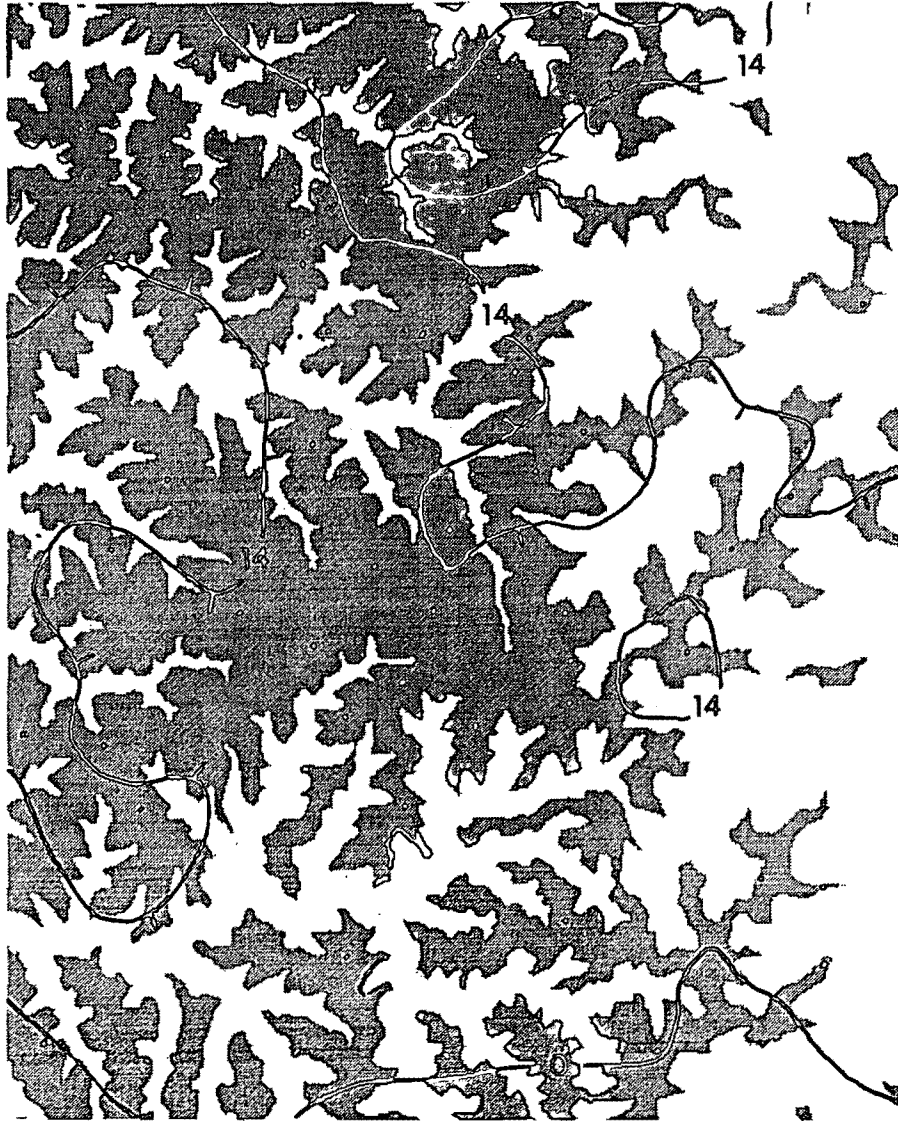


**Left:** Extent of Hazard bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

**Below:** Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.



N = 93
Range = 0 - 37 in
Mean = 12.29
SD = 5.94
Var = 35.29
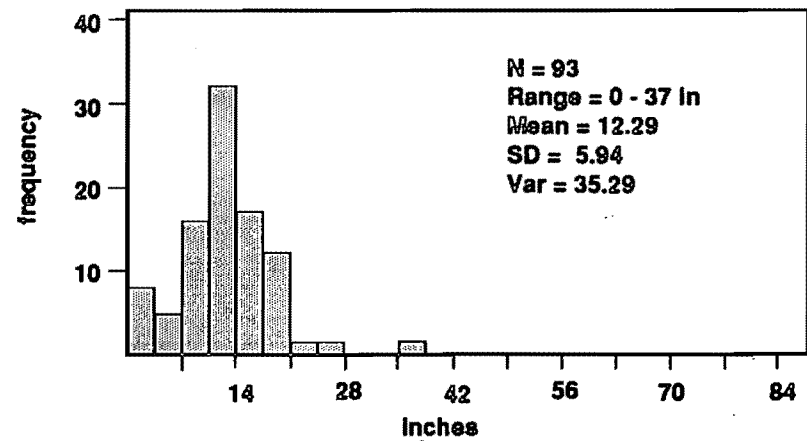
# HAMLIN COAL BED

**Coal Availability Results**

**(Thousands of Short Tons)[1]**

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | *14-28"* | | | *> 28"* | | | *14-28"* | | | *>28"* | | |
| | *MEAS* | *IND* | *INF* | *MEAS* | *IND* | *INF* | *MEAS* | *IND* | *INF* | *MEAS* | *IND* | *INF* |
| Original | 366 | 817 | 412 | 0 | 0 | 0 | 3,594 | 5,627 | 1,338 | 0 | 0 | 0 |
| Mined-Out Surface | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 366 | 817 | 412 | 0 | 0 | 0 | 3,594 | 5,627 | 1,338 | 0 | 0 | 0 |
| Total Restrictions | 108 | 281 | 76 | 0 | 0 | 0 | 3,594 | 5,627 | 1,338 | 0 | 0 | 0 |
| Total Available | 258 | 536 | 335 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Land-Use Restrictions[2]* | | | | | | | | | | | | |
| Cemeteries | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 7 | 44 | 25 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 0 | 14 | 9 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 102 | 250 | 62 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions[2]* | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 33 | 98 | 11 | 0 | 0 | 0 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 3,594 | 5,627 | 1,338 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

Available Coal Resources of the Handshoe 7.5-Minute Quadrangle
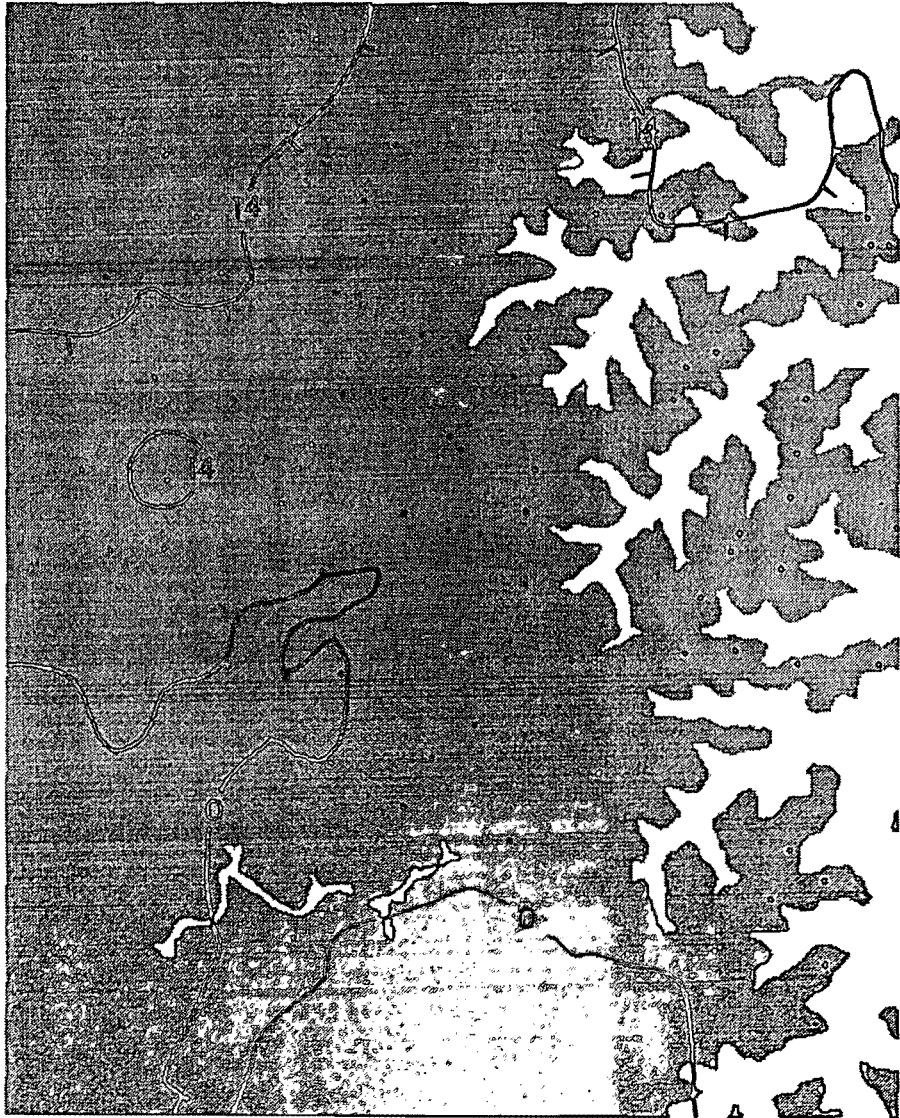
# Hamlin Bed



Left: Extent of Hamlin bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

Below: Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.



N = 109
Range = 0 - 32 in
Mean = 7.24
SD = 7.37
Var = 54.24
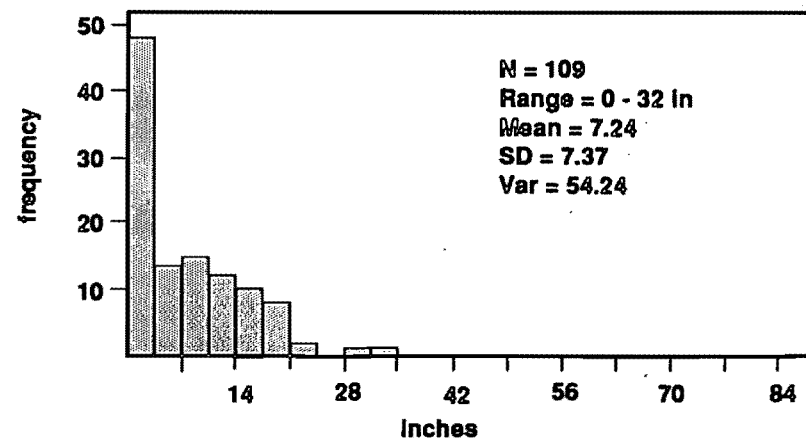
# HAZARD NO. 4 RIDER COAL BED

## Coal Availability Results
### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
| Original | 475 | 1,090 | 378 | 205 | 240 | 2 | 3,186 | 3,969 | 925 | 1,906 | 1,520 | 5 |
| Mined-Out Surface | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 475 | 1,090 | 378 | 205 | 240 | 2 | 3,186 | 3,969 | 925 | 1,906 | 1,520 | 5 |
| Total Restrictions | 112 | 130 | 55 | 9 | 105 | 0 | 3,186 | 3,969 | 925 | 1,320 | 516 | 0 |
| Total Available | 363 | 959 | 324 | 197 | 135 | 2 | 0 | 0 | 0 | 586 | 1,005 | 5 |
| *Land-Use Restrictions*[2] | | | | | | | | | | | | |
| Cemeteries | 6 | 2 | 0 | 0 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 22 | 12 | 7 | 1 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 7 | 0 | 0 | 8 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 25 | 24 | 1 | 0 | 13 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 30 | 30 | 1 | 0 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 82 | 108 | 49 | 0 | 99 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions*[2] | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 | 54 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 14 | 32 | 13 | 43 | 14 | 0 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 3,186 | 3,969 | 925 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

# Hazard No. 4 Rider Bed

Left: Extent of Hazard No. 4 rider bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

Below: Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.

N = 122
Range = 0 - 50 In
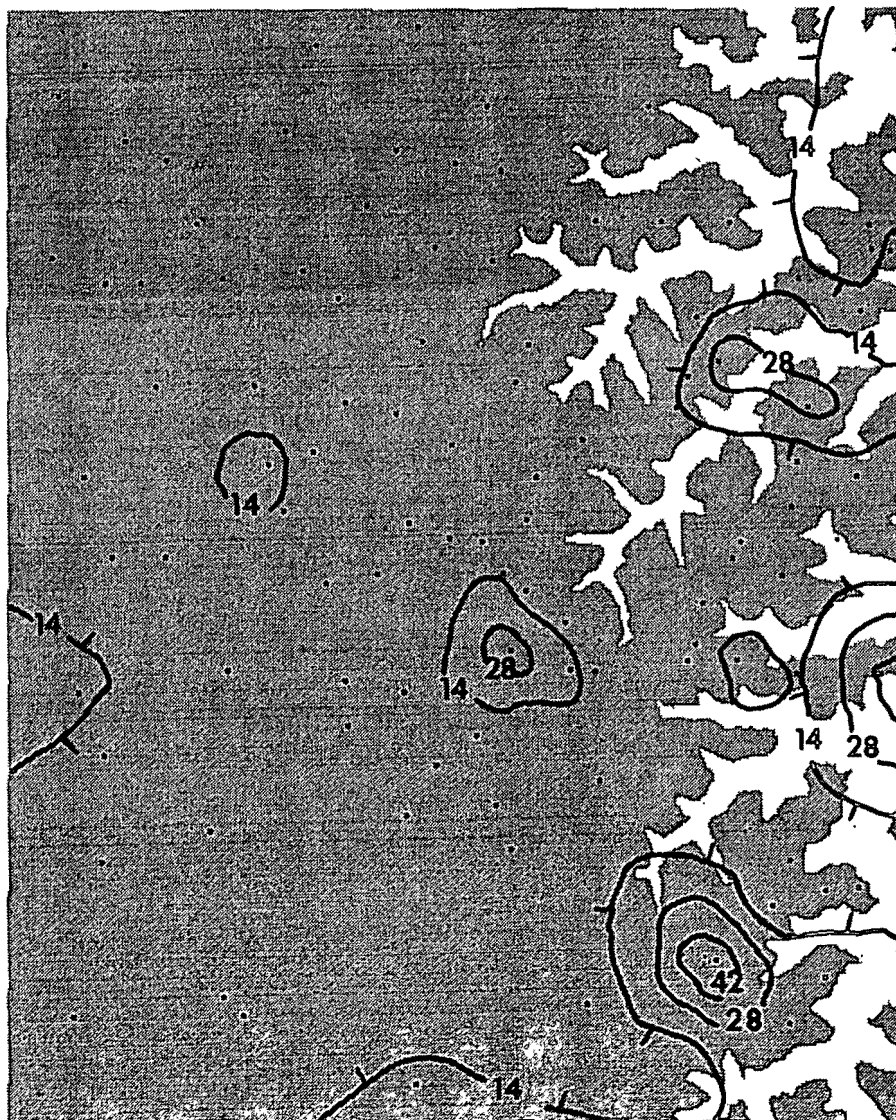Mean = 9.69
SD = 8.74
Var = 76.33
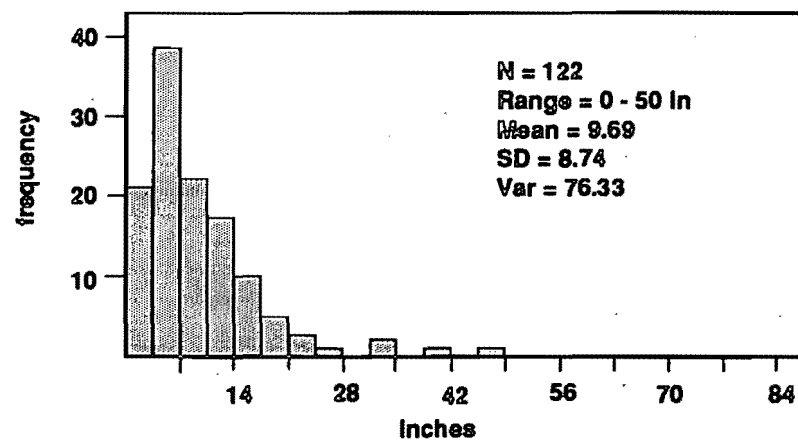
# HAZARD NO. 4 COAL BED

**Coal Availability Results**

**(Thousands of Short Tons)[1]**

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
| Original | 385 | 1,009 | 363 | 2,899 | 5,491 | 989 | 10,946 | 18,388 | 1,470 | 30,148 | 32,005 | 1,508 |
| Mined-Out Surface | 0 | 0 | 11 | 421 | 393 | 0 | 0 | 0 | 0 | 28 | 24 | 0 |
| Mined-Out Deep | 3 | 2 | 15 | 50 | 89 | 31 | 0 | 0 | 19 | 807 | 693 | 41 |
| Remaining | 382 | 1,006 | 337 | 2,428 | 5,009 | 958 | 10,946 | 18,388 | 1,451 | 29,314 | 31,288 | 1,466 |
| Total Restrictions | 190 | 506 | 82 | 336 | 433 | 7 | 10,946 | 18,388 | 1,451 | 557 | 451 | 14 |
| Total Available | 192 | 500 | 255 | 2,092 | 4,576 | 951 | 0 | 0 | 0 | 28,756 | 30,837 | 1,452 |
| *Land-Use Restrictions[2]* | | | | | | | | | | | | |
| Cemeteries | 0 | 14 | 0 | * | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 15 | 21 | 10 | 78 | 97 | 2 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 0 | 0 | 0 | 21 | 65 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 18 | 100 | 5 | 0 | 60 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 130 | 289 | 8 | 145 | 134 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 68 | 342 | 70 | 134 | 102 | 5 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions[2]* | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | * | 0 | 6 | 162 | 78 | 14 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 149 | 277 | 42 | 395 | 374 | 0 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 10,946 | 18,388 | 1,451 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

* Indicates measurements less than reported precision.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

Available Coal Resources of the Handshoe 7.5-Minute Quadrangle
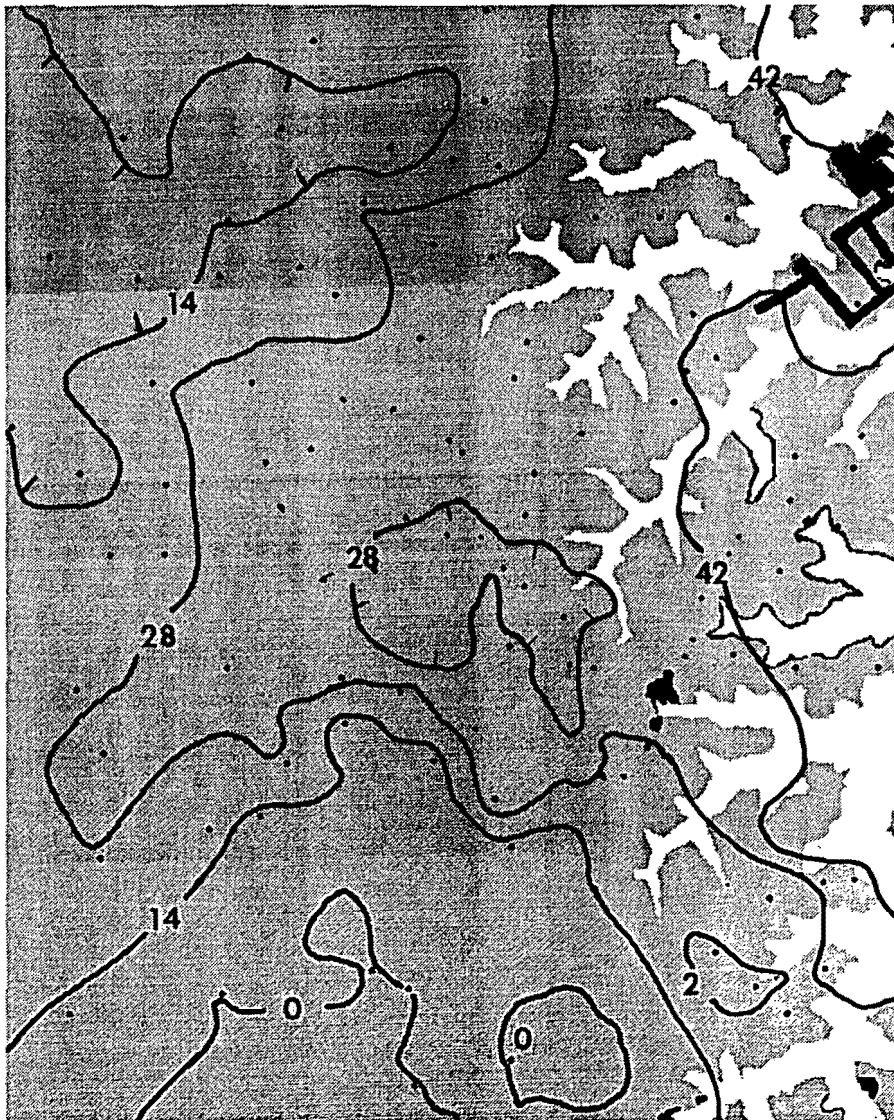
# Hazard No. 4 Bed

Left:   Extent of Hazard No. 4 bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

Below: Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.



N = 189
Range = 0 - 83 in
Mean = 28.09
SD = 16.34
Var = 266.95
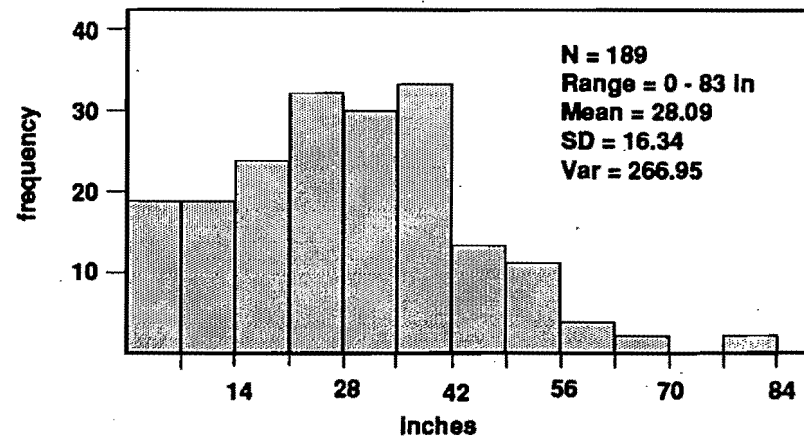
# LOWER WHITESBURG COAL BED
## Coal Availability Results
### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
| Original | 593 | 2,293 | 540 | 87 | 11 | 0 | 11,901 | 23,832 | 4,791 | 385 | 45 | 0 |
| Mined-Out Surface | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 593 | 2,293 | 540 | 87 | 11 | 0 | 11,901 | 23,832 | 4,791 | 385 | 45 | 0 |
| Total Restrictions | 79 | 319 | 48 | * | 0 | 0 | 11,901 | 23,832 | 4,791 | 0 | 0 | 0 |
| Total Available | 513 | 1,974 | 492 | 87 | 11 | 0 | 0 | 0 | 0 | 385 | 45 | 0 |
| Land-Use Restrictions[2] | | | | | | | | | | | | |
| Cemeteries | 0 | 6 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 27 | 60 | 15 | * | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 2 | 43 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 0 | 55 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 22 | 114 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 28 | 103 | 30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Technological Restrictions[2] | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 172 | 425 | 89 | 0 | 0 | 0 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 11,901 | 23,832 | 4,791 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

* Indicates measurements less than reported precision.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

Available Coal Resources of the Handshoe 7.5-Minute Quadrangle
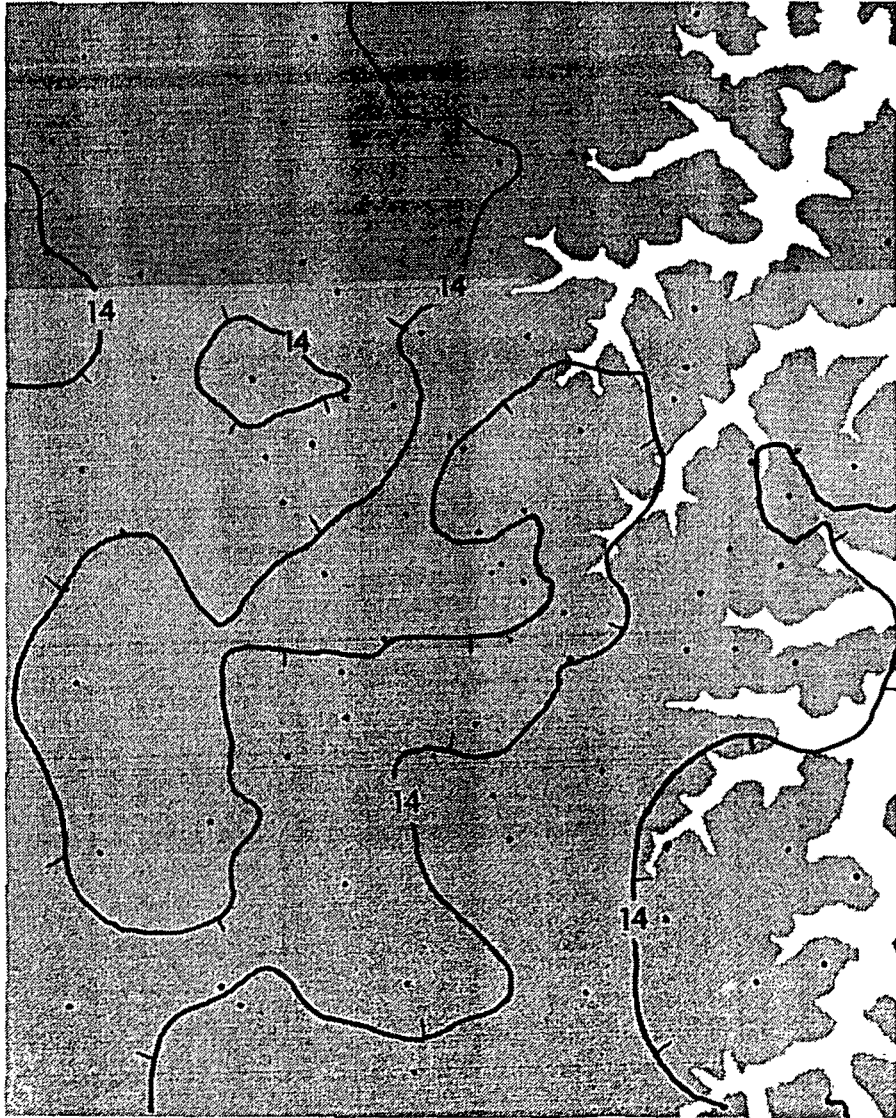
# Lower Whitesburg Bed

Left: Extent of Lower Whitesburg bed within the Hands-hoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

Below: Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.

N = 151
Range = 0 - 31.5 in
Mean = 14.17
SD = 5.48
Var = 30.01
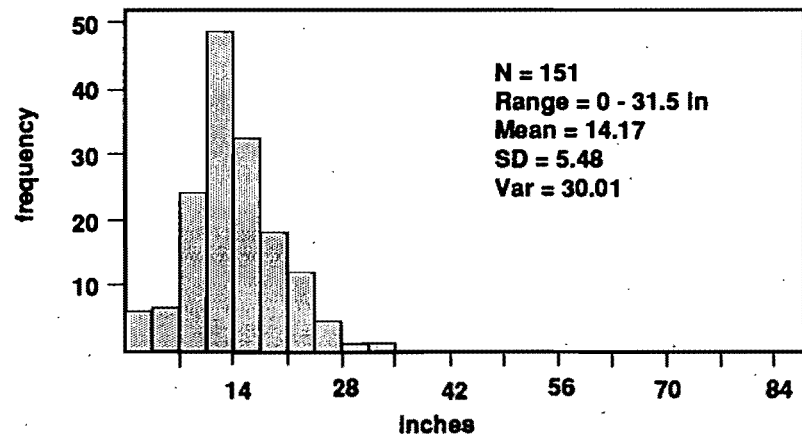
# UPPER ELKHORN NO. 3 COAL BED

## Coal Availability Results
### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Original | 61 | 363 | 275 | 771 | 2,302 | 618 | 4,795 | 6,977 | 676 | 51,684 | 116,552 | 20,520 |
| Mined-Out Surface | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Deep | 0 | 5 | 24 | 22 | 44 | 29 | 0 | 111 | 36 | 1,685 | 1,222 | 127 |
| Remaining | 61 | 358 | 251 | 749 | 2,258 | 588 | 4,795 | 6,866 | 640 | 49,999 | 115,330 | 20,393 |
| Total Restrictions | 21 | 155 | 171 | 492 | 1,697 | 295 | 4,795 | 6,866 | 640 | 1,049 | 2,165 | 383 |
| Total Available | 40 | 202 | 81 | 258 | 561 | 293 | 0 | 0 | 0 | 48,950 | 113,165 | 20,010 |
| *Land-Use Restrictions[2]* | | | | | | | | | | | | |
| Cemeteries | 4 | 15 | 6 | 21 | 66 | 8 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 9 | 12 | 55 | 88 | 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 0 | 0 | 8 | 0 | 51 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | 0 | 8 | 20 | 109 | 289 | 11 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 10 | 43 | 11 | 259 | 581 | 25 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 11 | 127 | 157 | 298 | 1,394 | 282 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions[2]* | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 14 | 9 | 98 | 159 | 32 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 67 | 138 | 15 | 953 | 2,007 | 350 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 4,795 | 6,866 | 640 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

# Upper Elkhorn No. 3 Bed

**Left:** Extent of Upper Elkhorn No. 3 bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

**Below:** Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.
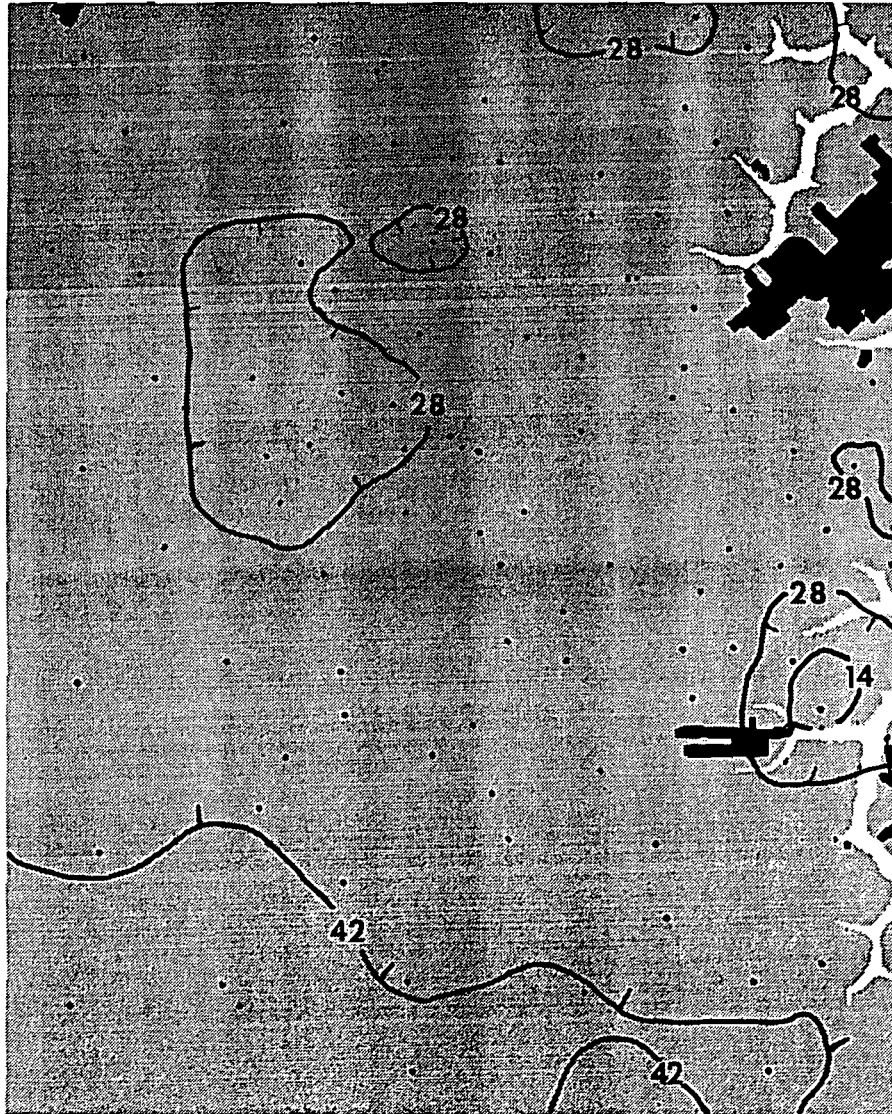


N = 154
Range = 16 - 82 In
Mean = 34.51
SD = 9.60
Var = 92.24
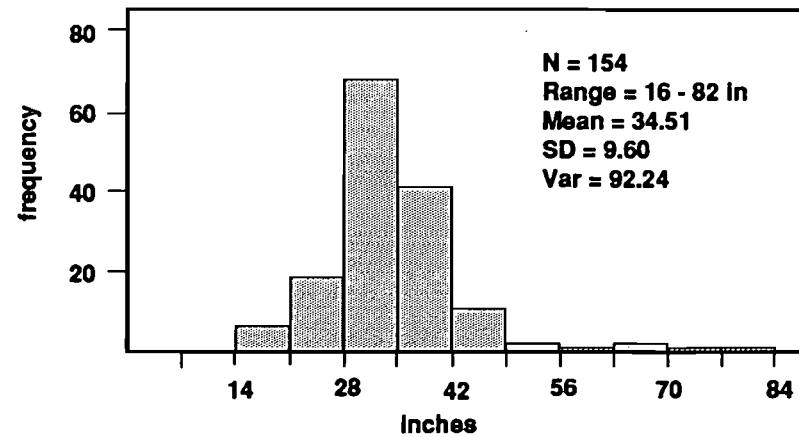
# UPPER ELKHORN NO. 2 COAL BED

## Coal Availability Results
### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF | MEAS | IND | INF |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Original | 82 | 767 | 519 | 0 | * | 127 | 10,891 | 26,374 | 10,390 | 469 | 52 | 317 |
| Mined-Out Surface | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 82 | 767 | 519 | 0 | * | 127 | 10,891 | 26,374 | 10,390 | 469 | 52 | 317 |
| Total Restrictions | 40 | 663 | 453 | 0 | * | 108 | 10,891 | 26,374 | 10,390 | 0 | * | 119 |
| Total Available | 42 | 104 | 66 | 0 | * | 18 | 0 | 0 | 0 | 469 | 51 | 199 |
| *Land-Use Restrictions*[2] | | | | | | | | | | | | |
| Cemeteries | 2 | 17 | 12 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | * | 44 | 24 | 0 | 0 | * | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 0 | 0 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | * | 177 | 65 | 0 | 0 | 32 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 30 | 331 | 92 | 0 | * | 18 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 10 | 586 | 447 | 0 | * | 104 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions*[2] | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | * | 119 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 233 | 480 | 210 | 0 | 0 | 0 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 10,891 | 26,374 | 10,390 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

* Indicates measurements less than reported precision.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

# Upper Elkhorn No. 2 Bed



Left: Extent of Upper Elkhorn No. 2 bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

Below: Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.



N = 107
Range = 0 - 39 In
Mean = 14.82
SD = 7.05
Var = 49.64
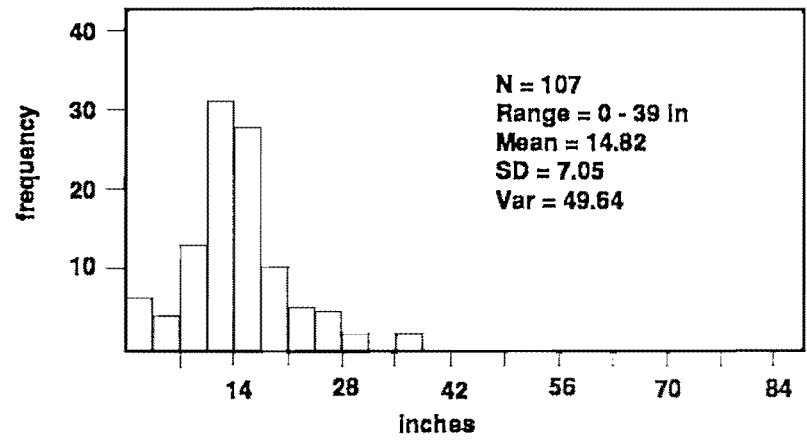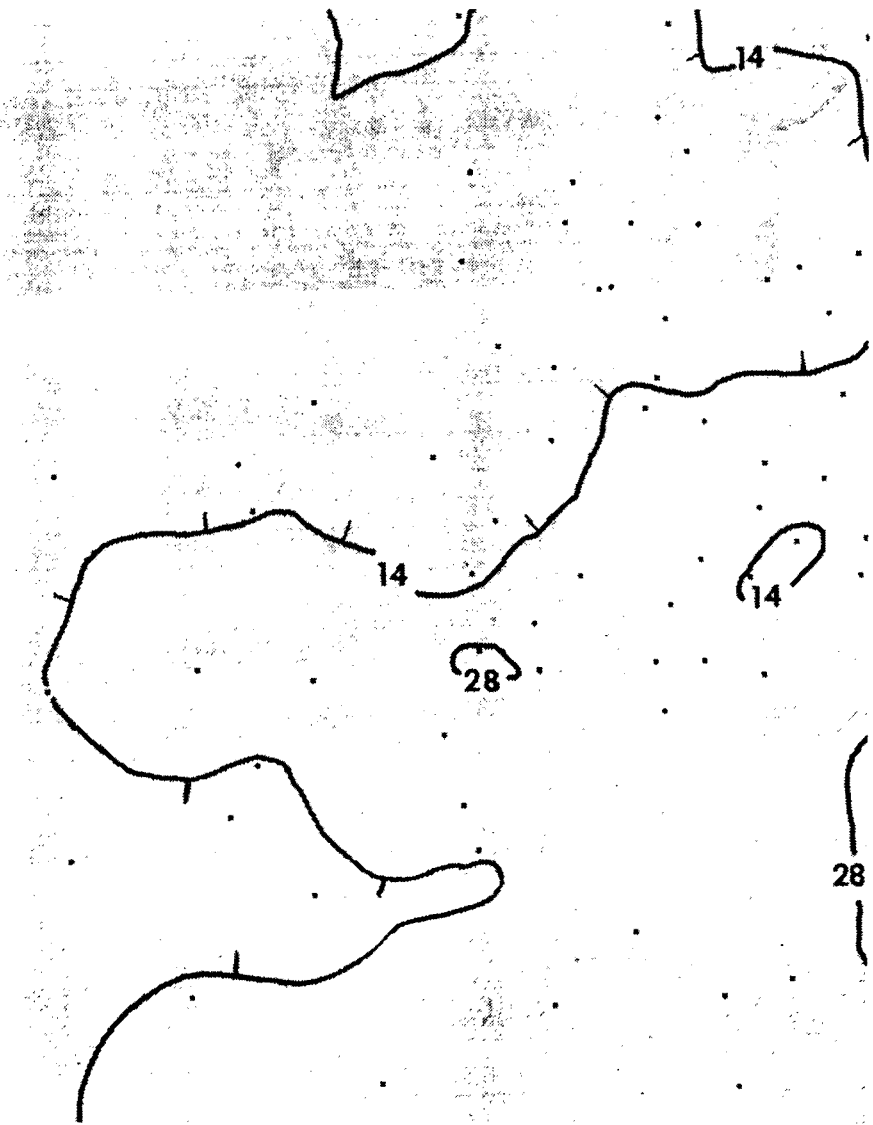
# UPPER ELKHORN NO. 1 COAL BED

## Coal Availability Results
### (Thousands of Short Tons)[1]

| | SURFACE (0-100') | | | | | | DEEP (> 100') | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 14-28" | | | > 28" | | | 14-28" | | | >28" | | |
| | *MEAS* | *IND* | *INF* | *MEAS* | *IND* | *INF* | *MEAS* | *IND* | *INF* | *MEAS* | *IND* | *INF* |
| Original | 5 | 418 | 429 | 206 | 590 | 297 | 6,816 | 21,020 | 15,130 | 18,388 | 25,882 | 2,828 |
| Mined-Out Surface | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mined-Out Deep | 0 | 0 | 0 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 |
| Remaining | 5 | 418 | 429 | 206 | 590 | 294 | 6,816 | 21,020 | 15,130 | 18,388 | 25,882 | 2,828 |
| Total Restrictions | 2 | 406 | 371 | 167 | 468 | 276 | 6,816 | 21,020 | 15,130 | 376 | 621 | 82 |
| Total Available | 3 | 12 | 58 | 40 | 122 | 19 | 0 | 0 | 0 | 18,012 | 25,261 | 2,746 |
| *Land-Use Restrictions[2]* | | | | | | | | | | | | |
| Cemeteries | * | 31 | 16 | 0 | 11 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 10 | 23 | 5 | 58 | 21 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pipelines | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Powerlines | 0 | 20 | 0 | 0 | 21 | 13 | 0 | 0 | 0 | 0 | 0 | 0 |
| Roads | * | 118 | 91 | 34 | 101 | 11 | 0 | 0 | 0 | 0 | 0 | 0 |
| Streams | 2 | 164 | 89 | 87 | 278 | 62 | 0 | 0 | 0 | 0 | 0 | 0 |
| Towns | 0 | 360 | 341 | 125 | 272 | 272 | 0 | 0 | 0 | 0 | 0 | 0 |
| *Technological Restrictions[2]* | | | | | | | | | | | | |
| Barriers | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Interburden < 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mining Within 40' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oil & Gas Wells | 0 | 0 | 0 | 0 | 0 | 0 | 111 | 343 | 390 | 376 | 621 | 82 |
| Coal Too Thin | 0 | 0 | 0 | 0 | 0 | 0 | 6,816 | 21,020 | 15,130 | 0 | 0 | 0 |

MEAS = Measured. IND = Indicated. INF = Inferred.

* Indicates measurements less than reported precision.

[1] Totals may not equal sum of components because of independent rounding.

[2] Total tonnage associated with each category. Sums of individual restrictions exceed the restriction total due to overlapping areas.

Available Coal Resources of the Handshoe 7.5-Minute Quadrangle
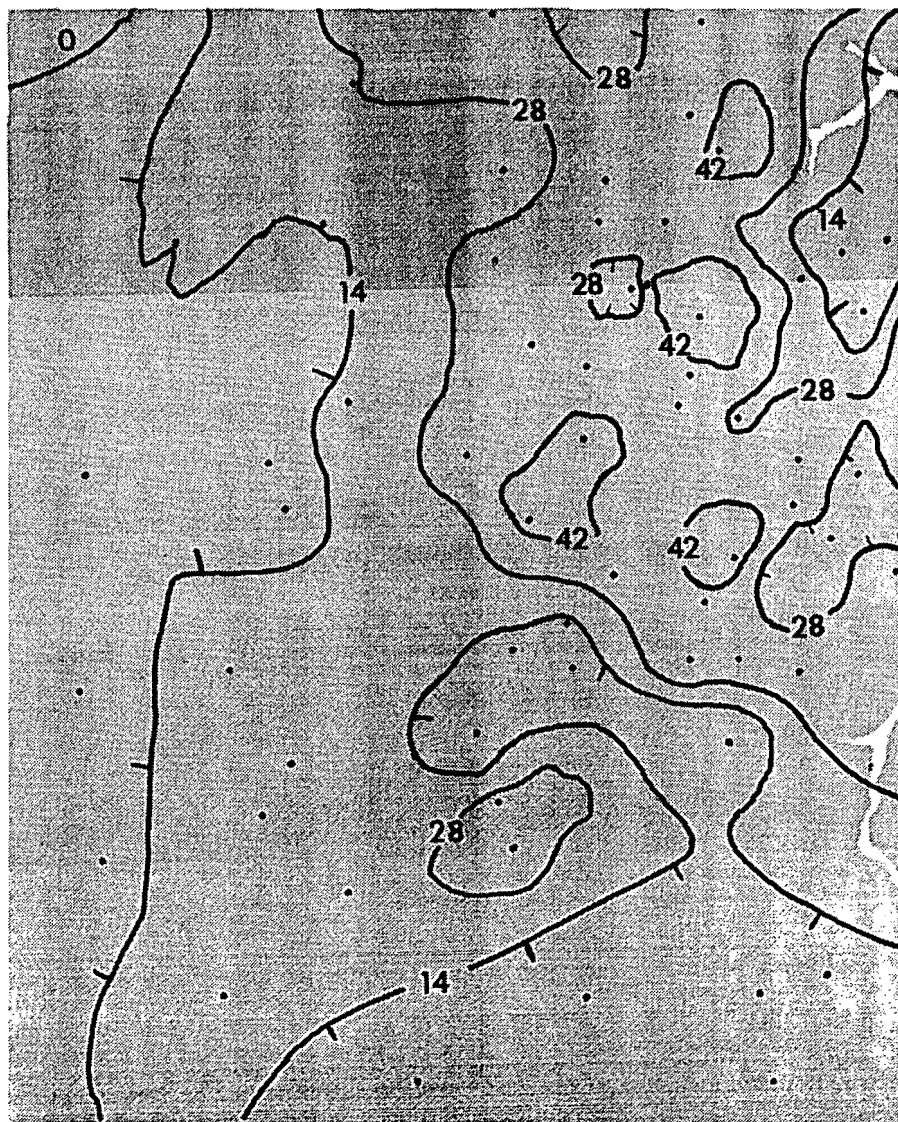
# Upper Elkhorn No. 1 Bed



**Left:** Extent of Upper Elkhorn No. 1 bed within the Handshoe Quadrangle (stippled) and interpolated thickness isolines. Tick marks on isolines indicate decreased thickness. Data points shown by dots and mined-out areas by black areas.

**Below:** Histogram of total coal thickness with summary statistics. Includes data from the margins of adjoining quadrangles.



N = 104
Range = 0 - 74.5 in
Mean = 24.37
SD = 15.43
Var = 238.23