

An investigation on image denoising technique using pixel-component-analysis

S.Kathiravan

Department of Electronics and Communication Engineering,
Kalaingar Karunanidhi Institute of Technology, Coimbatore, India
Tel: 0091-7708914377 Email: kathiravan.sss@gmail.com

N. Guhan Raja

Department of Electronics and Communication Engineering,
Kalaingar Karunanidhi Institute of Technology, Coimbatore, India
Tel: 0091-9944288113 Email: guhanraja16@gmail.com

R. Arun Kumar

Department of Electronics and Communication Engineering,
Kalaingar Karunanidhi Institute of Technology, Coimbatore, India
Tel: 0091-9095811465 Email: arunkumar.soft18@gmail.com

Abstract:

This paper authenticates a proficient image denoising scheme with the analysis local pixel coherence. In the dominion of a study about noise and pixel elements in image processing, the influence of the Gaussian effect on image contrast plays a key role. It is found in particular that pixel variations may be vast in some cases which potentially tend to develop irregularities in the image.

Scope and preamble:

A customary way to remove noise from image data is to employ spatial filters. Owing to these basic methods, there exists certain disadvantage also. The process by which manifestation of digital image is recovered from noisy signals is identified to be Denoising (M. Elad & M. Aharon, 2006). The prior objective is to enhance the appearance of any image by using the new concept in Denoising. Here some basic existing methods are given below.

1. Existing methods:

1.1 Spatial filtering:

1.1.1 Non linear filters:

In this filter noise is removed without any attempt made to identify it. Spatial filters employ a low pass filtering on group of pixels with the assumption that noise occupies higher region of frequency region of frequency spectrum. Normally spatial filters remove noise upto an extent, but in case of blurring images, inturn make the edges in picture invisible sometimes.

1.1.2 Linear filter:

This filter reduces Gaussian noise in the sense of mean square error. Linear filters do tend to blur sharp edges, destroy lines and other fine image details and perform poorly in the presence of the signal dependent noise.

In case of Wiener filtering method, it requires the information about the spectra of noise and the original signal. This method implements spatial smoothing and its model complexity control correspond to choosing the values of window size (A.K.Jain, 1989). To overcome the weakness of Wiener filtering, other advanced methods were found.

2. Transform domain filtering:

2.1 Spatial frequency filtering:

This refers to use of low pass filters using FFT. In frequency smoothing methods, the removal of noise is achieved by designing a frequency domain filter and adopting a cut-off frequency when the noise components are decorrelated from the useful signal in frequency domain.

These methods are bit time consuming and depend on the cut-off frequency and filter functions. They also may produce artificial frequency in processed image.

2.2 Wavelet domain filtering:

Here assumption of filtered image that is more visually displeasing than the original noisy signal, even though the filtering operation noisy signal, even though the filtering operation successfully reduces the noise (S. Mallat, 1998). It involves sparsity property of wavelet transform and it maps white noise in the signal domain to white noise in transform domain. Thus despite the facts that signal energy become more concentrated into fewer coefficients in the transform domain, enables separation of signal from noise.

Thus, denoising is often a necessary and the first step to be taken before the images data is analyzed. It is necessary to apply an efficient denoising technique to compensate for such data corruption.

Data adaptive thresholds (H. Zhang, 2000) were introduced to achieve optimum value of threshold. Later efforts found that substantial improvements in perceptual quality could be obtained by translation invariant methods based on thresholding of an undecimated Wavelet Transform (R. Coifman & D. Donoho, 1995). These thresholding techniques were applied to the non-orthogonal wavelet coefficients to reduce artifacts.

3. Proposed method:

Whenever an image is processed or applied for segmentation, there exist a few irregularities in the alignment and parameters of the image. This is mainly due to the noise caused by white Gaussian effect (J. Portilla & V. Strela, 2003). Here a concept of denoising is introduced in order to recover the affected image. The process of recovery of digital image which is affected by noise is called denoising.

Accordingly denoising is done in 2 stages by principal component analysis (D.D. Muresan & T.W. Parks, 2003) using local pixel coherence. Now the problem is how to estimate the noise by extracting the underlying pixel. Applying such procedures, even by using various filters to each pixel component the whole image can be denoised. Some of the existing low level image processing procedure is smoothing filter, frequency domain method, wavelet transform, and non local mean based method.

Consider wavelet transform, its very effective in noise removal. It decomposes the input image into multiple segments. Each segment has individual pixel components with different frequency components. At each segments operations like thresholding and statistical modeling (Marteen Jansen, 2000) can be performed to suppress noise. Noisy components are eliminated through demonstrating each segment of an image with fixed wavelet basis. But in the case of natural images, there is a rich amount of pixel elements which cannot be represented using fixed wavelet basis. Therefore wavelet transform methods can introduce many visual artifacts in the denoising output.

To overcome the problem non local mean approaches were developed. The major idea behind this method is to show a relationship the similar image pixels. For instance, consider an image is divided multiple segments. Each segment is labeled by using pixel value. Then mean of each pixel are taken to find out the average value. By determining the average value, which are having pixel value closer to average value are combined together for image analysis.

4. SYSTEM:

Each pixel is estimated as the weighted average of all the pixels in the image, and the weights are determined by the similarity between the pixels. This technique can also be correlated with patch matching and sparse 3D transform. A sparse 3D transform is then applied to 3D images and noise was concealed by applying wiener filtering in the transformed domain.

4.1 LPC-PCA DENOISING ALGORITHM:

An image pixel is described by 2 quantities the spatial locations (K. Dabov & A. Foi, 2007) and its intensity, while the image local structure is represented as a part of neighbouring pixels at different intensity levels. Since most of the isolated information of an image is conveyed by its edges.

Therefore irregularities at the edges are highly desired in image denoising. In this concept pixel and its nearest neighbours as a vector variable and perform noise reduction on the vector instead of single pixel.

Consider the modeling of LPC-PCA based denoising.

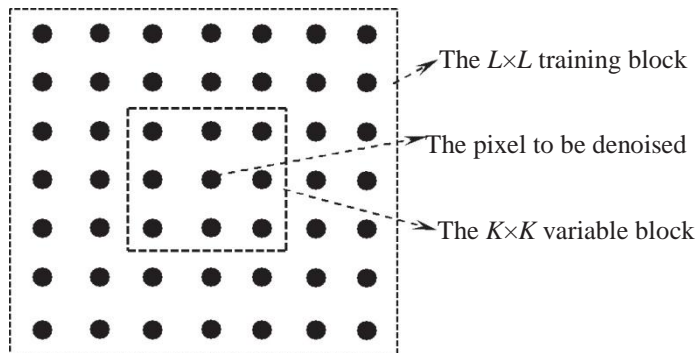


Fig.1 Illustration of the modeling of LPG-PCA based denoising.

Referring to the figure 1, set of $K \times K$ window centered on it, and it is denoted by

$a = [a_1 \dots a_m]^T$ $m = k^2$, the vector containing all the components within the window. Since the above image is noise corrupted, it is denoted by $a_v = a + v$.

Where, a = noise vector

Here $a^v = [a_1^v \dots a_m^v]^T$, $V = [v_1 \dots v_m]^T$. To estimate a and a^v , identify vector variables (ie. noiseless and noisy vector).

By using PCA, analysis of training samples of a_v , its neighbouring vector is carried out for PCA transformation. The simplest way is to take the pixels in each possible $K \times K$ block within the $L \times L$ training block as the samples of noisy variables a_v , its neighbouring vector is carried out for PCA transformation. The simplest way is to take the pixel in each possible $K \times K$ block within the $L \times L$ training block as the samples of noisy variables a_v . In this way there are totally $(L-K+1)^2$ training samples for each component of a and a_v . However there can be different blocks from the given central $K \times K$ block in the $L \times L$ training window so that taking all the $K \times K$ blocks as the training samples of a_v will lead to inaccurate estimation of the covariance matrix of a_v , which subsequently leads to inaccurate estimation of PCA transformation matrix and finally results in noise residual. Therefore selecting and coherence the training samples that are similar to the central $K \times K$ block is necessary for applying PCA transform in denoising.

5. LPC (Local pixel coherence):

Alignment of training samples which are evaluated from fig 1, the central blocks $K \times K$ and $L \times L$ is used for coherence. Thus different coherence methods which are used here is blocking, correlation-based matching. K-mean clustering depends upon certain criteria.

Concert of denoising algorithms is considered using quantitative performance measures such as Peak signal-to-noise ratio (PSNR), signal-to-noise ratio (SNR) as well as in terms of visual quality of the images. Many of the current

techniques assume the noise model to be Gaussian. In this assumption, image appearance is varied due to nature and sources of noise.

An ideal denoising procedure requires *a priori* knowledge of the noise, whereas a practical procedure may not have the required information about the variance of the noise or the noise model. Thus, most of the algorithms assume known variance of the noise and the noise model to compare the performance with different algorithms. Gaussian Noise (P. Moulin & J. Liu, 1999) with different variance values is added in the natural images to test the performance of the algorithm.

6. Denoising of color images:

There are mainly two reasons for the noise residual. First, because of the strong noise in the original dataset X_t , the covariance matrix X_{xt} is much noise corrupted, which leads to estimation bias of the PCA transformation matrix and hence deteriorates the denoising performance; second, the strong noise in the original dataset will also lead to LPC errors, which consequently results in estimation bias of the covariance matrix X_x (or X_{xt}). Performance of denoising algorithms is measured using quantitative performance measures (Z. Wang & A.C. Bovik, 2004) such as peak signal-to-noise ratio (PSNR), signal-to-noise ratio (SNR) as well as in terms of visual quality of the images. Many of the recent techniques assume the noise model to be Gaussian. In actual fact, this statement may not always seize factual due to the varied nature and sources of noise. Therefore, it is necessary to further process the denoising output for a better noise reduction. Since the noise has been much removed in the first round of LPC-PCA denoising, the LPC accuracy and the estimation of X_x (or X_{xt}) can be much improved with the denoised image. Thus we can implement the LPC-PCA denoising procedure for the second round to enhance the denoising results.

On the base of denoising concept we have evaluated and compared the different methods by using two measures: PSNR and SSIM. PSNR can measure the intensity difference between two images, it is recognized that it may fail to depict the visual perception of the image. Alternatively, how to evaluate the visual quality of an image is a very difficult problem and it is currently an active research topic. The SSIM index proposed in one of the most commonly used measures for image visual quality assessment (A. Pizurica & W. Philips, 2006). Compared with PSNR, SSIM can better reflect the structure similarity between the target image and the reference image.

Based on the experimental results obtained below shows the PSNR values corresponding to different values of sigma.

Table.1 lists the PSNR and SSIM measures of the first stage and second stage denoising outputs on the test image set. We can see that the second stage can improve 0.1–1.5 dB the PSNR values for different images under different noise level (s is from 10 to 40). Although for some images the second stage will not improve much the PSNR measures, the SSIM measures, which can better reflect the image visual quality, can be much improved.



Figure.2 Analysis of denoising results using Monarch

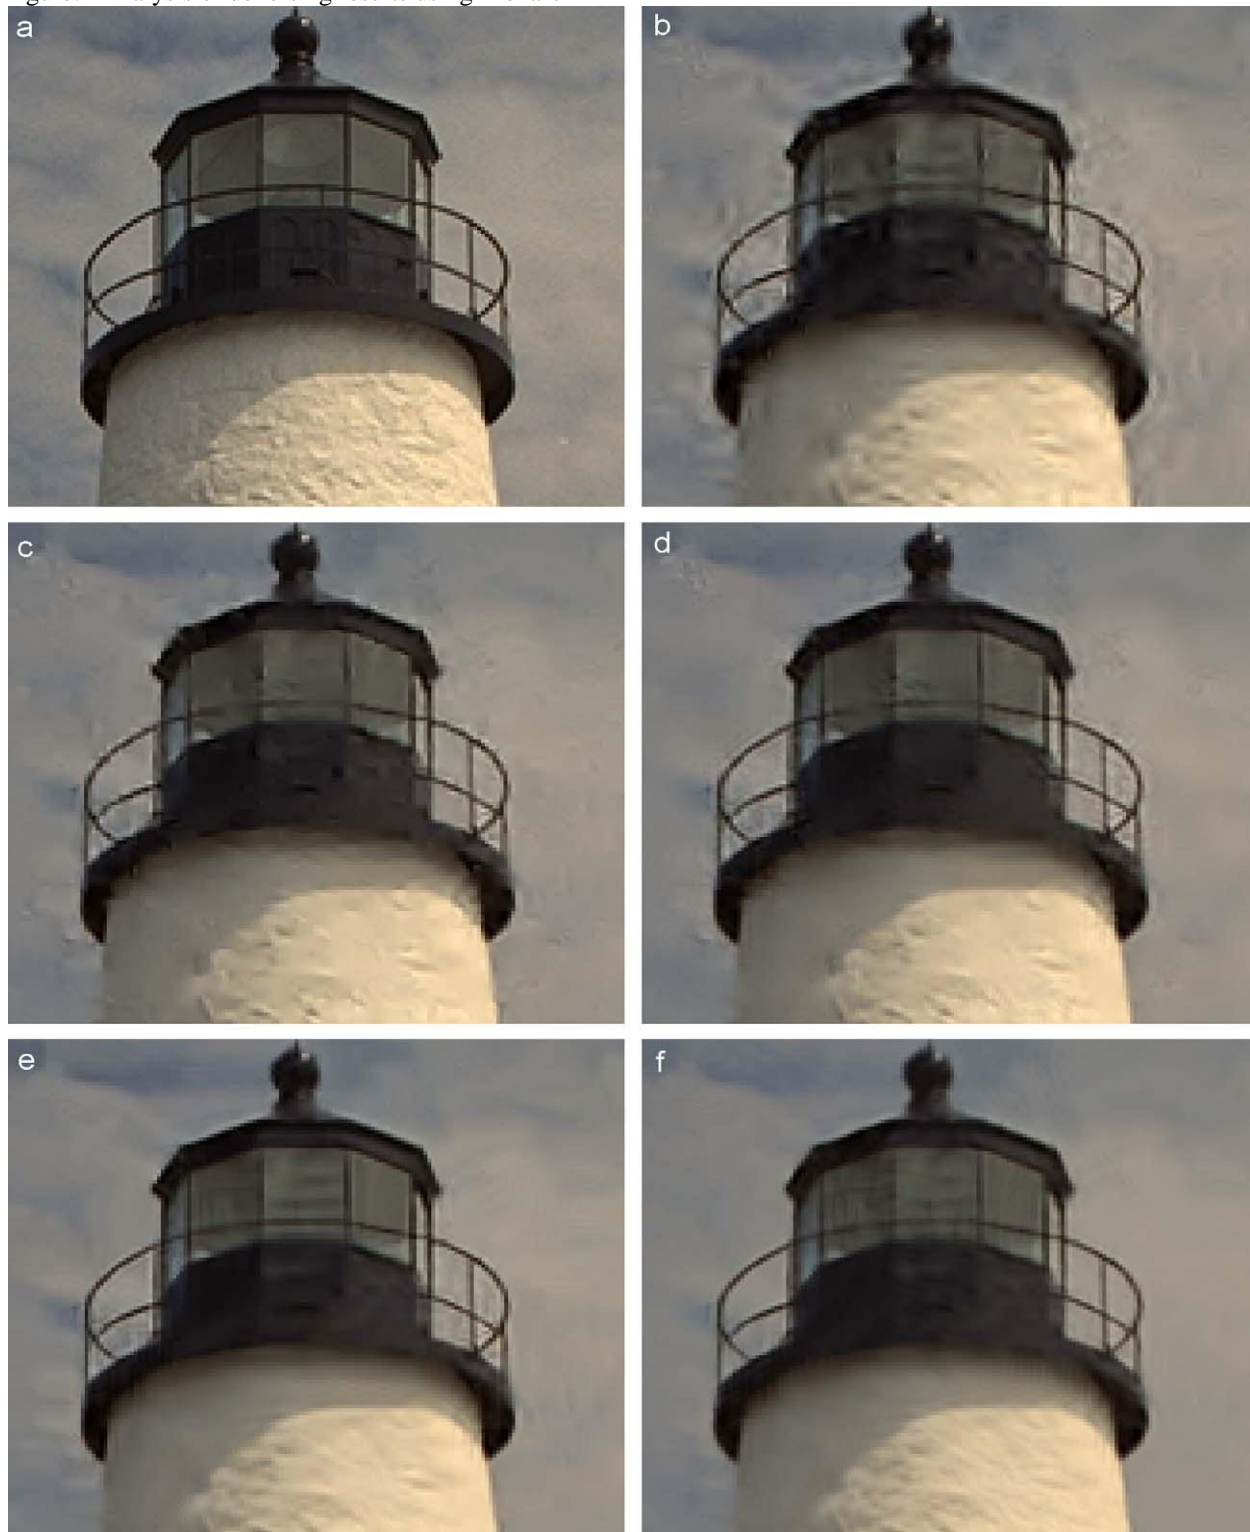


Figure.3 Analysis of denoising results using Tower

Experimental results: Table.1 The PSNR values of the denoised images

Methods		PSNR(SSIP)	PSNR(SSIP)	PSNR(SSIP)	PSNR(SSIP)	LPC-PCA PSNR(SSIP)
Monarch	Sigma =10	33.1(0.9442)	33.6(0.9527)	33.5(0.9501)	33.9(0.9577)	34.2(0.9594)
	Sigma =20	28.8(0.8912)	29.5(0.9076)	29.6(0.9077)	30.1(0.9222)	30.0(0.9202)
	Sigma=30	26.5(0.8370)	27.1(0.8583)	27.4(0.8663)	28.0(0.8850)	27.4(0.8769)
	Sigma =40	25.0(0.7916)	25.7(0.8179)	25.9(0.8260)	26.6(0.8462)	25.9(0.8378)
Tower	Sigma=10	34.2(0.9017)	34.6(0.9099)	34.7(0.9115)	35.0(0.9144)	34.8(0.9123)
	Sigma=20	30.5(0.8270)	31.1(0.8444)	31.4(0.8533)	31.6(0.8576)	31.1(0.8522)
	Sigma=30	28.5(0.7711)	29.2(0.7919)	29.3(0.8018)	29.7(0.8135)	29.1(0.8069)
	Sigma=40	27.3(0.7277)	27.9(0.7505)	27.9(0.7583)	28.3(0.7760)	27.8(0.7695)

Denoising refinement in the second stage:

There are mainly two reasons for the noise residual. First, because of the strong noise in the original dataset X_t , the covariance matrix X_{xt} is much noise corrupted, which leads to estimation bias of the PCA transformation matrix and hence deteriorates the denoising performance; second, the strong noise in the original dataset will also lead to LPC errors, which consequently results in estimation bias of the covariance matrix X_x (or X_{xt}). Therefore, it is necessary to further process the denoising output for a better noise reduction. Since the noise has been much removed in the first round of LPC-PCA denoising, the LPC accuracy and the estimation of X_x (or X_{xt}) can be much improved with the denoised image. Thus we can implement the LPC-PCA denoising procedure for the second round to enhance the denoising results. Although the PSNR is much improved, we can still see much noise residual in the denoising output.

Compared with the first approach, the second approach can exploit both the spatial correlation and the spectral correlation in denoising color images. However, there are two main problems. First, the dimensionality of the color variable vector is three times that of the gray level image (C. Tomasi & R. Manduchi, 1998) and this will increase significantly the computational cost in the PCA denoising process. Second, the high dimensionality of the color variable vector requires much more training samples to be found in the LPC processing. Nonetheless, we may not be able to find enough training samples in the local neighborhood so that the covariance matrix of the color variable vector may not be accurately estimated, and hence the denoising performance can be reduced. With the above consideration, in this paper we choose the first approach for LPC-PCA based color image denoising due to its simplicity and robustness.

Results on analysis:

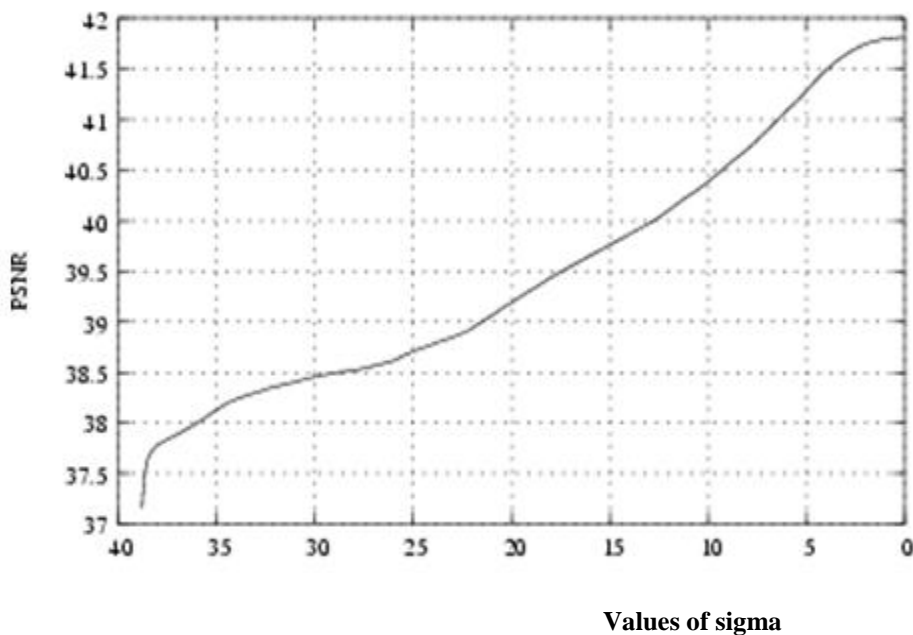


Figure.4 Illustration of PSNR values

CONCLUSION:

Analysis of the processed image data is one of the hot topics in imaging field where Error probability plays vital role. This paper has evaluated the global denoising performance with the real distribution of image processing in a viewing format. The results are particularly encouraging especially because of the comparison with the other techniques like wavelet transform and frequency domain methods. This is a simplistic method for improving the standards of an image by pixel alignment with all possible screening performances as a classification feature. Thus finally the concept of denoising investigates common errors that occurs during image processing and effectively replaces fine structures of the given input image.

References:

M. Aharon, M. Elad, A.M. Bruckstein, The K-SVD: an algorithm for designing of over complete dictionaries for sparse representation, *IEEE Transaction on Signal Processing* 54 (11) (2006) 4311–4322.

A.K.Jain, *Fundamentals of digital image processing*. Prentice-Hall, 1989

S. Mallat, *Wavelet Tour of Signal Processing*, Academic Press, New York, 1998.

H. Zhang, Aria Nosratinia, and R. O. Wells, Jr., “Image denoising via wavelet-domain spatially adaptive FIR Wiener filtering”, in *IEEE Proc. Int. Conf. Acoust., Speech, Signal Processing*, Istanbul, Turkey, June 2000.

R. Coifman and D. Donoho, "Translation invariant de-noising," in *Lecture Notes in Statistics: Wavelets And Statistics*, vol. New York: Springer-Verlag, pp. 125--150, 1995

J. Portilla, V. Strela, M.J. Wainwright, E.P. Simoncelli, Image denoising using scale mixtures of Gaussians in the wavelet domain, *IEEE Transaction on Image Processing* 12 (11) (2003) 1338–1351.

D.D. Muresan, T.W. Parks, Adaptive principal components and image denoising, in: *Proceedings of the 2003 International Conference on Image Processing*, 14–17 September, vol. 1, 2003, pp. I101–I104.

Marteen Jansen, Ph. D. Thesis in “Wavelet thresholding and noise reduction” 2000.

Z. Wang, A.C. Bovik, H.R. Sheikh, E.P. Simoncelli, Image quality assessment: from error visibility to structural similarity, *IEEE Transaction on Image Processing* 13 (4) (2004)

A.Pizurica, W. Philips, Estimating the probability of the presence of a signal of interest in multiresolution single- and multiband image denoising, *IEEE Transaction on Image Processing* 15 (3) (2006) 654–665.

K. Dabov, A. Foi, V. Katkovnik, K. Egiazarian, Image denoising by sparse 3D transform-domain collaborative filtering, *IEEE Transaction on Image Processing* 16 (8) (2007) 2080–2095

P. Moulin and J. Liu, “Analysis of multiresolution image denoising schemes using generalized Gaussian And complexity priors”, *IEEE Infor. Theory*, Vol. 45, No 3, Apr. 1999, pp. 909-919.

C. Tomasi, R. Manduchi, Bilateral filtering for gray and colour images, in: *Proceedings of the 1998 IEEE International Conference on Computer Vision*, Bombay, India, 1998, pp. 839–846

This academic article was published by The International Institute for Science, Technology and Education (IISTE). The IISTE is a pioneer in the Open Access Publishing service based in the U.S. and Europe. The aim of the institute is Accelerating Global Knowledge Sharing.

More information about the publisher can be found in the IISTE's homepage:

<http://www.iiste.org>

The IISTE is currently hosting more than 30 peer-reviewed academic journals and collaborating with academic institutions around the world. **Prospective authors of IISTE journals can find the submission instruction on the following page:**

<http://www.iiste.org/Journals/>

The IISTE editorial team promises to review and publish all the qualified submissions in a fast manner. All the journals articles are available online to the readers all over the world without financial, legal, or technical barriers other than those inseparable from gaining access to the internet itself. Printed version of the journals is also available upon request of readers and authors.

IISTE Knowledge Sharing Partners

EBSCO, Index Copernicus, Ulrich's Periodicals Directory, JournalTOCS, PKP Open Archives Harvester, Bielefeld Academic Search Engine, Elektronische Zeitschriftenbibliothek EZB, Open J-Gate, OCLC WorldCat, Universe Digital Library, NewJour, Google Scholar

