

Enhancement Mechanical Properties of Barium Chloride by Adding Copper Chloride using Ultrasonic Technique

Prof.Dr.Abdul-Kareem J. Al-Bermany(Corresponding author)

Babylon University / Facility of Science /Physics Department /Advanced polymer laboratory

E-Mail: dr.abdulkaream@yahoo.com

Burak Yahya Kadem

E-Mail burakwh@yahoo.com

Lamis Faaz Naser

Babylon University / Facility of Science /Physics Department /Advanced polymer laboratory

SShh-Phy@yahoo.com

Abstract:

Some of physical properties of BaCl₂ dissolves in distilled water had been studied at different concentrations (0.05%, 0.1%, 0.15%, 0.2%, 0.25% and 0.3%) (gm./ml) before and after adding (0.3)gm of CuCl₂ for all concentrations, the mechanical properties such as ultrasonic velocity had been measured by ultrasonic waves system at frequency 25 KHz, other mechanical properties had been calculated such as absorption coefficient of ultrasonic waves, relaxation time, relaxation amplitude, specific acoustic impedance, compressibility and bulk modulus. The results show that all these properties are increasing with the increase of the polymer concentration except compressibility is decreasing with the increase of the concentration; results show that when adding CuCl₂ these properties are increasing except compressibility is decreasing. Results also shows that adding CuCl₂ to BaCl₂ enhances the ultrasonic absorption coefficient as a result of high values after addition.

Keywords: BaCl₂ solution, CuCl₂ solution, mechanical properties, ultrasound technique.

1. Introduction

The BaCl₂ is a water-soluble synthetic polymer, due to the characteristics of easy preparation, good biodegradability, excellent chemical resistance, and good mechanical properties, BaCl₂ is used mainly as a solution in water but its solubility in water depends on temperature, [1]. BaCl₂ is available as colorless crystals and salt barium is the most important and has high degradation in water. An improved understanding of the excited state structure and dynamics in conjugated polymers should aid in the design of more efficient materials for such applications. The prevailing view is that these materials can be thought of as collections of chain segments with varying conjugation lengths, whose proximity to each other does not affect their fundamental electronic structure, but whose intramolecular excitation states interact via weak, Forster-type interactions [2]. Copper(II) chloride is the chemical compound with the formula CuCl₂. This is a light brown solid, which slowly absorbs moisture to form a blue-green dihydrate. The copper(II) chlorides are some of the most common copper(II) compounds, after copper sulfate. Anhydrous CuCl₂ adopts a distorted cadmium iodide structure. In this motif, the copper centers are octahedral. Most copper(II) compounds exhibit distortions from idealized octahedral geometry due to the Jahn-Teller effect, which in this case describes the localization of one d-electron into a molecular orbital that is strongly antibonding with respect to a pair of chloride ligands. In CuCl₂·2H₂O, the copper again adopts a highly distorted octahedral geometry, the Cu(II) centers being surrounded by two water ligands and four chloride ligands, which bridge asymmetrically to other Cu centers solvent effects might therefore be expected to influence the ultrasonic relation behavior, the absorption of ultrasonic in liquid systems is governed by local modes of motion and cooperative whole molecule movement because of the strong intermolecular interaction it should be possible to observe cooperative motion in the ultrasonic range.. However these properties are dependent on humidity, in other words, with higher humidity more water is absorbed, the water which acts as a plasticizer, will then reduce its tensile strength, but increase its elongation and tear strength. Acoustic relaxation measurements on other solutions have been reported by several workers[8,9], ultrasonic technique is good method for studying the structural changes associated with the information of mixture assist in the study of molecular interaction between two species; some of mechanical properties of different solutions were carried by some workers using ultrasonic technique[10]. The purpose of this research was to investigate the physical properties of BaCl₂ with CuCl₂ as aqueous solutions by ultrasound wave at fixed frequency (25 KHZ) and study the effect of adding CuCl₂ on the physical properties of BaCl₂ to enhance its different applications.

2. Experimental:

2.1 Preparation of Solutions:

BaCl₂ (Gerhard Buchman –Germany) with assay (99%) and CuCl₂ (Messina) with assay (99.8%) [11]. The BaCl₂ solutions were prepared by dissolving a known weights of BaCl₂ powder in a fixed volume (400 ml) of

distilled water under stirring at 70°C for (30 min). The BaCl₂ concentrations were (0.05%, 0.1%, 0.15 %, 0.2%, 0.25% and 0.3%) gm./ ml ; then CuCl₂ was added with weight (0.3 gm.) to all BaCl₂ Concentrations. The resulting solution was stirred continuously for (30 min) until the solution mixture became a homogeneous.

2.2 Ultrasonic measurements:

Ultrasonic measurements were made by pulse technique of sender-receiver type (SV-DH-7A/SVX-7 velocity of sound instrument) with constant frequency (25 KHz), as shown in Fig. below the receiver quartz crystal mounted on a digital vernier scale of slow motion, the receiver crystal could be displaced parallel to the sender and the samples were put between sender and receiver. The sender and receiver pulses (waves) were displayed as two traces of cathode ray oscilloscope, and the digital delay time (*t*) of receiver pulses were recorded with respect to the thickness of the samples (*x*). The pulses height on oscilloscope (CH1) represents incident ultrasonic wave's amplitude (*A*₀) and the pulses height on oscilloscope (CH2) represents the receiver ultrasonic wave's amplitude (*A*).



The instruments of ultrasonic system

2.3 Theoretical calculations:

The absorption coefficient (α) was calculated from Lambert – Beer law[12]:

$$A / A_0 = e^{(-\alpha x)} \dots\dots\dots(1)$$

Where (*A*₀) is the initially amplitude of the ultrasonic waves, (*A*) is the wave amplitude after absorption and (*x*) is the thickness of the sample.

The ultrasonic wave velocity (*V*) was calculated using the following equation[13]:

$$V = x / t \dots\dots\dots(2)$$

Where (*t*) is time that the waves need to cross the samples (digital obtained from the instrument). Attenuation is generally proportional to the square of sound frequency so the relaxation amplitude (*D*) was calculated from the following equation[14] where (*f*) is the ultrasonic frequency:

$$D = \frac{\alpha}{f^2} \dots\dots\dots(3)$$

The acoustic impedance of a medium (*Z*), it was calculated by equation[15]:

$$Z = \rho V \dots\dots\dots(4)$$

Bulk modulus (*K*) is the substance's resistance to uniform compression, it is defined as the pressure increase needed to decrease the volume; it was calculated by Laplace equation[16] :

$$K = \rho V^2 \dots\dots\dots(5)$$

Compressibility (*B*) is a measure of the relative volume change of a fluid or solid as a response to a pressure (or mean stress) change, it was calculated by the following equation[17]:

$$B = (\rho V^2)^{-1} \dots\dots\dots(6)$$

The relaxation time (τ) was calculated from the equation[18]:

$$\tau = 4\eta_s / 3\rho V^2 \dots\dots\dots(7)$$

3. Results and Discussion:

(Fig.2) shows that absorption coefficient is increasing with concentration this attributed to the fact that when polymer concentration increase there will be more molecules in solution this lead to more attenuation against wave propagation, the attenuation can be attributed to the friction and heat exchange between the particles and the surrounding medium as well as to the decay of the acoustic wave in the forward direction due to scattering by the Particles [15], this behavior same to that give by [19] for other polymers, adding CuCl₂ enhances absorption coefficient by increasing its values. This attributed that there were more flexibility for these polymer chains in solution as a result of adding CuCl₂ molecules, and because ultrasonic waves propagate as compression and rarefaction in a medium so there are variation in density medium and there were more attenuation to energy of ultrasound waves when adding CuCl₂[20]. Ultrasonic velocity is increasing with increasing CuCl₂ as shown in (Fig.1) this because structural or volume relaxation it occurs in associated liquids such as polymers, a liquid when at rest has a lattice structure similar to that possessed by solid when waves are propagated through it, the resultant periodic changes of wave pressure causes molecules to flow into vacancies in the lattice during compression phase and to return to their original positions in the lattice during rarefaction so when adding CuCl₂ the vacancies were occupied by these molecules lead to increases the velocity [21]. The compressibility is decreasing with the increase of concentration (Fig.3) and attributed to the fact that in Laplace equation no. (6) There are inverse proportionality between compressibility and ultrasonic velocity [23, 24]. Ultrasonic relaxation time was calculated by using equation no. (7) Shown in (Fig.4) and the relaxation amplitude shown in (Fig.5) calculated from equation no.(3) their values are increasing with concentration, this behavior same to that give by [19] for other polymers, also (Fig.4) Shows that relaxation time decreased when adding CuCl₂ this attributed to the fact that ultrasonic energy depends on viscosity thermal conductivity, scattering and intermolecular processes , thermal conductivity and scattering effects are known to be negligible and since CuCl₂ increase velocity so relaxation time must decrease [18] Specific acoustic impedance shown in (Fig.6) is increasing with concentrations this behavior same to that given by [25] for other polymers and attributed to the equation no. (4) has only one variable parameter which is velocity and density has very small variations with respect to that of velocity. And the bulk modulus is increasing with concentration (Fig.7) ; this behavior same to that give by [26].(Fig.6) shows that adding CuCl₂ increased acoustic impedance because CuCl₂ chains fills the valances by swallowing water molecules and be closer to BaCl₂ macromolecules that increasing Specific acoustic impedance[27].

4. Conclusion

1. Adding CuCl₂ polymer to BaCl₂ enhances the ultrasonic absorption coefficient as a result of high values after addition so it can be used as coated materials for moving bodies in order to detect its by ultrasonic technique .
- 2.Adding CuCl₂ increases the ultrasonic velocity so it can be used as good medium for transforming ultrasonic waves in such medical instruments.
3. Adding CuCl₂ reduced compressibility this lead to increase interaction between polymer molecules this cause enhancement for mechanical properties against environments .

References

- 1.Greenwood, N. N. and Earnshaw, A. (1997). Chemistry of the Elements (2nd Edn.), Oxford:Butterworth-Heinemann.
2. Jayanta Chakraborty, Jayashri Sarkar, Ravi Kumar and Giridhar Madra (2004) "Ultrasonic Degradation of Poly butadiene and Isotactic Polypropylene", Polymer Degradation and Stability, Elsevier, 85(1).
3. Krishna, Palakodety Radha; G. Dayaker (2007). "A stereoselective total synthesis of (-)-andrachcinidine via an olefin cross-metathesis protocol". *Tetrahedron Letters* (Elsevier) 48 (41): 7279–7282. doi:10.1016/j.tetlet.2007.08.053.
4. Chapman , A. Hallp E "Thickening and Gelling Agents for food" , 2002.
5. Anon, "Society of Petroleum Eng. of AIME J.". Pub. by Soc. of Pc. Eng. of AIME. USA, P. 482, 1985.
6. Biswal DR, Singh RP (2004) "Characterization of Carboxy methyl cellulose and poly acryl amide graft copolymer", Carbo hyd. Polymer, 57:379-387.
7. Edgar181, Source: "Own work by uploader " , 14:36, 16 October 2008 (UTC).
8. Poly (Ethylene Glycol) Coating on the Acoustic Properties of Biocompatible Magnetic Fluid", International Journal of Thermo physics. Springer link, 31(1), 70–76.
9. Khalida,H.H. (2004) "Study of Structural and Visco-Relaxation of Polycarbonates Solutions by Ultrasonic Technique", Journal of Al-Qadisiya of Pure Sciences, 9(3),188-122.
10. B. Boro Djordjevi (2009) "Ultrasonic characterization of advanced composite materials" the 10thInternational Conference of the Slovenian Society for Non- Destructive Testing (Application of

Contemporary Non-Destructive Testing in Engineering), Ljubljana, Slovenia, 47-57.

11. Messina incorporated “product data”, Travis suite 520 Data, Texas. p. 22,1998.
12. Zong fang Wu1 and Dong C. Liu (2011) “Method of improved scattered size estimation without Attenuation known a priori” Bioinformatics and Biomedical Engineering (ICBBE), 4th International Conference, IEEE, 8(10).1- 4.
13. Boutouyrie P, Briet M, Collin C, Vermeersch S and Pannier B (2009) “Assessment of pulse wave velocity”, ArteryResearch, 3 (1), 3–8..
14. Josef and Herbert Krautkramer (1990) “Ultrasonic testing of materials” 4th edition, Springer.
15. Jarth Mc-Hugh (2008). a thesis PhD Bundesanstalt fur Material for schung und - prufung (BAM), Germany.
16. Siddhartha Roy ,Alexander Winner ,Tillman Beck Thomas Studnitzky and Gunter Stephanie (2011) “Mechanical properties of cellular solids produced from hollow stainless steel spheres” J Mater Sci ,46:5519–5526.
17. R. Palani and S. Kalavathy 2011, volumetric compressibility and transport studies on molecular Interactions of mono, di and tri saccharine in aqueous sodium butyrate mixtures at 303.15 K, Advances in Applied Science Research, 2011, 2 (2): 146-155.
18. Curi E.,Campana S. (2006), Journal of Macromolecules science chem.A431,4.
19. Ehssan D.J, a thesis M.Sc (2004) “Gamma relaxation effect on some physical properties of polymer xanzan cellulose” university of Babylon.
20. Alaa J. Kadham Algidsawi, Ahmed Hashim and Hayder J. Kadham Algidsawi (2011) “The Effect of (LiFCuCl₂.2H₂O) on Mechanical Properties of Poly-Vinyl Alcohol”, European Journal of Scientific Research, 65 (1) , 74-78.
21. Oudry J, Bastard C, Miette V, Willinger R and Sandrin L(2009) ”Ultrasound Medical Biology”,1185-97
22. T.G. Lazareva and E.V. Shingareva (2002) “ Rheological and Electrophysical Characteristics of polyvinyl Alcohol and water- soluble Carboxymethyl Cellulose”, Russian Journal of Applied Chemistry, 75, (10), 1688-1691.
23. Oudry J, Bastard C, Miette V, Willinger R and Sandrin L(2009) ”Ultrasound Medical Biology”,1185-97.
24. Al-Bermany K.J. (2010) “Enhancement of mechanical properties using gamma radiation for HEC Polymer”, Journal of college of Education, Babylon University, 1(5), 10-15.
25. Ahmed Hashim, Alaa J. Kadham Algidsawi, Hayder J. Kadham Algidsawi and Shaymaa Hadi (2011)“ Mechanical Properties of (PVA-CoNO₃, BaSO₄.5H₂O) Composites”, European Journal of Scientific Research, 65(2) , 163-167.
26. Abdul-Kareem J. Rashid, Ehssan Dhiaa Jawad and Burak Y. Kadem (2011) “A Study of Some Mechanical Properties of Iraqi Palm Fiber-PVA Composite by Ultrasonic” European Journal of Scientific Research, 61 (2). 203-209.
27. Martin F.D and Kuntamukula M, “polymeric Material science and Engineering” v.72,pub. , 2001.

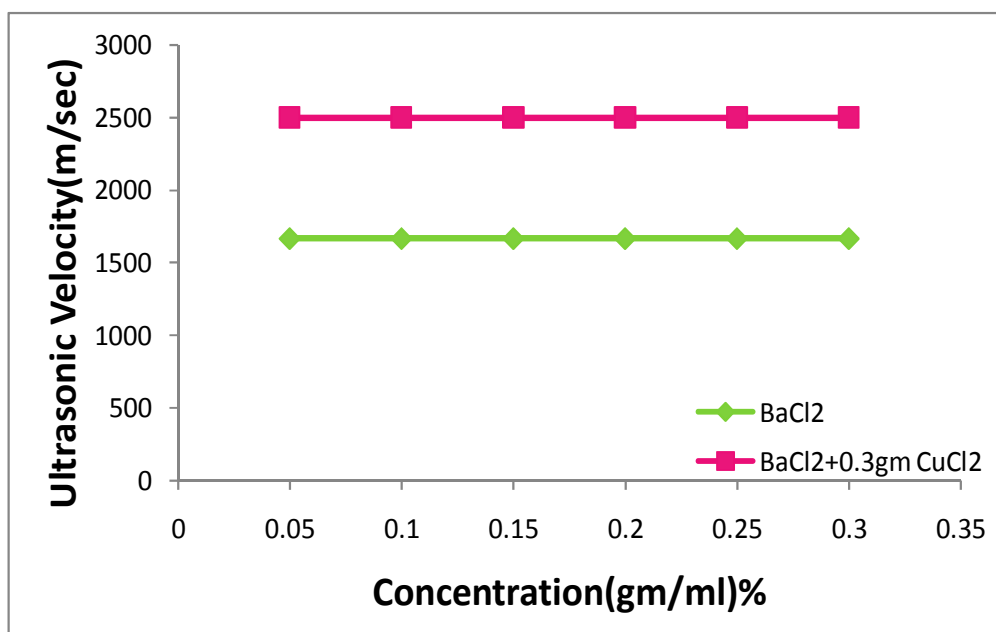


Fig.1. Ultrasonic Velocity due to concentration

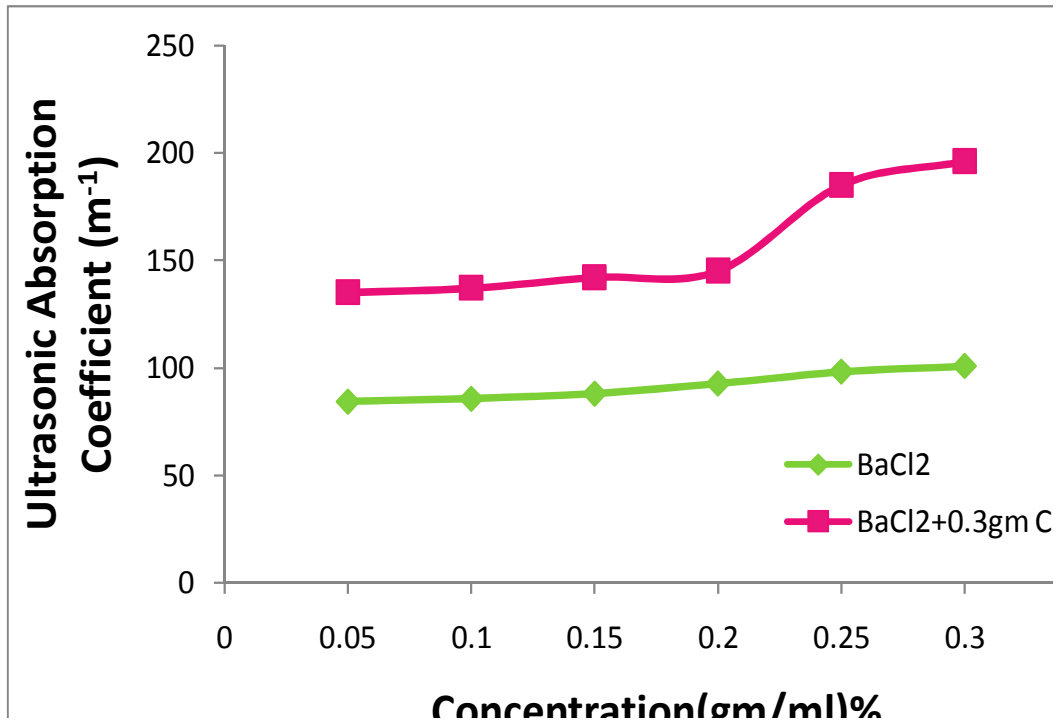


Fig.2. Absorption coefficient due to concentration

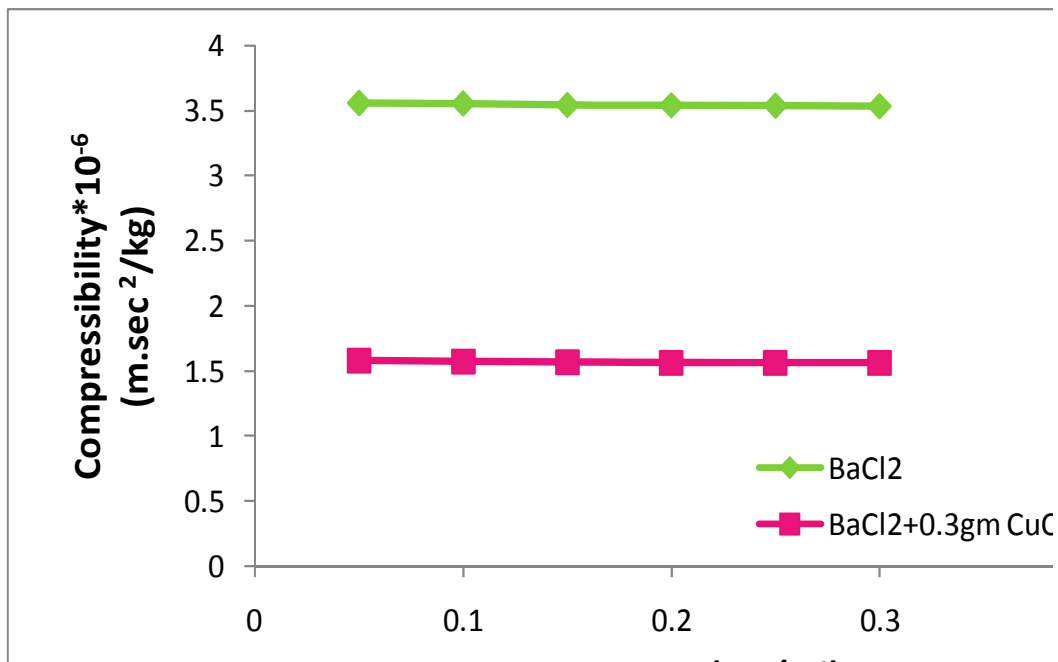


Fig.3. Compressibility due to concentration

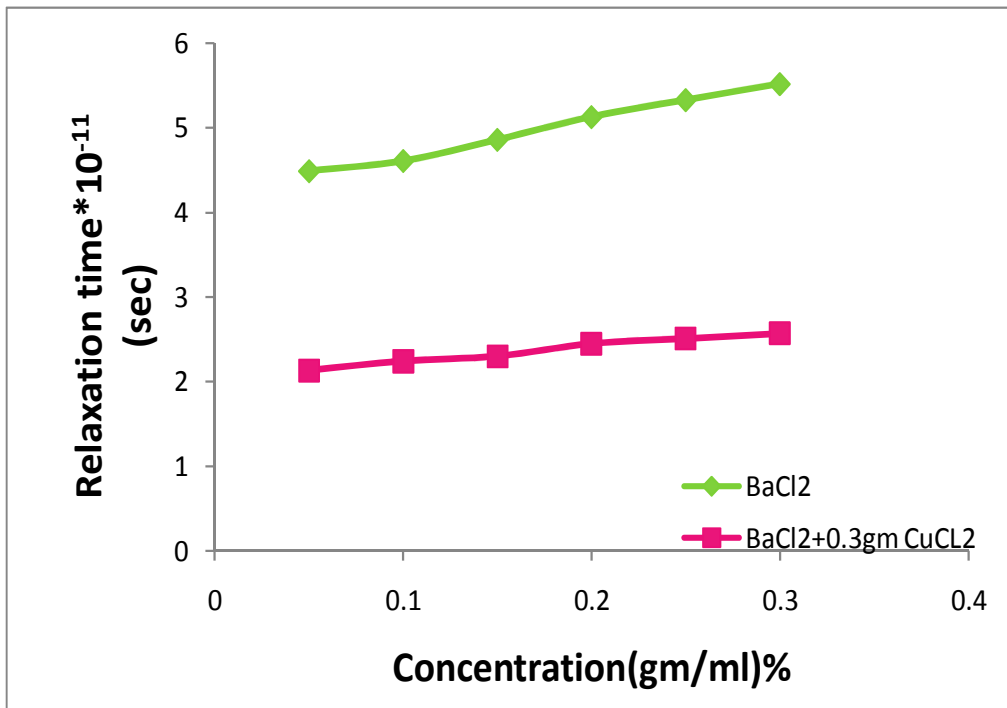


Fig.4. Relaxation time due to concentration

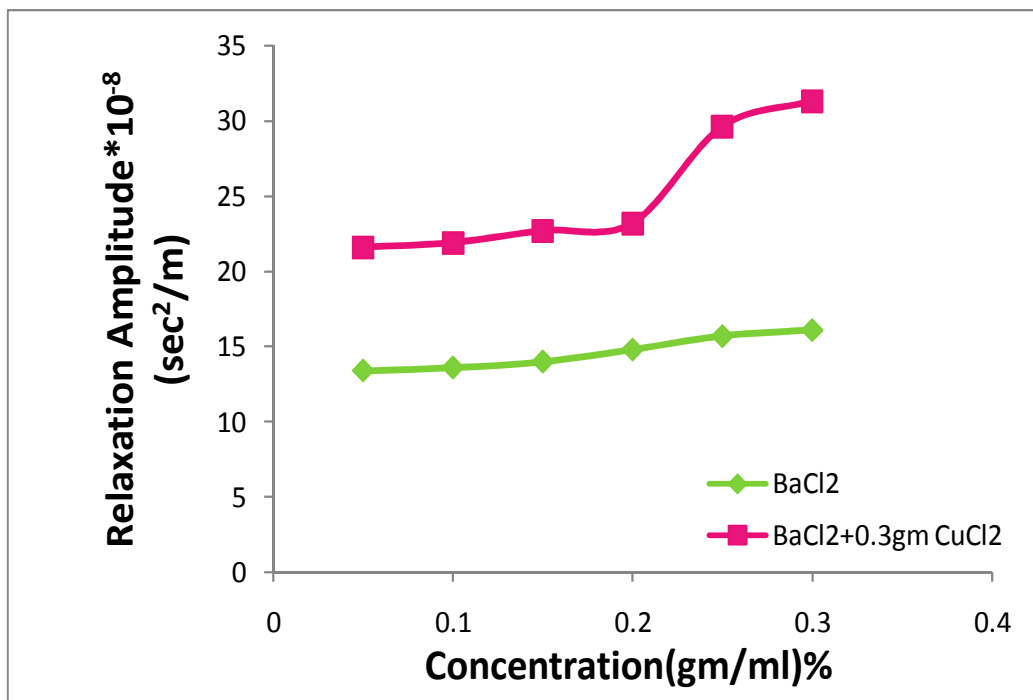


Fig.5. Relaxation amplitude due to concentration

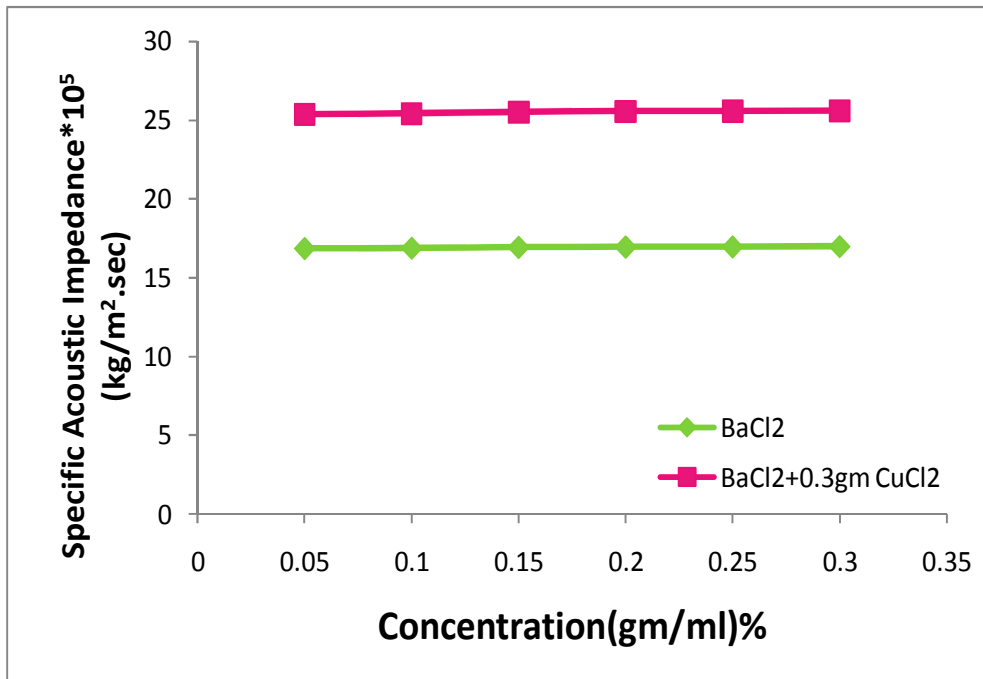


Fig. 6. Acoustic impedance due to concentration

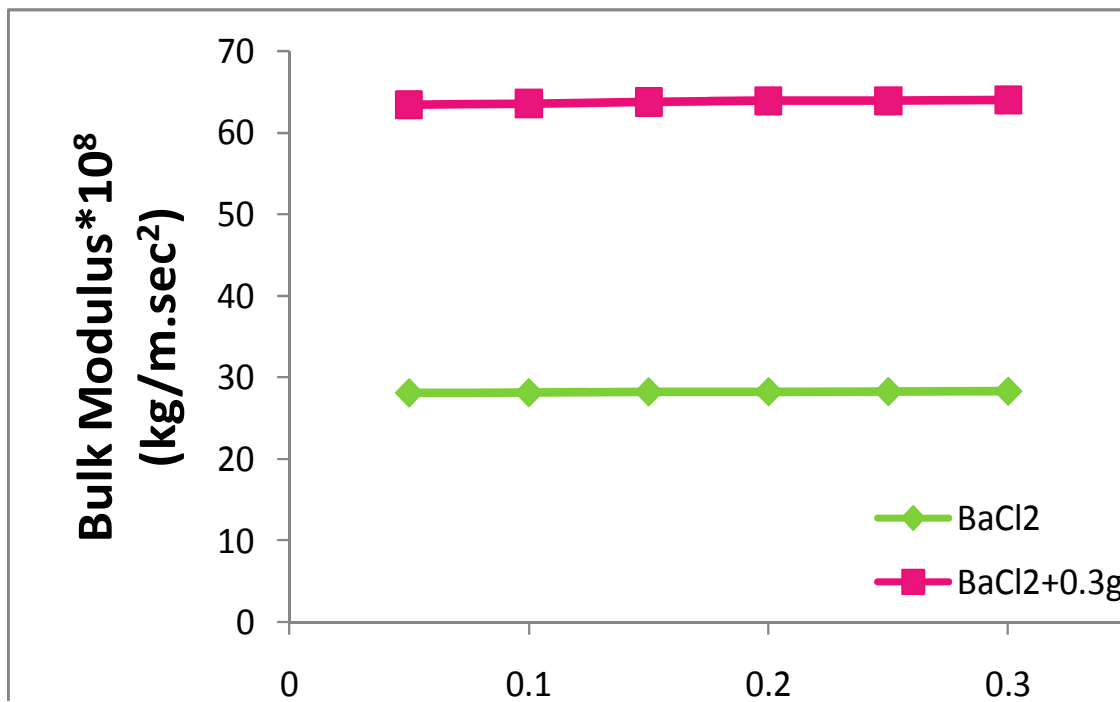


Fig.7. Bulk Modulus due to concentration

This academic article was published by The International Institute for Science, Technology and Education (IISTE). The IISTE is a pioneer in the Open Access Publishing service based in the U.S. and Europe. The aim of the institute is Accelerating Global Knowledge Sharing.

More information about the publisher can be found in the IISTE's homepage:

<http://www.iiste.org>

CALL FOR PAPERS

The IISTE is currently hosting more than 30 peer-reviewed academic journals and collaborating with academic institutions around the world. There's no deadline for submission. **Prospective authors of IISTE journals can find the submission instruction on the following page:** <http://www.iiste.org/Journals/>

The IISTE editorial team promises to review and publish all the qualified submissions in a **fast** manner. All the journals articles are available online to the readers all over the world without financial, legal, or technical barriers other than those inseparable from gaining access to the internet itself. Printed version of the journals is also available upon request of readers and authors.

IISTE Knowledge Sharing Partners

EBSCO, Index Copernicus, Ulrich's Periodicals Directory, JournalTOCS, PKP Open Archives Harvester, Bielefeld Academic Search Engine, Elektronische Zeitschriftenbibliothek EZB, Open J-Gate, OCLC WorldCat, Universe Digital Library, NewJour, Google Scholar

