



POLITECNICO DI TORINO  
Repository ISTITUZIONALE

Experimental validation of topology optimization of Additive Manufactured polymeric beams subjected to three-point bending test

*Original*

Experimental validation of topology optimization of Additive Manufactured polymeric beams subjected to three-point bending test / Pakkanen, JUKKA ANTERO; Manfredi, DIEGO GIOVANNI; Minetola, Paolo; Fino, Paolo; Iuliano, Luca. - ELETTRONICO. - (2017), pp. 200-201. ((Intervento presentato al convegno Simulation for Additive Manufacturing tenutosi a Munich (Germany) nel 11th-13th October, 2017.

*Availability:*

This version is available at: 11583/2693486 since: 2017-11-24T03:29:25Z

*Publisher:*

Technical University of Munich

*Published*

DOI:

*Terms of use:*

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)

## Experimental validation of topology optimization of Additive Manufactured polymeric beams subjected to three-point bending test

Jukka Pakkanen<sup>1,3</sup>, Diego Manfredi<sup>1</sup>, Paolo Minetola<sup>2</sup>, Paolo Fino<sup>1,3</sup> and Luca Iuliano<sup>2</sup>

Center for Sustainable Future Technologies  
Istituto Italiano di Tecnologia, Corso Trento 21, 10129 Torino, Italia  
jukka.pakkanen@polito.it

Department of Management and Production Engineering  
Politecnico di Torino, Corso Duca Degli Abruzzi 24, 10129 Torino, Italia

Department of Applied Science and Technology  
Politecnico di Torino, Corso Duca Degli Abruzzi 24, 10129 Torino, Italia

**Key Words:** *Topology Optimization (TO), Additive Manufacturing (AM), 3D Printing, Flexural behaviour*

Topology Optimization (TO) is a powerful tool for the optimization of product geometry and weight for compliance with structural requirements. The shapes generated by TO are generally complex and intricate, but nowadays they can be produced by Additive Manufacturing (AM) or 3D Printing [1]. 3D Printing is the term that is widely used to address layered manufacturing in the case of consumer applications with polymeric materials [2] while AM mostly refers to industrial applications. The basic algorithm for TO is based on the Solid Isotropic Material with Penalisation (SIMP) method [3].

The increasing importance of AM has recently driven researchers to develop modified versions of the SIMP algorithm [4] for considering the constraints and peculiarities of layered manufacturing, such as the use of lattice structures with intermediate densities [5] or the need to include support structures in the case of overhanging features [6]. Owing to the diffusion of AM and 3D Printing, SIMP methods have also been implemented in many commercial computer aided design and engineering (CAD/CAE) software packages. Specific TO software is also available outside CAD packages. However, the anisotropic nature of layered technologies brings additional challenges for TO methods, especially in the case of load bearing structures [7]. There is the need of improving the performances and the accuracy of TO by considering the peculiarities of the adopted AM techniques and the properties of the specific material.

In this work a commercial TO software, SolidThinking Inspire, is used to optimize the geometry of polymeric beams subjected to a three-point bending test under different loading levels. Two different AM technologies are considered to produce the beams: powder bed Selective Laser Sintering (SLS) and material extrusion 3D Printing. Several polymeric materials are used and for the specific AM process the TO calculations are defined by considering the mechanical properties declared by the supplier on the material datasheet. The results of TO are then validated by fabricating and testing replicas of the optimized beams with the corresponding material and process.

The workflow of the research is represented in Figure 1. Starting from the CAD model of a three-point bending beam with some design space for TO (Fig. 2a), the TO is then executed (Fig. 2b) with different load levels for the different materials and the optimized beam is then fabricated using the corresponding AM process (Fig. 2c). Finally, the results of the 3-point bending test performed on the replicas of the optimized beams are compared to the TO results. Correlation and differences between the experimental behaviour of the beam and the flexural resistance predicted by TO are analysed and discussed.

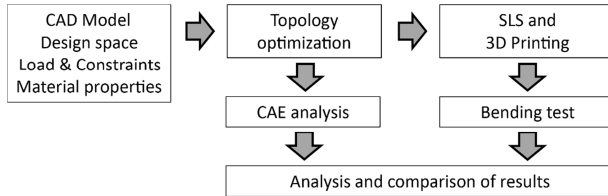


Figure 1. Workflow for experimental validation of TO results.




Figure 2. Model for TO of beams subjected to three-point bending test (a), optimized beam with a 70% weight reduction (b), 3D printed optimized beam in ABS for experimental testing (c).

## References

- [1] F. Calignano, D. Manfredi, E.P. Ambrosio, S. Biamino, M. Lombardi, E. Atzeni, A. Salmi, P. Minetola, L. Iuliano, P. Fino: Overview on Additive Manufacturing Technologies. *Proceedings of the IEEE*, 105(4), 593-612, 2017
- [2] ISO/ASTM Standard. 52900:2015 – Additive manufacturing – General principles: Terminology.
- [3] M.P. Bendsoe, O. Sigmund. Topology Optimization: Theory, Methods and Applications. *Second Edition, Springer-Verlag Berlin Heidelberg GmbH*, 2004.
- [4] K. Salonitis, S.A. Zarban. Redesign Optimization for Manufacturing Using Additive Layer Techniques. *Procedia CIRP*, 36:193 – 198, 2015.
- [5] A. Clausen, N. Aage, O. Sigmund. Exploiting Additive Manufacturing Infill in Topology Optimization for Improved Buckling Load. *Engineering*, 2:250-257, 2016.
- [6] A.M. Mirzendehtel, K. Suresh. Support structure constrained topology optimization for additive manufacturing. *Computer-Aided Design*, 81:1-13, 2016.
- [7] P. Zhang, J. Liu, A. To. Role of anisotropic properties on topology optimization of additive manufactured load bearing structures. *Scripta Materialia*, 2016.