
Presentations

2015

Towards Predicting Street-Level Inundation: using Operational Forecast Modeling Techniques during 2011 Hurricane Irene

J. D. Loftis
Virginia Institute of Marine Science

H. V. Wang
Virginia Institute of Marine Science

D R. Forrest
Virginia Institute of Marine Science

Follow this and additional works at: <https://scholarworks.wm.edu/presentations>



Part of the [Atmospheric Sciences Commons](#), [Climate Commons](#), [Environmental Indicators and Impact Assessment Commons](#), [Environmental Monitoring Commons](#), [Meteorology Commons](#), [Oceanography Commons](#), [Other Earth Sciences Commons](#), and the [Other Oceanography and Atmospheric Sciences and Meteorology Commons](#)

Recommended Citation

Loftis, J.D., Wang, H.V., and Forrest, D.R. (2015). Towards Predicting Street-Level Inundation: using Operational Forecast Modeling Techniques during 2011 Hurricane Irene. VIMS 75th Anniversary Research Symposium. Virginia Institute of Marine Science, College of William and Mary. <http://doi.org/10.21220/V56C7P>

This Presentation is brought to you for free and open access by W&M ScholarWorks. It has been accepted for inclusion in Presentations by an authorized administrator of W&M ScholarWorks. For more information, please contact scholarworks@wm.edu.

Towards Predicting Street-Level Inundation: using Operational Forecast Modeling Techniques during 2011 Hurricane Irene

Jon Derek Loftis, Harry V. Wang, and David R. Forrest
Virginia Institute of Marine Science, The College of William & Mary



INTRODUCTION


Coastal flooding initiated by storm surge and river discharge during hurricanes and Nor'easters along the U.S. East Coast is a substantial threat to residential properties, community infrastructure, and human life. Very high-resolution, accurate flooding prediction at the street-level is highly desirable.

The traditional methods for universally decreasing the scale of a model grid to achieve street-level resolution is constrained by computational limitations. As an ideal alternative that is well-suited for forecast predictions, the sub-grid modeling approach enables the model to cover a large domain with reasonable resolution while simultaneously allowing an embedded sub-grid to resolve fine-scale features efficiently. Key elements involved in this study are outlined below:

- Large-scale forecast simulations during 2011 Hurricane Irene were performed using the state-of-the-art open-source SCHISM model for the entire U.S. Eastern Seaboard and provided to emergency managers before the event.
- A fine-scale sub-grid model was driven using SCHISM model predictions at the mouth of the Elizabeth River Estuary.
- In order to increase accuracy of inundation simulation predictions:
 - The sub-grid model will be coupled with high-resolution Lidar-derived digital topography embedded within a 5m resolution sub-grid (Loftis, 2014; Wang *et al.*, 2015)
 - Buildings will be incorporated in the grid for the urban areas surrounding the Elizabeth River (Wang *et al.*, 2014; Loftis *et al.*, 2015)
- A general purpose wetting-and-drying scheme using an innovative nonlinear solver is incorporated in the sub-grid (Casulli, 2009; Casulli and Stelling, 2011).

STUDY SITES


SCHISM Model Domain : U.S. East Coast

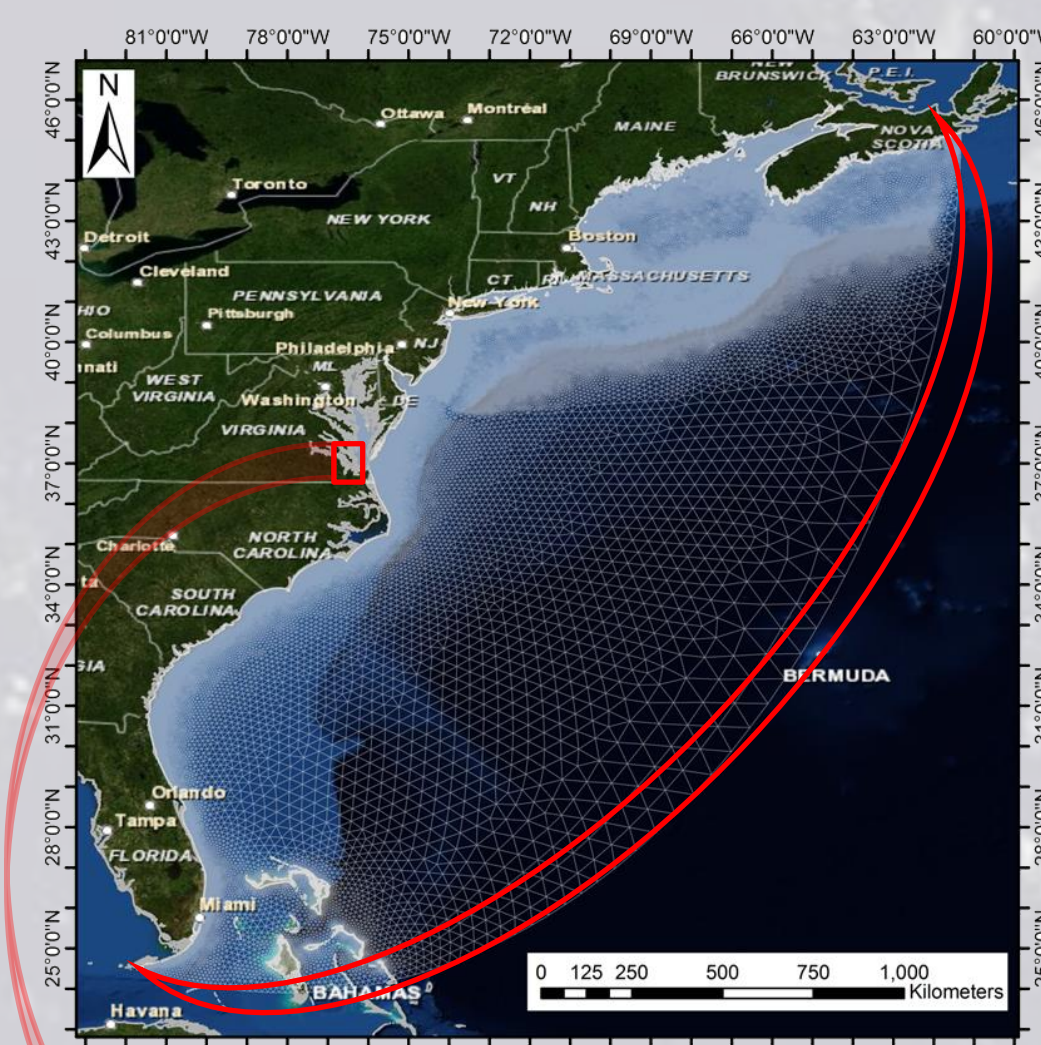

Open Boundary Condition Tidal Harmonics: $M_2, S_2, N_2, K_2, O_1, P_1, K_1, Q_1, & M_4$

Wind and Atmospheric Pressure Inputs from Forecast: National Weather Service Wakefield, VA GFS 12km spatial resolution; 3 hr temporal resolution
Hindcast: Combined Inputs from Simulations

Sub-Grid Model : Elizabeth River

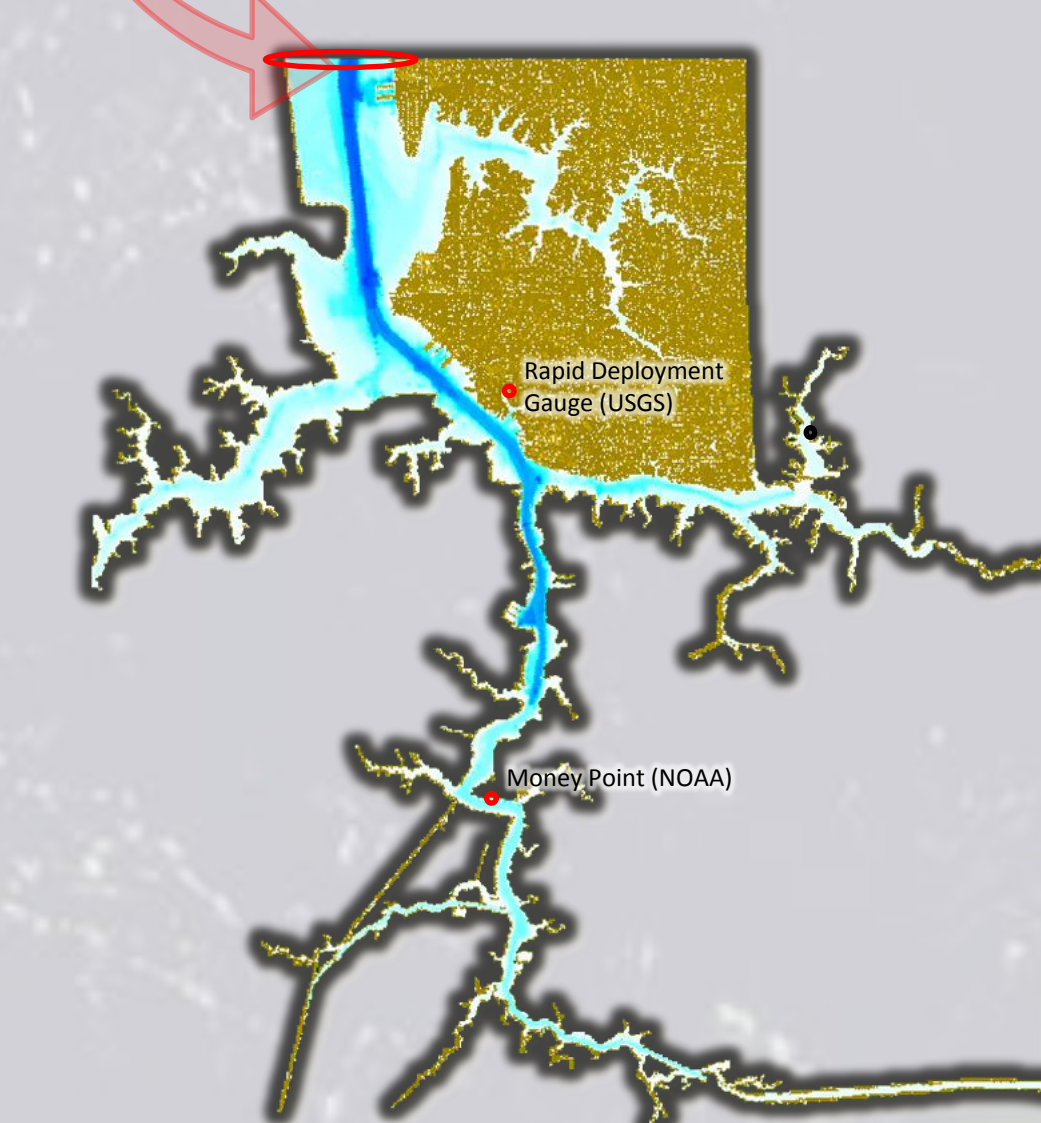

Open Boundary Condition at Sewells Point (Forecast: SCHISM Hindcast: NOAA)

Southern Flux Boundary Condition at Princess Anne (USGS)

Wind and Atmospheric Pressure Inputs from Forecast: SCHISM Hindcast: NOAA Sewells Point

ABSTRACT

Storm surge-induced coastal inundation poses numerous personal, commercial, industrial, and sociopolitical challenges for society. Flooding can be caused by the combination of storm surge and river-induced inland flooding in many locations throughout the coastal plain. The cross-disciplinary nature of the hydrodynamics involved (hydraulics, oceanography, and hydrology), coupled with the complexity of the atmospheric forcing, makes a numerical model the best approach for a comprehensive study of the dynamics of coastal inundation.


This study builds upon the lessons learned from forecast modeling experiences during 2011 Hurricane Irene in Tidewater Virginia, to ascertain the most effective way to approach predicting street-level inundation. During the storm event, a large-scale ocean model (SCHISM) was provided atmospheric forcing from the National Oceanic and Atmospheric Administration's Global Forecast System, updated every 6 hours to simulate 9 separate 30-hour simulations, which were provided to emergency managers and the National Weather Service in Wakefield, VA. Forecast water level predictions were evaluated at 5 stations near the Hampton Roads region in the Lower Chesapeake Bay to yield an aggregate RMSE=19.9 cm.

To accurately predict street-level inundation, water elevations at key points near the mouths of vulnerable tributaries can be used to drive a separate street-level high-resolution sub-grid model (UnTRIM) to simulate localized flooding events on the scale of 5-meter resolution. To this end, high-resolution Digital Elevation Models including building and roadway infrastructure were developed from Lidar-derived topography for the Hampton Roads Region of Virginia, and used to accurately predict flooding in low-lying areas of the Cities of Norfolk, Portsmouth, and Chesapeake along the Elizabeth and Lafayette Rivers. Additionally, grids were prepared for the City of Virginia Beach along the Lynnhaven River, and along Hampton, York, and Poquoson along the Back River. Tropical storm surge flood heights were validated via temporal comparison with water level observations from NOAA, the USGS, and NASA; aggregated to an average RMSE=0.18 cm. Spatial extent of flooding was evaluated using USGS data retrieved from high water marks and from rapid deployment overland water level gauges during Hurricane Irene to reveal favorable agreement with the model's inundation predictions.





METHODOLOGY

This study embodies a two-pronged approach to achieving street-level ($\leq 5m$ resolution) forecast model results:

- 1) The large-scale SCHISM Model was used to run 9 successive 30-hour forecast simulations (6 hours apart; updating with latest forecast wind and pressure predictions) and pass the A) animated water level maps, and B) time series predictions and from each forecast to emergency managers
- 2) A Street-Level Sub-Grid Inundation Model was used to predict inundation at 5m spatial resolution throughout the Elizabeth River Estuary using modeled forecast results retrieved from Sewells Point in SCHISM

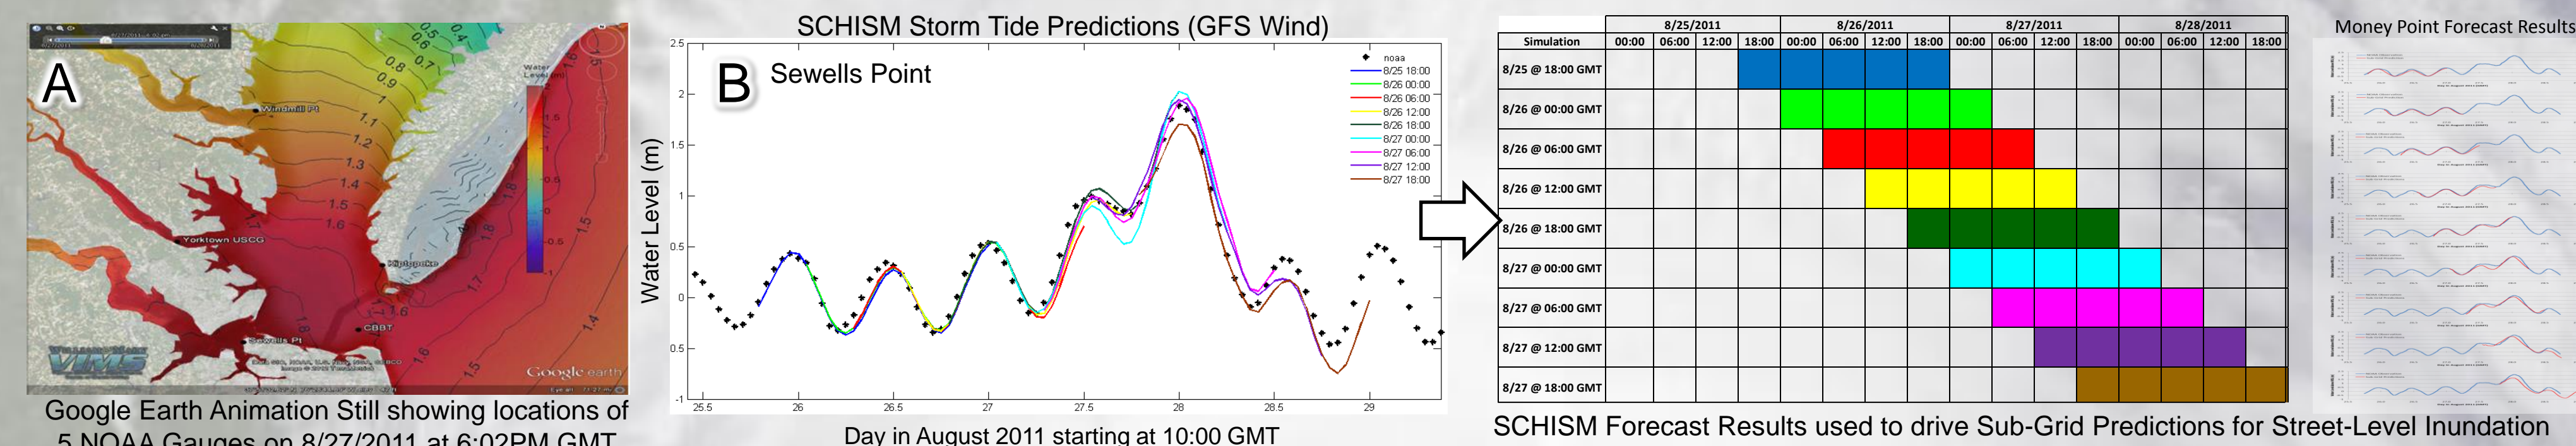

RESULTS

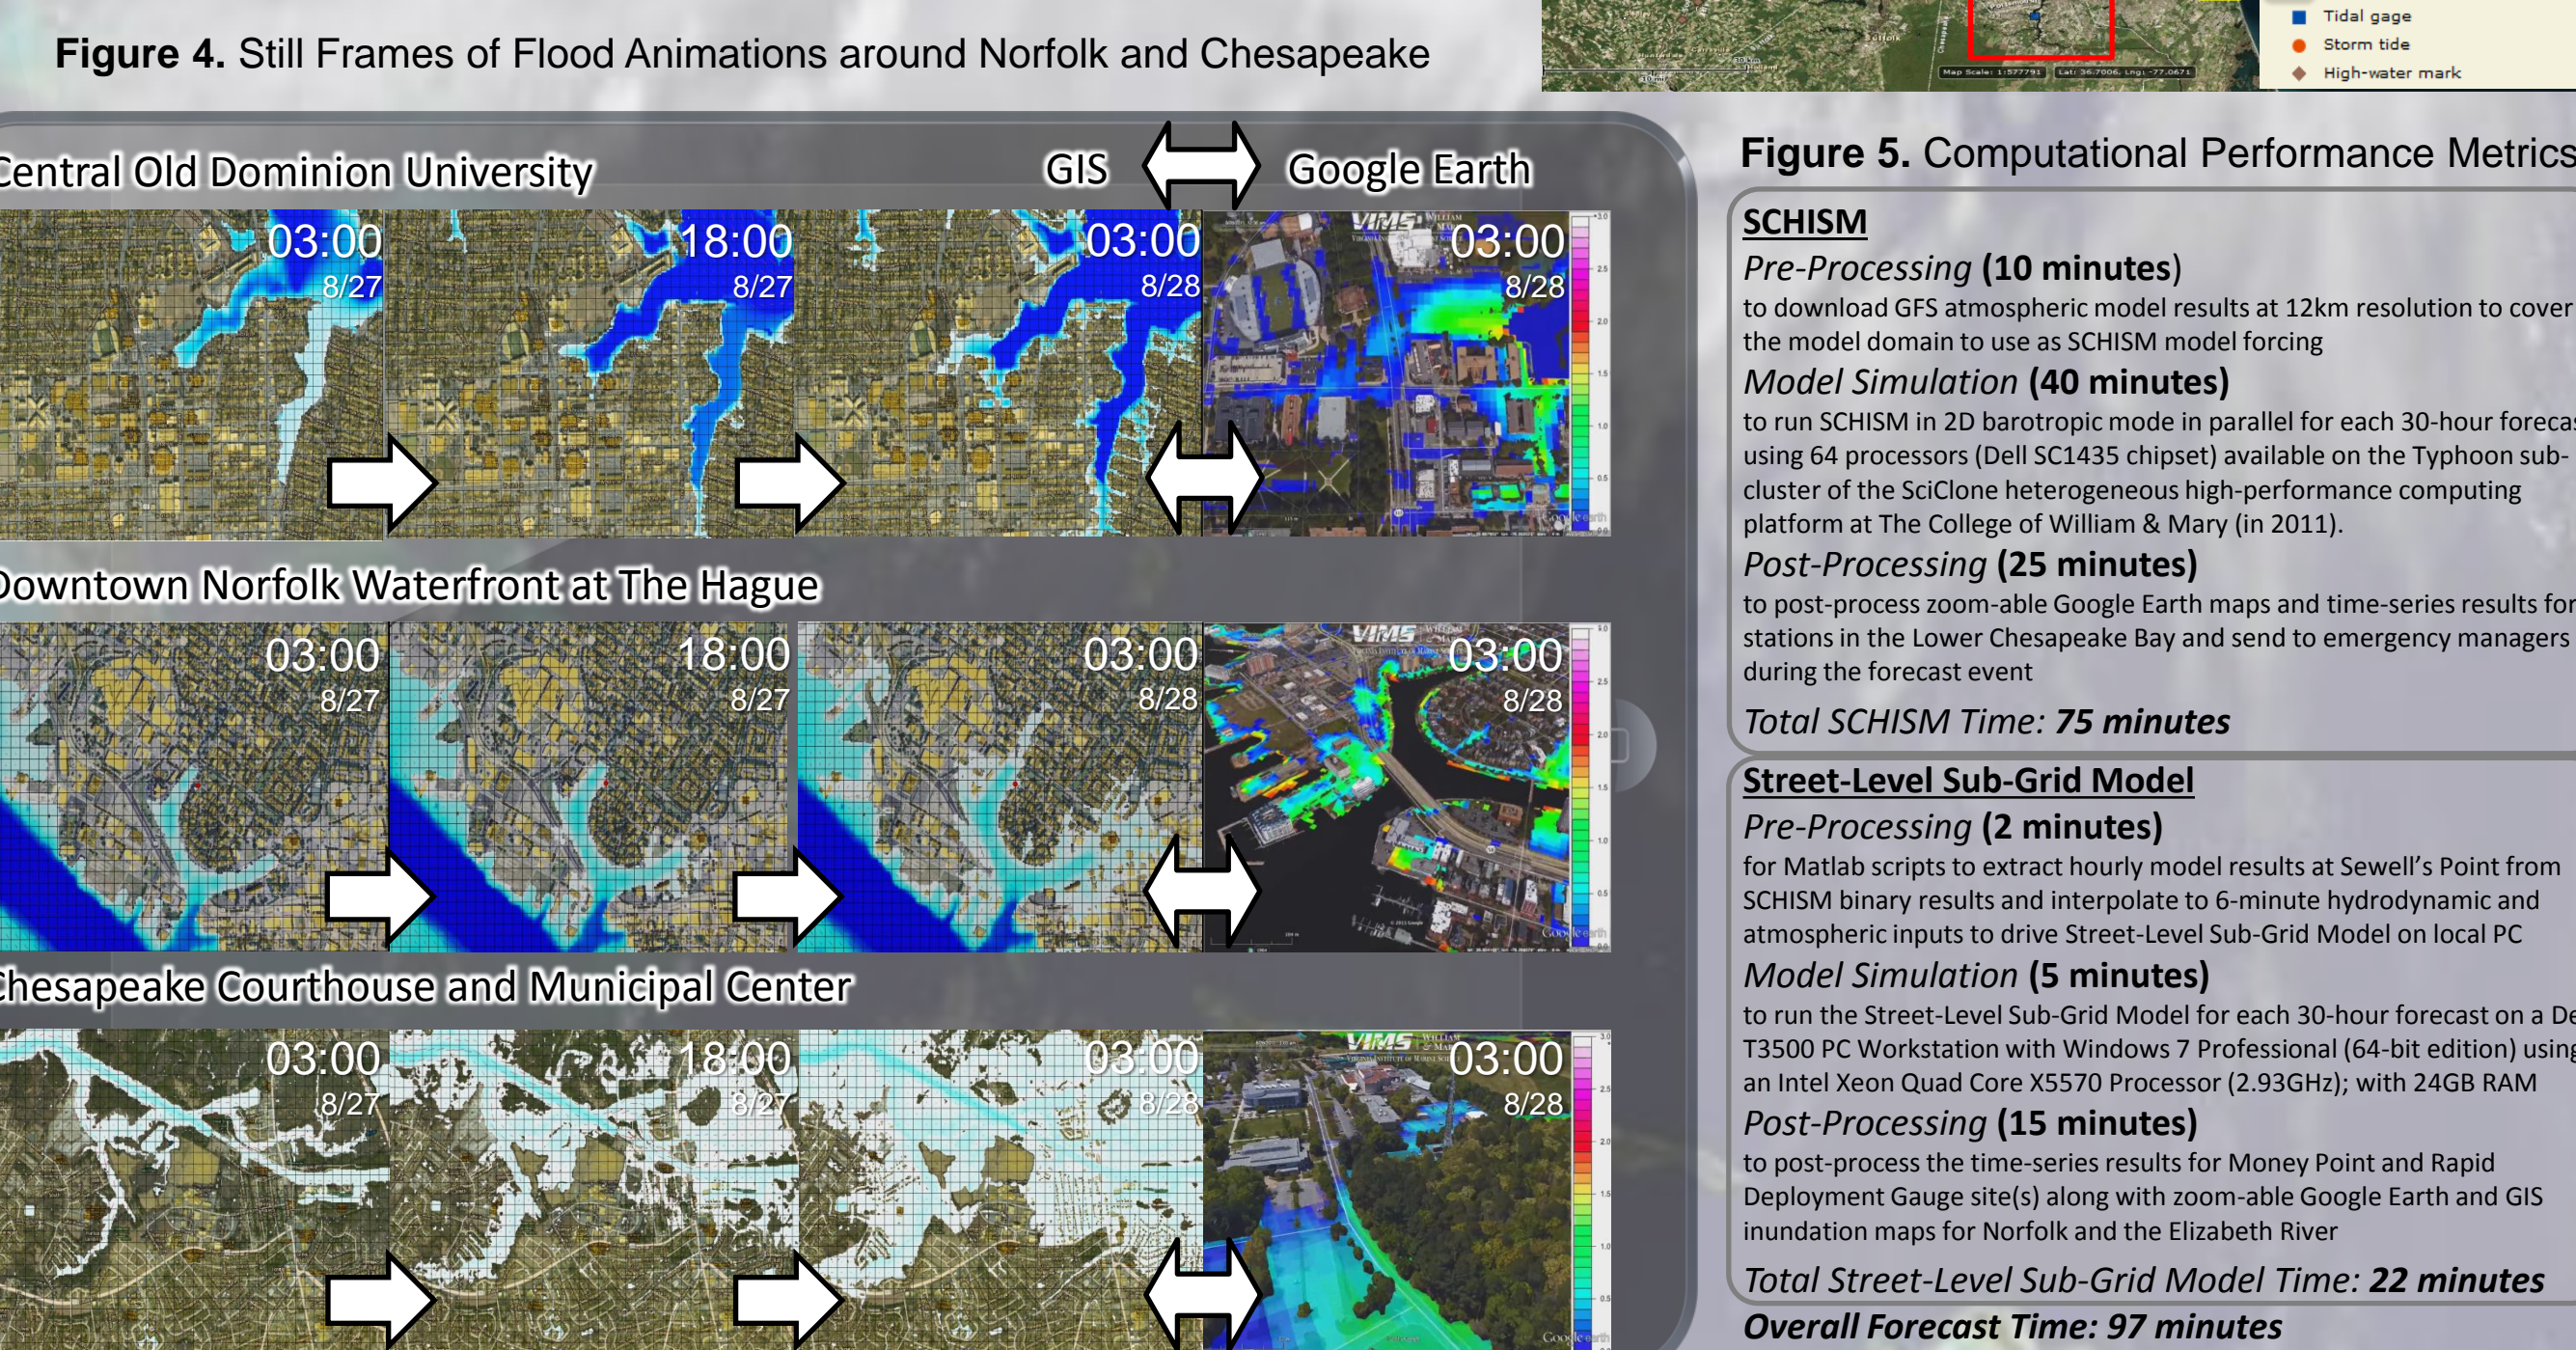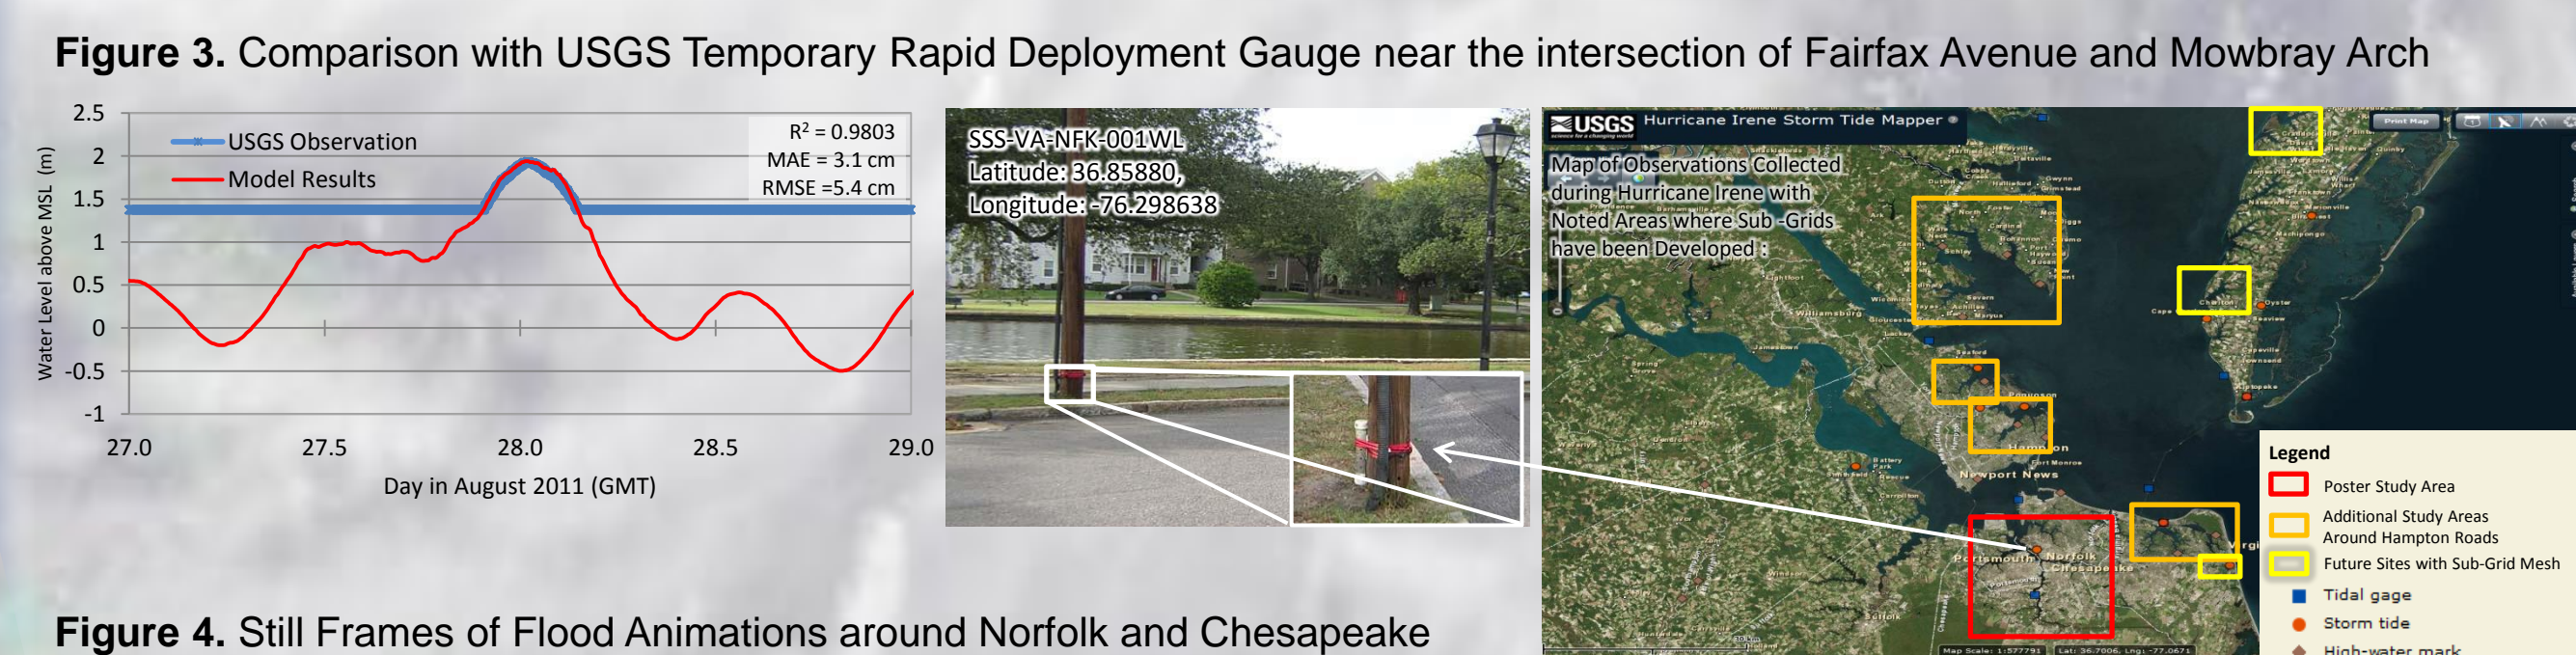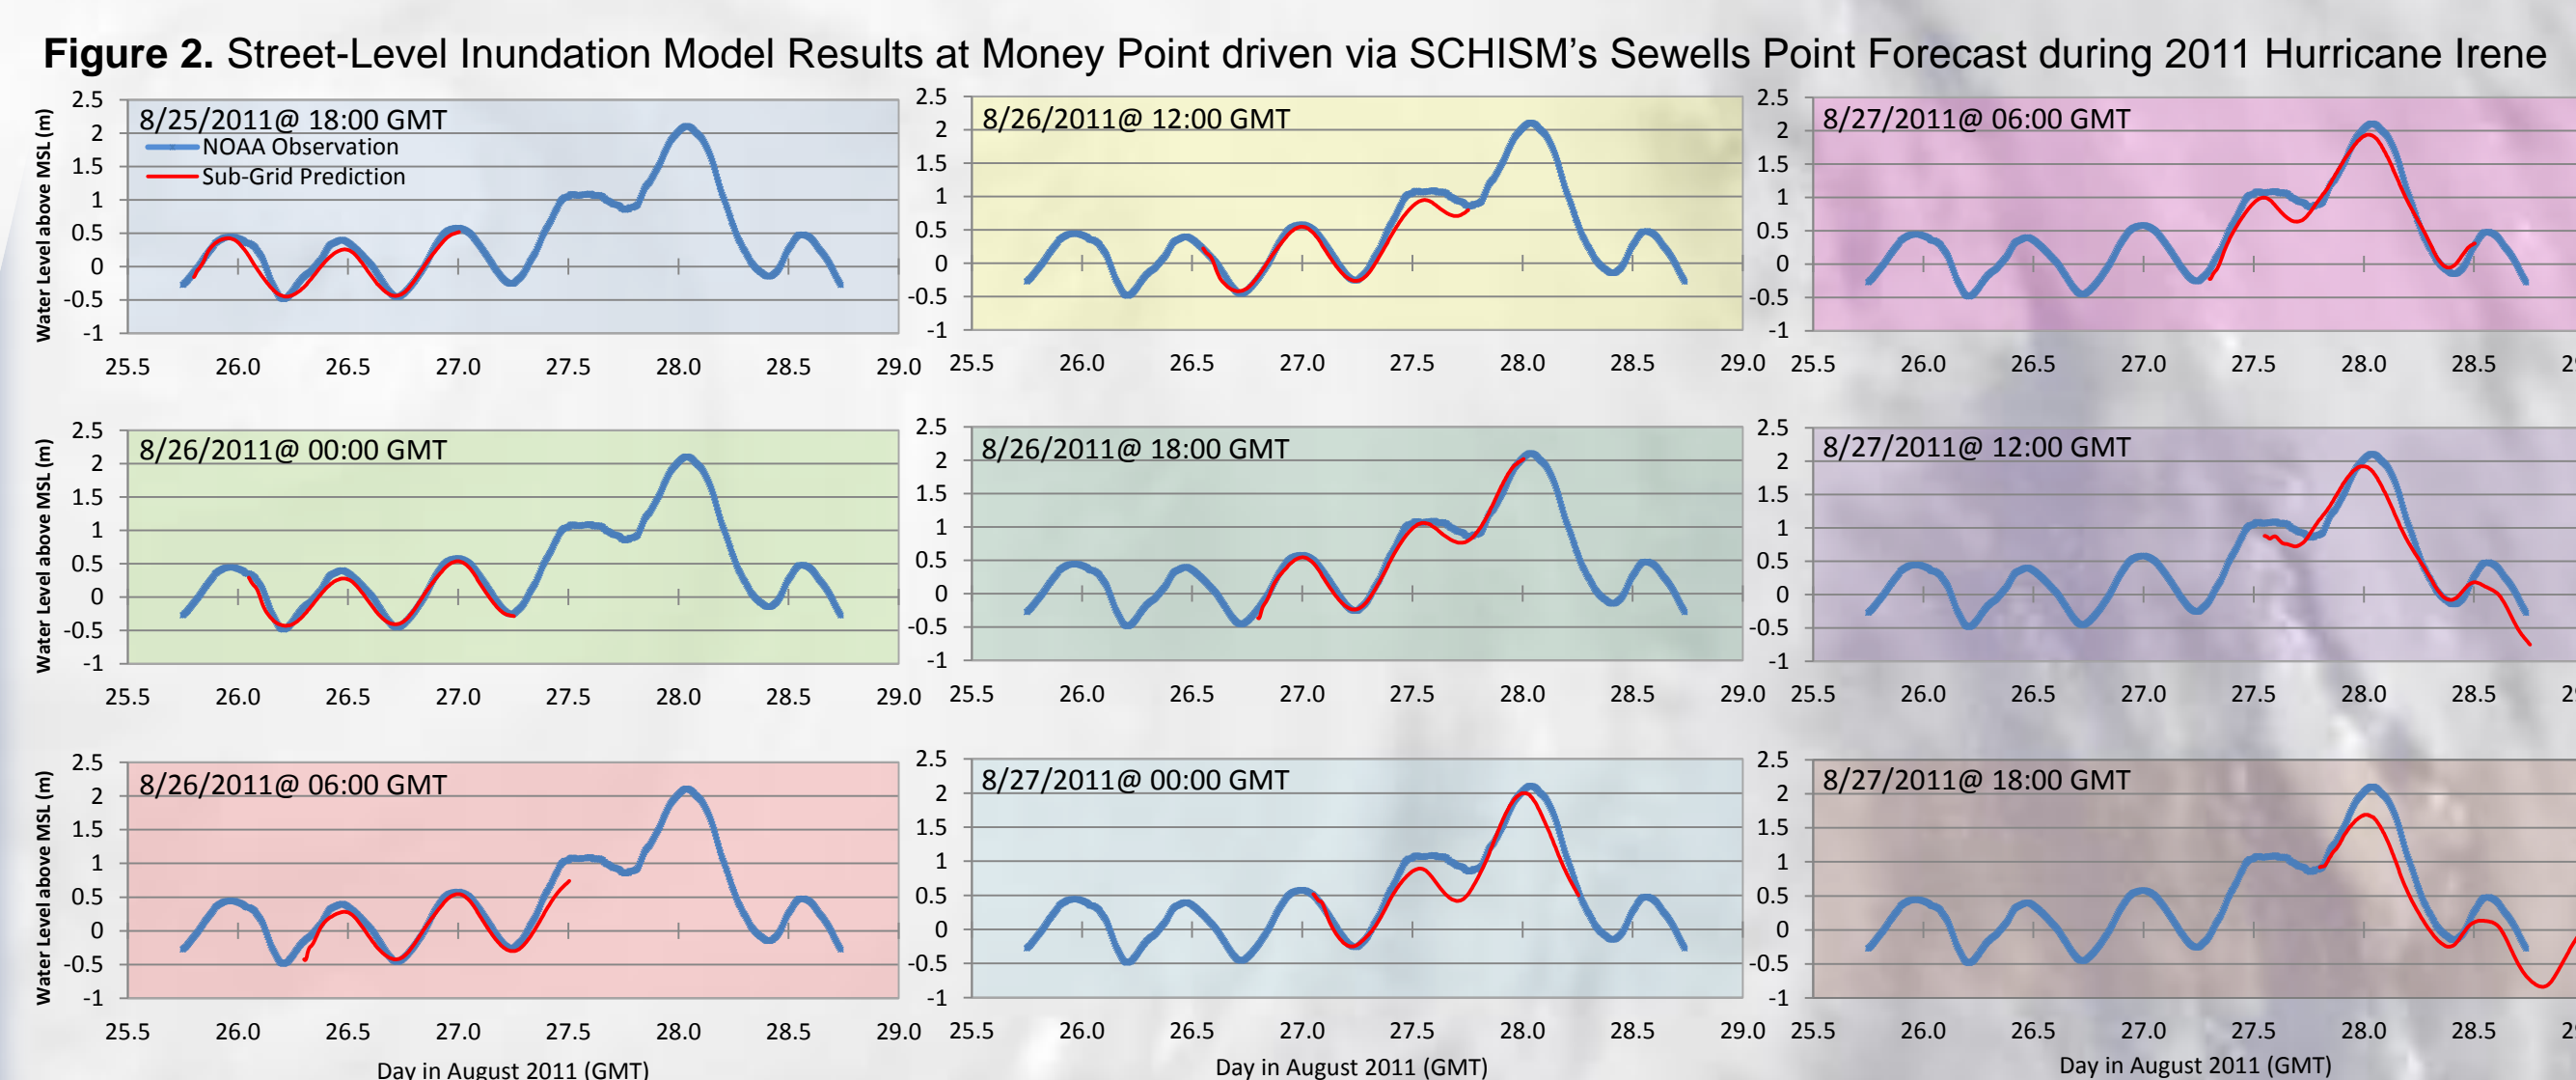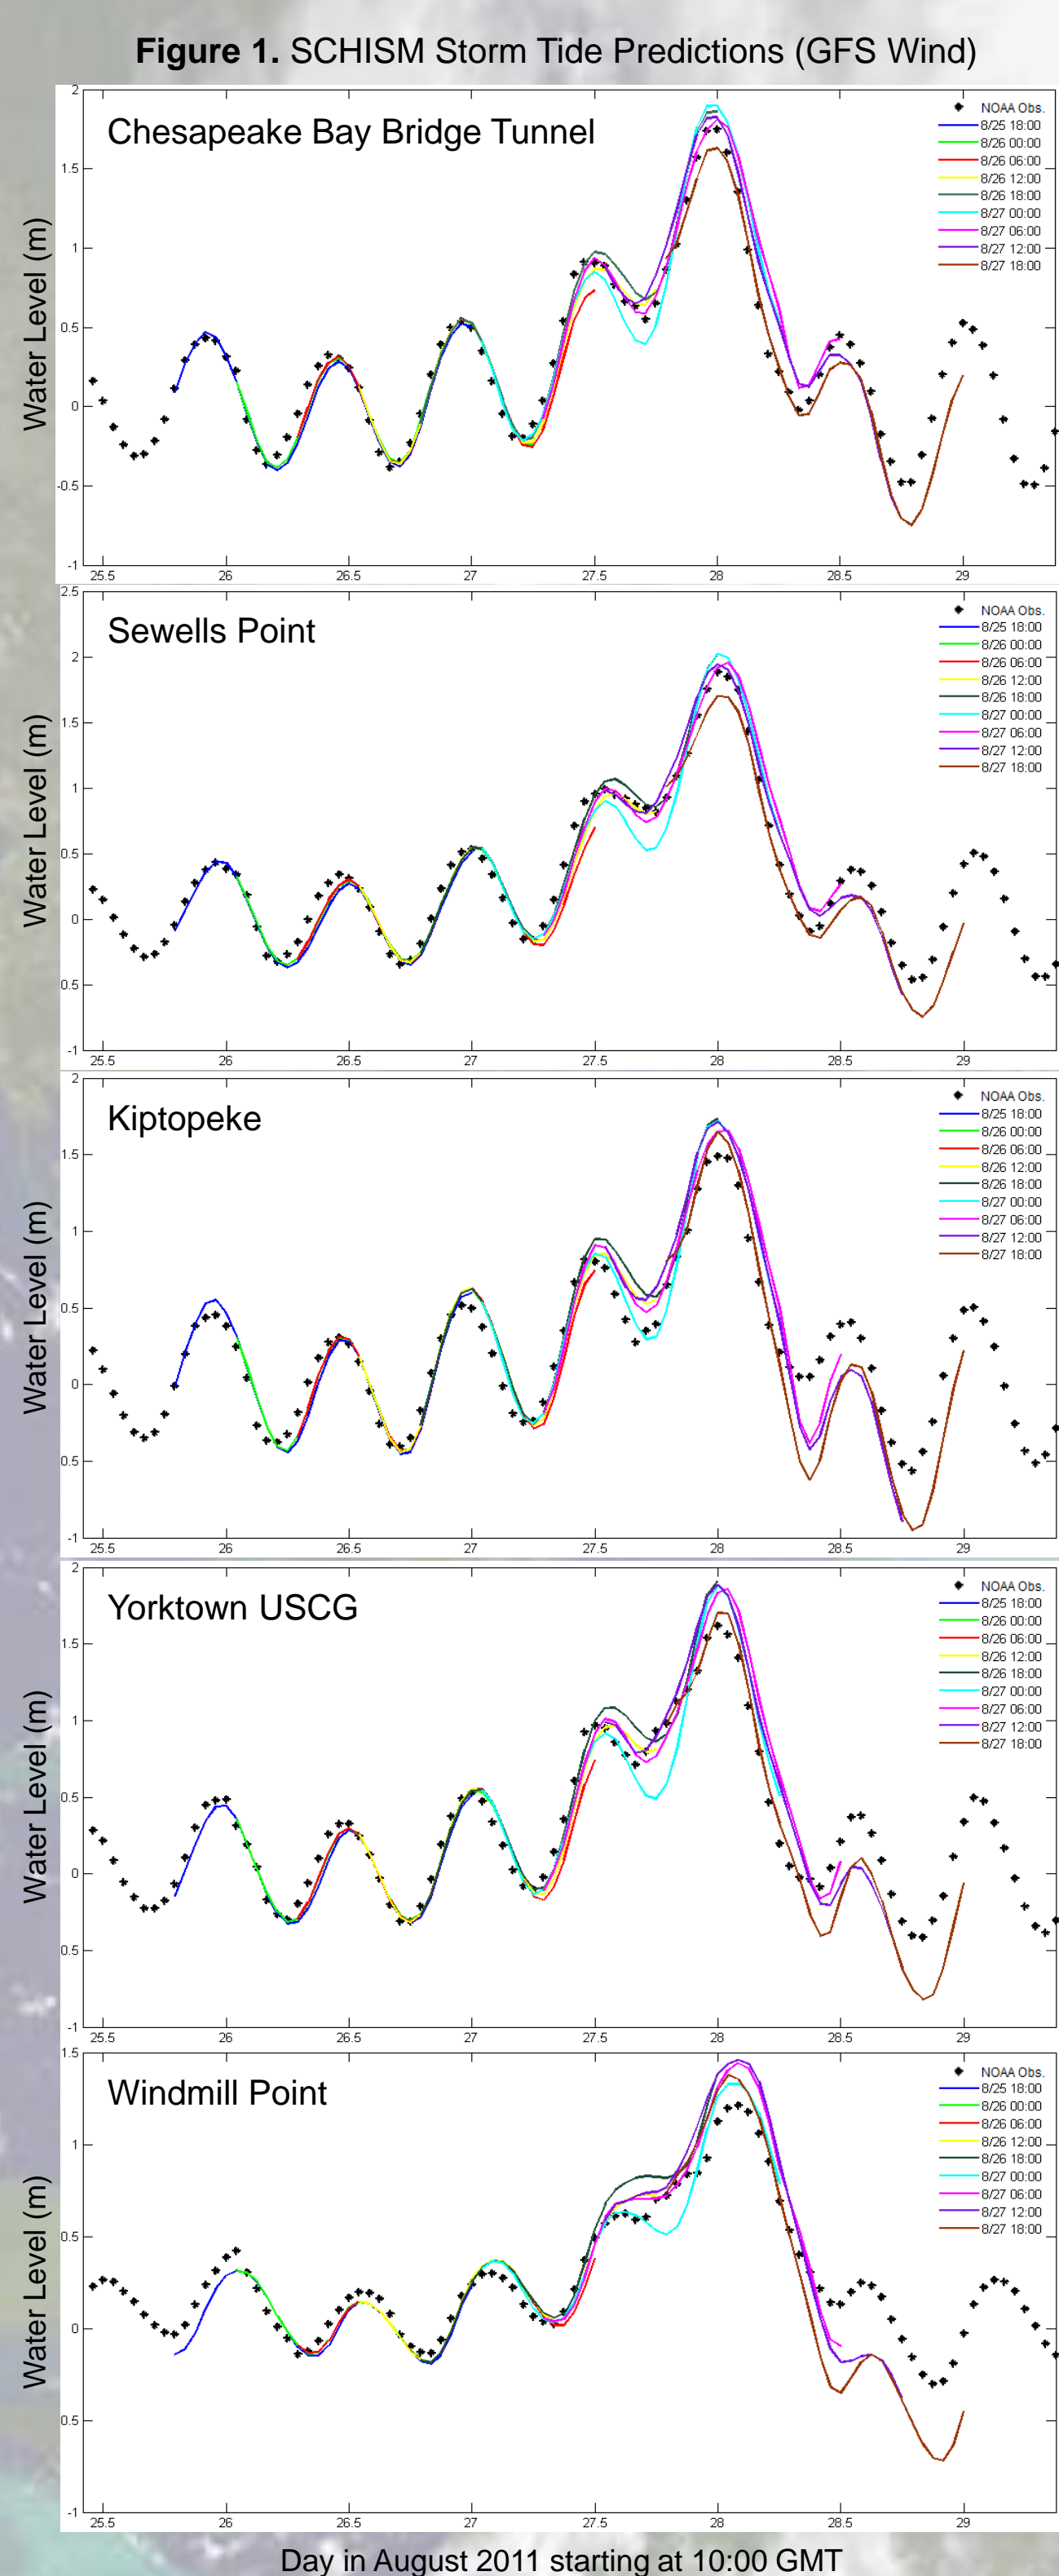

DISCUSSION

SCHISM Storm Tide Predictions in the Lower Chesapeake Bay during 2011 Hurricane Irene

- Water Levels at 5 Ches. Bay Tide Gauges (Table 1):

Station Name	R ²	MAE (cm)	RMSE (cm)
Chesapeake Bay Bridge Tunnel	0.9102	9.1	12.6
Sewells Point	0.9356	6.5	9.7
Kiptopeke	0.8389	21.3	24.8
Yorktown USCG	0.8818	16.6	19.4
Windmill Point	0.8519	20.8	23.2
Average	0.8837	14.9	17.9
Std. Dev.	0.0401	6.8	6.6

Street-Level Inundation Model Predictions at Money Point during 2011 Hurricane Irene

- Water Levels driven via SCHISM Forecast (Table 2):

Simulation #	Timeframe Start	R ²	MAE (cm)	RMSE (cm)
1	8/25/2011 @ 18:00 GMT	0.9377	7.3	11.6
2	8/26/2011 @ 00:00 GMT	0.9619	4.2	9.3
3	8/26/2011 @ 06:00 GMT	0.9428	10.1	14.5
4	8/26/2011 @ 12:00 GMT	0.9827	9.9	13.1
5	8/26/2011 @ 18:00 GMT	0.9849	6.4	9.7
6	8/27/2011 @ 00:00 GMT	0.9308	20.3	24.2
7	8/27/2011 @ 06:00 GMT	0.9530	13.0	17.3
8	8/27/2011 @ 12:00 GMT	0.9056	22.8	27.6
9	8/27/2011 @ 18:00 GMT	0.8801	29.7	35.2
Average		0.9422	13.7	18.1
Std. Dev.		0.0341	8.6	9.0

- These results (RMSE=18.1 cm) make this modeling method ideal for piggybacking (+22 minutes) on large-scale forecasting operations (Figure 5).

CONCLUSION

- SCHISM is capable of producing accurate storm tide water level predictions over a large area in an operational capacity; RMSE=17.9 cm (Loftis *et al.*, 2015).
- Sub-grid modeling can be successfully used in conjunction with SCHISM as an efficient method to develop reliable street-level inundation predictions.
- This was verified ($\leq 5m$ resolution) when compared with verified observation data (Figures 1-3).

ACKNOWLEDGEMENTS

Thank you to Drs. Yi-Cheng Teng and Yanqiu Meng for their efforts running forecast simulations and plotting results to send to emergency managers during the 2011 Hurricane Irene forecast event. Also, Thank you to Dr. Joseph Zhang for his SCHISM (formerly SELFE) model used during the forecast event.

Thank you to the National Weather Service office in Wakefield, VA, for their atmospheric wind and pressure fields that made this forecast effort possible.

Finally, thank you to the Commonwealth of Virginia Innovative Technology Symposium for recognizing the merits of this research and awarding us with the Governor's Technology Award in Richmond in 2011:



REFERENCES

Casulli, V. (2009). A high-resolution wetting and drying algorithm for free-surface hydrodynamics, *Int. Journal for Numerical Methods in Fluid Dynamics*, 60, 391-408.

Casulli, V., and Stelling, G. (2011). Semi-implicit sub-grid modeling of three-dimensional free-surface flows, *Int. Journal for Numerical Methods in Fluid Dynamics*, 67, 441-449.

Loftis, J.D., Wang, H.V., DeYoung, R.J., and Ball, W.B. (2015). Using Lidar Elevation Data to Develop a Topographic Digital Elevation Model for Sub-Grid Inundation Modeling at Langley Research Center. *Journal of Coastal Research*, Special Issue, 76, 1-15.

Loftis, J.D., Wang, H.V., Hamilton, S.E., and Forrest, D.R. (2015). Combination of Lidar Elevations, Bathymetric Data, and Urban Infrastructure in a Sub-Grid Model for Better Predicting Inundation in New York City during Hurricane Sandy. *arXiv preprint arXiv:1412.0966*, 1-15.

Loftis, J.D. (2014). Development of a Large-Scale Storm Surge and High-Resolution Sub-Grid Inundation Model for Coastal Flooding Applications: A Case Study During Hurricane Sandy. Ph.D. Dissertation. *College of William & Mary*.

Wang, H., Loftis, J.D., Liu, Z., Forrest, D., and Zhang, J. (2014). Storm Surge and Sub-Grid Inundation Modeling in New York City during Hurricane Sandy. *Journal of Marine Science and Engineering*, 2(1), 226-246.

Wang, H., Loftis, J.D., Forrest, D., Smith, W., and Stamey, B. (2015). Modeling Storm Surge and Inundation in Washington, D.C., during Hurricane Isabel and the 1936 Potomac River Great Flood. *Journal of Marine Science and Engineering*, 3(3), 607-629.