

Available online at [www.sciencedirect.com](http://www.sciencedirect.com)**SciVerse ScienceDirect**

Procedia Engineering 00 (2013) 000–000

**Procedia  
Engineering**[www.elsevier.com/locate/procedia](http://www.elsevier.com/locate/procedia)

The Malaysian International Tribology Conference 2013, MITC2013

## Elastohydrodynamics Lubrication for Bio-Based Lubricants in Elliptical Conjunction

Z.H. Nazri<sup>a\*</sup>, M.Z.M. Rody<sup>a,b</sup>, Mohd Fadzli Bin Abdollah<sup>a,b</sup>, S.A. Rafeq<sup>a,b</sup>, Hilmi Amiruddin<sup>a,b</sup>  
Noreffendy Tamaldin<sup>a,b</sup>, Nor Azmmi Bin Masripan<sup>a,b</sup><sup>a</sup>*Faculty of Mechanical Engineering, Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, 76100 Durian Tunggal, Melaka, Malaysia*<sup>b</sup>*Green Tribology and Engine Performance Research Group (G-TriboE), Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, 76100 Durian Tunggal, Melaka, Malaysia*

### Abstract

This paper investigates a bio-based lubrication issue of elastohydrodynamic lubricants in mechanical part. Bio-based lubricants are one of the possibilities that might be used as a substitute for the conventional lubricants in the industries. The paper focused on elastohydrodynamic lubrication flows at the elliptical conjunctions by using bio-based lubricants and mineral oil. The computational fluid dynamic was used to determine the effect of lubricants in elliptical conjunctions. This software helps to verify the deformation of the pressure distribution at the conjunctions. From this study, at constant speed, the mineral oil has higher value of dynamic pressure than bio-based lubricants along X and Y axis between two mating surfaces. It is found that, the mineral oil carried more load compared to bio-based lubricant. Hence, the bio-based lubricant is the best lubricant to protect the surfaces from wear and damage due to its properties has less value of dynamic pressure than mineral oil.

© 2013 Published by Elsevier Ltd. Selection and/or peer-review under responsibility of the Malaysian Tribology Society, Department of Mechanical Engineering, Universiti Malaya, 50603 Kuala Lumpur, Malaysia.

*Keywords:* Elastohydrodynamic, elliptical conjunction, bio-based lubricant, mineral oil, computational fluid dynamic

### 1. Introduction

Many machine elements, lubricated by fluid film have surfaces that do not conform to each other, so small lubricated areas must then carry the load. The lubrication area of a non-conformal conjunction is typically three orders of magnitude less than that of a conformal conjunction. In general, the lubrication area between non-conformal surfaces enlarges considerably with increasing load, but it is still smaller than the lubrication area between conformal surfaces. Some examples of non-conformal surfaces are the concentrated load-supporting or load-transmitting contacts such as gear teeth, cams and followers, rolling-element bearings and others.

Elastohydrodynamic lubrication (EHL) is defined as the type of hydrodynamic lubrication where the pressure between contact surfaces is very high thus the contact surfaces deform elastically to an amount comparable to the film thickness. Unlike hydrodynamic lubrication where the expression for the film thickness can be determined a priori, in EHL problems the pressure distribution and the film thickness must be determined simultaneously. Although, there are generally two types of problems in EHL like line contact problems and point contact problems. In line contact EHL, the contact elements are assumed to be infinitely long in one direction and the contact takes place in an infinitely long strip. Meanwhile in point contact EHL; the contact takes place within a finite elliptical region [1].

\* Corresponding author. Tel.: +606 234-6912; fax: +606 234-6884  
E-mail address: [nazrihuzaimi@utem.edu.my](mailto:nazrihuzaimi@utem.edu.my)

### 1.1. Bio-based lubricant

The need for lubrication cannot be over-emphasized as far as its role in engineering is concerned. With the technological advancement, man in his quest to improve his standard of living continues to invent and produce new machines. When two metal parts are in contact, the amount of asperities and interaction within the contact area increases thereby causing frictions which insist motion wear of the metal parts and generation of excessive heat. These friction, wear and excessive heat caused by the interaction between the surfaces of the moving parts of the machine has to be controlled by lubrication whose function is to reduce friction and wear, prevent oxidation and corrosion while acting as a coolant facilitating heat dissipation from the engine. A lubricant may be in gaseous, liquid, semi-solid (grease) or solid form. Lubrication is achieved when the surfaces in contact are separated by a continuous lubricant film.

Liquid lubricants have the highest application because they readily provide the separation of surfaces when correctly applied. Because of the importance and wide application of lubrication, coupled with the ever increasing world energy crisis, there is need to source out lubricants other than the computational ones obtained from mineral oils [4, 5].

Thus an alternative of producing a lubricant from bio-based material should be taken into consideration. There is strong concern of awareness in biodegradable low-toxicity lubricants. Biodegradability is reached by using a suitable biodegradable base fluid, but low-toxicity requires an additivation that is environmentally friendly [2], too. However, the key aspects for any industrial application are technical performance and technical advantages proved in dedicated tests.

Therefore, in this project the effect of deformation on pressure distribution behavior in elastohydrodynamics lubrication in elliptical conjunction was investigated in order to clarify the best performance of lubricants.

## 2. Methodology

Computational Fluid Dynamic (CFD) is a numerical method for partial differential equation (PDE) by representing the fluid flow with numbers. The equations are integrated by space and time to give the solution. There are some equations that need to be concerned in order to run any simulation by using computational fluid dynamic (CFD). So, the important equation that must be considered during the simulation is the continuity equation and the momentum equation.

### 2.1 Pre-Processing CFD

To solve this project and to run the simulation, we must start the process with pre-processing. Pre-processing is the process that includes building geometry, meshing and setting boundary type for the model to run in the simulation. In other words, pre-processing consists of data input through an operator friendly software. Later, these inputs can be read and processed by the solver.

### 2.2 Building Geometry

Generally, building geometry is a process of defining the geometry of the region of interest. This project used two-dimensional structure or body. For this project, the model of this project is drawn as Fig.1a below. In fluent, before running the simulation, we must draw a tunnel. This tunnel will act as a boundary for the structure during the simulation. That means, the fluent will just analyze the structure or body in the tunnel only. So, Fig.1b below also represents the tunnel for this project.

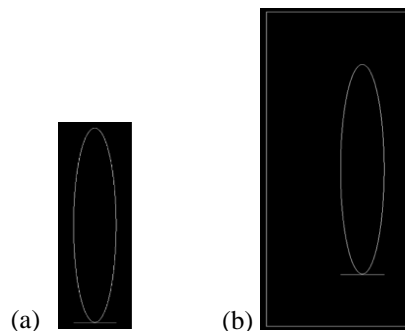


Fig.1. (a) Model and (b) tunnel was done in the Gambit for this project respectively

### 2.3 Meshing Process

In Fluent software, meshing process is one of the important part before conducting the simulation. Meshing process will ensured the result gained after the simulation is more accurate. Hence, the best size of meshing must be selected before run the simulation. All the meshing has been constructed in the Gambit. The meshing for this project is shown in Fig.2. Fluent can be divided into two parts where one part is draw one body or structure and another part is to run the simulation. Therefore, all the drawing was constructed in Gambit.

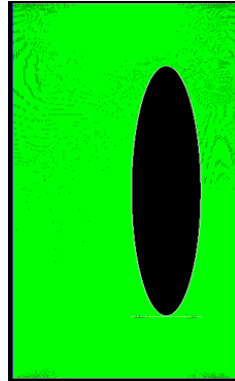


Fig. 2. The meshing was done in Gambit before export to Fluent

In Gambit, the size of meshing and the boundary condition has been set up before exporting the model into Fluent. These boundary conditions were wall, pressure inlet, outflow, pressure outlet and others. Table 1 shows the selected types of boundary condition for this project.

Table 1. Name and type for each boundary layer condition

Zone name/Label	Zone type	Position
Inlet	Pressure inlet	Tunnel inlet
Outlet	Pressure outlet	Tunnel outlet
Wall	Building/Structure	Building/Structure
Tunnel	Wall	Both tunnel side and top

### 2.4 Processing CFD

After the pre-processing stage has been completed, Fluent software was utilized in this project to simulate the result on the model. This section will be discussing about the specific parameters utilized in this project's.

Three types of numerical solution techniques can be applied in the solver as the calculation method. They are finite different, finite volume, finite element and spectral methods. In computational fluid dynamic (CFD), finite volume methods was applied. In Fluent, there are some steps that need to be done and set before starting the iteration such as;

- Read the mesh file
- Check the grid to make sure that there is no missing grid and error is zero
- Define the solver. For this part, segregated solvers with implicit formulation were chosen
- Define the viscous model can be used.
- Setup the boundary condition of the inlet velocity.
- Initialization
- Setup the monitor residual. From this monitor, the simulation can be monitored and the simulation convergence can be verified.
- Iterate. Start the simulation.

### 3. Result and Discussion

The entire experiment consists of two parts, where the two parts involve a type of lubricants which are mineral oil and biodegradable ester.

#### 3.1. Comparison between mineral oil and bio-based lubricants (biodegradable ester) at two surfaces

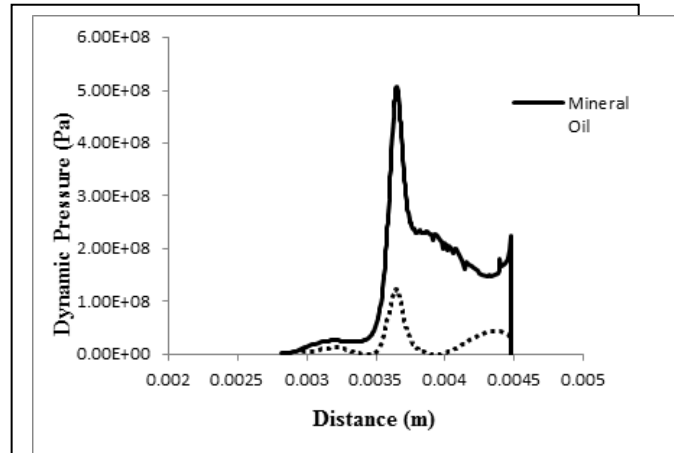


Fig. 3. Dynamic pressure distribution for X-axis

Fig. 3 shows the dynamic pressure distribution along X-axis between two surfaces for both lubricants. It is found that both lubricants have a similar peak of distance approximately at 0.0365m but the value of the maximum pressure for both lubricants was different. The mineral oil represents the highest value of dynamic pressure at 0.5GPa compare to the bio based lubricants 0.12GPa. Consequently, mineral oil will be able to withstand the loading of the part in contact than the bio-based lubricants.

According to Barus (1893) and Roelands (1966) formula, viscosity is proportional to the pressure. In the other word, when the pressure increases, viscosity also can increase. Based on the figure above, the different pressure was observed for both lubricants were due to the variation of viscosity. In this study, viscosity for mineral oil is  $1.1063 \times 10^{-4}$  kg/ms (99.4cSt) while for bio-based lubricants is  $8.3475 \times 10^{-5}$  kg/ms (75cSt). The pressure spike formed at 0.0045m for mineral oil while the bio-based was at 0.0043m. It is prove that the pressure spike for mineral oil was higher than the bio-based lubricants.

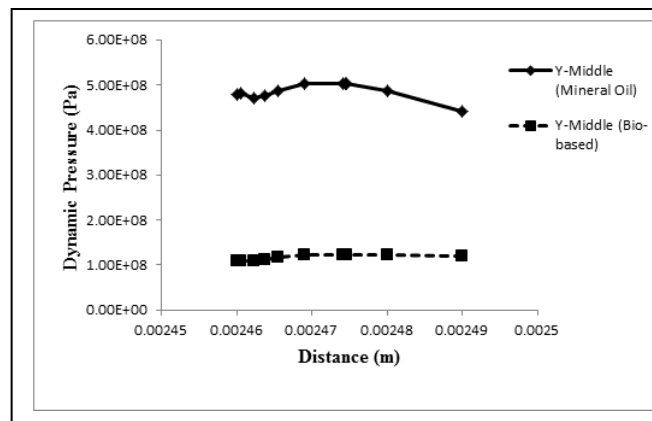


Fig.4 .Dynamic Pressure distribution for Y-axis

Fig.4 represents the dynamics pressure distribution along Y-axis for mineral oil and bio based lubricants. It is clearly observed the dynamic pressure for mineral oil was highest than bio-based where the maximum pressure for both lubricants is 0.5GPa, 84.7MPa respectively. This variation is due to the density for both lubricants where the density for mineral oil is higher than bio-based. In this study, the density for mineral oil is 925 kg/m<sup>3</sup> while for bio-based is 870 kg/m<sup>3</sup>.

According to Hamrock et al. (1987), in elasto-hydrodynamic lubrication, when the rate of pressure increase is extremely high, typically 1013 Pa/s, the lubricant under these conditions will not have time to crystallize but will be compressed to an amorphous solid. Physically, this means that as the lubricant is compressed, the distance between the molecules of the lubricants becomes smaller and smaller.

There exists a point where the molecules are not free to move and any further compression will result in deformation of the molecules. The pressure where this first starts to occur is the solidification pressure, which varies considerably for the different lubricants. Besides that, based on Dowson and Higginson (1966) formula, the density is also proportional to the pressure.

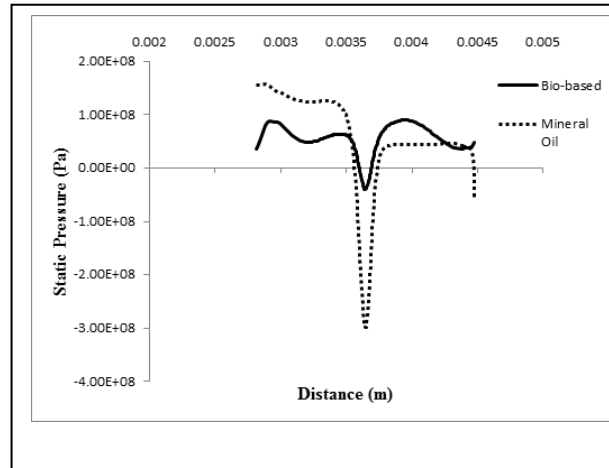


Fig.5. Static pressure between two surfaces

Based on the Fig.5 the static pressure between two surfaces can be determined for both lubricants. According to the graph, both lubricants have a similar spot of distance approximately at 0.03660m but the value of the maximum pressure for both lubricants was totally different. The bio-based lubricant shows the highest value at -40MPa while the static pressure for mineral oil was -0.3GPa.

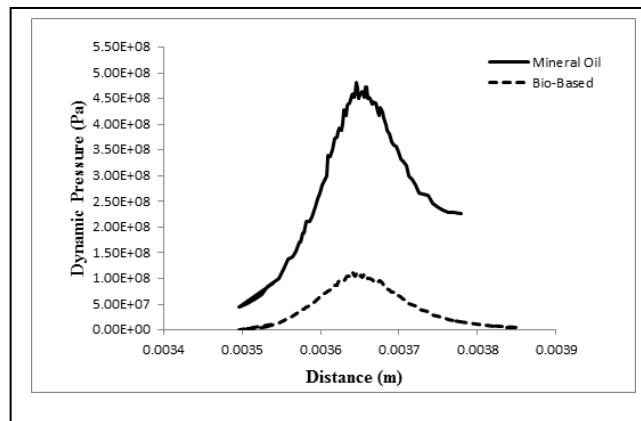


Fig.6. Dynamic pressure distribution for X-axis at the surfaces

Fig.6 shows the different of dynamic pressure distribution for X-axis at the surfaces for both lubricants. The maximum pressure for mineral oil and bio-based was 0.48GPa, 0.11GPa respectively. Even though mineral oil has a higher pressure than bio-based but in an area of surfaces between two contacts, it is shown that the mineral oil is not a good lubricant due to its higher pressure would cause a serious wear and tear at the surfaces. Thus in this case, bio-based lubricant is suggested as the best lubricant to protect the surfaces from wear and damage.

## 4. Conclusion

The following major conclusions can be drawn from the present study:

- At constant speed, the mineral oil has the highest value of dynamics pressure than bio-based lubricants along X and Y axis between two surfaces. Therefore mineral oil will able to carry more load than bio-based lubricant.
- The bio-based lubricant is the best lubricant to protect the surfaces from wear and damage than mineral oil due to it higher value of dynamics pressure than bio-based lubricant.
- Static pressure for both lubricants represents a different value where the mineral oil shows the highest value than bio-based lubricant.
- The peak pressure location moves closer to the inlet between the surfaces deforms.

## Acknowledgements

The author wishes to thank Universiti Teknikal Malaysia Melaka (UTeM) for providing opportunity to conduct this research activity under short term grant (PJP/2011/FKM(28A)/S00987).

## References

- [1] Carmen Ana Beatrice Cioc. (2004). "An Elastohydrodynamic Lubrication Model for Helicopter High-Speed Transmission Components." Ph.D. Thesis. University of Toledo.
- [2] Bishop D. D., Carter L. P., and Chapman S. P. (1982). "Crops Science and Food Production." McGraw-Hill book Company.
- [3] Eckey E. W. (1954). "Vegetables fats and oils." Rein Hold.
- [4] Joy D. C., Wibherlay E.J. (1979). "A Tropical Agricultural Handbook." Chassell.
- [5] Peters M. C., Francis W. (1981), "Fuels and Fuel Technology." McGraw-Hill book Company. 251-266.
- [6] Bernad J. Hamrock (1994). "Fundamentals of Fluid Film Lubrication." McGraw-Hill book Company.
- [7] J. Halling (1975). "Principles of Tribology." The Macmillan Press Ltd.
- [8] P. Yang., J. Cui. (2006). "The influence of spinning on the performance of EHL in elliptical contacts." Springer.
- [9] Kaplan, D.L. (ed.). (1998). "Biopolymers from Renewable Resources." Springer, Berlin.
- [10] Rhodes, B.N., and D. Johnson, (2002). "Vegetable-Based Motor Oils in Biobased Industrial Fluids and Lubricants." edited by S.Z. Erhan and J.M. Perez, AOCS Press, Champaign, IL, 85–109.
- [11] Dwivedi, M.C., and S. Sapre. (2002). "Total Vegetable-Oil Based Greases Prepared from Castor Oil." J. Synth. Lubr. 19:229–241
- [12] G. Biresaw. (2006). "Elastohydrodynamic Properties of Seed Oils." AOCS Press.
- [13] R. Martinsa,\*, J. Seabrab, A. Britoc, Ch. Seyferth, R. Lutherd, A. Igartua. (2006) "Friction coefficient in FZG gears lubricated with industrial gear oils: Biodegradable ester vs. mineral oil." Tribology International, 39:512-521
- [14] Ho'hn B-R, Michaelis K, Doleschel A. (2001). "Frictional behavior of synthetic gear lubricants." Tribology research: From model experiment to Industrial Problem. Amsterdam: Elsevier.
- [15] Brajendra K. Sharma., Umer Rashid., Farooq Anwar., Sevim Z. Erhan. (2009). "Lubricant properties of Moringa oil using thermal and tribological techniques." Springer.
- [16] A. B. Hassan, M. S. Abolarin, A. Nasir, and U. Ratchel. (2006). "Investigation on the Use of Palm Olein as Lubrication Oil." Leonardo Electronic Journal of Practices and Technologies.
- [17] Radoslav Rakic. (2004). "The influence of lubricants on cam failure." Tribology International, 37: 365-373.