



Faculty of Manufacturing Engineering

CONCEPTUAL DESIGN OF REVERSE AND JAW DETECTOR JIG

Ahamad Zaki Bin Mohamed Noor

**Master of Manufacturing Engineering
(Manufacturing System Engineering)**

2015

CONCEPTUAL DESIGN OF REVERSE AND JAW DETECTOR JIG

AHAMAD ZAKI BIN MOHAMED NOOR

**A thesis submitted
in fulfillment of the requirements for the degree of Master
in Manufacturing Engineering (Manufacturing System)**

Faculty of Manufacturing Engineering

UNIVERSITI TEKNIKAL MALAYSIA MELAKA

2015

BORANG PENGESAHAN STATUS LAPORAN PROJEK SARJANA MUDA

TAJUK: **Conceptual Design of Reverse and Jaw Detector Jig**

SESI PENGAJIAN: **2014/15**

Saya **AHAMAD ZAKI BIN MOHAMED NOOR**

mengaku membenarkan Laporan PSM ini disimpan di Perpustakaan Universiti Teknikal Malaysia Melaka (UTeM) dengan syarat-syarat kegunaan seperti berikut:

1. Laporan PSM adalah hak milik Universiti Teknikal Malaysia Melaka dan penulis.
2. Perpustakaan Universiti Teknikal Malaysia Melaka dibenarkan membuat salinan untuk tujuan pengajian sahaja dengan izin penulis.
3. Perpustakaan dibenarkan membuat salinan laporan PSM ini sebagai bahan pertukaran antara institusi pengajian tinggi.
4. ****Sila tandakan (✓)**

- SULIT (Mengandungi maklumat yang berdarjah keselamatan atau kepentingan Malaysia sebagaimana yang termaktub dalam AKTA RAHSIA RASMI 1972)
- TERHAD (Mengandungi maklumat TERHAD yang telah ditentukan oleh organisasi/badan di mana penyelidikan dijalankan)
- TIDAK TERHAD

Disahkan oleh:

Alamat Tetap: _____

NO. 33, Jalan Taman Star

Taman Wah Keong

31400, Ipoh, Perak

Cop Rasmi:

Tarikh: _____

Tarikh: _____

** Jika Laporan PSM ini SULIT atau TERHAD, sila lampirkan surat daripada pihak berkuasa/organisasi berkenaan dengan menyatakan sekali sebab dan tempoh laporan PSM ini perlu dikelaskan sebagai SULIT atau TERHAD.

FAKULTI KEJURUTERAAN PEMBUATAN

Tel : +606 331 6019 | Faks : +606 331 6431/6411

Rujukan Kami (Our Ref) :
Rujukan Tuan (Your Ref) :

11 September 2015

Pustakawan
Perpustakaan UTeM
Universiti Teknikal Malaysia Melaka
Hang Tuah Jaya,
76100 Durian Tunggal,
Melaka.

Tuan/Puan,

PENKELASAN LAPORAN PSM SEBAGAI SULIT/TERHAD LAPORAN PROJEK SARJANA KEJURUTERAAN PEMBUATAN (MANUFACTURING SYSTEM ENGINEERING**): AHAMAD ZAKI BIN MOHAMED NOOR**

Sukacita dimaklumkan bahawa Laporan Projek Sarjana yang tersebut di atas bertajuk "**Conceptual Design of Reverse and Jaw Detector Jig**" mohon dikelaskan sebagai *SULIT / TERHAD untuk tempoh LIMA (5) tahun dari tarikh surat ini.

2. Hal ini adalah kerana **IANYA MERUPAKAN PROJEK YANG DITAJA OLEH SYARIKAT LUAR DAN HASIL KAJIANNYA ADALAH SULIT.**

Sekian dimaklumkan. Terima kasih.

Yang benar,

Tandatangan dan Cop Penyelia

* Potong yang tidak berkenaan

NOTA: BORANG INI HANYA DIISI JIKA DIKLASIFIKASIKAN SEBAGAI SULIT DAN TERHAD. JIKA LAPORAN DIKELASKAN SEBAGAI TIDAK TERHAD, MAKA BORANG INI TIDAK PERLU DISERTAKAN DALAM LAPORAN PSM.

DECLARATION

I declare that this thesis entitled “Conceptual design of Reverse and Jaw Detector Jig” is the result of my own research except as cited in the references. The thesis has not been accepted for any degree and is not concurrently submitted in candidature of any other degree.

Signature :

Name :

Date :

APPROVAL

I hereby declare that I have read this dissertation/report and in my opinion this report is sufficient in terms of scope and quality as a partial fulfilment of Master of Manufacturing Engineering (Manufacturing System Engineering).

Signature :

Supervisor Name :

Date :

DEDICATION

I would like to give a very special appreciation to my beloved friends and family for always been there in the time of need. Thanks for giving me continuous support in order for me to fulfill the needs of my Master Project. To my beloved mother, father, family and friends, thank you all for this.

ABSTRACT

Essentra Component is a company located in Ipoh, Perak which produce seals. There are two types of seal available in the company which are metal and plastic seals. The production plant still employs fully manual operation for most of the production line, but some operations are semi – automated. Due to manual assembly, human operator tends to get fatigue for doing repetitive task in one long shift. When this occurs, minor error such as misplace or wrong orientation of jaw will occur. Customers complain that the seal, especially those plastic seals are not functioning well. The quality problem sometimes not purposely done by the operator during placing the jaw in reverse orientation and moreover the jaw sometimes can be missing during transportation of work – in – progress to the ultrasonic welding station. This jig is designed to have the ability to detect reverse jaw or missing jaw and so that the finish product which has the quality problem will be prevented from being shipped to customers. The jig must also have a flexibility to be used for other plastic seal product. Under chapter 2, jig definition is known, the method of designing, suitable type of sensors, sample jig which used and research on decision making tool. As for methodology, a project schedules being developed in the form of Gantt chart to have time restriction in producing the concept design of reverse and missing jaw jig. Each and every stage was explained in detail in the methodology chapter. In result and discussion, House of Quality (HOQ) have been used to determine the highest weightage criteria. The important criteria which will be carried forward to Analytical Hierarchy Process (AHP) are 15.9% on flexibility and ease of maintenance, 15.4% on both ease of use and longevity of jig usage, lastly 15.2% for accuracy checking. The result obtain after AHP computation are Design 1 with 20.7%, Design 2 with 13.7%, Design 3 with 22%, Design 4 with 27.1% and Design 5 with 16.5%. Design 4 is selected due to the highest weightage after computation. Last chapter consists of a conclusion that has been drawn out from overall research project where final design is justified its properties and why should it be fabricate. Some suggestions are mentioned for future work in order to obtain better reading to make a better judgement.

ABSTRAK

Essentra Component ialah sebuah syarikat terletak di Ipoh, Perak di mana menghasilkan “seals”. Terdapat dua jenis “seal” iaitu jenis besi dan plastic. Kilang ini menjalankan operasi keseluruhannya melalui cara manual dan sebahagian merupakan separuh automatik. Disebabkan kerana pemasangan manual, operator akan cepat penat kerana melakukan pekerjaan yang sama dalam satu jangka tempoh yang panjang. Ketika ini berlaku, kesilapan kecil bakal terjadi seperti tidak letak atau tersilap letak “jaw”. Masalah kualiti ini sebenarnya tidak disengajakan oleh operator kerana “kehilangan jaw atau tersalah kedudukan boleh terjadi ketika pemindahan produk yang belum siap sebelum ke mesin kimpalan ultrasonic. Jig ini dicipta supaya mempunyai kebolehan untuk mengesan kehilangan atau terbalik kedudukan “jaw” supaya produk yang mempunyai masalah tidak akan dihantar kepada pelanggan. Jig ini juga perlu mempunyai tahap fleksibel yang tinggi supaya semua jenis “seal” lain jenis plastic boleh digunakan. Dibawah proses pengimbasan sastera, maksud jig dikenalpasti, cara untuk mereka, jenis sensor yang tepat, sampel jig yang pernah digunakan dan mengkaji alat digunakan untuk melakukan sesuatu keputusan. Bagi metodologi pula, jadual projek dibuat dalam bentuk Carta Gantt untuk mengawal masa ketika menghasilkan konsep rekabentuk jig bagi mengesan terbalik dan tidak diletakkan “jaw”. Setiap peringkat diterangkan lebih lanjut dalam bab ini. Di dalam Bab 4 pula, “House of Quality” (HOQ) digunakan untuk memilih 5 kriteria paling tinggi pemberatnya. Kriteria yang telah dipilih dan digunakan di Analytical Hierarchy Process” (AHP) adalah 15.9% pada daya fleksibel dan mudah untuk menyelenggara, 15.4% pada dua kriteria iaitu mudah digunakan dan tahan lama serta 15.2% terhadap kriteria ketepatan memeriksa. Hasil daripada AHP pula menunjukkan Reka Bentuk 1 sebanyak 20.7%, Reka Bentuk 2 sebanyak 13.7%, Reka Bentuk 3 sebanyak 22%, Reka Bentuk 4 sebanyak 27.1% dan Reka Bentuk 5 sebanyak 16.5%. Reka Bentuk 4 dipilih kerana mempunyai pemberat yang tinggi. Di hujung bab ini, sebuah rekabentuk akan dipilih untuk dibina. Topik terakhir merupakan kesimpulan terhadap keseluruhan projek. Sedikit cadangan ditambah pada bab ini juga supaya boleh meletakkan skala dengan lebih bagus jester memperoleh keputusan yang lebih tepat.

ACKNOWLEDGEMENT

First and foremost, I would like to give greatest gratitude to Almighty God, Allah S.W.T for giving me strength to complete this Master Project. My sincere acknowledgement to my supervisor Dr. Fairul Azni Bin Jafar from Faculty of Manufacturing Engineering, University of Technical Malaysia, Malacca (UTeM) for his supervision, guidance, support and encouragement towards the completion of this report.

I would like to take this opportunity to thanks Essentra Company for giving me the trust to carry out this project. Thanks to Mr Noel Roy S/O Louis a staff from Human Resource Department for arranging my appointment with Mr Lee Chn Kee who is the Senior Manufacturing Operation Manager. The permission is granted by Mr. Lee himself after further discussion. Last person from Essentra Company who has been a helping hand is one of the Process Engineer, Mohd Hafikri Azwan bin Mohd Rosli by suggesting few concept designs. With this knowledge that I have gained, it would be a great asset for me to bring for my career in future.

Lastly, I would like to thank my peers, my parents, siblings who have helped me directly or indirectly during the preparation and crucial parts of this Master Project. Very much appreciated.

TABLE OF CONTENTS

DECLARATION	i
APPROVAL	ii
DEDICATION	iii
ABSTRACT	iv
ABSTRAK	v
ACKNOWLEDGEMENT	vi
TABLE OF CONTENTS	vii
LIST OF TABLES	xi
LIST OF FIGURES	xiii
LIST OF APPENDICES	xv
LIST OF ABBREVIATIONS	xvi
CHAPTER 1	1
INTRODUCTION	1
1.1 Background of Study	1
1.2 Problem Statement	4
1.3 Research Questions	4
1.4 Objectives	5
1.5 Research Scope	5
1.6 Thesis Structure	5
CHAPTER 2	7
LITERATURE REVIEW	7
2.1 Jig	7
2.1.1 Definition of Jig	7
2.2 Approaches of Designing Jigs	8

2.2.1	CAD Designing Software.....	8
2.2.2	Intelligence Jigs and Fixtures	10
2.2.3	RBR applied in CAFD.....	12
2.2.4	Group Technology in CAFD.....	13
2.3	Types of Sensors.....	15
2.3.1	On – Line Machine Vision System for Detect Split Defects in Sheet – Metal Forming Processes.....	15
2.3.2	Design and Development of a Novel Non – Contact Fibre Optic Laser Scanning System	18
2.3.3	Development of a Unique Sensors Using Piezoelectric Plate.....	20
2.4	Decision Making Tools.....	22
2.4.1	Benefit Analysis	22
2.4.2	Analytical Hierarchy Process (AHP).....	23
2.5	Sample of Jig Fabricated.....	24
2.6	Chapter Summary	26
CHAPTER 3.....		27
METHODOLOGY		27
3.1	Project Schedules.....	27
3.2	Overall Flow Chart	30
3.3	Stage Explanation	32
3.3.1	Identify Problem Statement, Research Aim & Scope	32
3.3.2	Project Research	32
3.3.3	Concept Decision.....	33
3.3.4	Concept Sketching.....	33
3.3.5	Analytical Hierarchy Process (AHP).....	33
3.3.6	House of Quality.....	34
3.3.7	Compute Consistent Ratio.....	35

3.3.7	Scale Adjustment.....	35
3.3.7	Result Analysis.....	35
3.3.8	Concept Selection.....	36
3.4	Chapter Summary.....	36
CHAPTER 4.....		37
RESULT & DISCUSSION.....		37
4.1	Analysis Method.....	37
4.2	Concept Sketches.....	38
4.2.1	Jig Design 1.....	39
4.2.2	Jig Design 1 – Description.....	40
4.2.3	Jig Design 2.....	42
4.2.4	Jig Design 2 – Description.....	43
4.2.5	Jig Design 3.....	45
4.2.6	Jig Design 3 – Description.....	46
4.2.7	Jig Design 4.....	48
4.2.8	Jig Design 4 – Description.....	49
4.2.9	Jig Design 5.....	51
4.2.10	Jig Design 5 – Description.....	52
4.3	House of Quality (HOQ).....	54
4.3.1	House of Quality – Discussion.....	56
4.4	Analytical Hierarchy Process (AHP).....	58
4.5	Consistency Ratio (CR).....	59
4.6	AHP Computations.....	60
4.6.1	Criterion A: Accuracy Checking.....	61
4.6.2	Consistency Ratio - Criterion A.....	63
4.6.3	Analysis of Criterion A.....	64

4.6.4	Criterion B: Ease of Use.....	65
4.6.5	Consistency Ratio - Criterion B	67
4.6.6	Analysis of Criterion B.....	68
4.6.7	Criterion C: Ease Maintenance.....	69
4.6.8	Consistency Ratio - Criterion C	71
4.6.9	Analysis of Criterion C.....	72
4.6.10	Criterion D: Longevity Jig Usage.....	73
4.6.11	Consistency Ratio - Criterion D	75
4.6.12	Analysis of Criterion D	76
4.6.13	Criterion E: Flexibility	77
4.6.14	Consistency Ratio - Criterion E.....	79
4.6.15	Analysis of Criterion E.....	80
4.6.15	Criteria Evaluation.....	81
4.6.16	Consistency Ratio - Criteria	83
4.6.17	Analysis of Criteria.....	84
4.6.18	Final Decision Making	85
4.7	Discussion.....	87
4.8	Chapter Summary	88
CHAPTER 5.....		89
CONCLUSION & RECOMMENDATION FOR FUTURE RESEARCH.....		89
5.1	Conclusion	89
5.2	Recommendation for Future Research.....	91
5.2.1	Sensitivity Analysis	91
5.2.1	Prototype Development	93
REFERENCE		94
APPENDICES.....		96

LIST OF TABLES

TABLE	TITLE	PAGE
4.1	Requirement by customer and company	54
4.2	Fundamental linguistic variables used for pairwise rating in AHP	58
4.3	Random consistency index table	60
4.4	Original pairwise comparison matrix	61
4.5	Adjusted pairwise comparison matrix	62
4.6	Weightage calculation	62
4.7	Consistency calculation	63
4.8	Original pairwise comparison matrix	65
4.9	Adjusted pairwise comparison matrix	66
4.10	Weightage calculation	66
4.11	Consistency calculation	67
4.12	Original pairwise comparison matrix	69
4.13	Adjusted pairwise comparison matrix	70
4.14	Weightage calculation	70
4.15	Consistency calculation	71
4.16	Original pairwise comparison matrix	73
4.17	Adjusted pairwise comparison matrix	74
4.118	Weightage calculation	74
4.19	Consistency calculation	75
4.20	Original pairwise comparison matrix	77

4.21	Adjusted pairwise comparison matrix	78
4.22	Weightage calculation	78
4.23	Consistency calculation	79
4.24	Original pairwise comparison matrix	81
4.25	Adjusted pairwise comparison matrix	82
4.26	Weightage calculation	82
4.27	Consistency calculation	83
4.28	Grouped data	85

LIST OF FIGURES

FIGURE	TITLE	PAGE
1.1	Jaw used for Mini Jawlock	1
1.2	Image of placing jaw and cap in Mini Jawlock	2
1.3	Locking of seal with the correct orientation of jaw	3
1.4	Locking of seal with the wrong orientation of jaw	3
2.1	Flow chart to verify method of designing	9
2.2	CAFD work flow diagram	11
2.3	Rule Base Reasoning flow in CAFD	12
2.4	Classification of jig and fixture	14
2.5	Machine vision system developed	15
2.6	System diagram	17
2.7	Fibre optics transmission system	18
2.8	Experimental setup for measuring output voltage by Piezoelectric Sensor	20
2.9	Positioning jig	24
2.10	Once – Swing jig	25
2.11	Twice – Swing manual jig	26
3.1	Gantt chart for Master Project 1	28
3.2	Gantt Chart for Master Project 2	29
3.3	Flow chart for MP1 and MP2	31
3.4	Sample House of Quality	34
4.1	Analysis flow Chart	37
4.2	Design Jig 1	39
4.3	Design Jig 2	42

4.4	Design Jig 3	45
4.5	Design Jig 4	48
4.6	Design Jig 5	51
4.7	House of Quality	55

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Permission Letter	96
B1	Tensile Test Report Page 1	97
B2	Tensile Test Report Page 2	98
C1	Insertion Test Report Page 1	99
C2	Insertion Test Report Page 2	100

LIST OF ABBREVIATIONS

CAD	-	Computer Aided Design
GT	-	Group Technology
CBR	-	Case Base Reasoning
CAFD	-	Computer Aided Fixture Design
AI	-	Artificial Intelligence
RBR	-	Rule Base Reasoning
KUKA	-	Keller Und Knappich Augsburg
MP1	-	Master Project 1
MP2	-	Master Project 2
AHP	-	Analytic Hierarchy Process
HOQ	-	House of Quality
LED	-	Light Emitting Diode
SOP	-	Standard of Procedure
λ_{\max}	-	Max Eigenvalue
Σ	-	Sum of Priority Value
CI	-	Consistency Index
CR	-	Consistency Ratio
RI	-	Random Consistency Index
UTeM	-	University Technical Malaysia

CHAPTER 1

INTRODUCTION

This chapter is about introducing the beginning of the proposed research. The title of this research is “Conceptual Design of Reverse and Jaw Detector Jig”. This jaw will make the seal to be effective enough in locking. The content which will be discussed in this chapter is the background of study, problem statement, objectives and scope.

1.1 Background of Study

Industrial people have found a way to create new type of seal whereby it reduces cost and can be customized. Essentra is a company based in United Kingdom which has brought over the company Abric recently. Even though, the top management has changed, the objective and main product still have not changed. This company produces two types of seal which are plastic seals and metal seals. Jaw is a component present in the plastic seal. The function of this jaw is to prevent the pull back of insertion and make sure a strong lock between the seal and the product that needs locking. The jaw is a metal part which being inserted in the plastic seal before being covered with plastic cap. Figure 1.1 is sample image of jaw which gives higher strength for the seal when locking.



Figure 1.1: Jaw used for Mini Jawlock.

Figure 1.1, the jaw is being placed in a slot and being covered by a plastic cap through the process of ultrasonic welding. Figure 1.2 shows the assembly of jaw and cap in the product of Mini Jawlock.

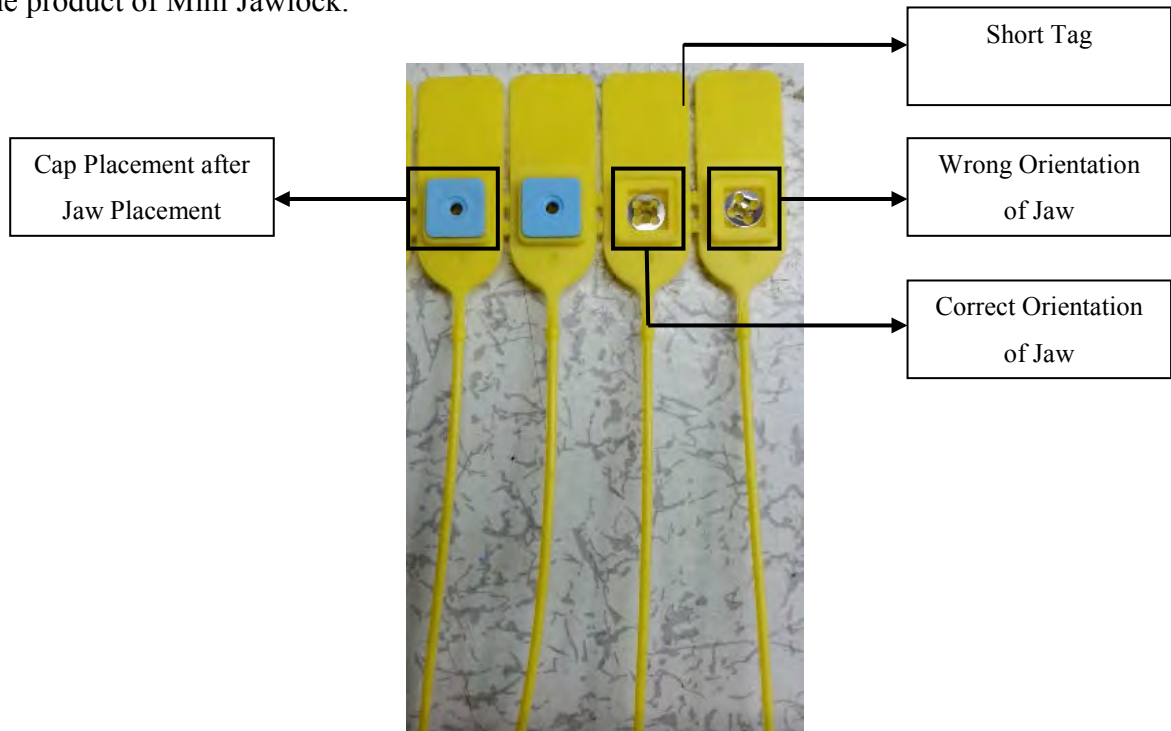


Figure 1.2: Image of placing jaw and cap in Mini Jawlock.

In this company, some of the seals are being assemble manually and some are assemble by using single manned machine basically with the used of automation table. The concept of creating this seal is based on the concept of cable tight. Different designs and colours are designed based on customization of customers. The specifications are altered according to how much strength needed for each type of seal for locking.

However, the company receives lot of complaints regarding the reverse jaw assembly problem, making the product to be sealed through a wrong orientation. The impacts of wrong assemble will caused customers to have hard time to use the seal. Some issues occur where during the assembly of jaw and cap after ultrasonic welding, few cavities are losing the jaw, hence making the locking impossible to be done. Figure 1.3 shows the locking condition in correct orientation of jaw placement, while Figure 1.4 shows the locking when the jaw is in wrong orientation.



Figure 1.3: Locking of seal with correct orientation of jaw.



Figure 1.4: Locking of seal with wrong orientation of jaw.

As can be seen in Figure 1.4, some cavities in the mat need to be sealed by inserting in opposite way. This is the problem that always occurred and need to be solved immediately. This is due to the fact that when a defect in any one cavity, the whole mat will be rejected.

1.2 Problem Statement

To overcome this problem of hard in detecting the reverse and absence of jaw, several studies and research have been carried out. Several problems encountered during the implementation of suggestion to design a new jig. One of the most crucial problems is the human fatigue. As mentioned, fatigue can lead to error while performing assembly process. In Figure 1.2, the jaw is being place in the mat can sometimes being placed inversely. When this problem occur, the seal will not functioning well. Next problem is that a mat consists of ten cavities. When one cavity is faulty, the whole mat will be rejected. The purpose of having the whole mat reject because some cavity can be located in the middle of the mat therefore amendments hard to be done. This will result as making the whole mat send for rework or send for crushing to make a new set of mat. The biggest problem that the company faces is that the possibility of shipping this rejects pieces to the customers. Since the failure to detect reverse or missing jaw in a particular cavity, the mat will be labelled as good part and ship to the customers. Some other problem which will probably occur is to identify the method of identifying tool to detect this defects. The final benefit that will be gain is that there will be zero defects product which will be shipped towards the customers. These are the few problems that need to be solved.

1.3 Research Questions

Some question rise when this research study starts such as:

- i. How to detect the jaw is present or in correct orientation?
- ii. Out from many criterions, which criterions is more important for design selection?
- iii. Which design of jig should be selected at the end of this research study?
- iv. How to make a jig that can be used to a variety of products?