



**SURFACE DEFECT DETECTION AND POLISHING PARAMETER
OPTIMIZATION USING IMAGE PROCESSING FOR
G3141 COLD ROLLED STEEL**

By

RUZAIDI BIN ZAMRI

**Thesis submitted to the School of Graduate Studies, Universiti Putra Malaysia, in
fulfillment of the requirement for the degree of Doctor of Philosophy**

Oktober 2016

COPYRIGHT

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia

Abstract of the thesis presented to the senate of University Putra Malaysia in fulfillment of the requirement for the degree of Doctor of Philosophy

**SURFACE DEFECT DETECTION AND POLISHING PARAMETER
OPTIMIZATION USING IMAGE PROCESSING FOR
G3141 COLD ROLLED STEEL**

By

RUZAIDI BIN ZAMRI

October 2016

Chairman: Professor Napsiah Ismail, PhD
Faculty: Engineering

Traditionally the surface quality inspection especially for metal polishing purpose is performed by human inspectors. Defect detection is a method of nondestructive testing of material and products to detect defects. This study consists of two parts where the first part is applying vision system to detect and measure surface defects that have been characterized to some level of surface roughness. Specimen of G3141 cold rolled steel is used in this research as it represents the actual material applied in local automotive manufacturer. Gray image of scratch defect on metal surface is detected and information about mean gray pixel value (Ga) is interpreted and converted to surface roughness (Ra) measurement. In this study a new technique is developed where the Ga only read on the specific scratch line without considering the whole image. To realize this, automatic cropping algorithm is developed to detect the region of interest and interpret the Ga value. This technique will enable the polishing to be done at specific scratch defect area without necessary to develop polishing path throughout the whole surface which is time consuming. Second part is to obtain the optimum polishing parameter by using artificial intelligence technique which is able to predict the grit size, polishing time and polishing force parameter to remove the scratch by polishing process. For the purpose of this study, multiple ANFIS or MANFIS have been selected to predict optimum parameter for polishing parameters. Polishing parameter data can be generated by using MANFIS to predict optimum polishing parameters such as grit size, polishing time and polishing force in order to perform polishing process. However due to lack of study done in the field of flat and dry polishing, the polishing parameter data have to be developed. The polishing parameter data for flat and dry polishing is performed by using robotic polishing arm and the experiment runs design by using full factorial design. Results show that the defect detection algorithm able to detect defect only on the scratch area and able to read the Ga value at detected scratch line and transform it to surface roughness measurement at considerably good level of accuracy compared with manual method. Results from MANFIS have shown that the system is able to predict up to 95% accuracy which is considerably high. The overall results from both parts of this research would inspire further advancements to achieve robust machine vision based surface measurement systems for industrial robotic processes specifically in polishing process.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia untuk memenuhi keperluan untuk ijazah Doktor Falsafah

**PENGESANAN KECACATAN PERMUKAAN DAN PENGOPTIMUMAN
PARAMETER PENGILAPAN MENGGUNAKAN PEMROSESAN IMEJ
BAGI G3141 KELULI TERGELEK SEJUK**

Oleh

RUZAIDI BIN ZAMRI

Oktober 2016

Pengerusi: Professor Napsiah Ismail, PhD
Fakulti: Engineering

Secara tradisinya, pemeriksaan kualiti permukaan untuk tujuan penggilapan permukaan logam dilakukan secara insani oleh manusia. Pengesanan kecacatan adalah merupakan suatu kaedah ujian tanpa musnah bagi mengesan kecacatan pada permukaan. Kajian ini terdiri dari dua bahagian iaitu bahagian pertama adalah penggunaan sistem penderia penglihatan untuk mengesan dan mengukur tahap kecacatan permukaan yang telah dikategorikan kepada tahap kekasaran permukaan yang tertentu. Spesimen G3141 keluli tergelek sejuk digunakan dalam kajian ini kerana ia mewakili bahan sebenar digunakan dalam pengeluaran automotif tempatan. Maklumat mengenai nilai purata piksel keabuan (Ga) kecacatan kecalaran ke atas permukaan logam yang dikesan akan diinterpretasikan dan ditukarkan ke bentuk ukuran kekasaran permukaan (Ra). Di dalam kajian ini juga satu teknik baru telah dibangunkan di mana nilai Ga hanya akan dibaca terhadap kecacatan kecalaran berkenaan sahaja tanpa perlu mengambilkira keseluruhan imej. Bagi merealisasikan tujuan ini, pengaturcaraan pemotongan secara automatik telah dibangunkan untuk mengesan kawasan kepentingan dan menginterpretasikan nilai Ga. Teknik ini juga membolehkan proses penggilapan dijalankan terus kepada tempat yang mempunyai kecacatan tanpa perlu membangunkan laluan penggilapan ke seluruh permukaan logam yang nyata mengambil masa yang lama. Bahagian kedua kajian ini adalah untuk mendapatkan parameter penggilapan optimum dengan menggunakan teknik kecerdikan buatan yang berkebolehan untuk meramal parameter seperti saiz grit kertas pasir, masa serta daya tekanan penggilapan bagi menghilangkan kecalaran menggunakan proses penggilapan. Bagi tujuan pengkajian ini, ANFIS berbilang atau MANFIS telah dipilih untuk meramal parameter optimum bagi proses penggilapan. Pemilihan data penggilapan boleh dihasilkan menggunakan MANFIS untuk meramal parameter yang optimum seperti saiz grit kertas pasir, masa dan daya tekanan bagi menjalankan proses penggilapan ini. Walaubagaimanapun disebabkan kekurangan kajian yang dilakukan di bidang penggilapan kering dan rata ini, pemilihan data penggilapan perlulah dibangunkan. Eksperimen telah dijalankan menggunakan robotik industri dan susunan eksperimen adalah menggunakan rekabentuk faktorial penuh melalui rekabentuk eksperimen. Keputusan menunjukkan bahawa pengaturcaraan pengesanan kecacatan mampu untuk mengesan kecacatan kecalaran serta boleh membaca nilai Ga hanya pada kecacatan kecalaran berkenaan dan menukarkan ia kepada ukuran kekasaran permukaan pada ketepatan yang agak tinggi dibandingkan dengan kaedah manual. Hasil

dapatan juga telah menunjukkan bahawa sistem MANFIS berupaya untuk meramal sehingga 95% ketepatan. Keseluruhan keputusan dari kedua-dua bahagian kajian akan menjadi pemangkin ke arah usaha untuk menghasilkan sistem pengukuran berasaskan penglihatan mesin yang baik bagi proses robotik industri terutamanya dalam bidang penggilapan.

ACKNOWLEDGEMENTS

In the name of Allah, the most Beneficent, the most Merciful. Praise be to Allah who gave me the strength and patience to complete this study and blessing and peace be upon Prophet Muhammad S.A.W, his family, and friends.

I sincerely thank my supervisor, Professor Datin Dr. Napsiah Ismail, for her guidance, advice, and encouragement toward the completion of this thesis. My deep appreciation and gratitude also extend to my supervisory committee members, Associate Professor Dr. B.T. Hang Tuah Baharudin, Dr. Azmah Hanim Mohamed Ariff, and Professor Dr. Anton Satria Prabuwono from the Faculty of Computing and Information Technology in Rabigh, King Abdulaziz University.

My special appreciation goes to my mother Nor Asiah, wife Ckin, and my children Airin, Afnan, Firas, and Mifzal for their love, support, and patience while I was undergoing this arduous research journey.

I certify that a Thesis Examination Committee has met on 26 October 2016 to conduct the final examination of Ruzaidi bin Zamri on his thesis entitled "Surface Defect Detection and Polishing Parameter Optimization using Image Processing for G3141 Cold Rolled Steel" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

Zulkiflle bin Leman, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Tang Sai Hong, PhD


Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Nuraini binti Abdul Aziz, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Chris Chatwin, PhD

Professor
University of Sussex
United Kingdom
(External Examiner)



NÖR AINI AB. SHUKOR, PhD

Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 28 February 2017

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

Napsiah Ismail, PhD

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Anton Satria Prabuwono, PhD

Professor
Faculty of Computing and Information Technology in Rabigh
King Abdulaziz University
(Member)

B.T Hang Tuah Baharudin, PhD

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Azmah Hanim Mohamed Ariff, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Member)

ROBIAH BINTI YUNUS, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012 .The thesis has undergone plagiarism detection software.

Signature: _____

Date: _____

Name and Matric No.: _____

Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____
Name of
Chairman of
Supervisory
Committee: _____

Signature: _____
Name of
Member of
Supervisory
Committee: _____



Signature: _____
Name of
Member of
Supervisory
Committee: _____

Signature: _____
Name of
Member of
Supervisory
Committee: _____

, TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	ii
ACKNOWLEDGEMENT	iv
APPROVAL	v
DECLARATION	vii
LIST OF TABLES	xi
LIST OF FIGURES	xii
LIST OF ABBREVIATIONS	xiv
 CHAPTER	
 1 INTRODUCTION	 1
1.1 Background of Study	1
1.2 Problem Statement	3
1.3 Objective of the Study	4
1.4 Scope of Study	4
1.5 Research methodology	4
1.6 Thesis Outline	6
 2 LITERATURE REVIEW	 8
2.1 Introduction	8
2.2 Abrasive Polishing Technology	8
2.2.1 Polishing Process Parameter	10
2.3 Polishing Robotic Cell	10
2.4 Machine Vision for Surface Defect Detection	17
2.4.1 Surface Roughness Prediction	22
2.4.2 Mean Gray Level Value (Ga) as Surface Roughness Measurement	23
2.5 Polishing Parameters' Optimization and Prediction	25
2.6 Summary	32
 3 DEVELOPMENT OF SURFACE DEFECT DETECTION MODEL USING MEAN GRAY LEVEL VALUE OF IMAGES	 33
3.1 Introduction	33
3.2 Purpose of the Study	33
3.3 Methodology	33
3.3.1 Vision System	35
3.3.2 Surface Roughness Measurement	36
3.3.3 Workpiece and Materials	37
3.3.4 Software and Computer	38
3.3.5 Development of Surface Defect Detection	38
3.3.5.1 Image Acquisition	40
3.3.5.2 Auto Cropping Algorithm and Segmentation Technique	40
3.3.5.3 Data Acquisition	50

	3.3.5.4	Surface Roughness Estimation Model Using Image Processing	50
	3.3.5.5	Linear Regression Model	53
	3.3.5.6	Sum of Sines Model	53
3.4		Result and Discussion	54
	3.4.1	Discussion of Result from Surface Roughness Estimation Model	58
3.5		Conclusion	64
4		IDENTIFICATION OF SIGNIFICANT POLISHING PARAMETERS FOR MANFIS DEVELOPMENT USING DESIGN OF EXPERIMENT FOR G3141 COLD ROLLED STEEL	65
	4.1	Introduction	65
	4.2	Purpose of the Study	65
	4.3	Methodology	65
	4.3.1	Polishing Parameters	68
	4.3.2	Polishing Tool and Workpiece	68
	4.3.3	Experimental Design and Conditions	69
	4.4	Result and Discussion	70
	4.4.1	Surface Roughness Model Representation	74
	4.5	Conclusion	74
5		DEVELOPMENT OF MANFIS STRUCTURE FOR POLISHING PARAMETER OPTIMIZATION OF G3141 COLD ROLLED STEEL	76
	5.1	Introduction	77
	5.2	Purpose of Study	77
	5.3	Methodology	77
	5.3.1	Adaptive Neuro-Fuzzy Inference System (ANFIS)	80
	5.3.2	ANFIS Training	82
	5.3.3	Development of MANFIS through SIMULINK Applications	84
	5.3.4	Research assumption and limitation	87
	5.4	Result and Discussion	87
	5.5	Conclusion	94
6		CONCLUSION AND RECOMMENDATIONS FOR FUTURE RESEARCH	95
	6.1	Conclusion	95
	6.2	Recommendation for Further Studies	96
		REFERENCES	98
		APPENDICES	107
		BIODATA OF STUDENT	163
		LIST OF PUBLICATIONS	164

LIST OF TABLES

	Page
Table 2.1: Research Studies On Polishing Robotic Cell	15
Table 2.2: Research Studies On Machine Vision For Surface Defect Detection	20
Table 2.3: Research Studies On Polishing Parameter Optimization And Prediction	31
Table 3.1: Data Collection From Experiment	52
Table 3.2: Sequence To Estimate The Coefficient Of M And C	53
Table 3.3: Dependent Variables (Ra) With All Independent Variable Data	55
Table 3.4: Anova Result For Significant Independent Variables	56
Table 3.5: Anova Result For Ga And Mean Idx	57
Table 3.6: Coefficients For Sum Of Sines Model	58
Table 3.7: Anova Result From Surface Roughness Linear Regression Model	60
Table 3.8: Summarization Of Predicted Value For Both Model (Training Data-40)	62
Table 3.9: Summarization Of Predicted Value For Both Model (Testing Data-16)	63
Table 3.10: Summarization Of Result For Surface Roughness Model	63
Table 4.1: Polishing Parameter	70
Table 4.2: Experiment Design By Doe	70
Table 4.3: Experiment Runs Combination By DOE	70
Table 4.4: Analysis Of Variance	71
Table 4.5: Surface Roughness Result Using DOE Model	74
Table 5.1: Full Factorial Experiment Runs	79
Table 5.2: Polishing Parameter Data	80
Table 5.3: Data Arrangement According To Polishing Parameter Group	88
Table 5.4: Polishing Data According To Ranking Of Surface Roughness Reduction	89
Table 5.5: Correlation For Percentage Ra Reduction With Gs, Pt And Pf	90
Table 5.6: Classification Of Polishing Parameter For Data Training	91
Table 5.7: Expected And Predicted Data Using MANFIS	91
Table 5.8: Pearson Correlation Coefficient	93
Table 5.9: Testing Data For MANFIS Structure Proposed	93

LIST OF FIGURES

	Page
Figure 1.1: Research Methodology Flowchart	6
Figure 2.1: Manual Polishing Process In Automotive Industries	9
Figure 2.2: Robotic Polishing Process In Automotive Industries	11
Figure 2.3: Research Area Of Polishing Robot	22
Figure 3.1: Schematic Diagram For The Surface Defect Detection System	34
Figure 3.2: Omron F500 Vision System And Lighting	35
Figure 3.3: The Optical Chart Provided By The F500 Vision Setup Manual	35
Figure 3.4: EasyCap USB 2.0 Video Capture	36
Figure 3.5: Mitutoyo Surftest SJ-301	37
Figure 3.6: Specimen JIS G3141 SPCC Cold Rolled Steel	37
Figure 3.7: Computer As Main Processor In Polishing Robotic System	38
Figure 3.8: Flowchart For The Development Of Surface Defect Detection Model	39
Figure 3.9: Original Gray Image (OGI) For Specimen 001	41
Figure 3.10: Original Gray Image (Ogi001)	42
Figure 3.11: The Optical Chart Provided By The F500 Vision Setup Manual	42
Figure 3.12: Binary Image Of Sample 001	43
Figure 3.13: Structure Element Operation (Strel – Line 5)	44
Figure 3.14: Image With Boolean Subtraction	45
Figure 3.15: After Structure Element Operation (Strel)	46
Figure 3.16: Image With Arithmetic Array Operation	46
Figure 3.17: Segmented Image Of Straight Line Defect	47
Figure 3.18: Automatic Cropping On Defective Area	48
Figure 3.19: Thresholding With Hole Filled	48
Figure 3.20: Defect Labeled With Color	48
Figure 3.21: Image Segmentation After Cropping	49
Figure 3.22: Segmentation In Gray Image	49
Figure 3.23: Maximum Idx (Pixel) Location	49
Figure 3.24: Sum Of Sines Curve Fitting (Nonlinear)	53
Figure 3.25: Linear Regression Model For Surface Roughness (Ra)	59
Figure 3.26: Sum Of Sines Curve Fitting (Nonlinear)	61
Figure 4.1: Flowchart Of Analysis Of Polishing Parameter	66
Figure 4.2: Experimental Setup	67
Figure 4.3 : Vernier Fp-Bta Force Plate	67
Figure 4.4 : MAGW-40 Myton Pneumatic Polisher	69
Figure 4.5: Polishing Disc	69
Figure 4.6: Interaction Plot For Surface Roughness (Ra)	72
Figure 4.7: Normal Plot Of The Standardized Effect	72
Figure 4.8: Contour Plot Of Surface Roughness (Ra)	73
Figure 4.9: Surface Plot Of Surface Roughness (Ra)	73
Figure 5.1: Flowchart For Manfis Development	78
Figure 5.2: ANFIS Architecture	81
Figure 5.3: Workspace Data In Matlab	83
Figure 5.4: Layout Of ANFIS Dialog Box Using Matlab	83

Figure 5.5: Workspace Data That Are Trained Using Matlab	83
Figure 5.6: Simulink Dialog Box Layout	84
Figure 5.7: Simulink Library	85
Figure 5.8: Function Block Used In Matlab Simulink For Manfis Development	85
Figure 5.9: Proposed MANFIS Design	86
Figure 5.10: Significant P-Value For C1 (Gs), C2 (Pt) And C3 (Pf)	90
Figure 5.11: Correlation Coefficient Between Gs Ex And Gs Pr	92
Figure 5.12: Correlation Coefficient Between Pt Ex And Pt Pr	92
Figure 5.13: Correlation Coefficient Between Gs Ex And Gs Pr	93

LIST OF ABBREVIATIONS

ANFIS	Adaptive Neuro Fuzzy Inference System
MANFIS	Multiple Adaptive Neuro Fuzzy Inference System
Ga	Mean Gray Level Value or Average Gray Level Value
ROI	Region of Interest
ANN	Artificial Neural Network
CMP	Chemical Mechanical Polishing
MCP	Mechano Chemical Polishing
GPS	Geometrical Product Specifications
AMPS	Automatic Mold Polishing System
ASIS	Automatic Surface Inspection System
GLCM	Gray Level Co-Occurrence Matrix
CCD	Cubic Couple Device
SIMO	Single Output Multi-Output
MIMO	Multi-Input Multi-Output
Ra	Surface Roughness
MISO	Multi Input Single Output
DOE	Design of Experiment
ECMP	Electrochemical Mechanical Polishing
DOF	Degree of Freedom

CHAPTER 1

INTRODUCTION

1.1 Background of Study

The developments of manufacturing automation have become an important feature in manufacturing that offers competitive advantage especially for multinational companies. The automated manufacturing system is a process performed by a machine without the direct participation of human beings. Most industries are seeking to improve performance and efficiency, increase productivity, cost reduction and quality improvement to produce higher quality products at lower prices.

Automatic defect detection systems are an element of manufacturing automation comprising a deeply rooted and ubiquitous component of modern automated systems. The purpose of automatic defect detection especially using computer vision is to decide if a particular exemplar object or defect is located somewhere in the image whereas localization provides accurate location information on the object (Andreopoulos and Tsotsos, 2013). Automated defect detection has the advantages of increasing productivity and reducing human wages. Besides that, many researches indicate automatic defect detection to be more reliable, better quality, highly efficient, and with good real time performance compared to manual visual method (Duan et al., 2011).

Automatic defect detection through the application vision system has been practiced in various applications and industries including steel manufacturing industries. Many of the techniques applied rely on the efficient algorithm to process the image according to the desired image. This can be achieved by focusing on specific defects and location at the beginning. According to Pishyar and Emadi (2016), defect of steel sheet metal is divided into three category such as surface, textural and dimensional defect. There have been several works for detecting and classifying steel surface defects. Xu et al. (2015) used Shearlet transform to classify surface defect on metal surface by decomposed the image captured into several sub-band. Sarma et al. (2013) presented wavelet transform in metal defect detection with artificial neural network classifier. Based on the surface image features, Babu (2010) applied parameter called Ga (Mean Gray Level Value) that is used to estimate the surface roughness, Ra. According to Ghorai et al. (2013), defect detection techniques have been applied in steel industries to detect defects on metal surfaces. Such techniques applied radiant light, edge-preserving filter, thresholding technique, undecimated wavelet transform, and mathematical morphology. There are many types of metal defect which are also known as surface imperfection according to ISO 8485:1998 Geometrical Product Specifications (GPS) – Surface imperfection – Terms, Definition and Parameters. However, indicators of metal surface defects which lie on surface roughness is still unavailable. Thus, for surface defect detection, this research is focused on the determination of defect location and surface roughness value of the straight line defect with respect to the Ga measurement. Processing of pixel and other information extraction will only focus on region of interest (ROI) which is the defect. This technique is much simpler without unnecessary complex algorithms and programming. Moreover,

it can be done on an authentic image and help prevent losing pixel information. Secondary processes such as polishing are needed to remove this flaw and cast the final touch on the surface.

Polishing is a secondary process performed to remove or repair defects or imperfections and cast final appearance on products. Traditionally it is done manually by an experienced expert. However due to dirt, noise, and the tediousness of the job, the polishing process is nowadays mostly automated. Automated polishing process can be done by industrial robotic arm (Brogårdh, 2007). The robotic arm can both hold the workpiece and perform dry polishing on the polishing tool or vice versa. Some researchers have discussed the development of robotic polishing, including the use of various types of sensors to detect the surface condition (Basanez and Rosell, 2005), control systems for industrial robot in polishing movement (Liao et al., 2008), and path planning in optimizing the time required to perform the polishing process (Li et al., 2010). However, variations in terms of standard and inconsistent perceptions have led to improper definitions of final appearance which rely mostly on each expert's intuition. Hence, it is important to apply correct parameter setting to obtained desired appearance. El Khalick Mohammad et al. (2016) proposed end effector for robotic-based surface Electrochemical Mechanical Polishing (ECMP) process. In this research, polishing force, tool feed rate, rotational speed, current and electrolyte flow rate are taken as the parameters to obtained optimum polishing parameter. However the study does not discussed the optimum polishing parameter obtained. Raju and Pradesh (2015) in their work on design and simulation of die casting mold using robot path applied tool path, feed rate, rotation of speed, number of passes and deformation of tool as their polishing parameters. For flat and dry polishing in this research, polishing parameters are developed based on DOE and applied for prediction and optimization which involved artificial intelligent.

Artificial intelligence has played an important role especially in manufacturing systems. It has been successfully applied in prediction and optimization of process parameters especially in machining of materials. Unlike machining with an abundance of machinability data, there is limited information on the parameters of polishing and such information is normally developed according to the individual needs of industries or organizations. The most common artificial intelligence used in prediction and optimization are expert system (Iqbal et al., 2007), genetic algorithm (Kant and Sangwan, 2015), fuzzy inference system (Tseng and Konada, 2015), artificial neural network, and adaptive neuro fuzzy inference system (ANFIS) (Razak et al., 2010). However new techniques have revealed that prediction and optimization can also be done by using a multiple adaptive neuro fuzzy inference system (MANFIS) which is the modification of ANFIS (Rolim and Schubert, 2012; Suhail et al., 2011). The advantages of MANFIS rely on both advantages of artificial neural network (ANN) and fuzzy logic. ANN has better learning ability such as parallel processing, ability to adaptation, fault tolerance, and distributed knowledge representation, whereas fuzzy logic strategy can deal with reasoning at higher levels.

According to Japanese Industrial Standard (JIS G3141 : 2011) G3141 cold roll sheet steel is specified as best suited for cars manufacturing and electrical appliances due to broader ranges from commercial to deep drawing qualities. The letter 'G' referred to ferrous

material and metallurgy. Available with three standards such as SPCC, SPCD and SPCE. SPCC standard which is used by the industry and donated as specimen in this research consist of material composition such as Carbon (C): 0.15%; Manganese (Mn): 0.60%; Phosphorous (P): 0.05%; Sulphur (S): 0.05% and Iron (Fe): 0.15% with negligible impurities.

With the specimen thickness of 0.65 mm, mechanical properties are such as the minimum yield point is 145 N/mm², minimum tensile strength is 270 N/mm² (MPa) and the elongation of 38%. G3141 cold roll sheet steel is often used as automobiles parts such as front fender and outer side panel. From the visit to one of the automotive manufacturer Shah Alam, the stamping parts are subjected to defect such as scratch and other kind of defects. Polishing process is recently performed manually which is significant and important to remove the defect before it is assemble and paint. The reason is that the defect will clearly appear after painting and to do rework after painting is difficult and expensive compared to loose part before assembly.

1.2 Problem Statement

Numerous techniques exist for surface roughness measurement in polishing. In defect detection, it is preferable to detect the defect and then read the Ga value from the particular defect which is similar in measuring Ra using stylus techniques. Kumar *et al.* (2005) proposed reading the pixel measurement from the image to determine the Ga value and predict the surface roughness of machined metallic surface. Different from defect detection, when the Ga is obtained from the particular defect this will enable the Ga measurement to be more precise rather than taking from the whole image as in machining. Thus for the case involved surface defect, a new algorithm which can detect the location of defect and gather Ga data from the defect is needed to obtain more accurate surface roughness of the defect especially on fine surfaces. The advantage of using gray image processing technique is its reflection of the true image pixels and conserving the original characteristics of the image.

Flat and dry polishing is normally carried out in a factory to overcome surface imperfections or defects before it is transferred to other sections and does not require a mirror finish. Such imperfections cannot be avoided due to dusty environments, machine operations, and handling and transportation of materials. Studies relating to polishing parameter data for this type of polishing have been relatively scanty and there is no study focusing on dry polishing. The study by Torniie et al. (2015) is on the effect of pad surface temperature under dry and wet conditions. However it is related to CMP process. The two types of polishing process that commonly practiced are chemical mechanical polishing (CMP) and mechano chemical polishing (MCP). They mostly focus on glass polishing for optic purposes and wafer industries. There are a number of research studies on CMP (Zantye and Kumar, 2004) and MCP (Chen and Shu, 2003). These kinds of polishing have the same purpose, which is to obtain a mirror finish although carried out on different materials. Realizing the gap in the literature, more research is needed in developing polishing data for dry polishing to enable the polishing data to be automatically predicted using artificial intelligence.

Parameter prediction using artificial intelligence has been widely explored. It is common to come across multi-input single-output (MISO) system for prediction. Furthermore, the data obtained is complete and from known sources. However, it is difficult to perform predictions when the data is incomplete and the subject comes from unknown sources. For example, for defects without complete information and unknown sources, and the only way to obtain the data is by digging the information on the surface or the defect itself. Suhail et al. (2011) have applied MANFIS for machinability data selection for turning operation. Different area of research such as face recognition, smart homes, medical, hydrology, vibration and traffic control have also applied MANFIS with successful result. However every MANFIS structure proposed is different from each one. MANFIS has the ability to perform single-input and multi-output system and multi-input multi-output system. Thus, with different MANFIS structure proposed for this research, there is a need to investigate MANFIS' capability to perform predictions under insufficient parameter data for dry polishing where the output is judged without any specific standards.

1.3 Objective of the Study

The objectives of this research are:

1. To develop a surface defect detection model using mean gray level value (Ga) of images for G3141 Cold Rolled Steel.
2. To identify significant polishing parameters using multiple adaptive neuro fuzzy inference system (MANFIS) using design of experiment for G3141 Cold Rolled Steel.
3. To develop MANFIS structure for polishing parameter optimization of G3141 Cold Rolled Steel.

1.4 Scope of the Study

This research focuses on straight lines defect of G3141 cold rolled sheet steel (SPCC Standard). Surface roughness (Ra) is an important element in this research because it is obtained by using the linear regression model and Ga from the image. The scope of this research is detection of straight line defect or scratch on G3141 cold roll sheet steel and Ra obtained from the surface detection model will be applied for parameter prediction performed by MANFIS. The thickness of the specimen is 0.65mm which focus on flat surface with dry polishing process which is similarly performed at automotive manufacturer in Shah Alam. Experiment of polishing process is performed using Comau 6 DOF industrial robot and programme is written by using teach pendant. This work presents a new prediction approach to the polishing process using design of experiment to obtain polishing data such as grit size, polishing time and polishing force.

1.5 Research Methodology

Based on research flow in Figure 1.1, the research is divided into 3 phases such as early research phase, research and experimental development phase and final phase. Early

research phase is where the fundamental of research begins. In research and experimental development phase the specimen is prepared and the scratch is measured in terms of surface roughness (Ra) with stylus equipment and then the specimen image is captured. At the same time, algorithm for surface defect detection is also developed. For surface defect detection, image processing algorithm is developed to detect the scratch and classify the image using Ga where with the model created the surface roughness is able to be identified. Therefore the surface roughness data should be more or less the same with the stylus ones.

In order to develop the polishing parameter data, the experiment is performed by using full factorial. This is done in polishing parameter development. After the full factorial design is determined, setup is done on Comau robot to performed polishing process experiment based on selected parameter such as grit size, polishing time and polishing force. This is the stage where the polishing parameter data for flat and dry surface for G3141 cold rolled steel is develop. At the same time MANFIS structure is developed by using MATLAB Simulink tools and the polishing parameter data obtained from the experiment is trained by using ANFIS. By using MANFIS, the polishing data were predicted.

In the final phase, result and data are analyzed and discussed to determine whether the objectives of the research are achieved. Conclusion and recommendations are drawn to enables the continuation of the research. The research concluded in the final phase.

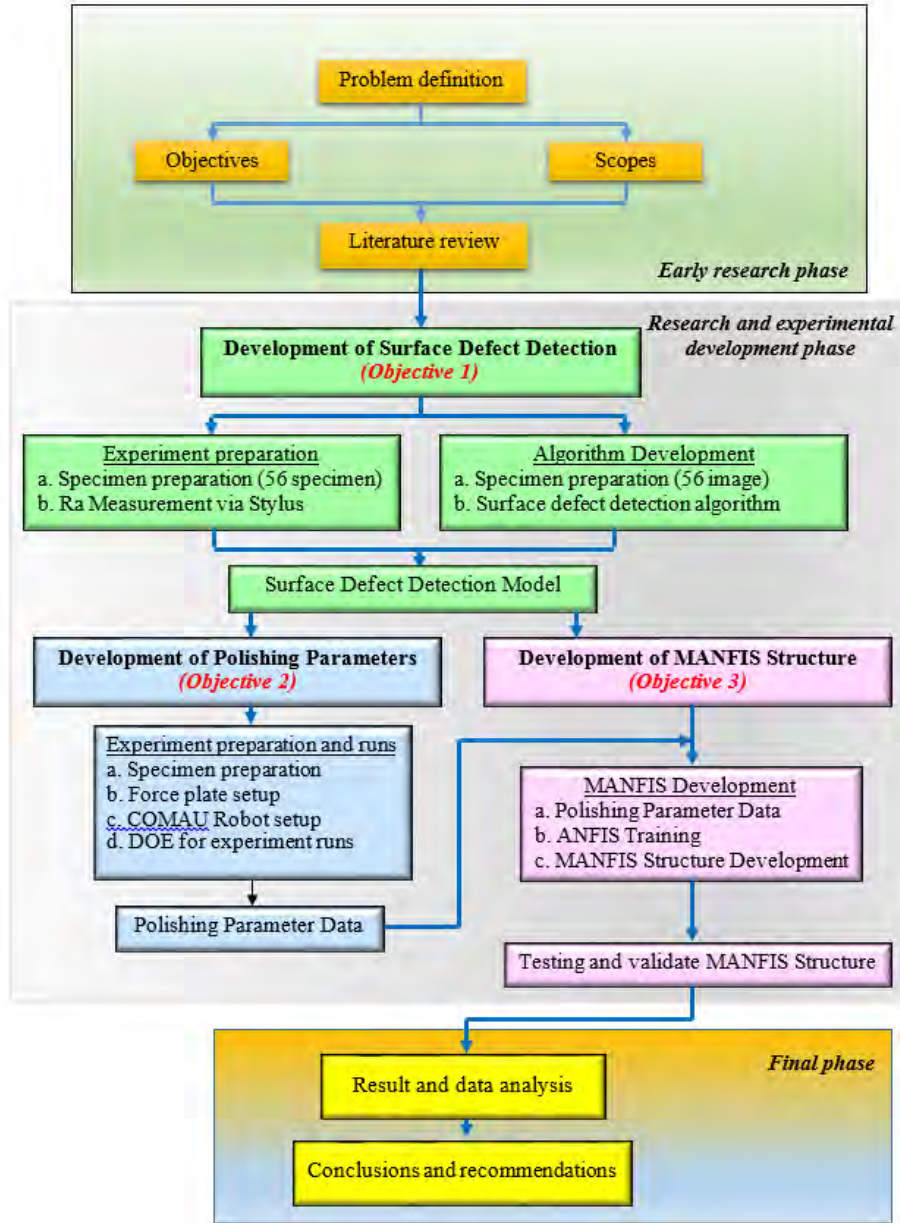


Figure 1.1: Research Methodology Flowchart

1.6 Thesis Outline

This thesis is divided into six chapters. Chapter 1 consists of the background of the research, problem statement, research objectives, and the scope of work. In Chapter 2, the literature review elaborates on surface defect detection and parameter optimization.

It explains the importance of Ga and Ra. The method and strategy used will be discussed in every chapter which include experimental materials and setup details. Chapter 3 discusses the development of the surface defect detection roughness model and the new technique to capture the structure and shape of straight line defects. The model will be tested to determine its accuracy compared to expected measurements. Chapter 4 discusses parameter influence in polishing and interaction and will include the surface roughness model obtained from design of experiment. Chapter 5 includes the advantages and disadvantages of MANFIS, which are trained and tested by the data obtained from the design of experiment method in Chapter 4. Chapter 6 discusses the contribution and conclusion of the research in reference to the research objectives. Suggestions for further research are then offered. Figure 1.2 shows the research flow.

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

The term ‘polish’ by definition is kenneled as the aspect of being smooth and shiny or a highly developed state of perfection; having a flawless or impeccable quality. Whereas the definition of polishing is the work of making something shines by polishing it. Polishing is used for the removal or smoothing-out of grinding lines, scratches, molds marks, pits, tool marks, parting lines and certain other surface defect that adversely affect the appearance or function of a component. According to ISO 8785:1998 Geometrical Product Specifications (GPS) as illustrated in Appendix 1, the term defect, here, refers to surface imperfection which some of it is able to be treated by polishing process. The common defects on metallic surface are divided into four categories: recession, raising, combined surface imperfection, and area imperfection. In this research, only scratch which is classified under recession is investigated from surface defect detection until parameter optimization. Other surface imperfections classified under recession is groove, crack, pore, blowhole, shrinkage hole, fissure, shrink, crevice, wane, buckle, and dent.

Grinding and polishing are two stages of surface finishing that explain for a substantial percentage of the die and mold manufacturing process. In operational sequence, polishing usually follows grinding and precedes buffing. However, in some applications polishing may be employed as the final surface finishing operation. Polishing differs from buffing or lapping primarily in terms of the amount of metal removed. Grinding is normally considered a machining operation because the amount of metal removed is higher compared to polishing. According to Lee et al. (1999) the polishing process of the mold not just influences the last appearance and the nature of the mold, it likewise possesses the aggregate production time and cost up to 40% the vast majority of which are performed by talented specialists utilizing customary systems. The abnormal state of expertise and finesse required has made this a troublesome procedure to mechanize. Clayton et al. (1996) showed that a lot of this trouble emerges because of the absence of information on the impact of the polishing parameters and surface attributes on the subsequent surface unpleasantness, despite some exploratory work has been distributed in this area.

2.2 Abrasive Polishing Technology

The history of abrasive technology began during the middle ages and continued until the industrial revolution. This technology was used for sharpening and polishing of tools, weapons, and armor. Early concepts for this machine appears in the drawing of Leonardo Da Vinci dating from about the year 1500. It took another 300-400 years until some of this machine’s concepts envisioned by Leonardo were put into practice (Malkin and Guo, 2008). Nowadays, an abrasive technology that is rapidly developing is a polishing.