



**Advances in Petroleum Exploration and Development**  
Vol. 8, No. 1, 2014, pp. 49-54  
DOI:10.3968/5398

ISSN 1925-542X [Print]  
ISSN 1925-5438 [Online]  
[www.cscanada.net](http://www.cscanada.net)  
[www.cscanada.org](http://www.cscanada.org)

## Study on Borehole Wall Real-Time Stability of Coal Seam With Coal Cleat When Underbalanced Drilling

CUI Zhihua<sup>[a]\*</sup>; AI Chi<sup>[a]</sup>; FENG Fuping<sup>[a]</sup>; XU Yifan<sup>[b]</sup>; YU Fahao<sup>[a]</sup>; XU Haisu<sup>[a]</sup>

<sup>[a]</sup> Key Laboratory of Education Ministry for Enhanced Oil Recovery, Northeast Petroleum University, Daqing, China.

<sup>[b]</sup> The Second Oil Recovery Factory of Daing Oilfield Co. Ltd, Daqing, China.

\*Corresponding author.

**Supported by** National High Technology Research and Development Program of China (863 Program, No. 2013AA064903); Natural Science Foundation of Heilongjiang Province of China (No.QC2012C021); National Natural Science Foundation of China (No.51274067).

Received 5 August 2014; accepted 21 September 2014

Published online 25 September 2014

### Abstract

Coal seam as the gas productive reservoir and gas-bearing reservoir, it is different from the conventional sandstone reservoir. On the one hand, coal cleat is well-developed in coal seam reservoir. Its characteristics are low porosity, small permeability, large specific surface area, low mechanical strength, strong heterogeneity, low reservoir pressure and so forth. These characteristics determine that drilling has more influence on coal seam reservoir than on conventional sandstone reservoir. In the process of drilling, therefore, in order to reduce or avoid the pollution to coal seam, usually adopt underbalanced drilling way to keep negative differential pressure and to reduce the damage of fluid in borehole flowing into the reservoir. At the same time, when underbalanced drilling, formation fluid flows into the borehole, leading to the formation pressure near the borehole to change. On the other hand, due to coal seam with low mechanical strength, great brittleness, and well-developed coal cleat, in the process of drilling especially underbalanced drilling, borehole wall is prone to collapse. Coal cleat exists in the coal

seam and affects its mechanical property. When studying coal seam borehole wall stability, coal cleat must be considered. Considering time effect, the paper established the borehole wall stability model of coal seam with coal cleat when underbalanced drilling, obtained the collapse pressure distribution, and analyzed influence factors of coal seam borehole wall stability, providing theoretical guidance to prevent borehole wall instability.


**Key words:** Coal seam; Underbalanced drilling; Negative differential pressure; Borehole wall stability; Coal cleat

Cui, Z. H., Ai, C., Feng, F. P., Xu, Y. F., Yu, F. H., & Xu, H. S. (2014). Study on borehole wall real-time stability of coal seam with coal cleat when underbalanced drilling. *Advances in Petroleum Exploration and Development*, 8(1), 49-54. Available from: URL: <http://www.cscanada.net/index.php/aped/article/view/5398> DOI: <http://dx.doi.org/10.3968/5398>

### 1. THE MODEL OF COAL SEAM BOREHOLE WALL INSTABILITY


Two groups of approximately vertical coal cleats exist in coal seam. Face cleats develop better and extend up to hundreds of meters. Butt cleats develop between face cleats and communicate face cleats. Cleats cut the coal into small discontinuous cubes and destroy the coal seam integrity<sup>[1-2]</sup>. It is easy to slip and collapse along the cleat surface (Figure 1).

Coal lump ① sandwiched between two face cleats is most likely to collapse<sup>[3]</sup>. The stress analysis for coal lump ① is shown in Figure 2.

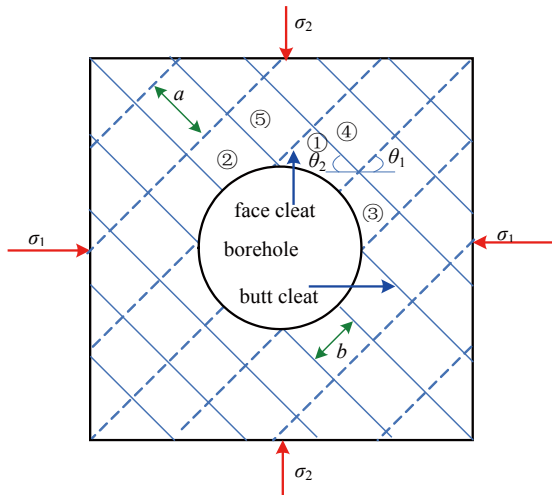

$\theta_1$  is the inclination angle of face cleat.  $\theta_2$  is the inclination angle of butt cleat.  $\sigma_1$  is the maximum horizontal in-situ stress.  $\sigma_2$  is the minimum horizontal in-situ stress.  $a$  is the space between face cleats.  $b$  is the space between butt cleats.

**Figure 1**  
**Discretization Model of Coal Seam**

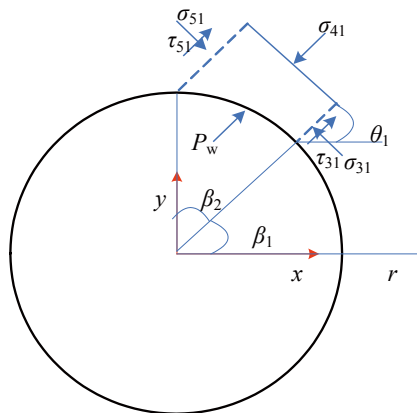

$\beta_1$  is the polar angle at the right side of coal lump ①.  $\beta_2$  is the polar angle difference between the left and right side of coal lump ①.  $\sigma_{31}$  is the compressive stress on contact surface between coal lump ① and ③.  $\tau_{31}$  is the shear stress on contact surface between coal lump ① and ③.  $\sigma_{41}$  is the compressive stress on contact surface between coal lump ① and ④.  $\tau_{41}$  is the shear stress on contact surface between coal lump ① and ④.  $\sigma_{51}$  is the compressive stress on contact surface between coal lump ① and ⑤.  $\tau_{51}$  is the shear stress on contact surface between coal lump ① and ⑤.

**Figure 2**  
**Stress Analysis of Coal Lump ①**

## 2. THE BOREHOLE WALL REAL-TIME STABILITY MODEL OF COAL SEAM WITH COAL CLEAT WHEN UNDERBALANCED DRILLING

Because coal seam gas reservoir usually adopts underbalanced drilling method<sup>[4]</sup>, there is a negative differential pressure between borehole pressure and formation pressure. Under the action of negative

differential pressure, formation fluid flows into the borehole when drilling, leading to the formation pressure near the borehole to change<sup>[5]</sup>. According to the theory of porous elastic medium mechanics, the effective stress at distance  $r$  from the center of borehole is:

$$\begin{cases} \sigma_r = \frac{r_0^2}{r^2} P_w + \frac{(\sigma_1 + \sigma_2)}{2} \left(1 - \frac{r_0^2}{r^2}\right) + \frac{(\sigma_1 - \sigma_2)}{2} \left(1 + \frac{3r_0^4}{r^4} - \frac{4r_0^2}{r^2}\right) \cos 2\theta - \alpha P(r, t) + \delta \left[ \frac{\alpha(1-2\nu)}{2(1-\nu)} \left(1 - \frac{r_0^2}{r^2}\right) - \phi \right] (P_w - P_r) \\ \sigma_\theta = -\frac{r_0^2}{r^2} P_w + \frac{(\sigma_1 + \sigma_2)}{2} \left(1 + \frac{r_0^2}{r^2}\right) - \frac{(\sigma_1 - \sigma_2)}{2} \left(1 + \frac{3r_0^4}{r^4}\right) \cos 2\theta - \alpha P(r, t) + \delta \left[ \frac{\alpha(1-2\nu)}{2(1-\nu)} \left(1 - \frac{r_0^2}{r^2}\right) - \phi \right] (P_w - P_r) \\ \tau_{r\theta} = -\frac{(\sigma_1 - \sigma_2)}{2} \left(1 - \frac{3r_0^4}{r^4} + \frac{2r_0^2}{r^2}\right) \sin 2\theta \end{cases} \quad (1)$$

Where,  $\sigma_r$ ,  $\sigma_\theta$  and  $\tau_{r\theta}$  are respectively for the radial stress, circumferential stress and shear stress, MPa;  $r_0$  is the borehole radius, mm;  $P_w$  is fluid column pressure, MPa;  $\alpha$  is the effective stress coefficient;  $\phi$  is the porosity;  $\nu$  is the Poisson ratio of coal seam;  $\delta$  is the permeability coefficient,  $\delta = 1$  when borehole wall is permeable,  $\delta = 0$  when borehole wall is impermeable;  $P(r, t)$  is the pore pressure at the distance  $r$  from the center of borehole at the time  $t$ .

Basic differential equation of unstable planar radial flow:

$$\frac{\partial^2 P_p}{\partial r^2} + \frac{1}{r} \frac{\partial P_p}{\partial r} = \frac{1}{\eta} \frac{\partial P_p}{\partial t} \quad (2)$$

Where,

$$\eta = \frac{K}{\mu \phi C} \quad (3)$$

According to the empirical formula:

$$C = \frac{2.587 \times 10^{-4}}{\phi^{0.4358}} \quad (4)$$

The initial condition:

$$P(r, 0) = P_p \quad (5)$$

The inner boundary condition:

$$P(0, t) = P_w \quad (6)$$

The outer boundary condition:

$$\lim_{r \rightarrow \infty} P(r, t) = P_p \quad (7)$$

Where,  $r$  is the distance from the center of borehole;  $\phi$  is the porosity;  $K$  is the permeability;  $\mu$  is the fluid viscosity;  $C$  is the fluid compressible coefficient.

According to the initial condition, boundary conditions and basic differential equation:

$$\begin{aligned} P(r, t) &= P_p - (P_p - P_w) e^{-\frac{r^2}{4\eta t}} \\ &\left[ e^{-\frac{\eta t}{4r^2}} \operatorname{erfc} \left( \frac{r}{2\sqrt{\eta t}} \right) + \frac{1}{4r^2} \int_0^{\eta t} e^{-\frac{\xi}{4r^2}} \operatorname{erfc} \left( \frac{r}{2\sqrt{\xi}} \right) d\xi \right] \end{aligned} \quad (8)$$

Where,  $\operatorname{erfc}(x)$  is Gaussian Error Function, which is an elementary function,  $\operatorname{erfc}(x) = 2/\sqrt{\pi} \cdot \int_0^x e^{-t^2} dt$ .

Taking the direction of  $\sigma_1$  and  $\sigma_2$  respectively as the direction of axis  $x$  and  $y$ , the stress components in rectangular coordinate system can be obtained by the stress components in polar coordinate:

$$\begin{cases} \sigma_x = \frac{\sigma_r + \sigma_\theta}{2} + \frac{\sigma_r - \sigma_\theta}{2} \cos 2\theta - \tau_{r\theta} \sin 2\theta \\ \sigma_y = \frac{\sigma_r + \sigma_\theta}{2} - \frac{\sigma_r - \sigma_\theta}{2} \cos 2\theta + \tau_{r\theta} \sin 2\theta \\ \tau_{xy} = \frac{\sigma_r - \sigma_\theta}{2} \sin 2\theta + \tau_{r\theta} \cos 2\theta \end{cases} \quad (9)$$

According to Formula (9),  $\sigma_{31}$ ,  $\sigma_{51}$  and  $\sigma_{41}$  can be expressed as:

$$\sigma_{51} \text{ or } \sigma_{31} = \sigma_y \cos^2 \theta_1 + \sigma_x \sin^2 \theta_1 - \tau_{xy} \sin 2\theta_1 \quad (10)$$

$$\sigma_{41} = \sigma_y \cos^2 \theta_2 + \sigma_x \sin^2 \theta_2 + \tau_{xy} \sin 2\theta_2 \quad (11)$$

When the coal lump ① collapses, the shear stress is equal to the maximum static friction force:

$$\begin{cases} \tau_{31} = \tan \varphi_m (\sigma_{31} - p_w) \\ \tau_{51} = \tan \varphi_m (\sigma_{51} - p_w) \end{cases} \quad (12)$$

Where,  $\varphi_m$  is the friction angle of face cleat, ( $^\circ$ ).

Because the borehole size is far greater than the cleat space<sup>[6]</sup>, the stress at the centre of contact surface can replace the average stress on the contact surface. Thus,  $\sigma_{41}$  is equal to the stress at the centre of contact surface between coal lump ① and ④:

$$\begin{cases} \sigma_{41} \approx c_{41} p_w + f_1(\sigma_1, \sigma_2, a, b, \theta_1, \theta_2, \beta_1, r_0) \\ c_{41} = \left(\frac{r_0}{r_{41}}\right)^2 (\cos^2 \theta_{41} - \sin^2 \theta_{41}) \sin^2 \theta_2 + \left(\frac{r_0}{r_{41}}\right)^2 \cdot \\ \left(\sin^2 \theta_{41} - \cos^2 \theta_{41}\right) \cos^2 \theta_2 + \left(\frac{r_0}{r_{41}}\right)^2 \sin 2\theta_{41} \sin 2\theta_2 \\ r_{41} = r_i + b \\ \theta_{41} = \beta_1 + \frac{a}{2r_i} \end{cases} \quad (13)$$

In Formula (13), the function  $f_1$  can be obtained by Formula (11) combined with the Formula (1) and (9).

In the same way,

$$\begin{cases} \sigma_{31} \approx c_{31} p_w + f_2(\sigma_1, \sigma_2, a, b, \theta_1, \theta_2, \beta_1, r_0) \\ c_{31} = \left(\frac{r_0}{r_{31}}\right)^2 (\cos^2 \theta_{31} - \sin^2 \theta_{31}) \sin^2 \theta_1 + \left(\frac{r_0}{r_{31}}\right)^2 \cdot \\ \left(\sin^2 \theta_{31} - \cos^2 \theta_{31}\right) \cos^2 \theta_1 - \left(\frac{r_0}{r_{31}}\right)^2 \sin 2\theta_{31} \sin 2\theta_1 \\ r_{31} = r_i + b/2 \\ \theta_{31} = \beta_1 \end{cases} \quad (14)$$

$$\begin{cases} \sigma_{51} \approx c_{51} p_w + f_3(\sigma_1, \sigma_2, a, b, \theta_1, \theta_2, \beta_1, r_0) \\ c_{51} = \left(\frac{r_0}{r_{51}}\right)^2 (\cos^2 \theta_{51} - \sin^2 \theta_{51}) \sin^2 \theta_1 + \left(\frac{r_0}{r_{51}}\right)^2 \cdot \\ \left(\sin^2 \theta_{51} - \cos^2 \theta_{51}\right) \cos^2 \theta_1 - \left(\frac{r_0}{r_{51}}\right)^2 \sin 2\theta_{51} \sin 2\theta_1 \\ r_{51} = r_i + b/2 \\ \theta_{51} = \beta_1 + a/r_i \end{cases} \quad (15)$$

In Formula (14) and (15), the function  $f_2$  and  $f_3$  can be obtained by Formula (10) combined with the Formula (1) and (9).

According to the equilibrium of radial force, the premise condition for coal lump not collapsing is:

$$(\sigma_{41} - p_w)a - (\tau_{31} + \tau_{51} + 2C_m)b \leq aS_{td} \quad (16)$$

Where,  $C_m$  is the cohesion of face cleat, MPa;  $S_{td}$  is the tensile strength of butt cleat, MPa.

Inserting Formula (12), Formula (13) - Formula (15) in Formula (16), collapse pressure  $p_c$  should satisfy:

$$\begin{aligned} (a - ac_{41} + b \tan \varphi_m c_{31} - 2b \tan \varphi_m + b \tan \varphi_m c_{51}) p_c \\ = cp_c \geq af_1' - 2bC_m - b \tan \varphi_m f_2 - b \tan \varphi_m f_3 - aS_{td} \end{aligned} \quad (17)$$

The borehole wall stability coefficient  $c$  is related to face cleat space, butt cleat space, the friction angle of face cleat, the location of coal lump and so on. And the value will determine the relationship between borehole pressure and borehole wall stability.

If  $c$  is positive everywhere in the borehole, the safe mud pressure should be greater than the maximum  $p_c$ . If  $c$  is negative everywhere in the borehole, the safe mud pressure should be less than the minimum  $p_c$ . If there are both positive and negative for  $c$ ,  $p_c$  is shown in Formula (18). In this case, it not only needs to adjust the density of drilling fluid, but also use drilling fluid with plugging performance to improve the resistance to pressure of formation. The location of the negative maximum  $c$  would be sensitive and prior to collapse.


$$p_c (c > 0, |c|_{\max}) \leq p_i \leq p_c (c < 0, |c|_{\max}) \quad (18)$$

### 3. INFLUENCE STUDY OF BOREHOLE WALL REAL-TIME STABILITY OF COAL SEAM WITH COAL CLEAT WHEN UNDERBALANCED DRILLING

With Qinduan block in Qinshui basin, China as an example<sup>[7]</sup>, the basic calculation parameters: the bit diameter in coal seam  $\varnothing 215.9$  mm, the coal seam depth 795 m, the minimum horizontal in-situ stress 11 MPa, the maximum horizontal in-situ stress 17 MPa, the initial formation pressure  $P_p$  5 MPa, elastic modulus  $E$  24.5 GPa, Poisson ratio  $\mu$  0.24, the porosity  $\varphi$  4%, the cohesion of face cleat  $C_m$  1.03 MPa, the friction angle of face cleat  $\varphi_m$   $33^\circ$ , the tensile strength of butt cleat  $S_t$  1.4 MPa, the inclination angle of face cleat  $\theta_1$   $55^\circ$ , the inclination angle of butt cleat  $\theta_2$   $35^\circ$ .

#### 3.1 Time Effect

According to Formula (8), formation pressure  $P_p$  at coal lump ① changed over time, as shown in Figure 3.

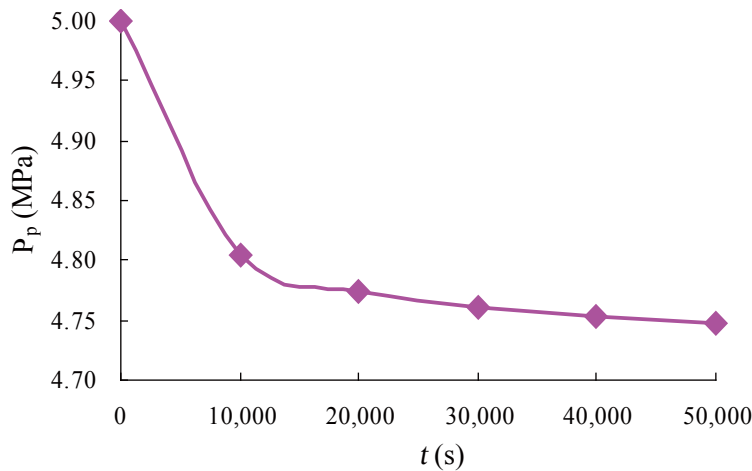


**Figure 3**  
The Change of Formation Pressure at Coal Piece ①

Adopt the method in the paper to calculate the distribution of the borehole wall stability coefficient  $c$  around the borehole wall when  $a = 4b$  and  $\Delta P = 0.3$  MPa, as shown in Figure 4. From Figure 4, when  $\beta_1$  was at the

interval of  $25^\circ - 36^\circ$  and  $74^\circ - 85^\circ$ ,  $c$  was close to 0. It implied that at the location, the borehole wall stability had nothing to do with borehole pressure, thus:

$$p_c|_{\beta_1=0^\circ} \leq p_t \leq p_c|_{\beta_1=55^\circ} \quad (19)$$

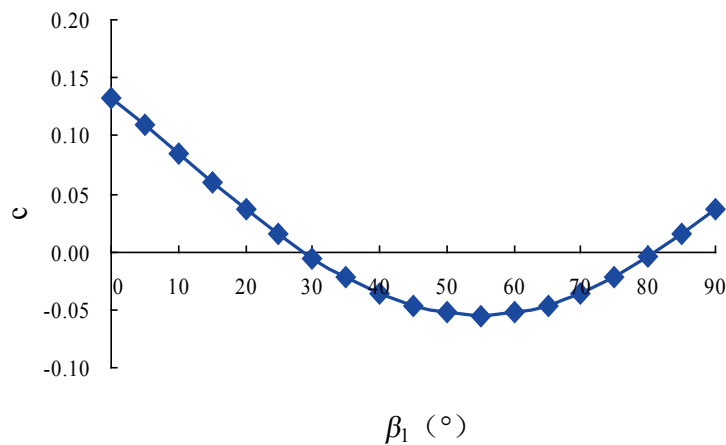

**Figure 4**  
The Distribution of Borehole Wall Stability Coefficient  $c$  Around the Borehole Wall When  $a = 4b$  and  $\Delta P = 0.3$  MPa

**Table 1**  
The Change of Collapse Pressure Over Time When  $a = 4b$  and  $\Delta P = 0.3$  MPa

| $t$ (s) | Collapse pressure (MPa) |       |
|---------|-------------------------|-------|
| 0       | $\beta_1 = 0^\circ$     | 0.307 |
|         | $\beta_1 = 55^\circ$    | 2.761 |
| 10,000  | $\beta_1 = 0^\circ$     | 0.313 |
|         | $\beta_1 = 55^\circ$    | 2.775 |
| 20,000  | $\beta_1 = 0^\circ$     | 0.314 |
|         | $\beta_1 = 55^\circ$    | 2.777 |
| 30,000  | $\beta_1 = 0^\circ$     | 0.314 |
|         | $\beta_1 = 55^\circ$    | 2.778 |
| 40,000  | $\beta_1 = 0^\circ$     | 0.314 |
|         | $\beta_1 = 55^\circ$    | 2.778 |
| 50,000  | $\beta_1 = 0^\circ$     | 0.314 |
|         | $\beta_1 = 55^\circ$    | 2.778 |

From Figure 3, with the fluid flowing into borehole, the pore pressure near borehole would be less than 0.5 MPa. From Table 1, after drilling the borehole, the collapse pressure increased with time gradually. That was to say, the change of pore pressure may lead to borehole wall instability after drilling the borehole.


### 3.2 The Influence of Negative Differential Pressure

Adopt the method in the paper to calculate the distribution of the borehole wall stability coefficient  $c$  around the borehole wall when  $t = 0$  and  $a = 4b$ , as shown in Table 2.


**Table 2**  
**The Collapse Pressure When  $t = 0$  and  $a = 4b$**

|     | Negative differential pressure (MPa) | Collapse pressure (MPa) |
|-----|--------------------------------------|-------------------------|
| 0.1 | $\beta_1 = 0^\circ$                  | 0.314                   |
|     | $\beta_1 = 55^\circ$                 | 2.777                   |
| 0.3 | $\beta_1 = 0^\circ$                  | 0.307                   |
|     | $\beta_1 = 55^\circ$                 | 2.761                   |
| 0.5 | $\beta_1 = 0^\circ$                  | 0.300                   |
|     | $\beta_1 = 55^\circ$                 | 2.745                   |

**3.3 The Influence of Cleat Size**

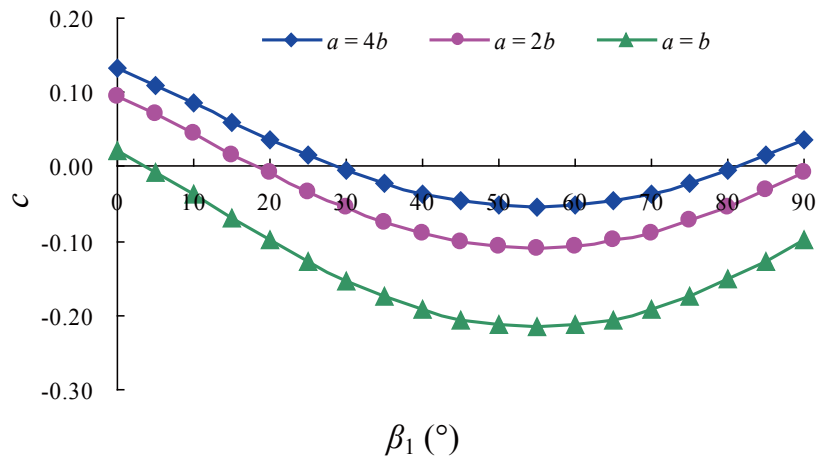

**Figure 5**  
**The Distribution of Borehole Wall Stability Coefficient  $c$  Around the Borehole Wall**

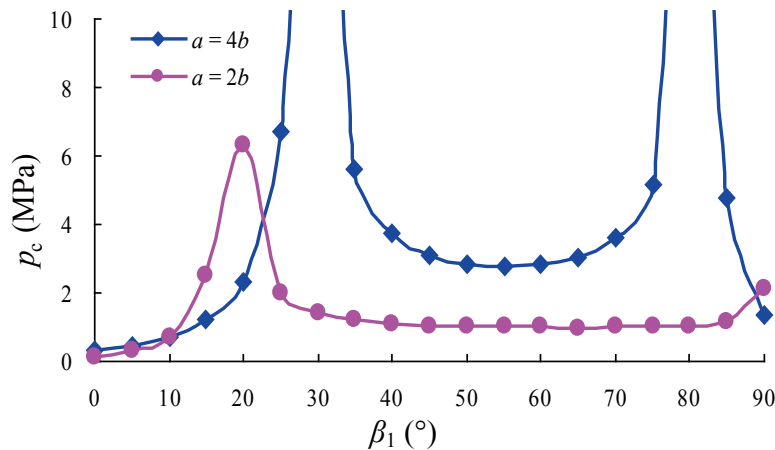

**Figure 6**  
**The Collapse Pressure When  $t = 0$  and  $\Delta P = 0.3$  MPa**

The distribution of the borehole wall stability coefficient  $c$  around the borehole wall when  $t = 0$  and  $\Delta P = 0.3$  MPa was shown in Figure 5. From Figure 5, when  $a = b$ , borehole wall stability coefficient  $c$  near  $\beta_1 = 0^\circ$  was 0. Namely at the location, borehole wall stability had nothing to do with borehole pressure. At other locations, borehole wall stability coefficient  $c$  was negative. In the case, the collapse pressure should be less than the minimum  $p_c$ . When  $a = 4b$  and  $a = 2b$ , there were both positive and negative for borehole wall stability coefficient  $c$ . The collapse pressure calculation result was shown in Figure 6. Table 3 was shown for the collapse pressure calculation result when  $t = 0$  and  $\Delta P = 0.3$  MPa.

**Table 3**  
**The Collapse Pressure When  $t = 0$  and  $\Delta P = 0.3$  MPa**

|          | Cleat size           | Collapse pressure (MPa) |
|----------|----------------------|-------------------------|
| $a = 4b$ | $\beta_1 = 0^\circ$  | 0.307                   |
|          | $\beta_1 = 55^\circ$ | 2.761                   |
| $a = 2b$ | $\beta_1 = 0^\circ$  | 0.116                   |
|          | $\beta_1 = 55^\circ$ | 1.008                   |
| $a = b$  | $\beta_1 = 55^\circ$ | 0.103                   |

**CONCLUSION**

(a) After drilling the borehole, with formation fluid flowing into the borehole, pore pressure near borehole

would decrease and collapse pressure would increase gradually. It may lead to borehole wall instability.

(b) The greater negative differential pressure, the smaller collapse pressure. Thus maintaining a certain negative differential pressure is beneficial to the borehole wall stability.

(c) The cleat size has great influence on borehole wall stability. The greater  $a/b$ , the greater collapse pressure at the sensitive location, and the more easily borehole wall collapse. It needs to use drilling fluid with plugging performance and adjust the density of drilling fluid to avoid borehole wall instability.

---

## REFERENCES

---

- [1] Chen, M., Zhao H. F., Jin, Y., Ding, Y. H., & Wang, Y. H. (2013). A discontinuous medium mechanics model for the sidewall stability predict of coal beds. *Acta Petrolei Sinica*, 1(34), 145-150.
- [2] Shen, R. C., Qu, P., & Yang, H. L. (2010). Advancement and development of coal bed wellbore stability technology. *Petroleum Drilling Techniques*, 20(3), 1-7.
- [3] Yang, L. W., Sun, M. Y., Hu, A. M., & Pan, J. (2002). New technology series favorable to develop coal bed methane reservoirs. *Acta Petrolei Sinica*, 23(4), 46-50.
- [4] Liang, D. C., Po, X. L., & Xu, X. H. (2002). Particularity of coal collapse and drilling fluid countermeasure. *Journal of Southwest Petroleum Institute*, 24(6), 25-27.
- [5] Qu, P., Shen, R. C., Yang, H. L., Li J. C., & Dong, S. W. (2009). Evaluation model of wellbore stability in coal seam. *Acta Petrolei Sinica*, 30(3), 455-459.
- [6] Zhang Z., Tang, C. A., Li, L. C., & Ma, T. H. (2006). Numerical investigation on stability of wellbore during coal bed gas mining process. *China Mining Magazine*, 15(9), 55-58.
- [7] Zhang, G. S., Li, Y. K., Yin, J. L., Tang, W. Y., Cui, J. B., & Cheng, H. (2010). Prediction of collapse pressure for CBM wells in Qinshui CBM fields. *Oil Drilling & Production Technology*, 32(4), 96-98.