

---

This is the accepted manuscript version of the article

---

# Methodology for optimal energy system design of Zero Energy Buildings using mixed-integer linear programming

Lindberg, K. B., Doorman, G., Fischer, D., Korpås, M., Ånestad, A., & Sartori, I.

Citation for the published version (APA 6th)

Lindberg, K. B., Doorman, G., Fischer, D., Korpås, M., Ånestad, A., & Sartori, I. (2016). Methodology for optimal energy system design of Zero Energy Buildings using mixed-integer linear programming. *Energy and Buildings*, 127(Supplement C), 194-205.  
doi:<https://doi.org/10.1016/j.enbuild.2016.05.039>

---

This is accepted manuscript version.  
It may contain differences from the journal's pdf version.

This file was downloaded from SINTEFs Open Archive, the institutional repository at SINTEF  
<http://brage.bibsys.no/sintef>

# Methodology for optimal energy system design of Zero Energy Buildings using mixed-integer linear programming

Karen Byskov Lindberg<sup>a,b,c\*</sup>, Gerard Doorman<sup>a,d</sup>, David Fischer<sup>c,e</sup>, Magnus Korpås<sup>a</sup>, Astrid Ånestad<sup>a</sup>, Igor Sartori<sup>f</sup>

<sup>a</sup> Department of Electric Power Engineering, Norwegian University of Science and Technology (NTNU), N-7491 Trondheim, Norway

<sup>b</sup> Norwegian Water Resources and Energy Directorate (NVE), PO Box 5091, Majorstua, N-0301 Oslo, Norway

<sup>c</sup> Department of Smart grids, Fraunhofer Institute for Solar Energy Systems ISE, DE-79110 Freiburg, Germany

<sup>d</sup> Statnett SF, PB 4904 Nydalen, N-0484 Oslo, Norway

<sup>e</sup> Kungliga Tekniska Högskolan (KTH), Stockholm, Sweden

<sup>f</sup> SINTEF Building and Infrastructure, Oslo, Norway

\*corresponding author: [karen.lindberg@ntnu.no](mailto:karen.lindberg@ntnu.no), mobile: +47 99604272

## Highlights

- The cost-optimal choice of energy technologies in a ZEB is determined
- Simultaneous optimisation of investments and hourly operation is performed
- How policies influence the energy technology choice, can be investigated
- By dividing the lifetime into periods, future changes are taken into account
- The ZEB's grid interaction is analysed through the hourly net electric load profile

## Abstract

According to EU's Energy Performance of Buildings Directive (EPBD), all new buildings shall be nearly Zero Energy Buildings (ZEB) from 2018/2020. How the ZEB requirement is defined have large implications for the choice of energy technology when considering both cost and environmental issues. This paper presents a methodology for determining ZEB buildings' cost optimal energy system design seen from the building owner's perspective. The added value of this work is the inclusion of peak load tariffs and feed-in-tariffs, the facilitation of load shifting by use of a thermal storage, along with the integrated optimisation of the investment and operation of the energy technologies. The model allows for detailed understanding of the hourly operation of the building, and how the ZEB interacts with the electricity grid through the characteristics of its net electric load profile. The modelling framework can be adapted to fit individual countries' ZEB definitions. The findings are important for policy makers as they identify how subsidies and EPBD's regulations influence the preferred energy technology choice, which subsequently determines its grid interaction. A case study of a Norwegian school building shows that the heat technology is altered from HP to bio boiler when the ZEB requirement is applied.

**Keywords:** mixed-integer linear optimisation (MILP), cost-optimality, zero energy building (ZEB), load profiles, weighting factors, grid interaction, self-consumption, demand side management (DSM), storage, feed-in-tariffs (FiT), PV, solar thermal

## 37 **1 Introduction**

38 The recast of the EU Directive on Energy Performance of Buildings (EPBD) states that all new buildings  
39 are to be nearly Zero Energy Buildings<sup>1</sup> (ZEB) from 2018/2020 [1]. The definition of nearly ZEBs in the  
40 EPBD states that “*a nearly zero-energy building means a building that has a very high energy*  
41 *performance. The nearly zero or very low amount of energy required should be covered to a very*  
42 *significant extent by energy from renewable sources, including energy from renewable sources produced*  
43 *on-site or nearby*” [2]. Generally speaking a nearly ZEB is an energy efficient building with low energy  
44 demand that to a high extent is covered by on-site generated renewable energy [3]–[5]. Because ZEBs  
45 need on-site energy generation in order to compensate for their energy use, they will inevitably become an  
46 active and integrated part of the energy system.

47 Even though the EPBD sets a definition framework, each of the EU member states shall define their own  
48 boundary conditions, weighting factors and ambition level when calculating the zero energy balance, due  
49 to differences in climate, culture & building tradition, policy and legal frameworks. As of April 2015,  
50 about half of the member states of the EU have accomplished this, and about 5 of the 28 states have  
51 chosen to use carbon emissions as weighting factors, thus aiming at Zero Emission Buildings<sup>2</sup>, rather than  
52 Zero Energy Buildings [6]. Accordingly, a Zero Emission Building is essentially the same as a Zero  
53 Energy Building, the only difference is that the balance is calculated by using carbon emissions instead of  
54 energy units (see more in Section 1.1). Whenever using ZEB in the following it embraces both Zero  
55 Energy and Zero Emission Buildings.

56 The balance of a ZEB is calculated as energy consumed minus energy generated over a year or over the  
57 total lifetime of the building. However, the building still exchanges electricity with the grid on an hourly  
58 or minute basis, as the instantaneous on-site generation may not always correspond with the load. As  
59 electric energy must be consumed the instant it is produced, on-site electricity generation from photo  
60 voltaic (PV) solar cells, lead to situations where the building is exporting electricity to the grid. Such  
61 electric energy generating buildings are also denoted as prosumers, which imports electricity in some  
62 hours and exports electricity in other hours.

### 63 **1.1 Definition of ZEB**

64 A significant effort was made from 2008-2013 to define what ZEBs are, especially through the IEA Solar  
65 Heating and Cooling Programme Task 40 “Net Zero Energy Solar Buildings” (IEA SHC Task 40) [7].  
66 One of the issues addressed was whether export of electricity should equalise import of natural gas or bio  
67 energy, when calculating the zero energy balance. Or should they be weighted according to their energy  
68 quality? Today, all member states use weighting factors, either primary energy factors (PE), in  $\text{kWh}_{\text{PE}} /$   
69  $\text{kWh}_f$ , or carbon factors, in  $\text{g}_{\text{CO}_2\text{-eq}} / \text{kWh}_f$ , which differs for each energy carrier,  $f$ , when calculating the  
70 ZEB balance. PE also have different versions; non-renewable PE and total PE, and additionally symmetric  
71 and asymmetric PE factors for electricity. As each member state is free to decide these factors, they differ  
72 slightly from country to country, however indicative values of non-renewable PE and total PE factors for  
73 European conditions are published in the EPBD [1].

---

<sup>1</sup> The notation net ZEB, or nZEB, is also commonly used in order to highlight that the balance is calculated on an hourly or monthly level, because the ZEB target is on an annual or lifetime level. In the following of this paper, whenever using ZEB this means net ZEB.

<sup>2</sup> Zero Emission Buildings are also denoted as Zero Carbon Buildings.

74 Within the work of IEA SHC Task 40, several case studies of both simulated and monitored ZEBs were  
75 performed. Noris et al. [8] analyse six ZEB buildings in four European countries, investigating the  
76 possibility of reaching the ZEB target by varying the weighting factor for calculating the ZEB balance.  
77 The findings show that regardless of using carbon or PE factors, bio energy is the preferred heat  
78 technology, as it has the lowest weighting factor in almost all European countries. The only exemption is  
79 the Danish PE factors, which favours heat pumps and district heating over bio energy. The paper  
80 concludes, without considering costs, that the chosen weighting factors have a large impact on the  
81 preferred heat technology within the building, which again influences the demanded PV area and the  
82 building's interaction with the electricity grid.

### 83 **1.2 Grid indicators**

84 The initial experience from the first ZEB pilot projects showed that reaching the zero balance is possible,  
85 and in almost all cases on-site PV generation is an inevitable part of the solution [8]–[11]. With PV as the  
86 main way of reaching the ZEB target, the building exports electricity to the grid in summer, and imports  
87 electricity in winter. This may lead to challenges for the grid depending on the capacity and conditions of  
88 the feeders and the transformers in the local distribution grid [12]. In order to evaluate the effect of the  
89 import/export situation on the grid, various grid indicators have been proposed and investigated [10]–[11],  
90 [13]. Salom et al. [10] conclude that a representation of net exported electricity in load duration curves is  
91 useful for showing maximum import and export values together with the amount of annual exported and  
92 imported electricity, especially when comparing different ZEBs. Further, it is stated that hourly time  
93 resolution is sufficient to capture the correlation between on-site demand and supply of energy.

### 94 **1.3 Optimisation of ZEBs**

95 When designing a ZEB, several aspects need to be taken into account, e.g. building physics, technical  
96 systems and their costs on the one hand, and the operation of the building, including energy prices and  
97 grid tariffs on the other. The complexity of this task has led to the development of several optimisation  
98 models which have;

- 99 1. Different *objectives*, such as maximising thermal comfort, or minimising costs or  
100 emissions. Mostly, multi-objective optimisation models have been developed.
- 101 2. Different *constraints*, such as emissions or thermal comfort
- 102 3. Different *modelling approaches*, such as simulating several different alternatives and  
103 weighting the energy performance, thermal performance and/or cost performance of the  
104 different cases in order to select the “best” cases occurring along a pareto front line, or  
105 using optimisation modelling, like LP or MILP, with one objective.
- 106 4. Different *time resolution*. The level of detail varies from minute to hourly simulations.
- 107 5. The *scope* of investigation is often either focused on optimal building design, or optimal  
108 operation.

109 The initial experience with ZEB pilot projects and case studies identified a trade-off between reducing  
110 energy demand vs. generation of on-site energy, when cost is considered [14]. As a consequence, different  
111 methodologies and tools for optimisation of building design occurred. Huws et al. [15] and Hamdy et al.  
112 [16] use multi-objective optimisation by stepwise varying different design parameters. Huws finds the  
113 optimal design by comparing emission vs. cost, cost vs. discomfort, and discomfort vs. emissions, and

114 determines the heat and renewable energy (RES) technologies within the building after the building design  
115 is concluded. Hamdy also separates the optimisation into different stages, where the first stage minimises  
116 heat demand and life cycle costs (LCC) of the building envelope. This leads to selected cases that lie on  
117 the pareto front for thermal demand vs. costs. In the second step, operation costs are calculated for each of  
118 the cases from step 1 when simulating four different heating and cooling systems. In the third and last  
119 step, ways of improving the costs and the energy consumption in step 2 are investigated by adding on-site  
120 renewable energy generation (solar thermal collectors and/or PV). In both Huws and Hamdy, the outcome  
121 depends on the weighting factors between their objectives; emissions, costs, discomfort and heat demand,  
122 and thus it may be difficult to draw clear conclusions. Lu [17] also optimises the energy system by a  
123 multi-objective function by minimising costs, emissions and grid interaction, but again the outcome  
124 depends on the weighting factors between the three. The operation of the building is simulated in both  
125 Hamdy, Huws and Lu while varying different design parameters, which might not reflect the cost-optimal  
126 operation of the building.

127 The optimal operation of buildings for a given design have been investigated in various studies (see e.g.  
128 [12], [18]–[22]). Especially with the introduction of on-site energy generation different control algorithms  
129 are developed, however in these studies, the energy technologies (choice and size) and the design of the  
130 building are treated as given, which means that the system may be over or under dimensioned according to  
131 what is economically profitable.

132 This paper aims at finding the optimal investment decision of the energy technologies when taking into  
133 account an optimal hourly operation of the energy system. Investment decisions for buildings can entail  
134 many details and contradictory objective functions [23]. Models that both optimise investment decisions  
135 and operation, are mostly found in energy system modelling tools such as TIMES [24], Balmorel [25] and  
136 ReMod [26], which optimise the whole energy system from a macroeconomic perspective. Similar  
137 modelling approaches are also found in Korpås et al. [27] and Slungård et al. [28]. Korpås study an  
138 integrated wind-hydrogen power system with co-optimisation of investments and operation using  
139 deterministic LP, and Slungård developed a deterministic dynamic programming tool to determine the  
140 optimal choice and size of heat technologies in a district heating grid.

141 On a building level, to our knowledge, only Milan et al. [29] have developed a similar LP optimisation  
142 tool for a ZEB building, with hourly time resolution and which take the building energy loads as input.  
143 However, the number of technologies implemented is limited, and the size of the heat storage tank is  
144 predefined to fit the standard size of a Danish single-family home, and is not a freedom of choice. Hence,  
145 larger buildings, such as multi-family houses (MFH) or non-residential buildings, are not addressed.

#### 146 **1.4 The aim of this study**

147 The focus of this work is to develop a mixed-integer linear modelling (MILP) framework to identify the  
148 cost-optimal choice and dimensioning of energy technologies for ZEBs, while simultaneously optimising  
149 the operation of the building. The framework is designed to investigate how the solution is influenced by  
150 the weighting factors (both choice and value of the factors), as well as the ZEB level and economic  
151 parameters. Moreover, it is possible to evaluate the effect of policy incentives, such as feed-in-tariffs and  
152 investment subsidies, on the building owner's choice of energy technologies for ZEB buildings. Naturally,  
153 the various energy technologies interacts with the power system in different ways, and the model  
154 facilitates the evaluation of this interaction for the optimal solution. This is done through selected grid

155 indicators proposed in Section 3, e.g. load duration curves of the hourly net electricity load, and self-  
156 consumption of on-site electricity generation (see also Section 1.2).

157 Previous experience showed that when using a multi-objective approach by minimising both emissions  
158 and costs, the outcome is dependent on the weighting between them. Giving higher value to minimisation  
159 of emissions lead to unreasonable large capacity investments, because cost is of less importance, in order  
160 to avoid emissions in a few hours [30]. In the current work, it is therefore decided to use a single objective  
161 function, minimising the total discounted costs while posing restrictions on the weighted energy consumed  
162 by the building. This approach leads to a clear outcome of the results and is consistent with the optimal  
163 operation of the building with the given energy prices. The design of the building is predetermined, and  
164 thereby treating the energy loads as input. In contrast to already existing literature, the model developed  
165 also determines the optimal sizing of the heat storage tank and contains mixed-integer variables.

166 This paper gives a thorough description of the developed mixed-integer linear deterministic optimisation  
167 model, while leaving in-depth case studies for coming papers. The model structure captures the whole  
168 lifetime of the building, and incorporates effect of parameters<sup>3</sup> that might change in future by dividing the  
169 lifetime into periods. The integrated optimisation of the investment and operation strongly connects the  
170 investment decision with the operational outcome as well as the influence of support schemes, which can  
171 be included in the model. Thus, it is possible to analyse how different assumptions on e.g. various  
172 subsidies, feed-in tariffs, market prices, energy indicators and ZEB ambition level (nearly or strictly  
173 ZEB?) change the optimal energy solutions of the building.

174 The hourly time resolution of the operation of the building's energy system ensures an optimal utilisation  
175 of the heat storage and the on-site renewable energy generation. Optimal utilisation of the heat storage  
176 indirectly facilitates demand side management (DSM) as it enables the optimal way to shift the heat loads  
177 according to market conditions. The hourly time resolution also enables investigation of the building's  
178 grid interaction in detail for the different cases.

179 This paper is structured as follows. In Section 2, the methodology of the model is presented. The sub-  
180 models of the energy technologies are presented in Section 2.2, and the objective function is described in  
181 Section 2.3. Section 2.4 explains the main restrictions, including the hourly heat and electricity balances,  
182 and the lifetime ZEB balance. Section 3 presents the criteria selected for assessing the ZEB building's  
183 interaction with the power grid. Examples of model results are given in Section 4 based on a case study of  
184 a Norwegian school building. The most important assumptions of the model framework are discussed in  
185 Section 5, before making concluding remarks in Section 6.

## Nomenclature

### Sets

$I^{\text{heat}}$  Heat technologies, subset of  $I$ ,  $I^{\text{heat}} = \{\text{ST, ASHP, GSHP, EB, BB, DH, GB, CHP}\}$

$I^{\text{el}}$  Power technologies, subset of  $I$ ,  $I^{\text{el}} = \{\text{PV, CHP}\}$

$I$  All energy technologies,  $I = I^{\text{el}} \cup I^{\text{heat}}$

<sup>3</sup> As the lifetime of a building can be up to 60 years, it is possible to divide the lifetime into three periods, each containing 20 years. Thus, e.g. the weighting factor for electricity can be set lower with more renewable electricity, and the FiTPV can be reduced or even removed in the second and third period.

$F$  Energy carriers,  $F = \{\text{el import, el export, bio pellets, natural gas, district heat}\}$

### Indexes

$p$  period  
 $\tau$  year within period,  $\tau = 1, \dots, N$   
 $t$  time step within year,  $t = 1, \dots, T$   
 $i$  energy technology  
 $f$  energy carrier  
 $m$  month within year,  $m = 1, \dots, 12$   
 $k$  reinvestment number

### Parameters

$C_i^{\text{tot spec}}$  Discounted specific investment costs, including reinvestments, for technology  $i$  [EUR/kW]  
 $C_i^{\text{tot fixed}}$  Discounted fixed investment costs, including reinvestments, for technology  $i$  [EUR]  
 $C_i^{\text{am}}$  Annual maintenance costs for energy technology  $i$  [EUR/kW per year],  
 $\Phi_i$  Expected lifetime of energy technology  $i$  [years]  
 $D_{t,p}^{\text{el}}$  Electricity demand of building, at hour  $t$  within an average year in period  $p$  [kWh/hr]  
 $D_{t,p}^{\text{heat}}$  Heat demand of building, at hour  $t$ , in period  $p$  [kWh/hr]  
 $P_{t,p}^{\text{buy,D}}$  Price of electricity bought from the grid at hour  $t$ , in period  $p$  [EUR/kWh]  
 $P_{t,p}^{\text{buy,HP}}$  Price of electricity bought from the grid at hour  $t$ , in period  $p$  [EUR/kWh]  
 $P_{t,p}^{\text{sell,PV}}$  Feed-in-tariff of PV electricity exported to the grid at hour  $t$ , in period  $p$  [EUR/kWh];  
 $P_{t,p}^{\text{sell,CHP}}$  Feed-in-tariff of CHP electricity exported to the grid at hour  $t$ , in period  $p$  [EUR/kWh];  
 $P_p^{\text{bio}}$  Price of bio pellets in period  $p$  [EUR/kWh];  
 $P_p^{\text{gas}}$  Price of natural gas in in period  $p$  [EUR/kWh];  
 $r$  Discount rate [-]  
 $\eta_i$  Efficiency of technology  $i$  [-]  
 $\eta_{i,t,p}$  Efficiency of technology  $i$ , at hour  $t$ , in period  $p$  [-]  
 $\text{COP}_{i,t,p}$  Coefficient of performance of technology  $i$ , at hour  $t$ , in period  $p$  [-]  
 $Y_{\text{PV},t,p}$  Specific PV electricity generation, at hour  $t$ , in period  $p$  [kW/kWp]  
 $Q_{\text{ST},t,p}$  Specific solar heat generation, at hour  $t$ , in period  $p$  [kW/m<sup>2</sup>]  
 $G_{f,p}$  Carbon emissions for energy carrier  $f$ , in period  $p$  [gCO<sub>2</sub>-eq/kWh]  
 $\text{PE}_{f,p}$  Primary Energy Factor for energy carrier  $f$ , in period  $p$  [kWh<sub>PE</sub>/kWh]  
 $\text{PE}^{\text{embodied}}, \text{G}^{\text{embodied}}$  Weighted embodied energy (PE or carbon) [kWh<sub>PE</sub> OR gCO<sub>2</sub>-eq]

$PE^{ref}, G^{ref}$	Weighted energy imports (PE or carbon) without ZEB restriction [kWh <sub>PE</sub> or gCO <sub>2</sub> -eq]
GRCH	Annual grid charge [EUR]
PPCH <sub><i>m</i></sub>	Peak power charge, for each month <i>m</i> [EUR/kW]
$H_m^{acc}$	Hour number of the last hour, for each month <i>m</i> [-]
$T_{t,p}^{SH}$	Temperature of water for space heating demand, at hour <i>t</i> , in period <i>p</i> [°C]
$T_{t,p}^{DHW}$	Temperature required for DHW, at hour <i>t</i> , in period <i>p</i> [°C]
$T_{t,p}^{source}$	Temperature of the heat source for HPs (ambient air temperature for ASHP, and ground temperature for GSHP) [°C]
$T_{t,p}^{collector}$	Temperature within the ST collector (assumed equal to storage temperature) [°C]
$T_{t,p}^{amb}$	Ambient air temperature [°C]
$IRR_{t,p}^{tilt}$	Global irradiation on a tilted plane at hour <i>t</i> , in period <i>p</i> [W/m <sup>2</sup> ]
$\gamma$	Factor for ZEB level [-]

### Variables

$x_i$	Installed capacity of technology <i>i</i> [kW]
$c_p^{run}$	Annual operational cost, for a typical year in period <i>p</i> [EUR/yr]
$q_{i,t,p}$	Heat generated by technology <i>i</i> , at hour <i>t</i> , for a typical year in period <i>p</i> [kWh/hr]
$d_{i,t,p}$	Electricity consumed by technology <i>i</i> , at hour <i>t</i> , for a typical year in period <i>p</i> [kWh/hr]
$b_{t,p}$	Bio pellets consumed in BB at hour <i>t</i> , for a typical year in period <i>p</i> [kWh/hr]
$g_{t,p}^{CHP}$	Natural gas consumed in CHP at hour <i>t</i> , for a typical year in period <i>p</i> [kWh/hr]
$g_{t,p}^{GB}$	Natural gas consumed in GB at hour <i>t</i> , for a typical year in period <i>p</i> [kWh/hr]
$S_{t,p}$	Heat stored in accumulator tank (S) at end of hour <i>t</i> , in period <i>p</i> [kWh/hr]
$y_{i,t,p}$	Electricity generated by technology <i>i</i> , at hour <i>t</i> , for a typical year in period <i>p</i> [kWh/hr]
$y_{i,t,p}^{exp}$	Electricity exported to the grid, from technology <i>i</i> , at hour <i>t</i> , in period <i>p</i> [kWh/hr]
$y_{i,t,p}^{selfcD}$	Electricity consumed in the building, from technology <i>i</i> , at hour <i>t</i> , in period <i>p</i> [kWh/hr]
$y_{i,t,p}^{selfcHP}$	Electricity consumed in HPs, from technology <i>i</i> , at hour <i>t</i> , in period <i>p</i> [kWh/hr]
$y_{t,p}^{impD}$	Electricity imported from the grid, at hour <i>t</i> , for a typical year in period <i>p</i> [kWh/hr]
$y_{t,p}^{impHP}$	Electricity imported from the grid to HP, at hour <i>t</i> , for a typical year in period <i>p</i> [kWh/hr]
$\delta_{t,p}^{exp}$	Binary variable, 1 if electricity is exported from the building, 0 if import



$\delta_{t,p}^{\text{imp}}$	Binary variable, 0 if electricity is exported from the building, 1 if import
$y_{m,p}^{\text{maximp}}$	Monthly maximum electricity import value, for each month $m$ , in period $p$ [kWh/hr]

186

FiT	Feed-in tariff
Electric specific demand	Demand of electricity services (lighting, fans&pumps, appliances, etc.)
Heat demand	Demand of heat services (space heating and domestic hot water demand)
Electricity consumption	Consumption of electricity, including electricity for heating purposes (if any)

187

## 188 2 Optimisation model

189 This paper investigates cost-optimal solutions for ZEBs for different energy indicators with a financial  
 190 perspective. For this purpose, a dynamic deterministic mixed-integer linear optimisation model (MILP) is  
 191 developed which optimises both the investments (technology choice and size), and the operation of the  
 192 energy technologies simultaneously. This model is presented in the following.

### 193 2.1 System Description

194 Figure 1 illustrates the energy technologies and energy flows that are implemented in the model, where  
 195 solid and minor dashed arrows indicate the hourly flows of respectively electricity and heat within the  
 196 building. The ZEB balance is achieved on the life cycle as embodied energy is included (see Section  
 197 2.4.4).

198 The energy technologies available are a micro combined heat and power unit (CHP), gas boiler (GB),  
 199 district heat exchanger (DH), bio pellets boiler (BB), air source heat pump (ASHP), ground source heat  
 200 pump (GSHP), electric top-up coil (EB), solar thermal collectors (ST), photovoltaic modules (PV) and a  
 201 heat storage (S). The availability of a heat storage makes the system capable of shifting the heat  
 202 generation to when it is economically profitable, while still being able to cover the heat demand at a later  
 203 or earlier stage.

204 The selection of energy technologies to be implemented in the model is made on grounds of common  
 205 available energy sources and energy technologies in European countries, and is inspired by the first  
 206 experiences from the ZEB pilot projects in the IEA SHC Task 40 [7], [8], [10]. It is assumed that the  
 207 building is attached to the electricity grid, and depending on the geographical situation, a natural gas grid  
 208 and district heating grid may also be present. Even though natural gas is a fossil energy carrier, CHP and  
 209 gas boilers was installed in some of the ZEB pilot projects [8], and it is of interest to study the effect of  
 210 using natural gas on the ZEB balance of the building. Bio energy and heat pumps are seen as key  
 211 technologies to lower Europe's climate emissions, especially as the electricity grid is expected to become  
 212 greener in future [31], [32]. In general, energy systems require a technology for providing base load  
 213 capacity and peak load capacity. Both the electric top-up coil and the gas boiler may serve as peak load  
 214 technologies. For the building to become a ZEB, it needs onsite renewable energy generation. ST  
 215 collectors and PV panels are the two technologies that may provide the building with this.

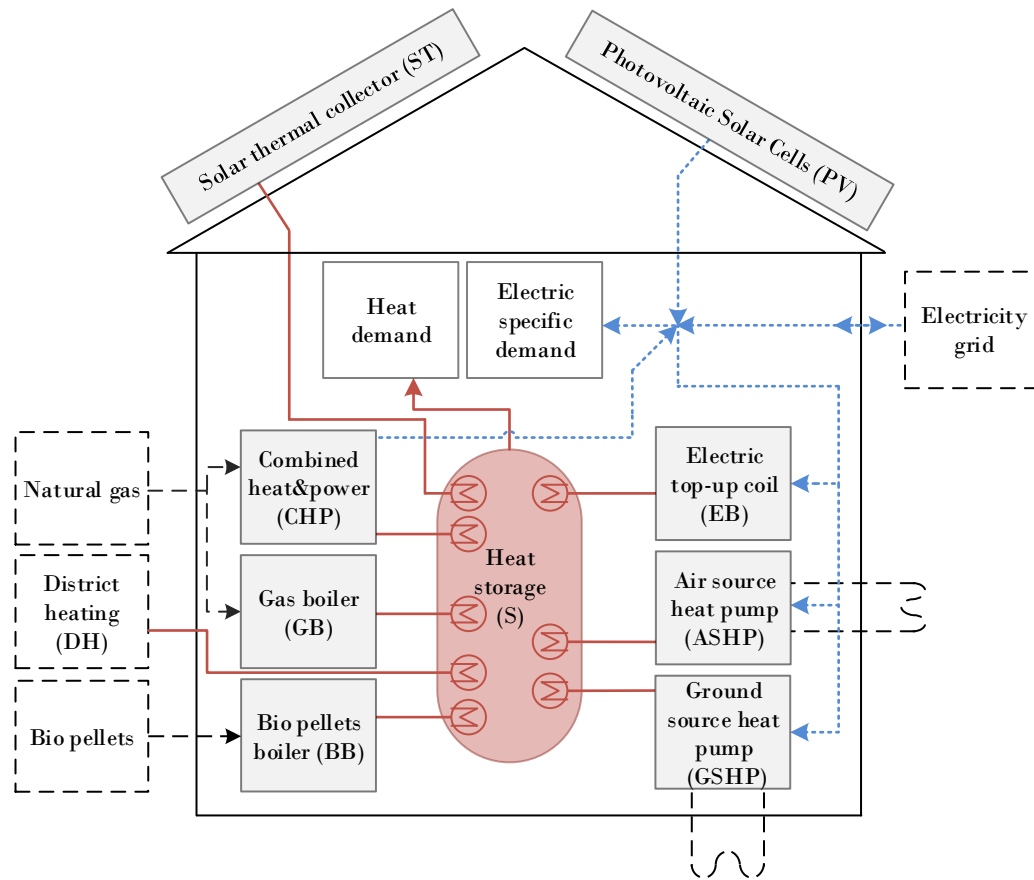


Figure 1 System scheme and energy flows of the building; heat flows (red solid lines) and electricity flows (dotted blue lines).

216

## 217 2.2 Modelling of energy technologies

218 The installed capacity of the heat pumps (HP), pellets boiler, gas boiler and the micro CHP unit are semi-  
 219 continuous variables. Hence, the technology is either invested, or not, and if invested, a minimum required  
 220 capacity has to be installed. In real life, technology costs are dependent on size, as larger units often have  
 221 lower specific costs (EUR/kW) than smaller units. The integer formulation of minimum installed capacity  
 222 is important when specific technology costs are assumed constant (EUR/kW). Without it, the model would  
 223 choose to install in several different technologies, some with a very small capacity. As end-users tend to  
 224 invest in one base load technology and one peak load, and not a variety of technologies, we are able to  
 225 correct for this. The operation of the heat technologies, is also semi-continuous, this explains it can either  
 226 be shut down, and if operating they must generate heat above a minimum capacity level (approximately 30  
 227 % of minimum installed capacity). The only exception is the solar thermal system, which naturally  
 228 operates whenever the sun shines. The model is implemented in the optimisation modelling tool MOSEL  
 229 Xpress provided by FICO systems [33].

### 230 2.2.1 Building's Energy Loads

231 Hourly heat and electricity demand of the building are given as input to the model as time series of heat,  
 232  $D_{t,p}^{\text{heat}}$ , and electricity,  $D_{t,p}^{\text{el}}$ , varying by hour,  $t$ , and period,  $p$ . The heat demand is the sum of domestic  
 233 hot water demand (DHW) and space heating demand (SH), whereas electric specific demand includes  
 234 electricity for electric appliances, lighting, fans & pumps and for cooling machines. The energy loads can

235 be provided from either building simulation models, or from statistical models based on energy  
 236 measurements of buildings (see e.g. [34], [35], [36]).

### 237 2.2.2 Constant efficiency for boilers and CHP

238 The CHP, and the gas, electric and bio boilers are modelled with a constant efficiency. Because the  
 239 efficiency varies with the load, this is a simplification to keep the model linear. In order to compensate for  
 240 this, the minimum operating capacity is set to 30 % of the installed capacity. This means, that the heat  
 241 generated from the heat technologies,  $q_{i,t,p}$ , is modelled as a semi-continuous variable being either 0 or  
 242 going from 30 % of the installed capacity,  $x_i$ . The exemption is the electric boiler, which mostly have the  
 243 same efficiency regardless of part load, and is thus assumed to have a continuous heat generation variable,  
 244  $q_{EB,t,p}$ .

245 Equation (1) reflects the energy balances for each of the boilers: gas boiler, bio boiler and electric boiler.

$$246 \quad q_{GB,t,p} = g_{t,p}^{GB} \cdot \eta_{GB} \quad , \quad q_{BB,t,p} = b_{t,p} \cdot \eta_{BB} \quad , \quad q_{EB,t,p} = d_{EB,t,p} \cdot \eta_{EB} \quad \forall t, p \quad [kWh] \quad (1)$$

247 The CHP is modelled with two efficiencies, one for heat generation and one for electricity generation,  
 248 similar to the approach in [26] and [37]. This means that when the model decides to generate one unit of  
 249 electricity from the CHP,  $\eta_{CHPheat} / \eta_{CHPel}$  units of heat are simultaneously generated. Similarly, if the  
 250 model decides to generate one unit of heat,  $\eta_{CHPel} / \eta_{CHPheat}$  units of electricity are generated.

$$251 \quad q_{CHP,t,p} = g_{t,p}^{CHP} \cdot \eta_{CHPheat} \quad , \quad y_{CHP,t,p} = g_{t,p}^{CHP} \cdot \eta_{CHPel} \quad \forall t, p \quad [kWh] \quad (2)$$

### 252 2.2.3 Variable efficiency for air source and ground source heat pumps

253 The conversion efficiency of electricity into heat (COP) of a heat pump is dependent on the heat source  
 254 temperature, in this case air or ground temperature, and the supply temperature, which is the temperature  
 255 of the accumulator tank. The latter is approximated by weighing the required energy demand with its set-  
 256 point temperature. In the model, the heat demand of the building is treated as the sum of the domestic hot  
 257 water demand (DHW) and the space heating demand (SH), on the assumption that they are supplied by a  
 258 stratified storage tank. The supply temperature for the domestic hot water is assumed constant throughout  
 259 the year. The supply temperature of the space heating, however, is dependent on the outdoor temperature  
 260 and determined according to a heating curve, which is dependent on the heat distribution technology used  
 261 (see examples in Figure 2).

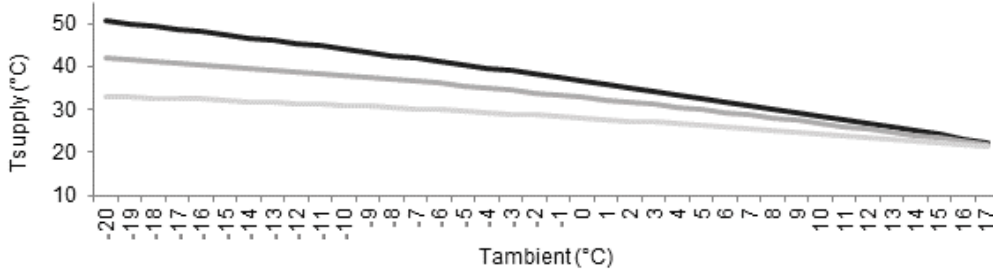


Figure 2 Heating curve. (supply temperature for space heating vs. outdoor temperature).

262

263 The COP of the heat pump is represented by a polynomial based on a fit of manufacturer's data presented  
 264 in [38]. The coefficients  $k_0$  to  $k_3$  are dependent on the technology used, and thereby respecting the  
 265 characteristics of either the ground source heat pump (GSHP), where  $T_{t,p}^{\text{source}}$  is the ground temperature, or  
 266 the air source heat pump (ASHP), where  $T_{t,p}^{\text{source}}$  is the same outdoor temperature used for creating the  
 267 building's heat demand,  $D_{t,p}^{\text{heat}}$  (see Section 2.2.1).

$$\text{COP}_{t,p} = k_0 - k_1 (T_{t,p}^{\text{supply}} - T_{t,p}^{\text{source}}) + k_2 (T_{t,p}^{\text{supply}} - T_{t,p}^{\text{source}})^2 \quad \forall t, p \quad [-]$$

where  $T_{t,p}^{\text{supply}} = T^{\text{DHW}}$  for DHW (3)

$T_{t,p}^{\text{supply}} = T^{\text{SH}}$  for SH

268

269 The heat storage is modelled as a single node, serving both DHW and SH demand. Thus, the average COP  
 270 of the heat pump when delivering to the whole tank is assumed to be a weighted average of the COP for  
 271 DHW and for SH as described in Eq.(4), where  $D_{t,p}^{\text{DHW}}$  is the demand of hot water, and  $D_{t,p}^{\text{SH}}$  the demand  
 272 for space heating.

$$\text{COP}_{t,p} = \frac{D_{t,p}^{\text{DHW}} \text{COP}_{t,p}^{\text{DHW}} + D_{t,p}^{\text{SH}} \text{COP}_{t,p}^{\text{SH}}}{D_{t,p}^{\text{heat}}} \quad \forall t, p \quad [-] \quad (4)$$

273

274 Equation (5) reflects that the heat generated from the ASHP,  $q_{\text{ASHP},t,p}$ , equals the electricity consumed,  
 275  $d_{\text{ASHP},t,p}$ , multiplied by the COP. Similarly, the energy balance for the GSHP is given in Eq.(5). Notice  
 276 that the COP changes by hour as the supply temperature and temperature of the source also varies by hour.

$$q_{\text{ASHP},t,p} = d_{\text{ASHP},t,p} \cdot \text{COP}_{t,p}^{\text{ASHP}} \quad , \quad q_{\text{GSHP},t,p} = d_{\text{GSHP},t,p} \cdot \text{COP}_{t,p}^{\text{GSHP}} \quad \forall t, p \quad [kWh] \quad (5)$$

277

#### 278 2.2.4 District heating

279 District heating is modelled with a constant efficiency, reflected in Eq. (6).

$$q_{DH,t,p} = DH_{t,p} \cdot \eta_{DH} \quad \forall t, p \quad [kWh] \quad (6)$$

### 280 2.2.5 Storage

281 The energy balance of the storage is equal to the heat balance of the total heat system of the building  
282 shown in Eq. (17), which incorporates the heat losses of the storage.

283 In order to make the optimal solution independent of the final storage content, the storage is required to  
284 contain the same amount of heat at the start ( $t = 0$ ) and at the end ( $t = T$ ) of the year. See Eq. (7).

$$s_{0,p} = s_{T,p} \quad \forall p \quad [kWh / hr] \quad (7)$$

285

### 286 2.2.6 Solar energy - PV and solar thermal collectors

287 The efficiency of the flat plate solar thermal collector (ST) is represented by a polynomial (see eq. (8))  
288 where the constants are determined by laboratory experiments in [39]. The total irradiation on the tilted  
289 plane,  $IRR^{\text{tilt}}$ , varies hourly and is calculated according to Quaschnig [40] with the same climatic  
290 conditions as when calculating the building's energy loads in Section 2.2.1. The temperature within the  
291 solar thermal collector,  $T_{t,p}^{\text{collector}}$ , must be determined exogenously. As Eq. (8) shows, a higher value of the  
292 temperature from the collector decreases the module efficiency. Thus, an assumption of e.g. 30°C of the  
293 collector temperature will give an optimistic value for the efficiency of the ST.

$$\eta_{ST,t,p} = c_0 - c_1 \frac{T_{t,p}^{\text{collector}} - T_{t,p}^{\text{amb}}}{IRR_{t,p}^{\text{tilt}}} - c_2 \frac{(T_{t,p}^{\text{collector}} - T_{t,p}^{\text{amb}})^2}{IRR_{t,p}^{\text{tilt}}} \quad \forall t, p \quad [-] \quad (8)$$

294 The input time series of ST heat generation,  $Q_{ST,t,p}$ , in Eq. (9) is equal to the total irradiation on the tilted  
295 plane,  $IRR_{t,p}^{\text{tilt}}$ , multiplied with the collector efficiency,  $\eta_{ST,t,p}$ . The utilised ST heat,  $q_{ST,t,p}$ , within the  
296 building can be either equal to or lower than the actual ST heat generation, which is necessary if heat  
297 demand is low and the storage tank is full at the time of ST heat generation.

$$Q_{ST,t,p} = IRR_{t,p}^{\text{tilt}} \cdot \eta_{ST,t,p} \quad \forall t, p \quad [kWh / m_{\text{collector}}^2] \quad (9)$$

$$q_{ST,t,p} \leq Q_{ST,t,p} \cdot x_{ST} \quad \forall t, p \quad [kWh] \quad (10)$$

298

299 The PV electricity generation,  $Y_{PV,t,p}$ , in Eq.(11), is found by using the same irradiation on the tilted  
300 surface as described above for ST. The efficiency of the PV module and the inverter is calculated based on  
301 a methodology proposed by Huld et al. [41] which takes cell temperature and module type into account, in  
302 addition to solar irradiation and outdoor temperature.

$$Y_{PV,t,p} = IRR_{t,p}^{\text{tilt}} \cdot \eta(IRR_{t,p}^{\text{tilt}}, T_{t,p}^{\text{amb}})_{PV,t,p} \quad \forall t, p \quad [kWh / kWp] \quad (11)$$

$$y_{PV,t,p} = Y_{PV,t,p} \cdot x_{PV} \quad \forall t, p \quad [kWh] \quad (12)$$

### 303 2.3 Objective function

304 This section presents the objective function which minimises total costs, while posing restrictions on the  
305 emissions or primary energy consumed.

306 A single objective function is used, which minimises discounted investment and operational costs over the  
307 total lifetime of the building. The lifetime of the building may be divided into periods,  $p$ , where the  
308 model is run for a representative year within each period. Hence, the total lifetime of the building equals  
309 the total number of periods,  $P$ , multiplied by the number of years within each period,  $N$ .

310 Equation (13) shows the objective function which sums the discounted investment costs (fixed [EUR] and  
311 specific [EUR/kW]), for each technology,  $i$ , and the total discounted annual operational costs. Starting  
312 from the right in Eq. (13), the annual operational costs,  $c_p^{\text{totrun}}$ , for a representative year in a period,  $p$ ,  
313 are discounted and summed for all years,  $\tau$ , within the period. Next, the operational costs for each period  
314 are discounted for all periods.

$$\min \pi = \sum_{i \in I} (C_i^{\text{tot-spec}} x_i + C_i^{\text{tot-fixed}}) + \sum_{p=1}^P \frac{1}{(1+r)^{(p-1) \cdot N(p)}} \cdot \sum_{\tau=1}^N \frac{c_p^{\text{totrun}}}{(1+r)^\tau} \quad [EUR] \quad (13)$$

315 The lifetime adjusted specific investment costs,  $C_i^{\text{tot-spec}}$ , are found for each technology,  $i$ , on the basis of  
316 its expected lifetime,  $\Phi_i$ , as shown in Eq.(14), where  $C_i^{\text{spec}}$  is the investment cost [EUR/kW], and  
317  $\left( \frac{P \cdot N(p)}{\Phi_i} - 1 \right)$  is the number of reinvestments,  $k$ , needed throughout the lifetime of the building. As an  
318 example, if the total lifetime of the building is 40, the number of reinvestments of an ASHP with an  
319 expected lifetime of 20 years equals  $\frac{40}{20} - 1 = 1$ , and the salvage value is zero.

$$C_i^{\text{tot-spec}} = \sum_{k=0}^{\left( \frac{P \cdot N(p)}{\Phi_i} - 1 \right)} \frac{C_i^{\text{spec}}}{(1+r)^{k \cdot \Phi_i}} - Z^{\text{salvage}} \quad [EUR / kW] \quad (14)$$

$$C_i^{\text{tot-fixed}} = \sum_{k=0}^{\left( \frac{P \cdot N(p)}{\Phi_i} - 1 \right)} \frac{C_i^{\text{fixed}}}{(1+r)^{k \cdot \Phi_i}} - Z^{\text{salvage}} \quad [EUR] \quad (15)$$

320

321 Equation (16) reflects that the annual operational costs for a representative year within each period,  
322  $c_p^{\text{totrun}}$ , equals the cost of energy imports in all hours,  $t$ , which is the price for each energy carrier,  $P_{t,p}^f$ ,  
323 multiplied by the amount of electricity,  $y_{t,p}^{\text{imp}}$ , bio pellets,  $b_{t,p}$ , or natural gas,  $g_{t,p}$ , consumed. Notice that  
324 in some countries, electricity used for heat pumps,  $y_{t,p}^{\text{impHP}}$ , has a lower tariff than normal electricity

325 consumption, and is thus specified separately. In the second line, the cost of self-consumption of on-site  
 326 electricity generation ( $P_{t,p}^{\text{selfc}} \cdot y_{t,p}^{\text{selfc}}$ ) is added, and in the third line, the income of electricity sold to the  
 327 grid is subtracted ( $P_{t,p}^{\text{sell}} \cdot y_{t,p}^{\text{exp}}$ ). The last line presents the fixed annual maintenance cost for each  
 328 technology,  $C_i^{\text{am}} \cdot x_i$ , and two special taxes of the electricity grid, where  $\text{PPCH}_m$  reflects the monthly  
 329 peak power charge (see more in Section 2.4.3) and  $\text{GRT}$  the annual grid charge.

$$\begin{aligned}
 c_p^{\text{totrun}} = & \sum_{t \in T} \left( P_{t,p}^{\text{buy,D}} y_{t,p}^{\text{impD}} + P_{t,p}^{\text{buy,HP}} y_{t,p}^{\text{impHP}} + P_p^{\text{bio}} b_{t,p} + P_p^{\text{gas}} (g_{t,p}^{\text{GB}} + g_{t,p}^{\text{CHP}}) \right) \\
 & + P_{t,p}^{\text{selfc}} \left( (y_{t,p}^{\text{PVselfc\_D}} + y_{t,p}^{\text{PVselfc\_HP}}) + y_{t,p}^{\text{CHPselfc}} \right) \\
 & - \left( P_{t,p}^{\text{sell,PV}} y_{t,p}^{\text{PVexp}} + P_{t,p}^{\text{sell,CHP}} y_{t,p}^{\text{CHPexp}} \right) \\
 & + \sum_{i \in I} C_i^{\text{am}} x_i + \sum_{m \in M} \text{PPCH}_m y_{m,p}^{\text{maximp}} + \text{GRCH}
 \end{aligned} \tag{16}$$

$\forall p \quad [EUR / \text{year}]$

330  
 331 The model can easily be adapted to investigate conditions in countries where there is no peak power  
 332 charge, or fee for self-consumption by letting them be zero. Further, if no feed-in-tariffs are present, the  
 333  $P_{t,p}^{\text{sell,PV}}$  and  $P_{t,p}^{\text{sell,CHP}}$  are replaced with the spot price in the electricity market.

334 This means that both the investment problem and the operation problem are solved at the same time. In  
 335 other words, the least cost solution for the operation of the building with the optimal technologies and  
 336 their sizing is found.

## 337 2.4 Restrictions

338 The optimal solution is found according to a set of constraints that cannot be violated. The technology  
 339 restrictions were elaborated on in Section 2.2. This section presents the constraints reflecting the hourly  
 340 heat and electricity balance and the lifetime ZEB balance of the building. Additional restrictions, such as  
 341 grid tariffs and maximum available façade area, are also explained.

### 342 2.4.1 Heat balance

343 For each hour, the heat demand of the building has to be met. Equation (17) reflects the heat balance  
 344 where the sum of heat generated from all heat technologies,  $q_{i,t,p}$ , added the content of the storage at the  
 345 beginning of hour  $t$ , must equal the heat demand of the building,  $D_{t,p}^{\text{heat}}$ , plus the energy content of the  
 346 storage at the end of hour  $t$ ,  $S_{t,p}$ . Notice that the content of the storage at the beginning of the hour  
 347 equals the content of the storage at the end of the previous hour,  $S_{t-1,p}$ , multiplied with an efficiency  
 348 factor,  $\eta_S$ .

$$\sum_{i \in J^{\text{heat}}} q_{i,t,p} + \eta_S \cdot S_{t-1,p} = D_{t,p}^{\text{heat}} + S_{t,p} \quad \forall t, p \tag{17}$$

349

350 2.4.2 Electricity balance

351 Similar as for heat, the electricity demand of the building,  $D_{t,p}^{el}$ , must be met every hour. Figure 3  
 352 illustrates the four electricity balance equations, where Node I reflects that the electricity demand of the  
 353 building,  $D_{t,p}^{el}$ , and the electric top-up coil  $d_{EB,t,p}$ , must be met by electricity bought from the grid,  $y_{t,p}^{impD}$ ,  
 354 and/or on-site generated electricity from PV,  $y_{PV,t,p}^{selfcD}$ , and/or CHP,  $y_{CHP,t,p}^{selfcD}$  (see Eq. (18)). As explained  
 355 in Section 2.3, electricity used for heat pumps may have a separate tariff, and is thus treated separately as  
 356 seen in Node II in Figure 3. Equation (19) reflects the electricity balance of the heat pumps, where the  
 357 electricity demanded by the heat pumps,  $d_{ASHP,t,p} + d_{GSHP,t,p}$ , is covered by import from the grid,  $y_{t,p}^{impHP}$ ,  
 358 and/or on-site generated electricity from PV,  $y_{PV,t,p}^{selfcHP}$ . It is assumed that if a CHP is installed, a HP will  
 359 not be installed additionally, and accordingly, the option of CHP providing electricity to the HP is left out.  
 360 Node III and IV, reflects the electricity balances for the PV and the CHP (given in Eq. (20) and (21))  
 361 respectively, where generated electricity,  $y_{i,t,p}$ , can be exported to the grid,  $y_{i,t,p}^{exp}$ , and/or self-consumed  
 362 within the building.

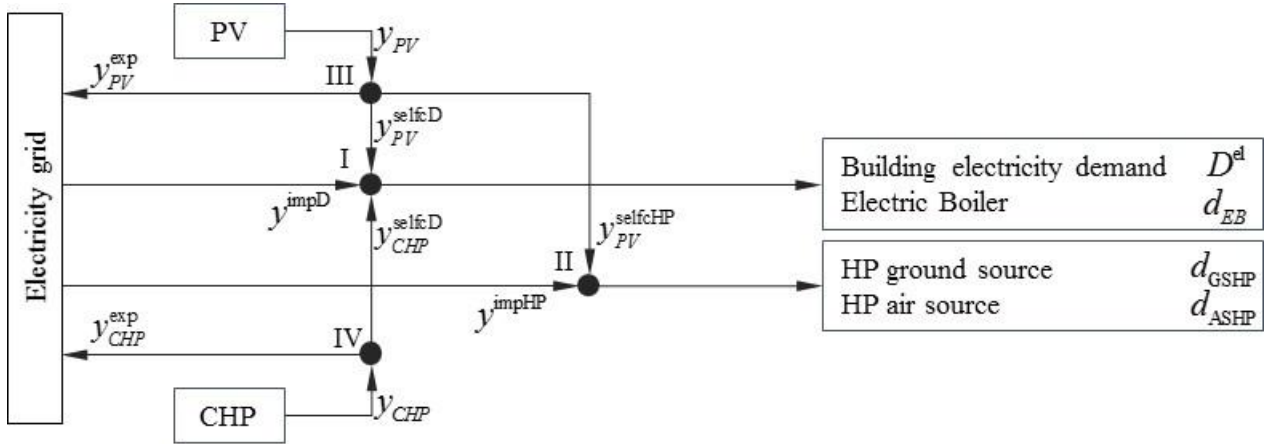


Figure 3 Graphical description of the hourly electricity balance.

363

$$I \quad D_{t,p}^{el} + d_{EB,t,p} = y_{PV,t,p}^{selfcD} + y_{CHP,t,p}^{selfcD} + y_{t,p}^{impD} \quad \forall t, p \quad (18)$$

$$II \quad d_{ASHP,t,p} + d_{GSHP,t,p} = y_{PV,t,p}^{selfcHP} + y_{t,p}^{impHP} \quad \forall t, p \quad (19)$$

$$III \quad y_{PV,t,p} = y_{PV,t,p}^{exp} + (y_{PV,t,p}^{selfcD} + y_{PV,t,p}^{selfcHP}) \quad \forall t, p \quad (20)$$

$$IV \quad y_{CHP,t,p} = y_{CHP,t,p}^{exp} + y_{CHP,t,p}^{selfcD} \quad \forall t, p \quad (21)$$

364



365 Equations (18)–(21) must be separate, if not, the export from the CHP will “turn to” PV export because  
 366 the payment is often higher for PV export. Further, because the feed-in tariff (FiT) for CHP export is  
 367 lower than the FiT for PV export, the model will always choose to export electricity from PV in favour of  
 368 CHP, and thus, there is no need for additional restrictions for the import-export situation.

### 369 2.4.3 Grid constraints

370 To avoid import and export of electricity within the same hour, the following three constraints are applied  
 371 in order to force the model to either import or export. This is done by use of binary variables (0 or 1),  $\delta_{t,p}^{\text{exp}}$   
 372 and  $\delta_{t,p}^{\text{imp}}$ , that get the value one if respectively export or import is positive.  $M^{\text{grid}}$  is an exogenously  
 373 determined parameter that has to be large enough for the equations to hold.

$$\text{If import:} \quad \left( y_{t,p}^{\text{impD}} + y_{t,p}^{\text{impHP}} \right) \leq \delta_{t,p}^{\text{imp}} \cdot M^{\text{grid}} \quad \forall t, p \quad (22)$$

$$\text{If export:} \quad \left( y_{t,p}^{\text{PVexp}} + y_{t,p}^{\text{CHPexp}} \right) \leq \delta_{t,p}^{\text{exp}} \cdot M^{\text{grid}} \quad \forall t, p \quad (23)$$

$$\text{Either import or export:} \quad \delta_{t,p}^{\text{exp}} + \delta_{t,p}^{\text{imp}} \leq 1 \quad \forall t, p \quad (24)$$

374

375 Grid companies may operate with a monthly peak power charge. To include this, the monthly peak power  
 376 needs to be found. Equation (25) determines the highest monthly peak value of electricity import, where  
 377  $H_m$  is a vector containing the time step number of the last hour of the last day in the month,  $\theta(m)$ , for  
 378 every month throughout the year.

$$\text{if } t \leq H_m = H_{m-1} + 24 \cdot \theta(m) \rightarrow y_{m,p}^{\text{maximp}} \geq (y_{t,p}^{\text{impD}} + y_{t,p}^{\text{impHP}}) \quad \forall t, m, p \quad (25)$$

379 The value of the first month (January) is  $H_1 = 744$ , while the last month (December), is  $H_{12} = 8760$ . For  
 380 every month, the peak electricity import value will be stored in the variable  $y_{m,p}^{\text{maximp}}$ . The monthly peak  
 381 power charge thus equals  $\left( \text{PPCH}_m \cdot y_{m,p}^{\text{maximp}} \forall m, p \right)$ , as seen in Eq.(16).

### 382 2.4.4 ZEB constraints

383 The modelling framework developed allows for modification of boundary conditions, weighting factors  
 384 and ZEB ambition level in order to fit individual countries' ZEB definitions. Here, the boundary condition  
 385 is set at the building's physical walls, and the ZEB ambition level includes energy used for constructing  
 386 the building (embodied energy) and all energy consumed within the building. In line with the EPBD [1]  
 387 the balance of the ZEB building is calculated as weighted energy imported minus weighted energy  
 388 exported over the total lifetime of the building.

389 Equation (26) and (27) reflect the zero primary energy and zero emission constraint, respectively. In Eq.  
 390 (26) the total primary energy imports over the entire lifetime of the building equals the sum of operational  
 391 and embodied energy,  $G^{\text{embodied}}$ . The operational energy import is found by multiplying the import of each  
 392 energy carrier,  $f$ , with its primary energy factor,  $\text{PE}_{f,p}$ , for each time step,  $t$ , summed over a

393 representative year within each period,  $p$ , multiplied by the number of years within each period,  $N$ , and  
 394 lastly summed over all periods,  $P$ . Notice that the balance only includes energy carriers either exported  
 395 from or imported to the building. As an example, solar thermal generation is not explicitly accounted for,  
 396 however its heat indirectly contributes to reduced energy imports for heat generation.

397 In order to investigate a relaxation of the ZEB constraints,  $\gamma$  is introduced which can take the values  $\{0,$   
 398  $\dots, 1\}$ .  $PE^{ref}$  represents the building's primary energy consumption when only minimising costs without  
 399 enabling the ZEB constraint, and is afterwards set as an exogenous parameter when activating the ZEB  
 400 constraint. Imposing  $\gamma = 1$  means that the building is a strictly ZEB, and the restriction in Eq. (26) equals  
 401 zero. When  $\gamma = 0$ , there is no ZEB requirement, and the cost-optimal solution without considering  
 402 primary energy consumption is found. Imposing  $\gamma = 0,6$  means that the primary energy consumption,  
 403  $PE^{totref}$ , must be reduced by 60 %, reflecting a 60 % nearly ZEB. As the environmental impact for the  
 404 energy carriers might change in the future, especially for electricity, the primary energy factors,  $PE_{f,p}$   
 405  $[kWh_{PE} / kWh_f]$ , can be changed according to the period.

$$\sum_{p \in P} \left( N(p) \sum_{t \in T} \sum_{f \in F} \left( (y_{t,p}^{impD} + y_{t,p}^{impHP})_f - (y_{t,p}^{PVexp} + y_{t,p}^{CHPexp})_f + (b_{t,p})_f + (g_{t,p}^{GB} + g_{t,p}^{CHP})_f \right) \cdot PE_{f,p} \right) + PE^{embodied} = (1 - \gamma) \cdot PE^{ref} \quad (26)$$

$[kWh_{PE}]$

406 The zero emission constraint in Eq. (27) has a similar layout as the zero primary energy constraint, where  
 407 the primary energy factors,  $PE_{f,p}$ , are replaced with carbon factors,  $G_{f,p} [g_{CO2-eq} / kWh_f]$ .

$$\sum_{p \in P} \left( N(p) \sum_{t \in T} \sum_{f \in F} \left( (y_{t,p}^{impD} + y_{t,p}^{impHP})_f - (y_{t,p}^{PVexp} + y_{t,p}^{CHPexp})_f + (b_{t,p})_f + (g_{t,p}^{GB} + g_{t,p}^{CHP})_f \right) \cdot G_{f,p} \right) + G^{embodied} = (1 - \gamma) \cdot G^{ref} \quad (27)$$

$[g_{CO2-eq}]$

408

#### 409 2.4.5 Technology capacity constraints

410 For each technology,  $i$ , capacity constraints and energy balances are applied, which states that the heat,  
 411 Eq. (28), or electricity, Eq. (29), generated cannot surpass the installed capacity,  $x_i$ , of each technology.

412 Constraints for ST and PV are given in Eq. (10) and Eq. (12), respectively.

$$x_i \geq q_{i,t,p} \quad \forall i \in I^{heat} \setminus ST, t, p \quad [kW] \quad (28)$$

$$x_i \geq y_{i,t,p} \quad \forall i \in I^{el} \setminus PV, t, p \quad [kW] \quad (29)$$

413

414 Maximum available façade and roof area for mounting PVs and ST modules is shown in Eq. (30). Notice  
 415 that the installed ST is given in m<sup>2</sup>, and the installed PV in kWp. Thus a factor of  $\Omega$  m<sup>2</sup>/kWp is multiplied  
 416 to the latter. With a relatively high module performance of e.g. 300 W, a factor of 5,3 m<sup>2</sup>/kW may be  
 417 reasonable.

$$x_{ST} + \Omega \cdot x_{PV} \leq A^{\max} \quad [\text{m}^2] \quad (30)$$

418

### 419 3 Assessment criteria: Grid Interaction indicators

420 A thorough presentation of assessment criteria for ZEBs is given in the report of Salom et al [13], and  
 421 further elaborated on in [10]. In this work, five grid interaction indicators are chosen for assessing the  
 422 building's interaction with the power grid (see Table 1).

423 The self-consumption evaluates the share of on-site electricity generation that is consumed within the  
 424 building. A graphic illustration of the hourly net electricity load is useful for showing maximum import  
 425 and export values together with the annual exported and imported amount of electricity. The generation  
 426 multiple (GM) relates the maximum export value to the maximum import value, and gives an indicative  
 427 value on how much stronger the grid connection capacity needs to be if the maximum export value  
 428 exceeds the maximum import value. As the choice of energy technology impacts the net electricity load  
 429 profile, the reference generation multiple ( $GM_{\text{ref}}$ ) can be used to compare the different cases on the same  
 430 grounds, i.e. in relation to a reference peak import value.

431 Table 1 Indicators chosen to evaluate the building's grid interaction.

Grid Indicator	Description	Formula
Self-consumption	Share of on-site electricity generation used by the building. First introduced by [12]. (Also called "supply cover factor")	$\gamma_s = \frac{\sum_{t \in T} (y_t^{\text{PVselfc}} + y_t^{\text{CHPselfc}})}{\sum_{t \in T} (y_t^{\text{PVexp}} + y_t^{\text{CHPexp}})} \quad (31)$
Annual Export	Yearly electricity exported.	$\text{EX} = \sum_{t \in T} (y_t^{\text{PVexp}} + y_t^{\text{CHPexp}}) \quad (32)$
Net electricity load	Annual duration curves of hourly net electricity import (+ import, - export). (This is the opposite of the definition in [11] which defines duration curves for net electricity export (- import, + export), however as buildings normally pose a load on the grid, import is given a positive sign.)	$ne_t = (y_{t,p}^{\text{impD}} + y_{t,p}^{\text{impHP}}) - (y_t^{\text{PVexp}} + y_t^{\text{CHPexp}}) \quad (33)$
GM factor	Generation Multiple relates the maximum export value to the maximum import value of electricity.	$\text{GM} = \frac{\max_{t \in T, p \in P} \{y_{t,p}^{\text{PVexp}} + y_{t,p}^{\text{CHPexp}}\}}{\max_{t \in T, p \in P} \{y_{t,p}^{\text{impD}} + y_{t,p}^{\text{impHP}}\}} \quad (34)$

GM <sub>ref</sub> factor	GM <sub>ref</sub> relates the maximum export value to the maximum import value of electricity in a reference case.	$GM_{ref} = \frac{\max_{t \in T, p \in P} \{y_{t,p}^{PVexp} + y_{t,p}^{CHPexp}\}}{\left( \max_{t \in T, p \in P} \{y_{t,p}^{impD} + y_{t,p}^{impHP}\} \right)_{ref}} \quad (35)$
--------------------------	--	--

432

#### 433 4 Results

434 This section presents selected results in order to illustrate how the modelling framework can be used as a  
 435 tool to optimize the energy system of ZEBs. The modeling framework can also be used to study the  
 436 impact of different incentives and governmental support schemes for energy efficiency and local energy  
 437 generation, which will be presented in papers to come.

438 The techno-economic optimization model described in this paper requires an extensive amount of input  
 439 data. In order to avoid a detailed description of the input parameters, they are taken from a case study  
 440 conducted on a simplified version of the model in [42]. The case study is a relatively large school  
 441 building of 10 000 m<sup>2</sup> with an assumed lifetime of 60 years, situated in Norway. The technology costs and  
 442 efficiency data, the energy market conditions and climatic conditions are adapted to the country specific  
 443 conditions.

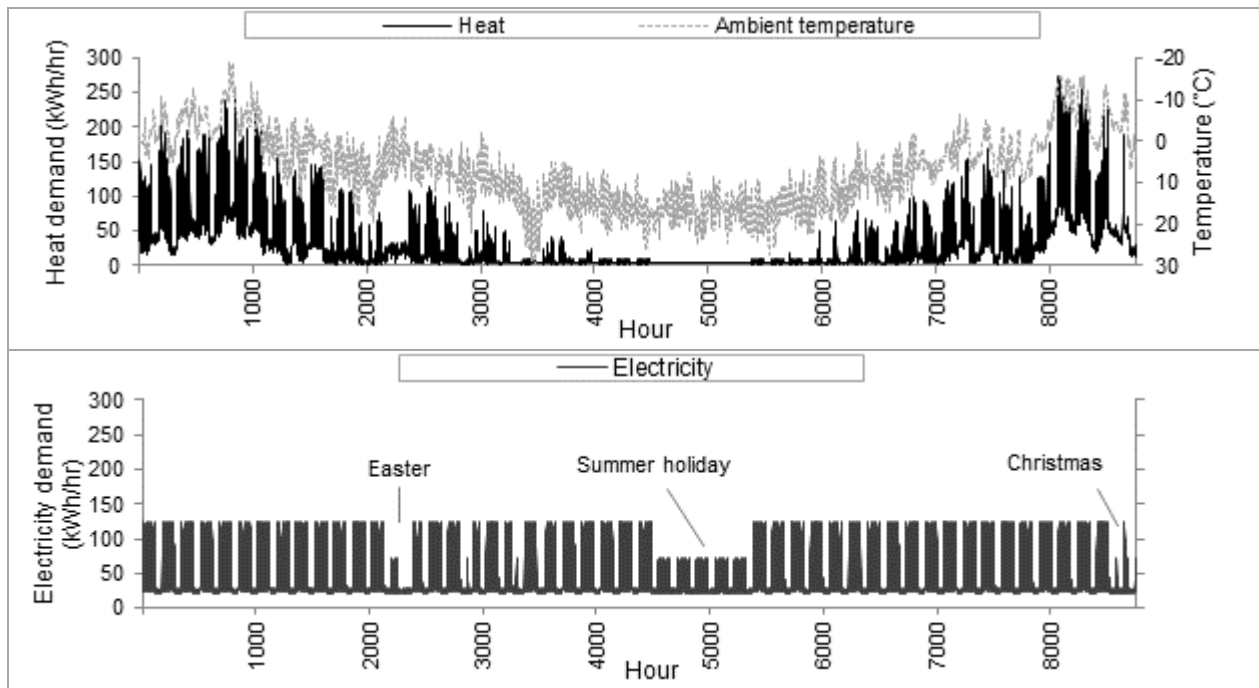


Figure 4 Hourly heat (upper) and electricity (lower) demand for a passive school building situated in southern Norway.

444

445 It is assumed that a ZEB is a building with passive energy standard, but with on-site energy generation.  
 446 The load inputs are given by regression models based on hourly measurements of electricity and district  
 447 heat consumption of a passive school building in Norway [35],[36]. Figure 4 shows that the building's  
 448 heat demand is correlated with the ambient temperature. When the temperature hits -15°C, the hourly heat  
 449 demand is between 270-290 kWh, however at temperatures above 10-15°C the heat demand reflects only  
 450 the hot tap water demand. The number of months with a heating strategy for the school building is thus

451 about 7 months. The electricity demand on the other hand, is related to the school holidays when lights are  
 452 switched off and the operation of the ventilation system is reduced. Further, there is no cooling demand in  
 453 summer as the school is closed.

454 As mentioned in the introduction, every EU member state is obliged to define its own ZEB definition and  
 455 ambition level. The ambition level reflects how “nearly” ZEB, or how close to zero the ZEB target, is set  
 456 to be. With the additional features of the  $\gamma$  presented in Section 2.4.4, the relaxation of the ZEB constraint  
 457 can be investigated. The following thus investigates the relaxation of the ZEB constraint when using  
 458 carbon factors.

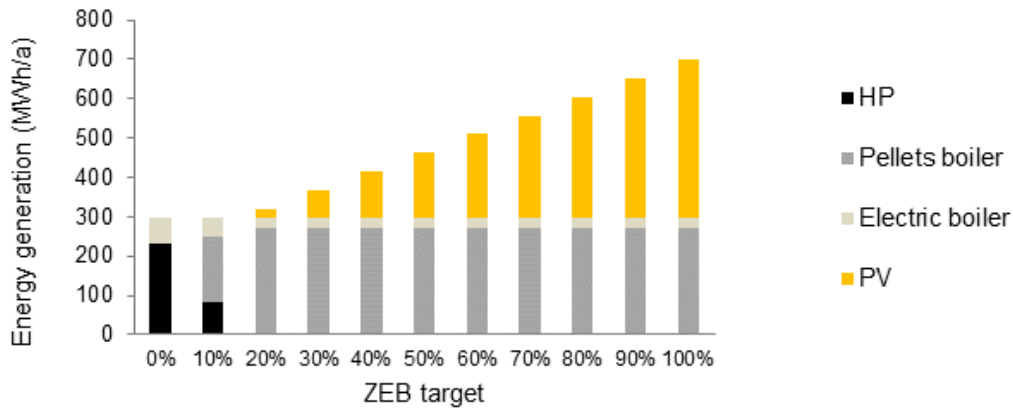


Figure 5 Relaxation of the zero emission constraint. Impact on annual heat and electricity generation (MWh/yr) within the building, by technology.

459

460 Figure 5 shows how the technology choice is influenced by the ZEB ambition level; here varying from no-  
 461 ZEB (0 %-ZEB) to strictly ZEB (100 %-ZEB). The energy technology choice shifts from heat pump (HP)  
 462 to bio pellets boiler and PV when strengthening the ZEB target from 0 % to 100 %. The most cost  
 463 efficient way to reduce the carbon emissions is first to reduce the operational emissions. In this case,  
 464 electricity used for heat pumps is replaced by bio pellets used in a bio boiler, which emits less carbon per  
 465 heat unit. When the heat pump is fully replaced by the bio pellets boiler, the next option is to compensate  
 466 the emissions by onsite renewable energy generation, where the installed PV capacity starts at 26 kWp for  
 467 20 %-ZEB, and reaches 483 kWp for 100 %-ZEB.

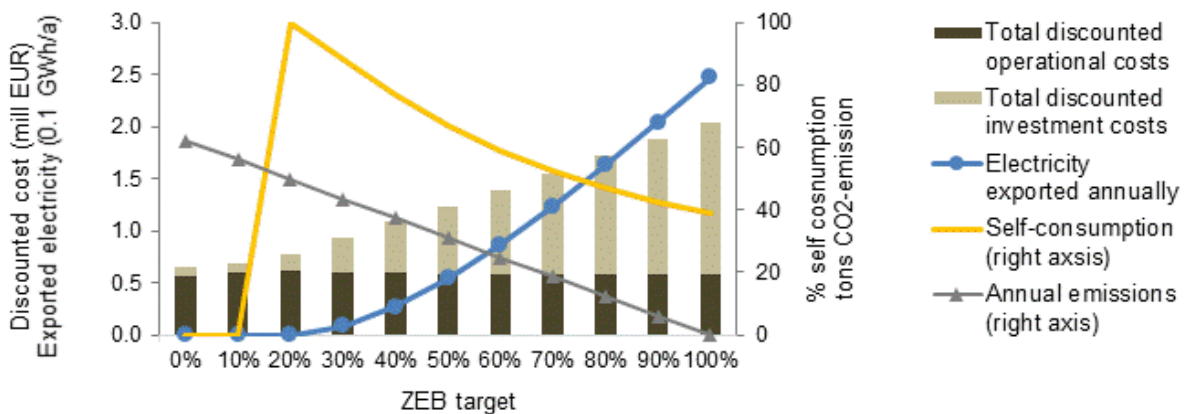


Figure 6 Relaxation of the zero emission constraint. Impact on total discounted investment and operational costs (1000 EUR), annual electricity exported (100 kWh/yr) and self-consumption rate (%).

468

469 Figure 6 shows the impact on the energy system costs, the annual electricity export and the self-  
470 consumption rate. The total discounted investment cost increases from 0,65 mill EUR (no-ZEB) to 2,04  
471 mill EUR (100 %-ZEB), which is mainly caused by the increased PV investments. The total discounted  
472 operational costs increases by 11 % at 20 %-ZEB, due to the more expensive operation & fuel cost of the  
473 bio boiler compared to the heat pump. From 30 %-ZEB and onwards, the operational costs declines due to  
474 the increased income from sold electricity to the grid. Because Norway do not have a feed-in tariff for PV,  
475 the income of the exported PV electricity is limited, and the total discounted operational cost reaches 0,57  
476 mill EUR at 100 %-ZEB, which is only 3 % lower compared to the 0 %-ZEB case.

477 The self-consumption rate is the amount of on-site PV generation that is consumed within the building  
478 calculated on an hourly level (see definition in Eq. (31)). When there is no PV present, the self-  
479 consumption is not defined and is seen as 0 % in the graph. As the PV is introduced at 20 %-ZEB, the  
480 amount of PV is so small that almost all the generation is consumed within the building and the self-  
481 consumption is 100 %. As the ZEB target becomes more ambitious, the PV installation increases, and the  
482 generation thus becomes larger than the building's electricity consumption in the hours when there is  
483 sunshine. Consequently, the self-consumption decreases to 40 % in the 100 %-ZEB case.

484 Figure 6 underlines the challenges of ZEBs because as the stronger the target is, the more PV needs to be  
485 installed, but the less of the actual on-site generated electricity can be self-consumed. Consequently, the  
486 building imports electricity in winter, and exports electricity in summer, using the electricity grid as a  
487 virtual seasonal storage. This is emphasized in Figure 7 which shows that the 100%-ZEB building is  
488 exporting electricity in 26 % of the hours, and the peak export value at 345 kW is higher than the peak  
489 import value at 229 kW, leading to a GM-value of 1,5.

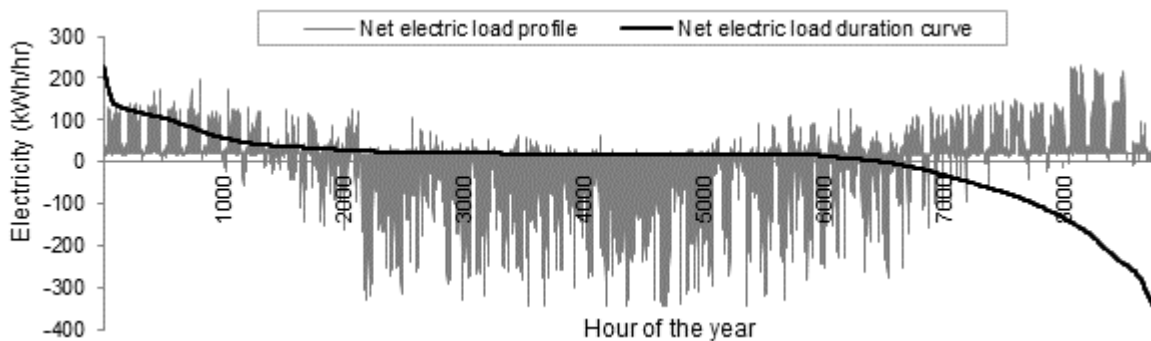


Figure 7 Hourly net electricity load profile and the sorted load duration curve for the strictly ZEB (100%).

490

491 Summed up, the modelling framework can be used for evaluating at which level it is reasonable to set the  
492 ZEB-target. Should it be at 20 %, when self-consumption is at its highest, or at 50 % when both emissions  
493 and electricity exports are within reasonable values, or will the grid handle everything and the cost of PVs  
494 drop further so that the 100 % target will be applicable?

## 495 **5 Discussion of the modelling framework**

496 The time resolution of the presented work is on hourly level. To capture all variations of load and  
497 generation, especially from PV, the time resolution would benefit from being closer to 15 or even 1  
498 minute. This can be seen in for example de Baetens et al. [12] who use a 1-minute time resolution to  
499 investigate the impact on grid-feeder level of the operation of a ZEB, but where investment decisions are  
500 taken as input. Salom et al. [11] investigate measurements of three ZEBs, showing that using sub-hourly  
501 data is preferred to hourly data when evaluating grid impact of a household, as the stochasticity of the load  
502 leads to high fluctuation for the imported electricity values which is not captured in the hourly data.  
503 However, on a building or cluster level, hourly values are adequate to make reliable conclusions on the  
504 correlation between import and export of electricity [10]. This assumption is also confirmed by [43] where  
505 a smoothening effect on the short-term variability of PV power output was identified at an aggregated  
506 level.

507 In the present work, when investigating investment decisions in ZEBs, a more detailed time resolution of  
508 15 min would increase the number of binary variables from 8760 to 35 040 multiplied by the number of  
509 available technologies within the model. Thus, it seems adequate to make the investment decision based  
510 on an hourly time resolution, however when investigating the real operation of one single building, sub-  
511 hourly values would be preferred.

512 As temperatures of the heat distribution within the building is not considered in the modelling framework,  
513 the feedback of the ST and heat pumps on the heat storage are not considered explicitly. In previous  
514 studies of energy investment analysis, the energy storage is often also treated as a single node, see e.g.  
515 [25], [44] or [45]. This formulation may however lead to too efficient components in some hours, thus  
516 slightly too optimistic, or small, sizes of the considered technologies. A dynamic simulation of operation  
517 of a building would definitely need temperatures, but again, as the focus of this work is on the investment  
518 decision, it is considered adequate to treat the heat as energy flows and the heat storage tank as a single  
519 node.

## 520 **6 Summary and conclusions**

521 The introduction of the concept nearly ZEB buildings has changed the view on buildings from being  
522 passive receivers of power, i.e. consumers, towards becoming active players in the electricity system by  
523 both consuming and producing electricity, i.e. prosumers. This development has opened new perceptions  
524 on building's energy systems e.g. for combining heat and electricity systems such as PV coupled with heat  
525 pumps in a thermal-electric system. When the operation of such buildings is evaluated, the investment  
526 decision considering dimensioning and choice of energy technologies should be optimised accordingly.  
527 This part has received little attention over the past years.

528 This paper presents a modelling framework for assessing the cost optimal dimensioning of the energy  
529 technology system for a zero energy, or zero emission, building (ZEB) from the building owner's  
530 perspective. The framework builds on the definition in the EPBD, and can study any country's specific  
531 ZEB definition by adapting e.g. the weighting factors, the ZEB level, and/or the energy market conditions  
532 such as feed-in tariffs, investment subsidies, peak load tariffs or other grid tariffs.

533 The model structure captures the whole lifetime of the building, and is able to take into account altered  
534 conditions in future by dividing the lifetime into periods. This is important especially for the weighting

535 factor for electricity (with more renewable energy in the electricity production mix), and for future energy  
536 market conditions (such as feed-in-tariffs for PV electricity). The interaction between the different  
537 components of the building is optimised each hour throughout a representative year within each period,  
538 and the primary energy consumption and carbon emissions throughout the lifetime of the building is  
539 calculated.

540 With semi-continuous variables on investment decisions and hourly operation of the heat technologies, the  
541 linear optimisation formulation is able to reflect the dynamics of the building's energy system in a  
542 sufficient way. The heat storage is modelled as a single node, thus treated as an energy bucket where heat  
543 may be stored or taken out. The hourly loads of heat and electricity are treated as given input. Heat  
544 demand includes demand for space heating (both radiators or floor heating system and ventilation heat)  
545 and hot tap water, including distribution losses. Electricity demand includes electricity for covering e.g.  
546 lighting and electric appliances. This means that the building design, including U-values and dimensioning  
547 of ventilation ducts, are treated as given.

548 The strength of this model is the combined optimisation of investments and operation costs, together with  
549 a high level of detail for the component models compared to general energy system models like TIMES,  
550 MARKAL and Balmorel. Because of the hourly time resolution, results of electricity import and export  
551 from the building are given as hourly time series, which enables investigation of the buildings grid impact.  
552 Hourly optimal operation of both heat and electricity system within the building, and the resulting net  
553 electricity load profile, will be analysed in detail in coming papers.

554 The influence of altered weighting factors (carbon emissions, and primary energy indicators), and policy  
555 incentives will be investigated in coming papers. For example, how the combination of a ZEB target and a  
556 feed-in tariff for PV electricity may lead to unintended outcomes. Thus, the modelling framework  
557 facilitates a holistic approach, which enables us to analyse how policies, technology data, ZEB targets and  
558 weighting factors affect the energy system design within ZEBs, and consequently their impact on the  
559 electricity grid.

## 560 **Acknowledgments**

561 This work has been supported by the Research Council of Norway and several partners through the  
562 Research Centre on Zero Emission Buildings (ZEB) and the Research Centre for Sustainable Energy  
563 Studies (CenSES). The authors also acknowledge the support from the Norwegian Water Resources and  
564 Energy Directorate (NVE) in Oslo, Norway, and Fraunhofer Institute for Solar Energy System (ISE) in  
565 Freiburg, Germany.

566

## 567 **References**

- 568 [1] prEN 15603:2013, "European Standard: draft Overarching standard EPBD," CEN (European Committee for  
569 Standardization), Avenue Marnix 17, B-1000 Brussels, 2013.
- 570 [2] European Parliament, "Directive 2010/31/EU on the energy performance of buildings (EPBD) - recast," *Off.*  
571 *J. Eur. Union*, no. L153, 2010.
- 572 [3] A. J. Marszal, P. Heiselberg, J. S. Bourrelle, E. Musall, K. Voss, I. Sartori, and A. Napolitano, "Zero Energy  
573 Building – A review of definitions and calculation methodologies," *Energy Build.*, vol. 43, pp. 971–979,  
574 2011.



- 575 [4] I. Sartori, A. Napolitano, and K. Voss, "Net zero energy buildings: A consistent definition framework,"  
576 *Energy Build.*, vol. 48, pp. 220–232, May 2012.
- 577 [5] T. Kristjansdottir, H. Fjeldheim, E. Selvig, B. Risholt, B. Time, L. Georges, T. H. Dokka, J. S. Bourrelle, R.  
578 Bohne, and Z. Cervenka, "A Norwegian ZEB Definition: Inclusion of embodied emissions," 2014.
- 579 [6] BPIE, "Nearly Zero Energy Buildings Definitions Across Europe - Status as of April 2015," *BPIE factsheet*,  
580 no. April, Buildings Performance Institute Europe (BPIE), Brussels, Belgium, 2015.
- 581 [7] IEA, "SHC Task 40: Net Zero Energy Solar Buildings," 2014. [Online]. Available: <http://task40.iea-shc.org/>.
- 582 [8] F. Noris, E. Musall, J. Salom, B. Berggren, S. Ø. Jensen, K. B. Lindberg, and I. Sartori, "Implications of  
583 Weighting factors on Technology Preference in net Zero Energy Buildings," *Energy Build.*, vol. 82, pp. 250–  
584 262, 2014.
- 585 [9] E. Musall, T. Weiss, K. Voss, and A. Lenoir, "Net Zero Energy Solar Buildings: An Overview and Analysis  
586 on Worldwide Building Projects," in *EuroSun Conference, Graz*, 2010, pp. 7–8.
- 587 [10] J. Salom, A. J. Marszal, J. Widén, J. A. Candanedo, and K. B. Lindberg, "Analysis of Load Match and Grid  
588 Interaction Indicators in net Zero Energy Buildings with simulated and monitored data," *Appl. Energy*, vol.  
589 136, pp. 119–131, 2014.
- 590 [11] J. Salom, J. Widén, J. Candanedo, and K. B. Lindberg, "Analysis of grid interaction indicators in net zero-  
591 energy buildings with sub-hourly collected data," *Adv. Build. Energy Res.*, no. October, pp. 1–18, Aug. 2014.
- 592 [12] R. Baetens, R. De Coninck, J. Van Roy, B. Verbruggen, J. Driesen, L. Helsen, and D. Saelens, "Assessing  
593 electrical bottlenecks at feeder level for residential net zero-energy buildings by integrated system  
594 simulation," *Appl. Energy*, vol. 96, pp. 74–83, Aug. 2012.
- 595 [13] J. Salom, A. J. Marszal, J. A. Candanedo, J. Widén, K. B. Lindberg, and I. Sartori, "Analysis of Load Match  
596 and Grid Interaction Indicators in net Zero Energy Buildings with High-Resolution Data," 2014.
- 597 [14] I. Nolte, O. Ralf, D. Staniaszek, and M. Faber, "Implementing the Cost-Optimal Methodology in EU  
598 Countries," 2013.
- 599 [15] H. Huws and L. Jankovic, "A method for zero carbon design using multi-objective optimisation," in *1st  
600 Conference on Zero Carbon Buildings in Birmingham, UK, Sept.*, 2014.
- 601 [16] M. Hamdy, A. Hasan, and K. Siren, "A multi-stage optimization method for cost-optimal and nearly-zero-  
602 energy building solutions in line with the EPBD-recast 2010," *Energy Build.*, vol. 56, pp. 189–203, Jan.  
603 2013.
- 604 [17] Y. Lu, S. Wang, Y. Zhao, and C. Yan, "Renewable energy system optimization of low/zero energy buildings  
605 using single-objective and multi-objective optimization methods," *Energy Build.*, vol. 89, pp. 61–75, 2015.
- 606 [18] U. I. Dar, I. Sartori, L. Georges, and V. Novakovic, "Advanced control of heat pumps for improved  
607 flexibility of Net-ZEB towards the grid," *Energy Build.*, vol. 69, pp. 74–84, 2014.
- 608 [19] S. Mueller, R. Tuth, D. Fischer, B. Wille-hausmann, and C. Wittwer, "Balancing Fluctuating Renewable  
609 Energy Generation Using Cogeneration and Heat Pump Systems," *Energy Technol.*, vol. 2, no. 1, pp. 83 –  
610 89, 2014.
- 611 [20] D. Fischer, T. R. Toral, K. B. Lindberg, and H. Madani, "Investigation of Thermal Storage Operation  
612 Strategies with Heat Pumps in German Multi Family Houses," *Energy Procedia*, vol. 58, pp. 137–144, 2014.
- 613 [21] F. Adinolfi, S. Massucco, F. Silvestro, A. DeDanieli, A. Fidigatti, and E. Ragaini, "Intelligent Load  
614 Management for a Shopping Mall model in a smart grid environment," in *IEEE Grenoble PowerTech  
615 Conference, France, 16-20 June*, 2013.
- 616 [22] M. Brunner, S. Tenbohlen, and M. Braun, "Heat pumps as important contributors to local demand-side  
617 management," in *IEEE Grenoble PowerTech Conference, France, 16-20 June*, 2013.
- 618 [23] E. Fabrizio, M. Filippi, and J. Virgone, "An hourly modelling framework for the assessment of energy

- 619 sources exploitation and energy converters selection and sizing in buildings,” *Energy Build.*, vol. 41, no. 10,  
620 pp. 1037–1050, Oct. 2009.
- 621 [24] A. Lind, E. Rosenberg, P. Seljom, K. Espegren, A. Fidje, and K. B. Lindberg, “Analysis of the EU renewable  
622 energy directive by a techno-economic optimisation model,” *Energy Policy*, vol. 60, no. September 2013, pp.  
623 364–377, Sep. 2013.
- 624 [25] K. Hedegaard and O. Balyk, “Energy system investment model incorporating heat pumps with thermal  
625 storage in buildings and buffer tanks,” *Energy*, vol. 63, pp. 356–365, 2013.
- 626 [26] H.-M. Henning and A. Palzer, “A comprehensive model for the German electricity and heat sector in a future  
627 energy system with a dominant contribution from renewable energy technologies—Part I: Methodology,”  
628 *Renew. Sustain. Energy Rev.*, vol. 30, pp. 1003–1018, Feb. 2014.
- 629 [27] M. Korpås, E. Stenvik, and T. Gjengedal, “Generic sizing methodology for remote wind-hydrogen power  
630 systems,” in *Proceedings CIGRÉ Session 2006, Paris France, 2006*.
- 631 [28] I. Slungård, M. Korpås, and H. H. Faanes, “Optimising the selection of energy sources in construction using  
632 MATLAB,” in *Proc. of Nordic MATLAB Conference, 2001*, p. 7446.
- 633 [29] C. Milan, C. Bojesen, and M. P. Nielsen, “A cost optimization model for 100% renewable residential energy  
634 supply systems,” *Energy*, vol. 48, no. 1, pp. 118–127, Dec. 2012.
- 635 [30] A. Ånestad, “Net electricity load profiles of Zero Emission Buildings - A Cost Optimization Investment  
636 Model for Investigating Zero Balances, Operational Strategies and Grid Restrictions,” Norwegian University  
637 of Science and Technology (NTNU), 2014.
- 638 [31] European Commission, “COMMUNICATION FROM THE COMMISSION: A Roadmap for moving to a  
639 competitive low carbon economy in 2050,” 2011.
- 640 [32] K. Bettgenhäuser, M. Offermann, T. Boemans, M. Bosquet, J. Grözinger, B. von Manteuffel, and N.  
641 Surmeli, “Heat Pump Implementation Scenarios until 2030 - Main report,” 2013.
- 642 [33] FICO Xpress, “FICO Xpress Optimization Suite.” 2014.
- 643 [34] D. Fischer, A. Härtl, and B. Wille-Haussmann, “Model for electric load profiles with high time resolution for  
644 German households,” *Energy Build.*, vol. 92, pp. 170–179, 2015.
- 645 [35] K. B. Lindberg and G. L. Doorman, “Hourly load modelling of non-residential building stock,” in *IEEE  
646 Grenoble PowerTech Conference, France, 16-20 June, 2013*.
- 647 [36] K. B. Lindberg, J. M. Chacon, G. L. Doorman, and D. Fischer, “Hourly Electricity Load Modeling of non-  
648 residential Passive Buildings in a Nordic Climate,” in *IEEE Eindhoven PowerTech Conference, Holland, 29  
649 June - 2 July, 2015*.
- 650 [37] IEA ETSAP, “Combined Heat and Power,” *IEA ETSAP Technology Brief*, 2010. [Online]. Available:  
651 [http://www.iea-etsap.org/web/e-techds/pdf/e04-chp-gs-gct\\_adfinal.pdf](http://www.iea-etsap.org/web/e-techds/pdf/e04-chp-gs-gct_adfinal.pdf). [Accessed: 06-Jun-2014].
- 652 [38] Stiebel Eltron, *Planung und Installation Wärmepumpen*. STIEBEL ELTRON GmbH & Co. KG, Dr.-Stiebel-  
653 Strasse, 37603 Holzminden, [www.stiebel-eltron.de](http://www.stiebel-eltron.de), 2013.
- 654 [39] TÜVRheinland and FraunhoferISE, “Summary of EN 12975 Test Results, annex to Solar KEYMARK  
655 Certificate, Registration no.011-7S1754 F,” 2012.
- 656 [40] V. Quaschnig, *Regenerative Energiesysteme: Technologie - Berechnung - Simulation*, 8., aktual. HANSER  
657 Verlag München, 2013.
- 658 [41] T. Huld, R. Gottschalg, H. G. Beyer, and M. Topič, “Mapping the performance of PV modules, effects of  
659 module type and data averaging,” *Sol. Energy*, vol. 84, no. 2, pp. 324–338, 2010.
- 660 [42] K. B. Lindberg, A. Ånestad, G. L. Doorman, D. Fischer, C. Wittwer, and I. Sartori, “Optimal investments in  
661 Zero Carbon Buildings,” in *1st Conference on Zero Carbon Buildings in Birmingham, UK, Sept., 2014*.
- 662 [43] IEA-PVPS-Task14, “Characterization of the spatio-temporal variations and ramp rates of solar radiation and

663 PV,” 2015.

664 [44] R. Niemi, J. Mikkola, and P. D. Lund, “Urban energy systems with smart multi-carrier energy networks and  
665 renewable energy generation,” *Renew. Energy*, vol. 48, pp. 524–536, Dec. 2012.

666 [45] P. Seljom and A. Tomasgard, “Short-term uncertainty in long-term energy system models — A case study of  
667 wind power in Denmark,” *Energy Econ.*, vol. 49, pp. 157–167, 2015.

668