

Available at [www.scientevents.com/proscience/](http://www.scientevents.com/proscience/)

ProScience 1 (2014) 168-173



## Conference Proceedings

1<sup>st</sup> International Conference on Atmospheric Dust - DUST2014

# Collection of substantial amount of fine and ultrafine particles during the combustion of miscanthus and forest residues in small and medium scale boilers for morphological and chemical characterizations

Patxi Garra<sup>1,2</sup>, Gontrand Leyssens<sup>1</sup>, Cornelius Schönnenbeck<sup>1</sup>,  
Sophie Kohler<sup>2</sup>, Gwenaëlle Trouve<sup>1\*</sup>, Alain Dieterlen<sup>2</sup>, Céline Liaud<sup>3</sup>,  
Stéphane Le Calvé<sup>3</sup>, Jean-Luc Jaffrezo<sup>4</sup>

<sup>1</sup>GRE Laboratory, Mulhouse, 68093, France

<sup>2</sup>MIPS Laboratory, Mulhouse, 68093, France

<sup>3</sup>ICPEES Laboratory, Strasbourg, 67087, France

<sup>4</sup>LGGE Laboratory, Grenoble, 38402, France

---

### Abstract

Renewable energies are destined to play a very important role in the future world energy balance. Among these energies, biomass production and utilization is growing considerably since it offers the possibility to provide partial substitution of fossil fuels. If health impacts of fine particles (PM<sub>2.5</sub>) from diesel combustion are well documented (Gangwar et al., 2012), those from biomass combustion need substantial information and improvements. Size fractionations of PM<sub>2.5</sub> have to be performed in order to both determine morphological and chemical characteristics, these properties being essential for biological effects.

Particulate matter was sampled during combustion of miscanthus and forest residues in medium and small scale biomass boilers (400 kW from Köb Pyrot and 40 kW from REKA). Fly ashes from medium scale boiler were sampled with a cyclone device and their granulometry was studied with both optical microscope and Malvern laser granulometer. PM<sub>2.5</sub> (sized in the range of 0.4 µm to 2.07 µm) from low scale boiler were sampled using a DEKATI DGI impactor modified for substantial PM collection. A quick overview of setup modifications for manual impactor will be developed. Particles were observed using fluorescence microscopy. A semi-quantitative method to compare fly ashes fluorescence was developed using ImageJ (Schneider et al., 2012). Speciation of organic compounds Polycyclic Aromatic Hydrocarbon (PAH) and Humic Like Substances (HULIS) was determined on PM<sub>2.5</sub> and fly ashes. A correlation between observed fluorescence and concentration was attempted.

*Keywords: Ultrafine particles, PM<sub>2.5</sub>, fly ashes, wood combustion, HULIS, HAP, fluorescence analysis.*

---

\*Corresponding Author: [gwenaëlle.trouve@uha.fr](mailto:gwenaëlle.trouve@uha.fr)

ISSN: 2283-5954 © 2014 The Authors. Published by Digilabs

Selection and peer-review under responsibility of DUST2014 Scientific Committee

DOI:10.14644/dust.2014.027

## 1. Introduction

The energy transition requires a switch from fossil fuels to renewable energy resources. The Upper Rhine Region is determined to exploit its considerable energy potential through biomass combustion. However, incomplete combustion in poorly optimized facilities can affect air quality, especially during adverse weather conditions. Fine particles are likely to pose a risk to environment and health because they can travel deeply into the respiratory tract. Particularly, fine particles (diameter below 2.5  $\mu\text{m}$ ) which largely dominate in number may be responsible for some adverse health effects associated to air-pollutant exposure. These particles get deposited in the alveolar regions of the lung where the adsorption efficiency for trace elements is up to 60-80% (Nussbaumer et al., 2005; Kaivosoja et al., 2013). This study examines chemical and morphological properties of both particulate emissions and the residual ashes generated during biomass combustion. The focus is on selected types of solid biomass combustibles, including forest residues (wood chips) and an energetic crop as miscanthus.

## 2. Experiments

### 2.1 Fuel characterization

In this study, heat was mainly produced by the combustion of miscanthus and forest residues. Miscanthus is locally produced as well as forest residues that come from municipal forest of Ammertzwiller and Bernwiller (Haut-Rhin, France). Their combustible properties are given in the Table 1.

Table 1. Fuel properties.

	LHV (MJ.kg <sup>-1</sup> )	Moisture <sup>a</sup> (%)	Ash <sup>a</sup> (%)	Apparent density <sup>a</sup> (kg.m <sup>-3</sup> )
miscanthus	17.0	10	1.4	116
forest residues	11.0	25	2.0	304

a: on raw basis

These materials have typical composition, compared with literature data concerning wood biomass, energetic crops and agricultural by-products (corn, rice straw and shell). (Verma et al., 2012).

### 2.2 Combustion tests

Combustion tests at laboratory scale were performed in a multi-fuels boiler (HKRST/V-FSK) supplied by REKA (Aars, Denmark) specifically equipped for combustion studies. Performance of the boiler ranged from 30 to 40 kW. Fuels as grains, grain wastes, straw, pellets, energetic crops containing up to 30% are recommended to produce heat in this boiler. The boiler basis is a moving stepped grate. The boiler is equipped with a water-cooled volume of 220 L, a fireproof lining on the sides and the top, a blower for primary and secondary preheated air and with a semi-automatic ash removal.

The municipality of Ammertzwiller has installed in 2008 a biomass boiler which feeds, via network of heat its municipal buildings, as well as private living houses. The wood-fired boiler of 400 kW was purchased from K ob-Pyrot (Germany). A multi-cyclone from

the same supplier lowers particulate emissions. Miscanthus was combusted with 2 % of lime (CaO) in order to avoid formation of bottom ashes on the grid of the furnace.

### *2.3 Gaseous emissions*

Emissions were measured in the chimney according to European standard EN-304 during experiments at laboratory scale on the REKA boiler. Flue gas temperatures were continuously recorded instead of O<sub>2</sub>, CO, CO<sub>2</sub>, VOC, SO<sub>2</sub> and NO<sub>x</sub>. Values of VOC expressed in mg. Nm<sup>-3</sup> were given in carbon equivalent. According to French standard, concentrations expressed in mg. Nm<sup>-3</sup> were referred to 11% of O<sub>2</sub> in the exhaust to insure comparison for both experiments.

### *2.4 Particle matter collection*

Emissions of particle matter PM<sub>2.5</sub> for the determination of their concentration in the flue gas were measured according to standard NFX 44-052. A Dekati Gravimetric Impactor (DGI) manufactured by DEKATI Ltd. (Tampere, Finland) was used to collect particles from the gas exhaust. This system allows the collection of two size fractions of particles ranging from 0.4 µm to 2.5 µm in function of their aerodynamic equivalent cut-off diameter (D<sub>ac</sub>) at 50% efficiency at nominal air flow rate of 100 Lpm. The total mass of the four fractions represents the Total Suspended Particles (TSP).

### *2.5 Chemical analyses*

Polycyclic Aromatic Hydrocarbons (PAH) adsorbed on particulate matter and cyclone ashes were extracted with acetonitrile by means of an Accelerated Solvent Extractor (ASE 300, Dionex). Procedure was detailed by Liaud et al. (2015).

Water Soluble Organic carbon (WSOC) and water soluble Humic-Like Substances (HULIS) were analysed using protocols previously detailed by Jaffrezo (Jaffrezo et al., 2005) and Baduel (Baduel et al., 2009).

Residual carbon presents in ashes was determined by thermogravimetric analysis according the standard protocol NF EN 14775.

### *2.6 Particle size determination*

Particle size determination was done using a laser granulometer Scirocco 2000M from MALVERN. Particle matter was feed in the instrument as powders. Because of big amount of material needed, only cyclone ashes were analysed through this method.

## 2.7 Microscopy analysis

Microscopy analysis was performed using an Olympus BX51 wide field microscope modified to acquire 3D images using optical sectioning, as described by previous users (Maalouf et al., 2011). Fly ashes (100-500  $\mu\text{g}$ ) are placed between microscope slide (Thermo Scientific™ 2951R) and coverslip (Roth® 0657.2) using Eukitt® (Fluka 03989) as mounting medium. In order to represent each sample, 10 wide field images (902  $\mu\text{m} \times 674 \mu\text{m}$ ) are taken using both fluorescence and white light mode in order to extract fluorescence percentage following the protocol introduced in the DUST2014 conference (Garra et al., 2014).

## 3. Results and discussion

### 3.1 Particle collection and gaseous emissions

Values of the main gaseous emissions (i.e., Table 2) were closed to those found in literature for medium and large scale combustion boilers (Kaivosoja et al., 2013).

Table 2 : Gaseous emissions from miscanthus burning at different scales.

Burning scale	P <sub>input</sub> kW	P <sub>output</sub> kW	CO <sub>2</sub> (%)	SO <sub>2</sub> (mg/Nm <sup>3</sup> )	CO (mg/Nm <sup>3</sup> )	NO <sub>x</sub> (mg/Nm <sup>3</sup> )	VOC (mg/Nm <sup>3</sup> )	TSP (mg/Nm <sup>3</sup> )
40 kW	36.6	24.2	7.8	12.6	94.6	180	7.7	30.4
400 kW	245 <sup>a</sup>	229	6.7	n.m. <sup>c</sup>	10	101	n.m. <sup>c</sup>	42.3

a. Calculated with 93% efficiency given by previous study on same boiler with same fuel at 90 kW

b. Not measured: on field measurement of this value was not available

### 3.2 Particle size distributions

Cyclone ashes size distributions from Ammertzwiller boiler were investigated in air medium. There is less than 4.8 % in volume of PM<sub>2.5</sub> in particles from forest residues burning, 50% in volume of dust is below 35  $\mu\text{m}$ ; there is less than 1.9 % in volume of PM<sub>2.5</sub> in particles from miscanthus burning, 50 % of dust is below 77  $\mu\text{m}$ .

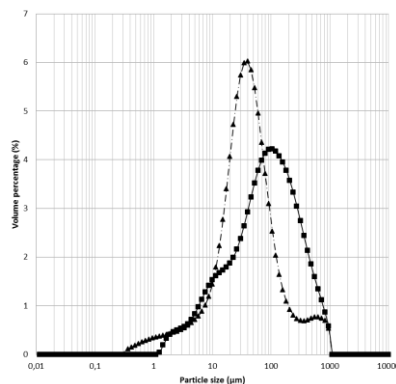


Fig. 1. Cyclone Ashes size distributions from miscanthus(▲) and forest residues (■) burning.

Details of the size mass distributions of PM<sub>2.5</sub> are given in the Fig.2.

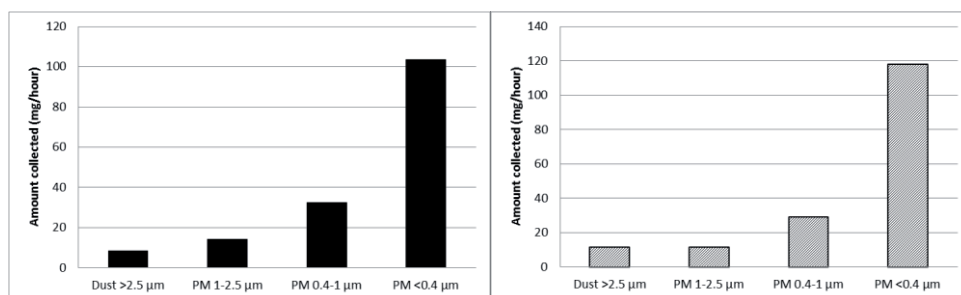


Fig. 2. Size distribution of fly ashes from miscanthus burning with 40 kW (left) and 400 kW boiler (right) at 100 Lpm.

Ultrafine particles with diameter below 0.4 μm dominate in the PM<sub>2.5</sub> fraction of cyclone ashes whatever the nature of the biomass boilers that represents 65% and 69% of the total mass of PM<sub>2.5</sub> during combustion of miscanthus in both boilers, respectively.

### 3.3 Chemical and microscopy analysis of fly ashes

Terminal filter stage from DGI (<0.4 μm) was not chemically analyzed in order to avoid sample contamination. Cyclone ashes were sieved below 20 μm:

Table 3 : Chemical and microscope analysis of fly ashes.

Fuel and boiler power – Particle size or collection mode	Residual carbon (%) <sup>a</sup>	WSOC (mg/g)	HULIS (μg/g)	PAH (μg/g)	Fluorescence percentage (pix %)
miscanthus 40kW (>2.5 μm)	<b>17.8</b>	4.95	281	<b>30.8</b>	<b>2.94</b>
miscanthus 40kW (1-2.5 μm)	<b>6.54</b>	5.23	500	<b>9.04</b>	<b>2.02</b>
miscanthus 40kW (0.4-1 μm)	<b>2.92</b>	1.21	95	<b>2.46</b>	<b>0.72</b>
forest residues 400 kW -Cyclone	9.46	2.17	116	4.97	13.6
miscanthus 400 kW - Cyclone	20.55	1.72	491	1.84	4.63

a. by weight

Results presented in the Table 3 in bold characters are linearly correlated with values of the coefficient of determination R<sup>2</sup> equal to 0.9983 and 0.8499 for PAH versus residual carbon and fluorescence versus PAH, respectively.

## 4. Conclusions

More than 1 g of PM<sub>0.4-2.5</sub> was collected during 100 hours of miscanthus combustion with the modified DGI setup at 100 Lpm. In order to collect more PM, an effort will have to be made to recover particles below 0.4 μm without lowering the flow rate. Low amounts of PAH were found following literature data (Kaivosoja et al., 2013) on biomass burning PAH emissions. Cyclone did not exhibit the same efficiency on fine particle trapping within different fuels emissions. Correlating know-to-be fluorescent chemical components (PAH, HULIS) and fluorescence percentage on wide field microscope images is not obvious, changes of image treatment procedure will have to be done (Garra et al., 2014).

## 5. Acknowledgements

Authors thank the Upper Rhine Region for financial support in the project Biocombust ([www.biocombust.eu](http://www.biocombust.eu)), the Mulhouse Alsace Agglomération (M2A) for their helpful cooperation, the French agency for environmental development and energy management (ADEME-Alsace) and the mayor of the municipality of Ammertzwiler (Haut-Rhin, France) for helpfully technical support.

## References

- Baduel C., Voisin D., Jaffrezo J.L. (2009). Comparison of analytical methods for Humic Like Substances (HULIS) measurements in atmospheric particles. *Atmospheric Chemistry and Physics*, 9, 5949-5962.
- Gangwar J.N., Gupta T., Agarwal A.K. (2012). Composition and comparative toxicity of particulate matter emitted from a diesel and biodiesel fuelled CRDI engine. *Atmospheric Environment* 46, 472–481. doi:10.1016/j.atmosenv.2011.09.007
- Garra P., Maschowski C., Liaud C., Dieterlen A., Leyssens G., Schönnenbeck C., Kohler S., Trouvé G., Giéré R. Fluorescence microscopy analysis of dust from biomass burning. *ProScience*, 1, 249-251.
- Jaffrezo J., Aymoz G., Delaval C., Cozic J. (2005). Seasonal variations of the water soluble organic carbon mass fraction of aerosol in two valleys of the French Alps. *Atmospheric Chemistry and Physics* 5, 2809-2821.
- Kaivosoja T., Jalava P.I., Lamberg H., Virén A., Tapanainen M., Torvela T., Tapper U., Sippula O., Tissari J., Hillamo R., Hirvonen M.-R., Jokiniemi J. (2013). Comparison of emissions and toxicological properties of fine particles from wood and oil boilers in small (20–25 kW) and medium (5–10 MW) scale. *Atmospheric Environment* 77, 193–201.
- Liaud C., Millet M., Le Calvé S. (2015). An analytical method coupling accelerated solvent extraction and HPLC-fluorescence for the quantification of particle-bound PAHs in indoor air sampled with a 3-stages cascade impactor. *Talanta* 131, 386-395. doi: 10.1016/j.talanta.2014.05.027.
- Maalouf E., Colicchio B., Dieterlen A. (2011). Fluorescence microscopy three-dimensional depth variant point spread function interpolation using Zernike moments. *Journal Optical Society of America A* 28, 1864–1870. doi:10.1364/JOSAA.28.001864
- Nussbaumer T., Klippel N., Oser M. (2005). Health relevance of aerosols from biomass combustion in comparison to diesel soot indicated by cytotoxicity tests, aerosols in biomass combustion, series thermal biomass utilization. *Graz University of Technology* 6, 45-54.
- Schneider C.A., Rasband W.S., Eliceiri K.W. (2012). NIH Image to ImageJ: 25 years of image analysis. *Nature Methods* 9, 671–675. doi:10.1038/nmeth.2089
- Verma V.K., Brama S., Delattin F., Laha P., Vandendael I., Hubin A., De Ruyck J. (2012). Agro-pellets for domestic heating boilers: Standard laboratory and real life performance. *Applied Energy* 90, 17-23.