



**Manchester  
Metropolitan  
University**

---

Javed, Muhammad Awais and Nafi, Nazmus Shaker and Basheer, Shakila and Aysha Bivi, Mariyam and Bashir, Ali Kashif (2019) Fog-Assisted Cooperative Protocol for Traffic Message Transmission in Vehicular Networks. IEEE Access, 7. pp. 166148-166156.

---

**Downloaded from:** <http://e-space.mmu.ac.uk/624539/>

**Version:** Published Version

**Publisher:** Institute of Electrical and Electronics Engineers (IEEE)

**DOI:** <https://doi.org/10.1109/access.2019.2953529>

**Usage rights:** Creative Commons: Attribution 4.0

Please cite the published version

<https://e-space.mmu.ac.uk>

Received October 25, 2019, accepted November 9, 2019, date of publication November 14, 2019, date of current version November 26, 2019.

Digital Object Identifier 10.1109/ACCESS.2019.2953529

# Fog-Assisted Cooperative Protocol for Traffic Message Transmission in Vehicular Networks

MUHAMMAD AWAIS JAVED<sup>1</sup>, (Senior Member, IEEE),  
NAZMUS SHAKER NAFI<sup>2</sup>, SHAKILA BASHEER<sup>3</sup>,  
MARIYAM AYSHA BIVI<sup>4</sup>, AND ALI KASHIF BASHIR<sup>5,6</sup>, (Senior Member, IEEE)

<sup>1</sup>Department of Electrical and Computer Engineering, COMSATS University Islamabad, Islamabad 45550, Pakistan

<sup>2</sup>School of Information Technology and Engineering, Melbourne Institute of Technology, Melbourne, VIC 3000, Australia

<sup>3</sup>Department of Information System, College of Computer and Information Sciences, Princess Nourah Bint Abdul Rahman University, Riyadh 11671, Saudi Arabia

<sup>4</sup>Department of Computer Science, King Khalid University, Abha 61421, Saudi Arabia

<sup>5</sup>Department of Computing and Mathematics, Manchester Metropolitan University, Manchester M15 6BH, U.K.

<sup>6</sup>School of Electrical Engineering and Computer Science, National University of Science and Technology, Islamabad 44000, Pakistan

Corresponding author: Muhammad Awais Javed (awais.javed@comsats.edu.pk)

This work was supported by the Deanship of Scientific Research at Princess Nourah Bint Abdulrahman University through the Fast-track Research Funding Program.

**ABSTRACT** Traffic information exchange between vehicles and city-wide traffic command center will enable various traffic management applications in future smart cities. These applications require a secure and reliable communication framework that ensures real-time data exchange. In this paper, we propose a Fog-Assisted Cooperative Protocol (FACP) that efficiently transmits uplink and downlink traffic messages with the help of fog Road Side Units (RSUs). FACP divides the road into clusters and computes cluster head vehicles to facilitate transmission between vehicles and traffic command center or fog RSUs. Using a combination of IEEE 802.11p and C-V2X wireless technologies, FACP minimizes the time required by a vehicle to retrieve traffic information. Furthermore, FACP also utilizes cooperative transmissions to improve the reliability of traffic messages. Simulations results show that FACP improves the reception rate and end-to-end delay of traffic messages.

**INDEX TERMS** Vehicular networks, traffic information, C-V2X, IEEE 802.11p.

## I. INTRODUCTION

Vehicular communication has many potential applications including passenger safety, vehicle route guidance, emergency notification sharing, and on the road Internet access [1]–[3]. Future smart cities will use an intelligent road traffic management system to avoid traffic congestion and reduce travel time. This will allow significant savings in terms of fuel consumption and traveling time [4]–[7].

Two major wireless technologies that will be the part of future vehicular networks include IEEE 802.11p (based on Wi-Fi) and C-V2X (based on cellular communications) [8]–[10]. Many car manufacturers plan to launch smart and connected vehicles in the future that will include chipsets of these wireless technologies. While IEEE 802.11p provides ad hoc short-range communication between vehicles, C-V2X enables long-range infrastructure-based

communication [11], [12]. Both these technologies are working on updated standards such as IEEE 802.11bd and 5G New Radio (NR) to improve data rate and network capacity [8], [13].

Traffic management applications require information exchange between vehicles and city traffic command center. Vehicles initiate traffic information query request and send to the traffic command centers using Road Side Units (RSUs). Traffic command centers work on the query and send the response (with updated traffic information) back to the vehicle. A secure and reliable data dissemination protocol is vital to these traffic management applications [14]–[16].

Reliable traffic information dissemination faces many challenges [17]. Since vehicles are far away from the traffic command centers and RSUs are not always within the transmission range of vehicles, either a multi-hop data dissemination technique using IEEE 802.11p is required or C-V2X can be used for long-range messages [18], [19]. Multi-hop data dissemination suffers from long delays and also requires fre-

The associate editor coordinating the review of this manuscript and approving it for publication was Zhenyu Zhou<sup>1</sup>.

quent retransmissions at every hop. Relying solely on C-V2X may cause network congestion for regular cellular communication. Therefore, an integrated solution that takes into account the advantages of both IEEE 802.11p and C-V2X while not overloading any of these networks is required. Vehicle mobility is also a challenge because query vehicles move away from the location they initiated the query. Therefore, traffic command centers need the updated location of all the query vehicles to transmit the response messages.

Fog computing is a paradigm that enables computing of data closer to the edge with the help of fog nodes [20], [21]. It provides many advantages such as data analysis, storage resources, and network management closer to the user. Future networks will deploy fog nodes to save bandwidth and reduce network latency. In vehicular network, RSUs are ideal candidates to serve as fog nodes [22]–[25]. They can carry out data computations and provide data storage facilities. They can also assist in efficient network management [26]. Data dissemination protocols can use the network information of fog RSUs to route data, allocate resources, control transmission parameters, and manage cooperative transmissions [27]. Moreover, fog RSUs can interact with the traffic command center, cache important traffic information in its data storage and provide quicker traffic notification to the vehicles.

In this paper, we propose a Fog-Assisted Cooperative Protocol (FACP) that enable vehicles to efficiently transmit traffic information. FACP segments road into clusters and select cluster head vehicles with the assistance of fog RSUs. Cluster head vehicles collect query messages on behalf of the cluster using IEEE 802.11p and transmit it to the fog RSU through C-V2X. Similarly, the fog RSU transmits the response messages of the whole cluster to the cluster head vehicle, which then sends it to the individual query vehicles. FACP also introduces a mechanism to enhance the reliability of response messages through cooperative transmissions. Simulation results verify the benefits of FACP in terms of reception rate and end-to-end delay of traffic messages.

The paper is organized as follows. Section II provides an overview of the related work in the literature. Section III presents the system model and Section IV explains the working of FACP. Performance evaluation is presented in Section V. Finally, conclusions are drawn in Section VI.

## II. RELATED WORKS

In this section, we present a brief survey of the literature related to clustering, multi-hop communications, C-V2X communications and cooperative communications in vehicular networks.


Clustering is a useful technique in vehicular networks as it allows a group of nearby vehicles to communicate efficiently. As the data delivery process in a vehicular network is a challenging task due to varying vehicle speed and position, clustering also helps in efficient time or frequency resource allocation. In this regard, a cluster-based cooperative caching approach with mobility prediction is proposed for Vehicular named data networking (VNDN)

in [28]. A clustering algorithm using the predicted location of vehicles is developed to group vehicles with similar mobility patterns. However, cluster heads are frequently changed due to varying vehicle speeds of the vehicles. Reference [29] proposed a Passive Multi-hop Clustering (PMC) algorithm that uses a node degree to evaluate the stability of the nodes within a cluster. To improve the stability of the cluster, the node with the highest stability is selected as the cluster head. In another study in [30], enhancement in the uplink data rate is achieved using a self-adaptive clustering algorithm that can be deployed in a heterogeneous vehicular network environment based on IEEE 802.11p and C-V2X. The proposed algorithm optimally evaluates the cluster size based on mobility information. Moreover, bandwidth allocation for both IEEE 802.11p and C-V2X radios is also optimized by considering the load in each cluster.

Related to multi-hop communications, [31] proposed a multi-hop broadcast protocol that uses a parameter called node index (defined as the relative distance of each node from the source) to assign forwarding probability to the vehicles. Furthermore, the probability of collisions is further reduced by using clustering and only selecting cluster heads for multi-hop transmissions. Reference [32] proposed a multi-hop algorithm for a Massive Input Massive Output (MIMO) system that maximizes the Signal to Noise Ratio (SNR) to determine the best path between the source and the destination.

A geo-based scheduling algorithm for C-V2X is proposed in [33] where vehicles autonomously allocate resources based on neighbor mobility information for better channel coordination. The proposed algorithm overcomes the hidden node problem in the Semi-Persistent Scheduling (SPS) based medium access protocol for C-V2X. The work in [34] uses cellular eNodeBs to allocate V2V resources. The proposed algorithm considers factors such as SNR and network latency to find the optimal V2V links for data transmission. Reference [35] evaluates the performance of C-V2X for road hazard warning applications. An analytical model is developed and metrics such as latency and packet loss probability are presented for mode 3 and mode 4 of C-V2X.

To increase the reliability and throughput of the vehicular network, [36] proposed a cooperative medium access protocol that improves the slot utilization of vehicles. By effectively coordinating unreserved time slots for cooperative transmissions, the proposed protocol reduces cooperation collisions and better utilize the cooperation opportunities. In [37], a stochastic model is developed to evaluate the reliability of data transmission in a vehicular channel. Moreover, vehicular computation tasks have been divided into smaller sub-tasks that are executed by many cooperative computing nodes in parallel. An optimal processor scheduling algorithm is thus presented to reduce the application execution time. The work in [38] proposed a clustering algorithm based on the k-means algorithm. An optimal power allocation scheme is also proposed that reduces the power consumption of cluster head vehicles.

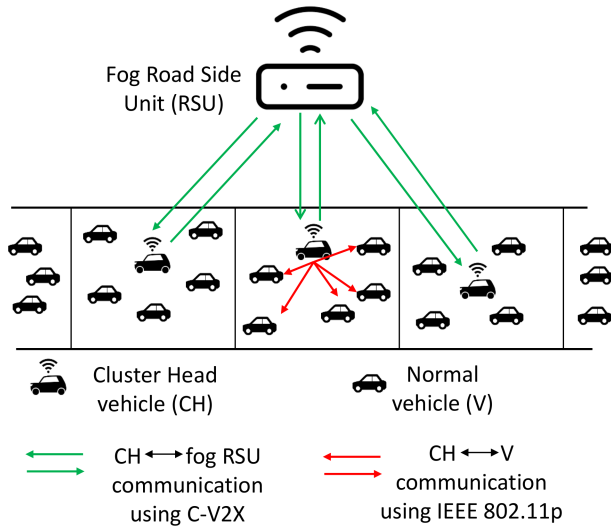

**FIGURE 1.** Cluster-based traffic message transmission using IEEE 802.11p and C-V2X.

### III. SYSTEM MODEL

We consider a vehicular networking scenario as shown in Fig. 1 where vehicles on the road are equipped with both IEEE 802.11p and C-V2X transceivers. Vehicles share traffic messages with the fog RSUs using a combination of IEEE 802.11p and C-V2X technologies. Traffic messages are of two types namely query and response. Initially, a vehicle sends traffic information query to the fog RSU. After the query is processed, fog RSU sends back the traffic information response message back to the vehicle. Generally, response messages are much larger as they contain detailed traffic information.

We divide the road into clusters and a cluster head vehicle  $V_{ch}$  is selected for each cluster to establish efficient traffic message transmission between vehicles and the fog RSU. Cluster head vehicle serves three purposes, firstly collecting traffic query request from the vehicles in the cluster, secondly communicating with the fog RSU (on both uplink and downlink) on behalf of the cluster, and thirdly cooperative transmission of traffic response messages to the query vehicles (vehicle that sends the traffic request message).

The rationale behind using a cluster-based scenario in this paper is because it simplifies the transmission of traffic messages. A big challenge in traffic messages is that the query vehicle moves to a new position when the traffic response message is ready. As a result, it is hard for the fog RSU to locate the request vehicle and requires multi-hop transmission. By using cluster-based transmission, fog RSUs only need to interact with the cluster head vehicles to retrieve the updated location of the request vehicle. Another advantage of cluster-based transmission is that C-V2X transmission is needed by the cluster head vehicles only, thus reducing vehicular traffic load on the cellular network. Therefore, we find cluster-based transmission as a suitable choice for traffic message transmission.

### IV. FOG-ASSISTED COOPERATIVE PROTOCOL FOR TRAFFIC MESSAGE TRANSMISSION

In this section, we explain the working of the proposed Fog-assisted Cooperative Protocol (FACP) for traffic message dissemination in vehicular networks. The key idea of FACP is to select cluster-head vehicles that can transmit traffic messages between vehicles and fog RSUs. In this paper, we have used fog RSUs to assist the vehicles in resource allocation and efficient dissemination of traffic information messages. In particular, the fog RSU assists the vehicles in cluster head selection based on channel information broadcast. Moreover, fog RSU also takes part in the cooperative transmissions phase by selecting cooperative relay vehicles and broadcasting cooperative transmission map.

FACP has four major components namely cluster head selection, query message transmission, response message transmission, and cooperative transmissions. Fig. 2 provides a summary of FACP. The timing diagram of FACP is shown in Fig. 3. It divides the time into four time slots. In the channel information broadcast time slot  $T_{cib}$ , vehicles share their channel conditions with each other. The query time slot  $T_q$  and response time slot  $T_r$  are used for query and response message transmissions respectively. Finally, cooperative time slot  $T_{coop}$  is used to transmit the response messages using cooperative relays.

#### A. CLUSTER HEAD SELECTION

FACP divides the road into fixed-sized clusters. The goal of cluster head selection is to find a suitable cluster head in each cluster that can disseminate query and response messages on behalf of the cluster. CH selection is performed by the fog RSU based on channel conditions. It works on the following three phases.

##### 1) CHANNEL INFORMATION BROADCAST

In this phase, vehicles share their IEEE 802.11p and C-V2X channel information with the fog RSU. Vehicles share short channel information broadcast messages using the service channel of IEEE 802.11p (employing CSMA/CA protocol) within a fixed time slot  $T_{cib}$  as shown in Fig. 3. Channel information broadcast aims to make each vehicle aware of its channel conditions with all other vehicles in the cluster. Based on the channel information broadcast message, each vehicle maintains a table of neighboring vehicles with their location information and received Signal to Noise Ratio (SNR). Each vehicle computes average received SNR from its neighbor table and sends this information to the fog RSU as a measure of its IEEE 802.11p channel quality. Based on this information, fog RSU gets to know that if a particular vehicle is to be selected as a CH, it can disseminate the response messages to other vehicles with that value of average SNR. Moreover, each vehicle also computes its list of top tier vehicles. This list contains all the neighborhood vehicles from the neighbor table whose SNR is greater than a predefined threshold  $SNR_{th}$ . The list of top tier vehicles is shared with the fog RSU

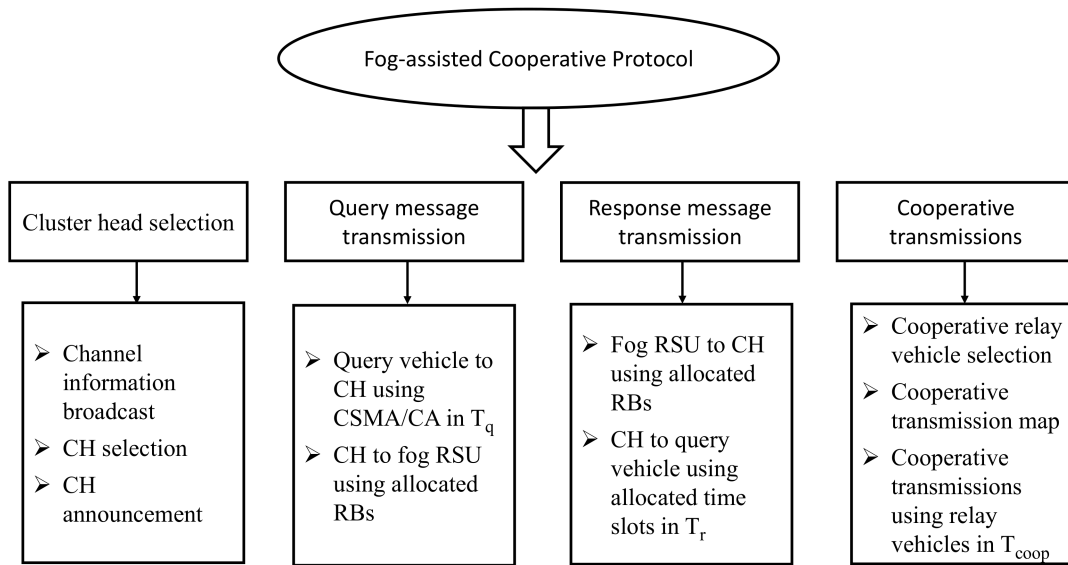


FIGURE 2. Summary of Fog-Assisted Cooperative Protocol.

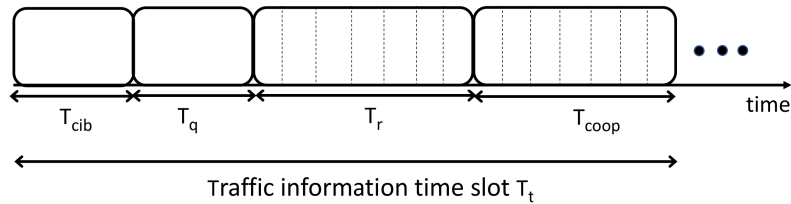


FIGURE 3. Timing diagram of query, response and cooperative messages shared over IEEE 802.11p channel.

Average SNR to neighbor vehicles	List of top tier vehicles	Average distance of neighbor vehicles	SNR of the pilot signal received from the fog RSU
----------------------------------	---------------------------	---------------------------------------	---

FIGURE 4. Format of channel information broadcast message using C-V2X.

and used in finding cooperative vehicles in the cooperative transmissions component of FACP.

Base stations (fog RSUs) periodically send pilot signals to the vehicles as per the C-V2X standard. Vehicles compute the SNR of these pilot signals and share them back with the RSUs as channel information broadcast message. Therefore, as shown in Fig. 4, each vehicle shares four types of information with the fog RSU in the channel information broadcast phase, i) average SNR to neighbor vehicles from its neighbor table (based on IEEE 802.11p channel), ii) list of top tier vehicles, iii) average distance of neighbor vehicles from its neighbor table, iv) SNR of the pilot signal received from the fog RSU (based on C-V2X channel). This information is shared by vehicles on the C-V2X channel after every traffic information time duration  $T_t$ .

## 2) CH SELECTION

Cluster head is selected every  $T_t$  time interval by the RSU. Based on information received in the channel information

broadcast phase, fog RSU selects the cluster head vehicle in this phase. Cluster head vehicle  $V_{ch}$  is selected as the one that can quickly transmit the response message to the query vehicle  $V_q$ . This is done by computing the response time for all potential cluster head vehicles  $c$  in  $V_{cell}$  as follows:

$$T_{resp}(r, c, q) = T_{r2c} + T_{c2q} \quad (1)$$

where  $T_{r2c}$  is the transmission time required for the response message to reach cluster head vehicle  $V_{ch}$  from the fog RSU.  $T_{c2q}$  is the average transmission time required for response message to reach each of the vehicle  $V_q$  from  $V_{ch}$ .  $T_{r2c}$  and  $T_{c2q}$  are given as follows:

$$T_{r2c} = \frac{L}{B_{V2X} \times \log_2(1 + \frac{P_r d_{rc}^{-\alpha_{rc}} h_{rc}}{N_0})} \quad (2)$$

and

$$T_{c2q} = \frac{L}{B_{802.11p} \times \log_2(1 + \frac{P_c d_{cq}^{-\alpha_{cq}} h_{cq}}{N_0})} \quad (3)$$



**Algorithm 1** Cluster Head Selection Algorithm

```

1 for every time interval  $T_t$  do
2   for all potential cluster head vehicles  $c$  in  $V_{cell}$  do
3     Find fog RSU to cluster head vehicle response
     message transmission time as
      $T_{r2c} = \frac{L}{B_{V2X} \times \log_2(1 + \frac{P_r d_{rc}^{-\alpha_{rc}}}{N_0})}$ 
4     Find average cluster head vehicle to query
     vehicle response message transmission time as
      $T_{c2q} = \frac{L}{B_{802.11p} \times \log_2(1 + \frac{P_c d_{cq}^{-\alpha_{cq}}}{N_0})}$ 
5     Find total response message transmission time
     as  $T_{resp}(r, c, q) = T_{r2c} + T_{c2q}$ 
6     Select cluster head vehicle which has the
     minimum total response message transmission
     time  $V_{ch} \leftarrow \min_{c \in V_{cell}} T_{resp}(r, c, q)$ 
7   end
8 end

```

Here  $L$  is the size of response message in bits,  $B_{V2X}$  and  $B_{802.11p}$  are the bandwidth of a C-V2X resource block and IEEE 802.11p channel in Hz respectively,  $P_r$  and  $P_c$  are the transmission powers of RSU and  $V_{ch}$  respectively,  $d_{rc}$  and  $d_{cq}$  represent the distances between the RSU and  $V_{ch}$  and between  $V_{ch}$  and  $V_q$  respectively,  $h_{rc}$  and  $h_{cq}$  are the small-scale fading channel coefficient of C-V2X and IEEE 802.11p channels respectively, and  $N_0$  represents the noise power in dBm.

Cluster head vehicle is selected as the one that minimizes equation 1.

$$V_{ch} \leftarrow \min_{v \in V_{cell}} T_{resp}(r, c, q) \quad (4)$$

**3) CH ANNOUNCEMENT**

Once a cluster head is selected for each cluster, fog RSU broadcasts its vehicle identification (ID) to all members of the cluster. The cluster head does not change until the time duration of  $T_t$ . After  $T_t$ , new channel information is obtained and fog RSU repeats the process of cluster head selection and announcement.

**B. QUERY MESSAGE TRANSMISSION**

Query messages are transmitted from vehicles to fog RSU using the following two phases

**1) QUERY VEHICLE TO CLUSTER HEAD VEHICLE**

In this phase, vehicles use the IEEE 802.11p and CSMA/CA protocol to transmit the query messages to the cluster head vehicle. Since query messages are small in size, the transmission time of these messages is short and CSMA/CA works well for these messages. For query messages, a fixed-sized time slot  $T_q$  is allocated as shown in the timing diagram Fig. 3.

**2) CLUSTER HEAD VEHICLE TO FOG RSU**

In this phase, cluster head vehicles of each cluster transmit the query messages to the fog RSUs using C-V2X. Messages

are transmitted one by one using available resource blocks as per the scheduling algorithm of the cellular network.

**C. RESPONSE MESSAGE TRANSMISSION**

Response messages are transmitted from the fog RSUs to the query vehicles. The following two phases are used to transmit these messages.

**1) FOG RSU TO CLUSTER HEAD VEHICLE**

Once the query is processed, fog RSU prepares a response message and stores it in its queue. Based on last received channel information broadcast, fog RSU finds the current cluster of the query vehicle (as query vehicle may have moved away when it sent the query message). Upon availability of the next available resource block as per the scheduling algorithm, this message is transmitted to the cluster head vehicle using C-V2X.

**2) CLUSTER HEAD VEHICLE TO QUERY VEHICLE**

Cluster head vehicles transmit response messages to the query vehicles using time interval  $T_r$  as shown in Fig. 3. The time interval  $T_r$  is divided into time slots and within each time slot, a single response message is transmitted. The duration of  $T_r$  is variable depending on the number of response messages in the queue of cluster head vehicle.

**D. COOPERATIVE TRANSMISSIONS**

Cooperative transmissions improve the reliability of the response messages by using cooperative vehicles that serve as relays. Cooperative transmissions take place for all those query vehicles that are not within the top tier list of the cluster head vehicle. Therefore, the cluster head vehicle keeps the response messages destined to all those query vehicles in a cooperative queue and retransmit these messages using cooperative relay vehicles.

**1) COOPERATIVE RELAY VEHICLE SELECTION**

Fog RSU selects the cooperative relay vehicles since it has a top tier list of all the vehicles in the cluster (from channel information broadcast messages). A cooperative vehicle for a given response message is selected as the one which belongs to the top tier list of both the cluster head vehicle and the query vehicle. This means that the selected cooperative vehicle has good channel conditions with both source (cluster head vehicle) and the destination node (query vehicle). If there is more than one potential cooperative relay vehicle (that belongs to the top tier list of source and destination), one of them is randomly picked. If there are no potential cooperative relay vehicles, then one of the vehicles in the cluster is randomly selected to perform relaying job.

**2) COOPERATIVE TRANSMISSION MAP**

Fog RSU broadcasts a cooperative transmission map as shown in Fig. 5 to all vehicles in the cluster. This map notifies the selected cooperative relay vehicles about the retransmission of response messages. All vehicles that find their name

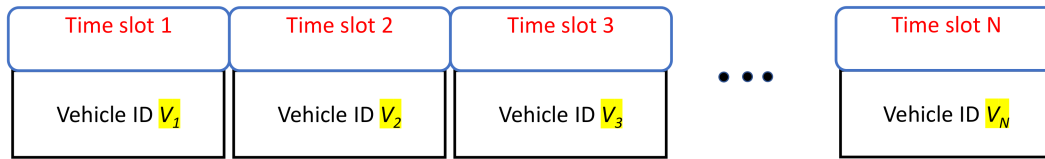


FIGURE 5. Format of cooperative transmission map.

in the cooperative transmission map note the slot number assigned to them for cooperative relaying. Moreover, this also informs the vehicles about the ending time of  $T_{coop}$  and the start of the next query time  $T_q$ .

### 3) COOPERATIVE TRANSMISSION USING RELAY VEHICLES

Finally, each selected relay vehicle retransmits the last received response message to the query vehicles in the allocated cooperative time slot.

## V. PERFORMANCE EVALUATION

### A. SIMULATION SCENARIO

We present the simulation scenario and parameters in Table 1. Using the Simulation of Urban MObility (SUMO) traffic simulator, we generate a traffic scenario of 3 km road length and 6 lanes. Vehicle density varies from 50 vehicles/km to 300 vehicles/km. Vehicle speeds range from 15 – 30 m/s. We use MATLAB to implement the proposed FACP. The query packet size, response packet size, and channel information broadcast packet size is taken as 30 bytes, 1000 bytes and 10 bytes respectively. Packet generation rate is taken as 2 – 5 packets/s.

We use a fixed query transmission time  $T_q$  and channel information broadcast time  $T_{cib}$  of 10 ms each. Cluster head size is set to 500 meter and  $SNR_{th}$  to find top tier vehicles in FACP is 20 dB. The query processing time at fog RSU is 10 ms. and a bandwidth of 10MHz per resource block. For IEEE 802.11p, the transmission range is set to 500m whereas the data rate and bandwidth used is 6 Mbps and 10 MHz. For C-V2X, we use a transmission range of 1000 meter and a bandwidth of 10MHz per resource block. The scheduling algorithm for C-V2X used is Maximum Throughput Scheduling (MTS). We also simulate cellular traffic on the C-V2X channel with each vehicle generating a packet size of 300 bytes at a packet generation rate of 2 packets/s.

We compare FACP with two following protocols

- **Multi-hop IEEE 802.11p** which uses a probabilistic multi-hop protocol based on IEEE 802.11p to transmit traffic messages
- **MTS C-V2X** which uses C-V2X transmissions with MTS algorithm to transmit safety messages.

We use the following two performance metrics

- **Packet Reception Ratio:** It is defined as the number of packets that are successfully received divided by the number of packets that were transmitted.
- **End-to-End Delay:** It is defined as the difference between the time when the response message is received

TABLE 1. Simulation parameters.

Parameter		Value
Traffic	Road length	3km
	Number of lanes	6 (3 per direction)
	Vehicle density	50 – 300 vehicles/km
	Vehicle speed	15 – 30 m/s
Traffic Information Message	Query packet size	30 bytes
	Response packet size	1000 bytes
	Channel information broadcast packet size	10 bytes
	Generation interval	2 – 5 packets/s
FACP Parameters	Query transmission time, $T_q$	10 ms
	Channel information broadcast time $T_{cib}$	10 ms
	Cluster head size	500 meter
	SNR threshold $SNR_{th}$	20 dB
IEEE 802.11p Parameters	Query processing time	10 ms
	Transmission range	500 meter
	Data rate	6 Mbps
C-V2X Parameters	$B_{802.11p}$	10 MHz
	Transmission range	1000 meter
	Scheduling algorithm	Maximum throughput
	Cellular traffic packet size	300 bytes
	Cellular traffic generation rate	2 packets/s
Propagation model	$B_{V2X}$	10 MHz
	Pathloss	Dual-slope
	Fading	Nakagami $m = 1, 3$

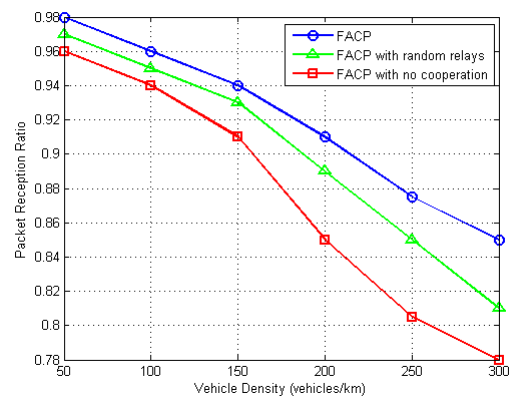


FIGURE 6. Packet reception ratio for FACP with cooperative relays, random relays and without cooperation.

by the query vehicle to the time when the query message was initiated.

### B. RESULTS

We present packet reception ratio for FACP in Fig. 6 at different vehicle densities and compare it with the case when random relay nodes are selected for cooperation and when no cooperation is used. It can be seen that FACP transmits traffic information messages with a packet reception ratio of higher than 0.85 at the highest vehicle density of 300 vehicles/km. In comparison, using random relay vehicles results in a 0.01 – 0.06 lower packet reception ratio. In case, cooperation is not used, the packet reception ratio falls up to 8% lower than FACP at the highest vehicle density. The gain

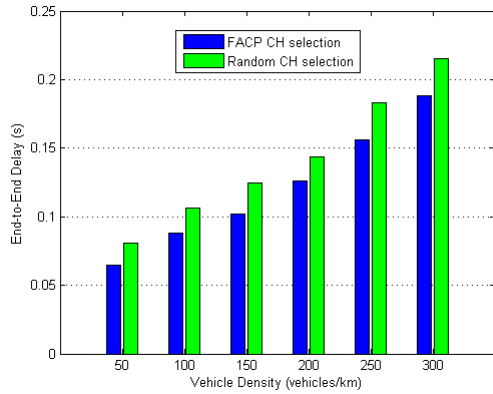


FIGURE 7. End-to-End Delay for FACP with proposed cluster head selection and with random cluster head selection.

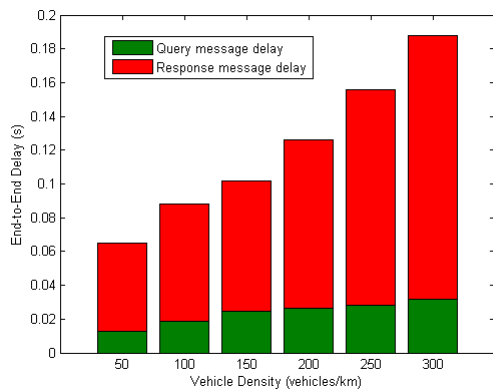


FIGURE 8. Query and Response delay for FACP at different vehicle densities.

in FACP is due to considering cooperative relays that have good channel conditions with the cluster head vehicle as well as the query vehicle.

We evaluate the performance of the cluster head selection algorithm in Fig. 7 in terms of end-to-end delay. Random cluster head selection incurs 16 – 27 ms more delay than the FACP cluster head selection technique. In particular, at a vehicle density of 300 vehicles/km, random cluster head selection requires 215 ms to receive the response message whereas FACP cluster head selection needs 188 ms. This is because FACP selects a cluster head vehicle that minimizes the transmission time of response messages.

We show the query and response message delay for FACP at different vehicle densities in Fig. 8. Results show that response delay is more than 80% of the total traffic information delay (sum of query and response message delays). This is due to the larger packet size of the response message as well as the time required in the processing of the query. At a vehicle density of 300 vehicles/km, query message delay is 37 ms whereas the response message delay is 151 ms.

We compare the results of the packet reception ratio in FACP with the two other protocols in Fig. 9. It can be seen that FACP shows superior performance in terms of packet reception ratio as compared to both multi-hop IEEE 802.11p protocol and MTS C-V2X. While FACP delivers all

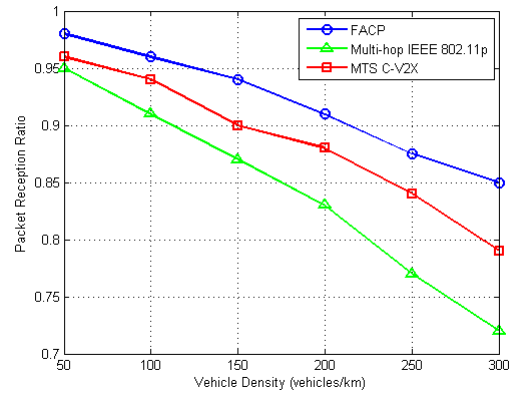


FIGURE 9. Packet reception ratio at different vehicle densities.

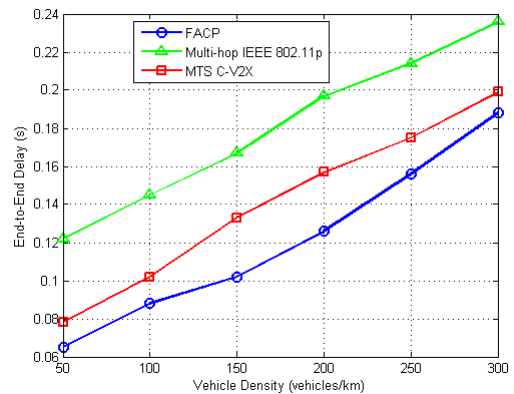



FIGURE 10. End-to-end delay at different vehicle densities.

packets with a reception ratio of higher than 0.85, this ratio falls to 0.79 and 0.72 for MTS C-V2X and multi-hop IEEE 802.11p protocols. The significant performance enhancement in terms of packet reception in FACP is due to efficient cluster head selection, transmission protocol design, and cooperative relay algorithm. MTS C-V2X shows superior performance as compared to multi-hop IEEE 802.11p. The reason is that multi-hop IEEE 802.11p transmits packets over multiple communication links to reach the destination and chances of failure are more as compared to single-hop communications in MTS C-V2X.

We present the end-to-end delay of FACP and the two other protocols in Fig. 10. FACP delivers response messages back to the query vehicle in less than 190ms at the highest vehicle density. In comparison, MTS C-V2X and multi-hop IEEE 802.11p require 12ms and 50ms more time to deliver response messages respectively.

We evaluate the effect of higher packet generation rate and higher Nakagmi  $m$  values on all the three protocols in comparison. At the highest packet generation rate of 5 packets/s and Nakagami  $m$  of 1, FACP shows 64 ms and 126 ms lower end-to-delay as compared to MTS C-V2X and multi-hop IEEE 802.11p protocols respectively. As we increase fading intensity and packet generation rate, end-to-end delay for FACP increases by 336ms at the highest vehicle density. FACP shows improved performance at higher transmission rate and



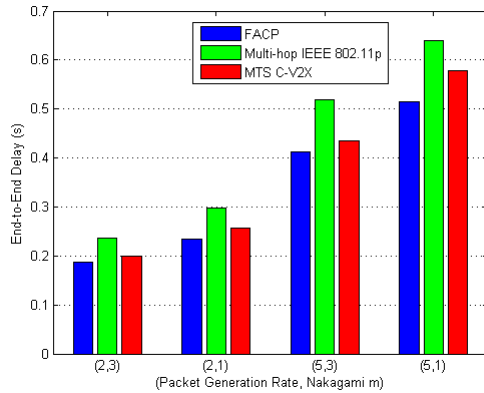

**FIGURE 11.** End-to-end delay at different packet generation rate and Nakagami  $m$  fading values.

poor channel conditions as compared to other protocols due to cooperative relays and using a combination of IEEE 802.11p and C-V2X to deliver traffic information messages.

## VI. CONCLUSION AND FUTURE WORK

In this paper, we propose a Fog-Assisted Cooperative Protocol (FACP) for efficient traffic message transmissions using a combination of IEEE 802.11p and C-V2X technologies. By dividing the road into clusters and selecting cluster head vehicles with the help of fog RSUs, FACP transmits the query and response traffic information messages between vehicles and traffic command center. To improve the reliability of response messages, FACP also uses cooperative transmissions. Simulation results show that FACP improves the reception rate and end-to-end delay of traffic messages. In the future, we will explore the impact of cluster parameters on the communication delay and intelligent local computation of data at the RSUs.

## REFERENCES

- [1] M. A. Javed, S. Zeadally, and E. B. Hamida, "Data analytics for cooperative intelligent transport systems," *Veh. Commun.*, vol. 15, pp. 63–72, Jan. 2019.
- [2] A. A. Khan, M. Abolhasan, W. Ni, J. Lipman, and A. Jamalipour, "A hybrid-fuzzy logic guided genetic algorithm (H-FLGA) approach for resource optimization in 5G VANETs," *IEEE Trans. Veh. Technol.*, vol. 68, no. 7, pp. 6964–6974, Jul. 2019.
- [3] M. Javed and S. Zeadally, "RepGuide: Reputation-based route guidance using Internet of Vehicles," *IEEE Commun. Standards Mag.*, vol. 2, no. 4, pp. 81–87, Dec. 2018.
- [4] L. Ding, Y. Wang, P. Wu, L. Li, and J. Zhang, "Kinematic information aided user-centric 5G vehicular networks in support of cooperative perception for automated driving," *IEEE Access*, vol. 7, pp. 40195–40209, 2019.
- [5] P. Lin, K. S. Khan, Q. Song, and A. Jamalipour, "Caching in heterogeneous ultradense 5G networks: A comprehensive cooperation approach," *IEEE Veh. Technol. Mag.*, vol. 14, no. 2, pp. 22–32, Jun. 2019.
- [6] L. Zhao, F. Wang, K. Zheng, and T. Riihonen, "Joint optimization of communication and traffic efficiency in vehicular networks," *IEEE Trans. Veh. Technol.*, vol. 68, no. 2, pp. 2014–2018, Feb. 2019.
- [7] A. Ali, H. Liu, A. K. Bashir, S. El-Sappagh, F. Ali, A. Baig, D. Park, and K. S. Kwak, "Priority-based cloud computing architecture for multimedia-enabled heterogeneous vehicular users," *J. Adv. Transp.*, vol. 2018, Sep. 2018, Art. no. 6235379.
- [8] G. Naik, B. Choudhury, and J.-M. Park, "IEEE 802.11bd & 5G NR V2X: Evolution of radio access technologies for V2X communications," 2019, *arXiv:1903.08391*. [Online]. Available: <https://arxiv.org/abs/1903.08391>
- [9] M. Gonzalez-Martín, M. Sepulcre, R. Molina-Masegosa, and J. Gozalvez, "Analytical models of the performance of C-V2X mode 4 vehicular communications," *IEEE Trans. Veh. Technol.*, vol. 68, no. 2, pp. 1155–1166, Feb. 2019.
- [10] F. Jameel, S. Wyne, M. A. Javed, and S. Zeadally, "Interference-aided vehicular networks: Future research opportunities and challenges," *IEEE Commun. Mag.*, vol. 56, no. 10, pp. 36–42, Oct. 2018.
- [11] Z. MacHardy, A. Khan, K. Obana, and S. Iwashina, "V2X access technologies: Regulation, research, and remaining challenges," *IEEE Commun. Surveys Tuts.*, vol. 20, no. 3, pp. 1858–1877, 3rd Quart., 2018.
- [12] D. Zhang, Y. Liu, L. Dai, A. K. Bashir, A. Nallanathan, and B. Shim, "Performance analysis of FD-NOMA-based decentralized V2X systems," *IEEE Trans. Commun.*, vol. 67, no. 7, pp. 5024–5036, Jul. 2019.
- [13] A. Bazzi, B. M. Masini, A. Zanella, and I. Thibault, "On the performance of IEEE 802.11p and LTE-V2V for the cooperative awareness of connected vehicles," *IEEE Trans. Veh. Technol.*, vol. 66, no. 11, pp. 10419–10432, Nov. 2017.
- [14] F. Jameel, M. A. Javed, and D. T. Ngo, "Performance analysis of cooperative V2V and V2I communications under correlated fading," *IEEE Trans. Intell. Transp. Syst.*, to be published.
- [15] F. Jameel and M. A. Javed, "On the performance of cooperative vehicular networks under antenna correlation at RSU," *AEU-Int. J. Electron. Commun.*, vol. 95, pp. 216–225, Oct. 2018.
- [16] C. Iwendi, M. Uddin, J. A. Ansere, P. Nkurunziza, J. H. Anajemba, and A. K. Bashir, "On detection of sybil attack in large-scale VANETs using spider-monkey technique," *IEEE Access*, vol. 6, pp. 47258–47267, 2018.
- [17] E. Ahmed and H. Gharavi, "Cooperative vehicular networking: A survey," *IEEE Trans. Intell. Transp. Syst.*, vol. 19, no. 3, pp. 996–1014, Mar. 2018.
- [18] D. Kim, Y. Velasco, W. Wang, R. N. Uma, R. Hussain, and S. Lee, "A new comprehensive RSU installation strategy for cost-efficient VANET deployment," *IEEE Trans. Veh. Technol.*, vol. 66, no. 5, pp. 4200–4211, May 2017.
- [19] J. Barrachina, P. Garrido, M. Fogue, F. J. Martinez, J.-C. Cano, C. T. Calafate, and P. Manzoni, "Road side unit deployment: A density-based approach," *IEEE Intell. Transp. Syst. Mag.*, vol. 5, no. 3, pp. 30–39, Jul. 2013.
- [20] Z. Ning, J. Huang, and X. Wang, "Vehicular fog computing: Enabling real-time traffic management for smart cities," *IEEE Wireless Commun.*, vol. 26, no. 1, pp. 87–93, Jun. 2019.
- [21] A. Ullah, X. Yao, S. Shaheen, and H. Ning, "Advances in position based routing towards ITS enabled Fog-oriented VANET-A survey," *IEEE Trans. Intell. Transp. Syst.*, to be published.
- [22] K. Xiong, S. Leng, J. Hu, X. Chen, and K. Yang, "Smart network slicing for vehicular fog-RANs," *IEEE Trans. Veh. Technol.*, vol. 68, no. 4, pp. 3075–3085, Apr. 2019.
- [23] J. Du, F. R. Yu, X. Chu, J. Feng, and G. Lu, "Computation offloading and resource allocation in vehicular networks based on dual-side cost minimization," *IEEE Trans. Veh. Technol.*, vol. 68, no. 2, pp. 1079–1092, Feb. 2019.
- [24] Z. Zhou, P. Liu, J. Feng, Y. Zhang, S. Mumtaz, and J. Rodriguez, "Computation resource allocation and task assignment optimization in vehicular fog computing: A contract-matching approach," *IEEE Trans. Veh. Technol.*, vol. 68, no. 4, pp. 3113–3125, Apr. 2019.
- [25] Z. Zhou, H. Liao, X. Zhao, B. Ai, and M. Guizani, "Reliable task offloading for vehicular fog computing under information asymmetry and information uncertainty," *IEEE Trans. Veh. Technol.*, vol. 68, no. 9, pp. 8322–8335, Sep. 2019.
- [26] A. K. Bashir, R. Arul, S. Basheer, G. Raja, R. Jayaraman, and N. M. F. Qureshi, "An optimal multitier resource allocation of cloud RAN in 5G using machine learning," *Trans. Emerg. Telecommun. Technol.*, vol. 30, no. 8, p. e3627, 2019.
- [27] Z. Zhou, J. Feng, Z. Chang, and X. Shen, "Energy-efficient edge computing service provisioning for vehicular networks: A consensus ADMM approach," *IEEE Trans. Veh. Technol.*, vol. 68, no. 5, pp. 5087–5099, May 2019.
- [28] W. Huang, T. Song, Y. Yang, and Y. Zhang, "Cluster-based cooperative caching with mobility prediction in vehicular named data networking," *IEEE Access*, vol. 7, pp. 23442–23458, 2019.
- [29] D. Zhang, H. Ge, T. Zhang, Y.-Y. Cui, X. Liu, and G. Mao, "New multi-hop clustering algorithm for vehicular ad hoc networks," *IEEE Trans. Intell. Transp. Syst.*, vol. 20, no. 4, pp. 1517–1530, Apr. 2019.

- [30] T. Wang, X. Cao, and S. Wang, "Self-adaptive clustering and load-bandwidth management for uplink enhancement in heterogeneous vehicular networks," *IEEE Internet Things J.*, vol. 6, no. 3, pp. 5607–5617, Jun. 2019.
- [31] X. Zeng, M. Yu, and D. Wang, "A new probabilistic multi-hop broadcast protocol for vehicular networks," *IEEE Trans. Veh. Technol.*, vol. 67, no. 12, pp. 12165–12176, Dec. 2018.
- [32] M. Z. Alam, I. Adhichandra, and A. Jamalipour, "Optimal best path selection algorithm for cluster-based multi-hop MIMO cooperative transmission for vehicular communications," *IEEE Trans. Veh. Technol.*, vol. 68, no. 9, pp. 8314–8321, Sep. 2019.
- [33] R. Molina-Masegosa, M. Sepulcre, and J. Gozalvez, "Geo-based scheduling for C-V2X networks," *IEEE Trans. Veh. Technol.*, vol. 68, no. 9, pp. 8397–8407, Sep. 2019.
- [34] F. Abbas, P. Fan, and Z. Khan, "A novel low-latency V2V resource allocation scheme based on cellular V2X communications," *IEEE Trans. Intell. Transp. Syst.*, vol. 20, no. 6, pp. 2185–2197, Jun. 2019.
- [35] C. Campolo, A. Molinaro, A. O. Berthet, and A. Vinel, "On latency and reliability of road hazard warnings over the cellular V2X sidelink interface," *IEEE Commun. Lett.*, vol. 23, no. 11, pp. 2135–2138, Nov. 2019.
- [36] S. Bharati, W. Zhuang, L. V. Thanayankizil, and F. Bai, "Link-layer cooperation based on distributed TDMA MAC for vehicular networks," *IEEE Trans. Veh. Technol.*, vol. 66, no. 7, pp. 6415–6427, Jul. 2017.
- [37] J. Zhou, D. Tian, Y. Wang, Z. Sheng, X. Duan, and V. C. M. Leung, "Reliability-optimal cooperative communication and computing in connected vehicle systems," *IEEE Trans. Mobile Comput.*, to be published.
- [38] H. Xiao, Y. Chen, Q. Zhang, A. T. Chronopoulos, Z. Zhang, and S. Ouyang, "Joint clustering and power allocation for the cross roads congestion scenarios in cooperative vehicular networks," *IEEE Trans. Intell. Transp. Syst.*, vol. 20, no. 6, pp. 2267–2277, Jun. 2019.



**MUHAMMAD AWAIS JAVED** (S'13–M'19–SM'19) received the B.Sc. degree in electrical engineering from the University of Engineering and Technology Lahore, Pakistan, in August 2008, and the Ph.D. degree in electrical engineering from The University of Newcastle, Australia, in February 2015. From July 2015 to June 2016, he was a Postdoctoral Research Scientist with the Qatar Mobility Innovations Center (QMIC) on SafeITS project. He is currently an Assistant Professor with

COMSATS University Islamabad, Pakistan. His research interests include intelligent transport systems, vehicular networks, protocol design for emerging wireless technologies, and the Internet of Things.



**NAZMUS SHAKER NAFI** received the B.Eng. degree (Hons.) in communication from the International Islamic University Malaysia (IIUM), in 2010, the M.Phil. degree in computer engineering from The University of Newcastle, Newcastle, NSW, Australia, in 2013, and the Ph.D. degree in electrical engineering from RMIT University, in 2017. He is currently a Lecturer with the School of Information Technology and Engineering, Melbourne Institute of Technology, Melbourne,

Australia. His current research interests include smart grid communication systems, wireless network architecture, vehicular communication systems, machine to machine communication systems, software defined networks, and the Internet of Things. He received Chartered Engineering status from Engineers Australia, in 2018.



**SHAKILA BASHEER** is currently an Assistant Professor with the Department of Information Systems, College of Computer and Information Sciences, Princess Nourah Bint Abdul Rahman University, Riyadh, Saudi Arabia. She has more than ten years of teaching experience and has published several technical articles in international journals/proceedings of international conferences/edited chapters of reputed publications. She has worked and contributed in the field of data mining, image processing, and fuzzy logic. Her research also focuses on data mining algorithms using fuzzy logic. She is also working on data mining, machine learning, blockchain, and vehicular networks.



**MARIYAM AYSHA BIVI** received the B.Sc. degree in computer science from Madurai Kamaraj University, in 1997, the M.C.A. degree from Madras University, in 2000, and the M.Phil. degree in computer science from Periyar University, in 2005.

From 2000 to 2007, she was with the Justice Basheer Ahmed Sayeed College for Women, eventually as a Senior Scale Lecturer. She was also a Part-Time Lecturer with the University of Madras,

from 2000 to 2007, an Academic Counsellor with Indira Gandhi National Open University, from 2002 to 2007, and as a Guest Lecturer with the Bharathi Women's College, in November 2002. She is currently a Lecturer with the Department of Computer Science, King Khalid University, where she has been working, since August 2007. She has published many technical articles in journals and conferences. She worked and contributed in the fields of data mining and image processing. She is also working on data mining, big data, cloud computing, and the IoT.



**ALI KASHIF BASHIR** (M'15–SM'16) received the B.S. degree from the University of Management and Technology, Pakistan, the M.S. degree from Ajou University, South Korea, and the Ph.D. degree in computer science and engineering from Korea University, South Korea.

He is currently a Senior Lecturer with the Department of Computing and Mathematics, Manchester Metropolitan University, U.K. He is also affiliated with SEECS, National University of Science and Technology, Pakistan, as an Adjunct Professor. He is the author of over 80 peer-reviewed articles. He is supervising/co-supervising several graduate (M.S. and Ph.D.) students. His research interests include the Internet of Things, wireless networks, distributed systems, network/cyber security, and cloud/network function virtualization. He is a Distinguished Speaker of ACM. His past assignments include Associate Professor of Information and Communication Technologies, Faculty of Science and Technology, University of the Faroe Islands, Denmark; Osaka University, Japan; Nara National College of Technology, Japan; the National Fusion Research Institute, South Korea; Southern Power Company Ltd., South Korea, and the Seoul Metropolitan Government, South Korea. He has served as the Chair (program, publicity, and track) and Chair on several conferences and workshops. He has delivered several invited and keynote talks, and reviewed the technology leading articles for journals, such as the IEEE TRANSACTIONS ON INDUSTRIAL INFORMATICS, the IEEE COMMUNICATION MAGAZINE, the IEEE COMMUNICATION LETTERS, the IEEE INTERNET OF THINGS, and the IEICE Journals, and conferences, such as the IEEE Infocom, the IEEE ICC, the IEEE Globecom, and the IEEE CLOUD OF THINGS. He is serving as the Editor-in-Chief of the IEEE FUTURE DIRECTIONS NEWSLETTER. He is the Editor of several journals and has served as a Guest Editor on several special issues in journals of IEEE, Elsevier, and Springer.

...