

UNIVERSITY OF BIRMINGHAM

University of Birmingham
Research at Birmingham

High-performance planar holographic structures for complex focusing of terahertz beams

Kuznetsov, Sergey A.; Astafev, Mikhail A.; Gentshev, A. N.; Navarro-Cia, Miguel; Beruete, M.; Arzhannikov, A. V.

License:

None: All rights reserved

Document Version

Peer reviewed version

Citation for published version (Harvard):

Kuznetsov, SA, Astafev, MA, Gentshev, AN, Navarro-Cia, M, Beruete, M & Arzhannikov, AV 2016, High-performance planar holographic structures for complex focusing of terahertz beams. in *META'16 in Malaga: The 7th International Conference on Metamaterials, Photonic Crystals and Plasmonics Proceedings*. META Proceedings: META'16 in Malaga, META Conferences, Spain, pp. 2085-2086, META'16, Malaga, Spain, 25/07/16.

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

In addition, authors are encouraged to post and share their work online (e.g., in institutional repositories or on their website) at any point before and after the conference.

<http://metaconferences.org/ocs/index.php/META16/index/about/submissions#copyrightNotice>

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

High-performance planar holographic structures for complex focusing of terahertz beams

S. A. Kuznetsov^{1,2,3*}, M. A. Astafev¹, A. N. Gentshev³,
M. Navarro-Cía⁴, M. Beruete⁵, and A. V. Arzhannikov^{1,3}

¹Novosibirsk State University, ATIC HT&NM, Russian Federation

²Institute of Semiconductor Physics SB RAS, Novosibirsk Branch“TDIAM”, Russian Federation

³Budker Institute of Nuclear Physics, Russian Federation

⁴School of Physics and Astronomy, University of Birmingham, UK

⁵Public University of Navarra, Institute of Smart Cities, Spain

*corresponding author: SAKuznetsov@nsm.nsu.ru

Abstract—We overview the research results on electromagnetic optimization and experimental realization of low- and high-aspect plasmonic structures designed for simple and sophisticated focusing at the frequencies of 0.35 and 0.65 THz. The structures are considered both in the reflect- and transmit-array configurations whose surface phase distribution is synthesized with a computer holography technique. The overall diffraction efficiency reaching 80% is experimentally demonstrated. The methods of structure fabrication using UV and deep X-ray lithography are discussed.

Last years, searching for effective ways to a complex wavefront manipulation becomes a hot topic in physics of metamaterials [1-5]. This task is evaluated to be important for various applications where beam-shaping and beam-focusing structures are highly demanded, especially in the relatively young terahertz (THz) domain which occasionally faces the lack of high-performance devices of this kind. Using plasmonic structures with a properly designed spatial-dependent reflection/transmission phase, which is normally synthesized by methods of computer holography, such a problem can be elegantly solved [2-5]. As a result, the holographic meta-structures (HMSs) turn out to be purely flat and thin devices with striking functionalities and high efficiency typically unreachable in conventional optics.

In this work, we present the results of electromagnetic optimization and experimental implementation for high-performance THz HMSs of several types, which are tested in the experiments on radiation focusing into the focal areas of simple and complicated shapes including single and several spaced spots, as well as “Latin letters” (Fig.1). The HMSs of the first kind are the reflect-arrays optimized for operation at the frequency of 0.35 THz. In a basic design they are realized as a single-layer photolithographically-patterned metasurface laying upon a grounded polypropylene slab 190 μm thick [5]. To cover the range of 360° phase variation, we employed the “patch-to-SRR” topological morphing to attain the polarization-sensitive focusing [5], while and the “patch-to-ring” transformation was utilized for the polarization-insensitive case. The HMSs of the second kind are represented by the transmit-arrays optimized for 0.65 THz, which are made as the single-layer high-aspect structures with a wavelength-comparable thickness. We proposed a relatively simple but effective method for their fabrication, which is based on deep X-ray lithographic patterning of a carrying PMMA layer followed by its entire surface metallization [6, 7].

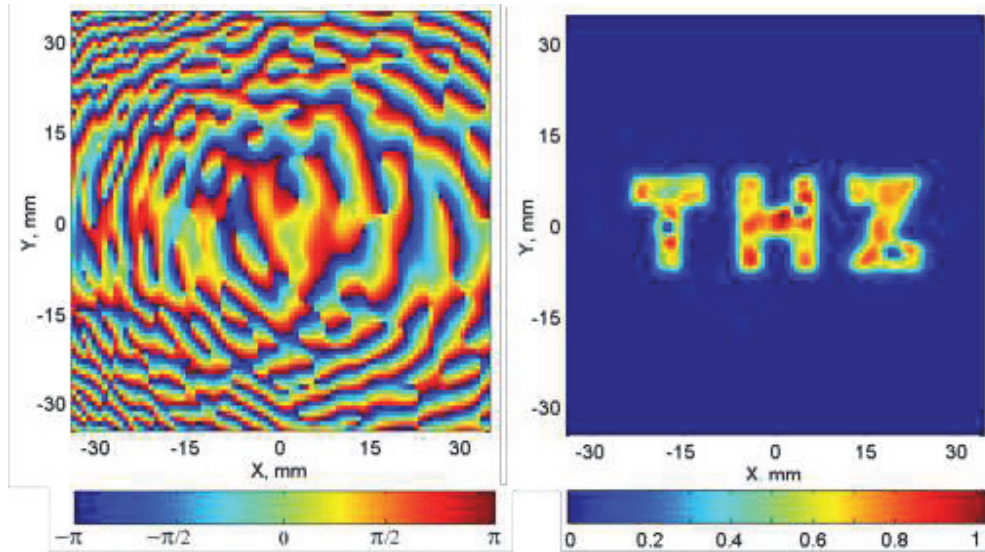


Figure 1. Example of the optimized surface phase distribution (left) for the holographic reflectarray designed to focus a Gaussian beam into the letters “THZ” at 0.35 THz. The right graph shows the measured intensity distribution in the focal plane positioned at $F=120$ mm from the HMS center (90° -reflection scheme, see [5]).

To attain the required phase distribution over the HMSs surface, all the developed HMSs were designed via the Gerchberg-Saxton holographic algorithm [5] which was mastered to maximize the diffraction efficiency (DE) of the HMSs. This allowed us to reach $\sim 80\%$ for the experimentally measured DE values. Such a high efficiency outperforms similar characteristics of many analogues operating at THz frequencies and demonstrates the effectual way in creating relatively inexpensive, flat, light-weight, and high-performance focusing devices.

This work was supported by the Ministry of Education and Science of the Russian Federation under the State Assignment Contract #3002.

REFERENCES

1. Luo, J., Yu., H., Song, M., Zhang, Z., “Highly efficient wavefront manipulation in terahertz based on plasmonic gradient metasurfaces,” *Optics Letters*, Vol. 39, No. 8, 2229–31, 2014.
2. Yu, N. F., & Capasso, F., “Flat optics with designer metasurfaces,” *Nat. Materials*, Vol. 13, 139–150, 2014.
3. Rui, G. and Zhan, Q., “Tailoring optical complex fields with nano-metallic surfaces,” *Nanophotonics*, Vol. 4, No. 1, 2–25, 2015.
4. Huang, L., Mühlenbernd, H., Li X., Song, X., Bai, B., Wang, Y., Zentgraf, T., “Broadband Hybrid Holographic Multiplexing with Geometric Metasurfaces,” *Adv. Mat.*, Vol. 27, No. 41, 6444–64491, 2015.
5. Kuznetsov, S. A., Astafev, M. A., Beruete, M. & Navarro-Cia, M., “Planar Holographic Metasurfaces for Terahertz Focusing,” *Scientific Reports*, 5, 7738, Jan. 13, 2015.
6. Kuznetsov, S. A., Astafev, M. A., Gelfand, A. V., Gentslev, A. N., and Bessmeltsev, V. P., “Frequency Filters and Planar Lenses for the Terahertz Band: Configurations with Low- and High-Aspect Microstructures” // in *Proceedings of 40th Int. Conf. on Infrared, Millimeter and Terahertz Waves (IRMMW-THz 2015)*, Hong Kong, China, August 23 - 28, 2015, T2E5 – 3136553.
7. Kuznetsov, S. A. et al., “High-performance subterahertz high-pass filters and planar focusing devices produced with deep X-ray lithography,” *To be submitted*, 2016.