



GRASAS Y ACEITES 67 (2)

April–June 2016, e127

ISSN-L: 0017-3495

doi: <http://dx.doi.org/10.3989/gya.0627152>

Determination of saturated aliphatic hydrocarbons in vegetable oils

R.B. Gómez-Coca[✉], R. Cert, M.C. Pérez-Camino and W. Moreda

Department of Characterization and Quality of Lipids, Instituto de la Grasa – CSIC-Campus of Universidad Pablo de Olavide, Building 46, Ctra. Utrera km 1, 41013 Seville, Spain

[✉]Corresponding author: raquel.coca@ig.csic.es

Submitted: 10 June 2015; Accepted: 13 October 2015

SUMMARY: The aim of this work is to inform about the development of a simple and reliable off-line method for the determination of saturated hydrocarbons (SH) in vegetable oils. SH can be used as markers for fuel or for mineral oil contamination in edible oils and fats. The method consists of the isolation of the fraction by LC on deactivated silver-silica gel and subsequent on-column GC-FID analysis. This stationary phase was prepared avoiding any kind of activation. The method was developed and validated through the participation in both a proficiency test organized by the Joint Research Centre of the European Commission, and a collaborative trial carried out with trained Spanish laboratories according to the standard ISO 5725. Results showed acceptable repeatability and reproducibility values, and Horrat index, being this protocol in use with satisfactory results ever since. The method's LOQ is $15 \text{ mg}\cdot\text{kg}^{-1}$ and its LOD $5 \text{ mg}\cdot\text{kg}^{-1}$, which make it suitable to quantify the $50 \text{ mg}\cdot\text{kg}^{-1}$ limit established by the EU, and to detect mineral oil content within the $10\text{--}500 \text{ mg}\cdot\text{kg}^{-1}$ range. Although other procedures with lower LOD have been developed throughout the years, the use of just regular laboratory equipment such as GC-FID makes the proposed method appropriate for application on a routine basis.

KEYWORDS: Fuel-oil; Mineral oil; Saturated hydrocarbons; Silver-silica gel fractionation; Unresolved Complex Mixture (UCM)

RESUMEN: *Determinación de hidrocarburos alifáticos saturados en aceites vegetales.* El objetivo de este trabajo es el de dar cuenta del desarrollo de un método sencillo y fiable para la determinación de hidrocarburos saturados (HS) en aceites vegetales. Los HS pueden utilizarse como marcadores de contaminación de aceites y grasas comestibles con fuel-oil y aceites minerales. El procedimiento consiste en el aislamiento de la fracción correspondiente por cromatografía en columna de gel de sílice argentada sin activar y posterior análisis mediante GC (on-column)-FID. El método se desarrolló y validó mediante la participación en una prueba de competencia organizada por el *Joint Research Centre* de la Comisión Europea, además de con un ensayo colaborativo llevado a cabo por laboratorios españoles de acuerdo con la norma ISO 5725. Los resultados mostraron valores de repetibilidad y de reproducibilidad aceptables, así como del índice de Horrat, por lo que dicho protocolo se está utilizando con resultados muy satisfactorios. El límite de detección (LDD) es de $5 \text{ mg}\cdot\text{kg}^{-1}$, y su límite de cuantificación (LDQ) de $15 \text{ mg}\cdot\text{kg}^{-1}$, lo que lo hacen muy adecuado para evaluaciones alrededor del límite de $50 \text{ mg}\cdot\text{kg}^{-1}$ establecido por la Unión Europea (UE). Asimismo es fiable para determinar el contenido de aceite mineral en el intervalo entre 10 y $500 \text{ mg}\cdot\text{kg}^{-1}$. Si bien se han desarrollado otros procedimientos con menor LDD a lo largo de los años, el uso de equipos habituales de laboratorio tales como GC-FID ha hecho que el método propuesto sea el de elección para su aplicación en cualquier laboratorio de forma rutinaria.

PALABRAS CLAVE: Aceite mineral; Fraccionamiento mediante sílice argentada; Fuel-oil; Hidrocarburos saturados; Mezcla compleja sin resolver (UCM)

Citation/Cómo citar este artículo: Gómez-Coca RB, Cert R, Pérez-Camino MC, Moreda W. 2016. Determination of saturated aliphatic hydrocarbons in vegetable oils. *Grasas Aceites* 67 (2): e127. doi: <http://dx.doi.org/10.3989/gya.0627152>.

Copyright: © 2016 CSIC. This is an open-access article distributed under the terms of the Creative Commons Attribution-Non Commercial (by-nc) Spain 3.0 Licence.

1. INTRODUCTION

Crude edible vegetable oils contain various classes of natural hydrocarbons: 50–350 mg·kg⁻¹ of the n-alkane series from C10 to C35, centred at C25-C29, the odd numbered elements being the most abundant; squalene that is the major hydrocarbon in olive and pumpkin oils (500–12000 mg·kg⁻¹); and low amounts of the n-alkene series and terpenic hydrocarbons (sesquiterpenes in olive oil, kaurene in sunflower oil). These compounds, when analysed by high-resolution gas chromatography-flame ionization detector (GC-FID), yield a GC profile constituted by numerous sharp peaks that can be easily quantified (Lanzón *et al.*, 1994).

On the other hand, base oil for manufacturing the lubricating or hydraulic oils used in the food industry, named “white mineral oil”, is constituted by a complex mixture of branched saturated aliphatic hydrocarbons (mainly iso-isomers) that yield a GC-FID hump between C20 and C54, known as unresolved complex mixture (UCM). In GC-FID chromatograms obtained from the hydrocarbon fraction of vegetable oils, mineral oil contamination can be evidenced by the presence of a hump of branched saturated hydrocarbons (SH) with a series of sharp peaks on the top corresponding to the n-alkanes.

Nevertheless in refined vegetable oils, significant amounts of unsaturated steroidal hydrocarbons coming from dehydrogenation of sterols are found, and in refined olive oils, isoprenoid alkenes from isomerization and cyclization of squalene and from dehydration and cyclization of oxidized squalene are found too (Lanzón *et al.*, 1994; Bastic *et al.*, 1978). All these compounds yield a very complex GC-FID profile between C20 and C35 overlapping with the hump due to mineral oil. Therefore, the determination of mineral oil in vegetable oils requires the isolation of a SH-fraction from the unsaturated ones.

GC-FID is the technique of choice for the analysis of the SH fraction because it enables the determination of SH naturally present in fats and oils, and the hump of branched paraffins from mineral oils. The use of silica gel high performance liquid chromatography (HPLC) as a first step to separate the paraffins from the rest of the oil has also been described (Fiselier *et al.*, 2009a). Mineral paraffins are determined by the area of the hump, confined by the baseline and an upper contour line defined by the baseline of the sharp (natural) peaks standing on the hump.

Some years ago about 1000 mg·kg⁻¹ of a mixture mainly constituted of saturated aliphatic hydrocarbons ranged from C18 to C40 (centred at C28) was found in crude sunflower oil coming from Ukraine, and attributed to contamination with mineral oil (Biedermann *et al.*, 2009). To protect consumers the European Commission decided to consider the UCM of SH as marker of mineral oil and

established a legal limit of 50 mg·kg⁻¹ from C10 to C56 (except n-C27, n-C29, and n-C31) in sunflower oils (EC, 2009). At that moment, IUPAC, 1987 and AOCS, 1997 methods were standardized for the control of this contaminant in oils and fats; in the former, the oil is fractioned by thin layer chromatography (TLC) on silica gel plates and determined by the densitometry of the spot; the latter lies in the weight of the SH-fraction isolated by column chromatography (CC) on alumina. Both methods suffered from a high detection limit (500–1000 mg·kg⁻¹) and consequently, new methods based on the chromatographic isolation of SH-fraction and posterior analysis by GC-FID were developed to detect lower amounts of mineral oil.

For the isolation of SH-fraction from the oil CC on alumina, silica gel, and their combinations have been proposed. Studies on the behaviour of different classes of paraffins (n-, iso-, large carbon-atom number) on alumina showed that the retention depends on the aluminium oxide activation temperature, mobile phase, column temperature, sensitivity to polar components and capacity (Fiselier *et al.*, 2009a; Fiselier *et al.*, 2009b; Wagner *et al.*, 2001), and that a partial loss of iso-paraffins may occur (Moret *et al.*, 2011). These results indicate that alumina is not advisable for the quantitative determination of mineral oil.

Silica gel has been usually applied for the isolation of the SH-fraction from the oil, using solid phase extraction (SPE) (Fiorini *et al.*, 2010), liquid chromatography (LC) (Tan and Kuntom, 1993) and especially on-line HPLC-GC (Tranchida *et al.*, 2011; Biedermann and Grob, 2012). A separation by SPE packed with alumina and silica gel on top, followed by GC-FID analysis with large volume on-column injection has been described (Fiselier and Grob, 2009). These methods reach sufficient sensitivity but the separation from the unsaturated hydrocarbons is not complete in refined oils containing significant amounts of sterenes or squalene. To improve resolution and sensitivity, on-line HPLC-HPLC-GC-FID systems have been proposed where the first column isolates the hydrocarbons from the bulk of the oil and the second one separates the paraffins (Fiorini *et al.*, 2008; Populin *et al.*, 2004; Neukom *et al.*, 2002). These methods require somehow more sophisticated apparatus that may not be available in many laboratories.

Other approaches to improve the isolation of the SH-fraction from the oil consist of the fractioning of the unsaponifiable matter on silica gel column, rendering better sensitivity and separation (Lanzón *et al.*, 1994), and the bromination (Wagner *et al.*, 2001; Moret *et al.*, 2003) or epoxidation (Biedermann and Grob, 2012; Biedermann *et al.*, 2009) of the oil to obtain more polar derivatives of the unsaturated compounds that are more strongly retained during LC. These procedures are solvent- and time consuming, tedious, and prone to contamination.

The use of silver-silica enhances the separation between the SH-fraction and the olefins due to the affinity of the Ag^+ ion to double bonds (olefinic and aromatic hydrocarbons) allowing a more reliable fractioning. An off-line method based on SPE on activated silver-silica gel mixture (1 g) followed by GC-FID has been reported (Moret *et al.*, 2011) for the determination of mineral oil in vegetable oils.

The aim of this work was to inform about the development of a simple and reliable off-line method for the determination of SH as markers of fuel or mineral oil contamination in edible oils and fats. The criteria were (i) availability of samples containing large amounts of interfering olefins and (ii) wide concentration range including the legal limit of $50 \text{ mg}\cdot\text{kg}^{-1}$ established by the European Commission for Ukrainian sunflower oil (EC, 2009). The method consists of the isolation of the fraction by LC on deactivated silver-silica gel and subsequent on-column GC-FID analysis. This stationary phase was prepared by a new procedure avoiding the activation used for the isolation of steroidal hydrocarbons in vegetable oils (Cert and Moreda, 1998).

2. MATERIALS AND METHODS

2.1. Samples

Samples of sunflower oil coming from Ukraine were obtained from the Spanish Food Safety Agency. Samples of crude and refined sunflower oils were purchased in the local markets. Refined pomace oil was obtained directly from the producers.

2.2. Material and reagents

All the reagents were of analytical grade unless otherwise specified. Distilled water, sea sand, and silver nitrate were purchased from Panreac (Montcada I Reixac, Barcelona, Spain). 3,5-Cholestadiene and the internal standard (IS) n-eicosane (C20) were from Sigma-Aldrich Co. LLC (St. Louis, Missouri, USA). Diethyl ether, n-heptane, and n-hexane 95% were supplied by Romil Ltd. (Waterbach, Cambridge, GB). We checked the n-hexane purity by concentrating a mixture of 200 mL of the solvent with 2 mL of the IS (C20) in a rotary evaporator down to 0.5 mL, and analysing the concentrate by GC with cool on-column injection. Silica gel 60 for column chromatography, 70–230 mesh, (Merck KGaA, Darmstadt, Germany) was used directly from the container. A silver nitrate solution (75% w/v) was prepared by dissolving 4.5 g of silver nitrate in 6 mL distilled water. Chromatography columns (50 cm long \times 1.5 cm id) were provided with Teflon stopcocks and were washed with n-hexane before use.

2.3. Method development

2.3.1. Separation of the hydrocarbon fractions

Deactivated 10% silver-silica gel was prepared following the procedure indicated for the separation of steroidal hydrocarbons (Cert and Moreda, 1998) but decreasing the water proportion down to 13.3% w/v.

For the preparation of 3 chromatography columns, 45 g silica gel were weighted in a 500-mL round-bottomed flask; thereafter 6 mL silver nitrate solution were added drop wise with a Pasteur pipette, shaking then vigorously. The flask was covered with aluminium foil and put in a rotary evaporator during 30 min at room temperature and atmospheric pressure. To avoid uneven distribution of the silver nitrate in the silica gel both the condenser and the evaporation flask were set horizontally. Finally it was let to stand during 12 h before use.

For each column arrangement, 15 g of silver-silica gel were suspended in a beaker in n-hexane, and the slurry was introduced onto the chromatographic column already containing 40 mL n-hexane. Once the packing settled, a small amount of sea sand (previously washed with n-hexane) was added (1 cm of column height), and the remaining solvent eluted. In order to avoid bubble formation, we tapped the column gently with a rubber rod. The column was eluted with 60 mL n-hexane to eliminate impurities of the packing material, and wrapped in black paper to protect it from the light.

To investigate the behaviour of the different types of hydrocarbons during the chromatographic separation on silver-silica gel column, refined olive pomace oil spiked with 3,5-cholestadiene was chosen. In a small beaker, 1 g oil was weighed to the nearest 1 mg, and 1 mL 3,5-cholestadiene standard solution was added. The mixture was transferred to the column with the aid of a Pasteur pipette and let get in the stationary phase. The beaker was washed with two portions of 1 mL n-hexane that were also added to the column packing. The column was then eluted with 100 mL n-hexane with a cadence of 15 drops every 10 s approximately, collecting three separated fractions of 40, 40, and 20 mL, respectively. Subsequently, 120 mL of the n-hexane:diethyl ether (98:2, v/v) mixture were added, collecting three independent 40 mL fractions. Most of the solvent of each fraction was evaporated in a rotary evaporator at room temperature under vacuum and until dryness with a nitrogen stream. Each residue was re-dissolved in 0.5 mL n-heptane and analysed by GC.

2.3.2. Gas chromatography analysis and quantitation

GC analysis of the hydrocarbons was performed using an Agilent 6890N gas chromatograph (Agilent Technologies, Santa Clara, California) equipped

with an Agilent 7683B Automatic Liquid Sampler and FID. Data was acquired with the Agilent ChemStation for GC system program. Separations were carried out on a high-temperature fused-silica capillary column (5% diphenyl-95% dimethylpolysiloxane: 10 m×0.32 mm id, 0.10 μm film; Sugelabor, Madrid, Spain), 2 μL injection volume, hydrogen carrier gas at 105 kPa and EPC cool on-column injection. The operating conditions were as follow: injector temperature, 60 °C; detector temperature,

350 °C; oven programming temperatures, initial 60 °C for 1 min and then rising at 12 °C·min⁻¹ to 350 °C, hold for 4 min. Under these conditions the IS (C20) appeared at a retention time of about 8.5 min (Figure 1).

For the quantitative determination of both natural *n*-alkanes and UCM, the sum of the respective areas, except that of the IS, was considered. On each case those areas were compared with the area of the IS.

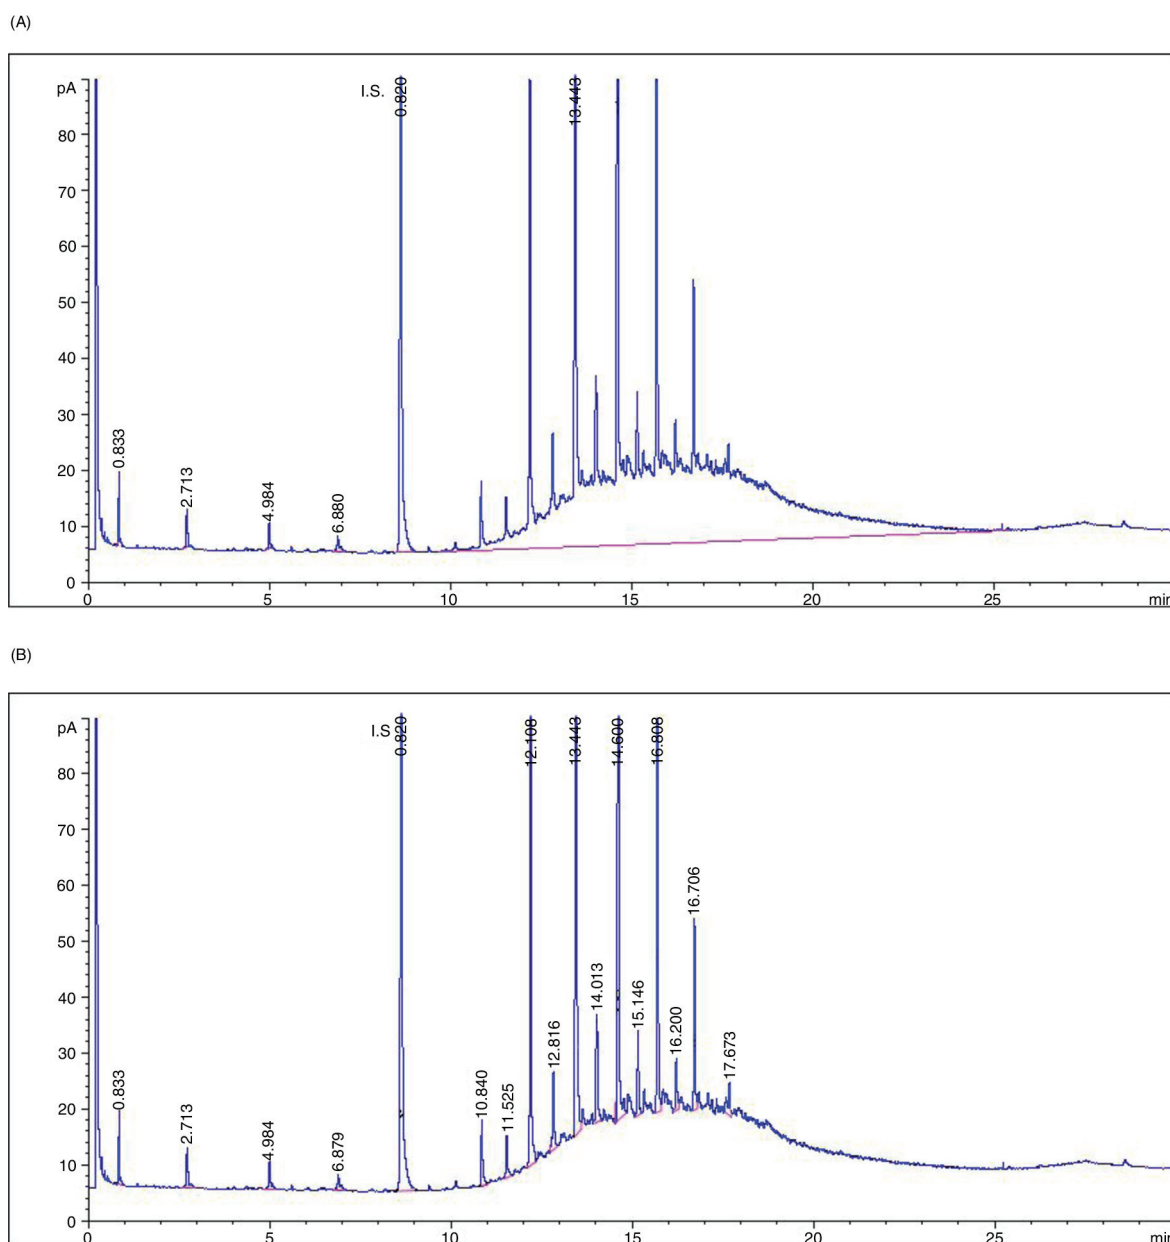


FIGURE 1. GC profile of the first 40 mL-*n*-hexane fraction containing SH from refined olive-pomace oil. IS = C20. Oven temperature ramp: 12 °C·min⁻¹. A) Manual baseline traced under hump. B) Baseline traced valley-valley under the natural *n*-alkane peaks. The main peaks at retention time from 12.1 to 16.7 minutes correspond to the odd series from C23 to C29.

2.4. Method validation

Mineral oil type B (ref. 78473, Fluka, Buchs, Switzerland) was constituted by paraffins from C19 to C41 with maximum at C27. For the calculation of the response factor, 1 mL portions of this mineral oil in n-hexane were prepared at concentrations of 20, 51, 101, and 507 mg·L⁻¹, by dilution of a 1014 mg·L⁻¹ solution. Refined sunflower oil samples containing 491, 105, 51, 19, and 11 mg·kg⁻¹ mineral oil were prepared by mixing mineral oil type B and a “blank” refined sunflower oil containing less than 5 mg·kg⁻¹ hydrocarbons (method's LOD).

The IS usually applied for the quantification of the SH was a solution of n-eicosane (C20) in n-hexane at concentration of 0.05 mg·mL⁻¹. This is the smallest natural *n*-alkane in the majority of vegetable oils. However, in the case of vegetable oils containing significant amounts of natural n-eicosane other *n*-alkane must be chosen; that is the case of corn oil, where the use of n-nonadecane (C19) is recommended.

The spiked mineral oil solutions were evaporated in a rotary evaporator at room temperature under negative pressure. The residues were re-dissolved in n-heptane and analysed by GC. Other spiked portions (1 mL) were fractionated through silver-silica gel column and each time the first 60-mL fraction was analysed by GC.

To evaluate the effect of oil matrix, refined sunflower oil samples containing 491, 105, 51 and 19 mg·kg⁻¹ mineral oil were prepared by blending mineral oil type B and a “blank” refined sunflower oil that yielded an analytical result below the method's LOD.

Repeatability at 50 mg·kg⁻¹ level was calculated analysing the oil sample containing 51 mg·kg⁻¹ six times consecutively.

The LOD was determined using the “blank” refined sunflower oil fortified with 10 mg·kg⁻¹ mineral oil.

3. RESULTS AND DISCUSSION

3.1. Method development

3.1.1. Separation of the hydrocarbon fractions

As pointed out before, to study the behaviour of the different types of hydrocarbons during the separation on silver-silica gel column, refined olive pomace oil spiked with 3,5-cholestadiene was chosen since it contains significant amounts of squalene and its derivatives, and steroidal hydrocarbons. The oil (1 g) was fractionated in the silver-silica gel column collecting three separated fractions of 40, 40, and 20 mL n-hexane, respectively. Subsequently, 120 mL of the n-hexane:diethyl ether (98:2) mixture were added, collecting three independent 40 mL fractions. Each fraction was analysed by GC. The first 40-mL

fraction contained natural SH and UCM (Figure 1). Negligible amounts of compounds were found in the second 40-mL fraction, whereas a small peak of stigmastadiene appears in the third 20-mL fraction. The subsequent elution with 40 mL n-hexane:diethyl ether (98:2) extracted cholestadiene and stigmastadiene and with an additional 40 mL-portion of the same solvent, a complex mixture of hydrocarbons and (aliphatic and terpenic) waxes was obtained. Finally, the GC chromatogram of a new 40-mL fraction showed alkyl esters of fatty acids and waxes together with some other humps. Squalene remained in the column. These facts indicate that a very good separation between SH and other compounds is achieved using silver-silica gel. Elution with 60 mL n-hexane (first fraction) is more than enough to assure a complete isolation of this fraction without interferences of other compounds, and there is no need to collect further eluates.

3.1.2. Gas chromatography analysis and quantitation

The analysis of the SH fraction coming from a contaminated vegetable oil yields a gas chromatogram showing a broad chromatographic hump of about 15 min width due to an UCM of branched hydrocarbons typical of mineral oils. On this hump, a series of sharp peaks corresponding to *n*-alkanes naturally present in vegetable oils appears. For the quantitative determination of the UCM, a straight baseline was traced using “manual integration”, from the beginning of the hump (just after the C20 IS has eluted) until the point where the trace returns to the baseline, resulting in the area of the hump and all the peaks on it (Figure 1A). Next, new valley-valley integrations were performed under each sharp peak appearing on the hump; the areas of all peaks corresponding to the *n*-alkane series were added (Figure 1B). The difference between the former and the latter integration results was the area of the UCM. For the determination of the natural *n*-alkanes, the sum of the areas of corresponding sharp peaks, except that of the IS, was considered. For quantification, the areas of the UCM and those of the natural *n*-alkanes were compared with the area of the IS.

3.2. Method validation

One mL Portions of spiked mineral oil type B solutions were analysed by GC. Other spiked portions (1 mL) were fractionated thorough silver-silica gel column and analysed also by GC. For concentrations lower than 500 mg·kg⁻¹ response factors with respect to the C20 IS were about 1.02, and recoveries vs. direct analysis, and vs. standard solutions were higher than 95 and 93%, respectively (Table 1), indicating minimum losses.

To evaluate the effect of oil matrix, “blank” refined sunflower oil samples were mixed at certain

TABLE 1. Responses of direct analysis and recoveries of analysis through silver-silica gel column of mineral oil type B standard solutions in n-hexane

Standard solution of mineral oil (mg·L ⁻¹)	Direct analysis by GC (mg·L ⁻¹)	Response (%)	GC analysis after passing through column (mg·L ⁻¹)	Recovery vs. direct analysis (%)	Recovery vs. standard solution (%)
1014	983	96.9	909	92.5	89.6
507	493	97.2	472	95.7	93.1
101	98	97.0	95	96.9	94.1
51	50	98.0	49	98.0	96.1
20	21	105.0	20	95.2	100.0

concentrations with mineral oil type B. The analysis of these oils using the proposed method produced recoveries of 93.3, 96.2, 102.1, and 110.5% with respect to the added mineral oil, and 92.7, 93.5, 96.0, and 95.5% taking into account the content of the “blank oil” (below 5 mg·kg⁻¹). These results indicate that the calibration curve obtained from n-hexane solutions can be used for quantification purposes.

Repeatability at 50 mg·kg⁻¹ level was calculated analysing the oil sample containing 51 mg·kg⁻¹. The standard deviation (SD) was ±1.9 mg·kg⁻¹ and the variation coefficient 4.0%.

A LOD of 5 mg·kg⁻¹ was estimated using the “blank” refined sunflower oil fortified with 10 mg·kg⁻¹ mineral oil. The LOQ was approximately 15 mg·kg⁻¹, three times the LOD, although it depends on the width of hump. This LOQ is sufficient to quantify around the 50 mg·kg⁻¹ limit established by the EU.

The aim of the present work was to develop a reliable and robust analytical method for the detection of mineral and fuel oil in edible fats and oils, which let compare results to those obtained by other methods. At this point, we participated in the proficiency test organized by The JRC of the European Commission on the determination of mineral oil in sunflower oils (Joint Research Centre, 2009) where each of the 55 laboratories used its own method. The results obtained using the method proposed in this paper are shown in Table 2. It can be seen that they are comparable with those obtained by other procedures.

3.3. Collaborative trial

A collaborative trial was carried out with trained Spanish laboratories according to the standard ISO 5725. Samples of “blank” refined sunflower oil, “blank” samples spiked with 51 mg·kg⁻¹ mineral oil type B, and highly contaminated crude sunflower oil samples were run by nine laboratories following the method described under Section 2.5, emphasizing the integration requirements. The results are shown in Table 3.

A lower precision for determinations of total and UCM hydrocarbons in samples containing

TABLE 2. Comparison of results of mineral oil determination obtained in the proficiency test organized by the Joint Research Centre of the EU

	Results using the proposed method (mg·kg ⁻¹)	Mean value after removal of outliers (mg·kg ⁻¹)	Gravimetrically established value (mg·kg ⁻¹)
Crude sunflower oil	381	358	–
Refined sunflower oil	123	113	–
Refined sunflower oil spiked with mineral oil	103	120	114

a hump of compounds can be observed, which suggests that the layout of the base line between the beginning and the end of the hump is the main source of error. This trouble is common to all methods for determining mineral oil using GC analysis.

3.4. Final remarks: GC temperature programme


In order to improve the precision of the method an increase in the ramp rate of the GC oven temperature was proposed (Moret *et al.*, 2011) since the width of the hydrocarbon hump was reduced; however, special care must be taken to avoid overlapping of this hump with the possible change of the baseline when the final temperature is reached. The baseline change with 20 °C·min⁻¹ ramp occurs at shorter retention time than with 12 °C·min⁻¹ (Figure 2) producing the alteration of the hump profile appearing in olive-pomace oil analysis (comparing Figures 1 and 3).

4. CONCLUSIONS

The method is reliable for mineral oil detection in the range 10–500 mg·kg⁻¹. At level of the limit established by the EU for mineral oil in sunflower oil (50 mg·kg⁻¹), the repeatability and reproducibility values, and the Horrat index were acceptable (Table 3),

TABLE 3. Precision data for the determination of various types of saturated hydrocarbons (SH) in refined, spiked and contaminated crude sunflower oils

	“Blank” refined sunflower oil			“Blank” refined sunflower oil spiked with 51 mg·kg ⁻¹ mineral oil type B			Contaminated crude sunflower oil		
	Total SH	<i>n</i> -alkanes	UCM	Total SH	<i>n</i> -alkanes	UCM	Total SH	<i>n</i> -alkanes	UCM
Laboratories retained after eliminating outliers	8	8	8	9	9	9	9	9	9
Number of test results on sample	16	16	16	18	18	18	18	18	18
Mean, mg·kg ⁻¹	159.6	157.9	1.6	214.2	160.3	53.9	508.1	126.1	382.0
Repeatability standard deviation (<i>S_r</i>)	3.4	2.8	1.3	4.2	2.6	2.7	11.9	5.0	10.1
Repeatability relative standard deviation (<i>RSD_r</i>), %	2.1	1.7	81.0	1.9	1.6	5.0	2.3	4.0	2.7
Repeatability limit (<i>r</i>)	9.5	7.7	3.7	11.7	7.4	7.5	33.3	14.0	28.4
Reproducibility standard deviation (<i>S_R</i>)	7.3	6.6	2.0	14.3	8.2	8.1	30.6	6.4	30.7
Reproducibility relative standard deviation (<i>RSD_R</i>), %	4.6	4.2	122.3	6.7	5.1	14.9	6.0	5.0	8.1
Reproducibility limit (<i>R</i>)	20.3	18.5	5.6	39.9	22.8	22.5	85.6	17.8	86.1
Horrat Index (<i>HoR</i>)	0.22	0.20	2.91	0.33	0.24	0.60	0.34	0.23	0.44

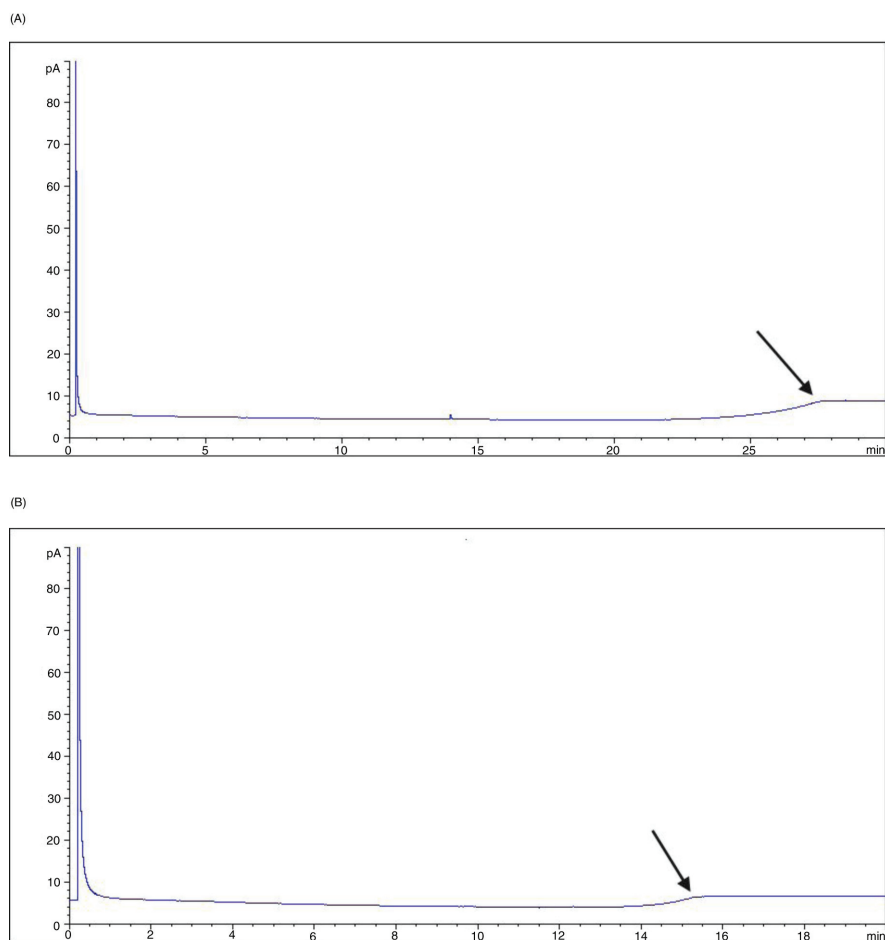FIGURE 2. GC baseline profiles of n-heptane obtained at different oven temperature rates: A) 12 °C·min⁻¹; B) 20 °C·min⁻¹. The arrow indicates the baseline change.

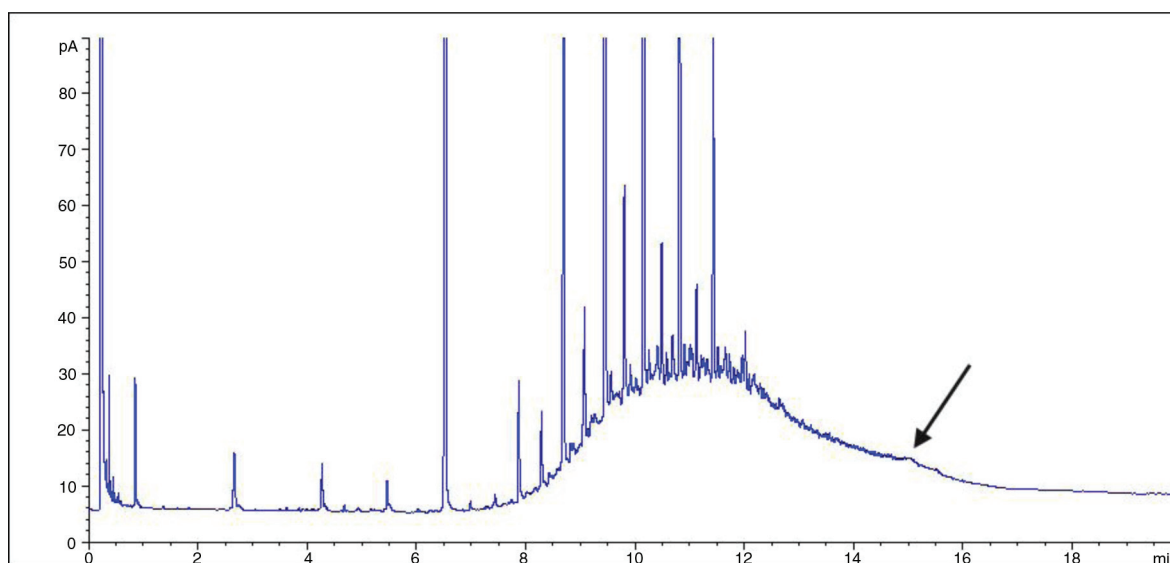


FIGURE 3. GC profile of the first 40 mL-n-hexane fraction containing SH from refined olive-pomace oil at oven temperature ramp of $20\text{ }^{\circ}\text{C}\cdot\text{min}^{-1}$. The arrow indicates the baseline change when using this temperature ramp.

and the mean value ($53.9\text{ mg}\cdot\text{kg}^{-1}$) was close to the spiking value ($51\text{ mg}\cdot\text{kg}^{-1}$). A draft ISO Standard regarding this method is been evaluated for the determination of aliphatic hydrocarbons in vegetable oils and fats ISO (ISO 2013).

ACKNOWLEDGEMENTS

The Spanish Ministry of Science and Innovation funded this work (ref. AGL2009-07618). The authors would like to thank Ms. Rosario González Cordones for her assistance in the laboratory.

REFERENCES

- AOCS Official Methods of Analysis. Method Ca 6c-65. Hydrocarbons (Mineral oil); Ca 6c-65; AOCS: Champaign, Illinois, USA, 1997, pp 1–2.
- Bastic M, Bastic L, Jovanovic JA, Spiteller G. 1978. Hydrocarbons and other weakly polar unsaponifiables in some vegetable oils. *J. Am. Oil Chem. Soc.* **55**, 886–891. <http://dx.doi.org/10.1007/BF02671413>.
- Biedermann M, Grob K. 2009a. How “white” was the mineral oil in the contaminated Ukrainian sunflower oils? *Eur. J. Lipid Sci. Technol.* **111**, 313–319 <http://dx.doi.org/10.1002/ejlt.200900007>.
- Biedermann M, Fiselier K, Grob K. 2009b. Aromatic hydrocarbons of mineral oil origin in foods: Method for determining the total concentration and first results. *J. Agric. Food Chem.* **57**, 8711–8721. <http://dx.doi.org/10.1021/jf901375e>.
- Biedermann M, Grob K. 2012. On-line coupled high performance liquid chromatography-gas chromatography for the analysis of contamination by mineral oil. Part 1: Method of analysis. *J. Chromatogr. A*, **1255**, 56–75. <http://dx.doi.org/10.1016/j.chroma.2012.05.095>.
- Cert A, Moreda W. 1998. New method of stationary phase preparation for silver ion column chromatography: Application to the isolation of steroidal hydrocarbons in vegetable oils. *J. Chromatogr. A*, **823**, 291–297. [http://dx.doi.org/10.1016/S0021-9673\(98\)00183-6](http://dx.doi.org/10.1016/S0021-9673(98)00183-6).
- EC, 2009. Commission Regulation (EC) No 1151/2009 of 27 November 2009 imposing special conditions governing the import of sunflower oil originating in or consigned from Ukraine due to contamination risks by mineral oil and repealing Decision 2008/433/EC; L 313. pp 36–40.
- Fiorini D, Fiselier K, Biedermann M, Ballini R, Coni E, Grob K. 2008. Contamination of grape seed oil with mineral oil paraffins. *J. Agric. Food Chem.* **56**, 11245–11250. <http://dx.doi.org/10.1021/jf802244r>.
- Fiorini D, Paciaroni A, Gigli F, Ballini R. 2010. A versatile splitless injection GC-FID method for the determination of mineral oil paraffins in vegetable oils and dried fruit. *Food Control*, **21**, 1155–1160. <http://dx.doi.org/10.1016/j.foodcont.2010.01.011>.
- Fiselier K, Fiorini D, Grob K. 2009a. Activated aluminium oxide selectively retaining long chain *n*-alkanes: Part II. Integration into an on-line high performance liquid chromatography-liquid chromatography-gas chromatography-flame ionization detection method to remove plant paraffins for the determination of mineral paraffins in foods and environmental samples. *Anal. Chim. Acta.* **634**, 102–109. <http://dx.doi.org/10.1016/j.aca.2008.12.011>.
- Fiselier K, Fiorini D, Grob K. 2009b. Activated aluminium oxide selectively retaining long chain *n*-alkanes. Part I, description of the retention properties. *Anal. Chim. Acta.* **634**, 96–101. <http://dx.doi.org/10.1016/j.aca.2008.12.007>.
- Fiselier K, Grob K. 2009. Determination of mineral oil paraffins in foods by on-line HPLC-GC-FID: lowered detection limit; contamination of sunflower seeds and oils. *Eur. Food Res. Technol.* **229**, 679–688. <http://dx.doi.org/10.1007/s00217-009-1099-8>.
- ISO, 2013. International standard methods for animal and vegetable fats and oils. Method 17780. Determination of Aliphatic Hydrocarbons; 17780.
- IUPAC, 1987. Standard Method 2.611 in Standard Methods for the Analysis of Oils, Fats and Derivatives. Determination of mineral oils in vegetable and animal fats and oils; 2611; Blackwell: Oxford.
- Joint Research Centre. 2009. Final report on proficiency test on the determination of mineral oil in sunflower oil.
- Lanzón A, Albi T, Cert A, Gracián J. 1994. The hydrocarbon fraction of virgin olive oil and changes resulting from refining. *J. Am. Oil Chem. Soc.* **71**, 285–291. <http://dx.doi.org/10.1007/BF02638054>.

- Moret S, Barp L, Grob K, Conte LS. 2011. Optimised off-line SPE-GC-FID method for the determination of mineral oil saturated hydrocarbons (MOSH) in vegetable oils. *Food Chem.* **129**, 1898–1903. <http://dx.doi.org/10.1016/j.foodchem.2011.05.140>.
- Moret S, Populin T, Conte LS, Grob K, Neukom HP. 2003. Occurrence of C15-C45 mineral paraffins in olives and olive oils. *Food Addit. Contam.* **20**, 417–426. <http://dx.doi.org/10.1080/0265203031000098687>.
- Neukom HP, Grob K, Biedermann M, Noti A. 2002. Food contamination by C20-C50 mineral paraffins from the atmosphere. *Atmos. Environ.* **36**, 4839–4847. [http://dx.doi.org/10.1016/S1352-2310\(02\)00358-8](http://dx.doi.org/10.1016/S1352-2310(02)00358-8).
- Populin T, Biedermann M, Grob K, Moret S, Conte L. 2004. Relative hopane content confirming the mineral origin of hydrocarbons contaminating foods and human milk. *Food Addit. Contam.* **21**, 893–904. <http://dx.doi.org/10.1080/02652030400001164>.
- Tan YA, Kuntom A. 1993. Gas chromatographic determination of hydrocarbons in crude palm kernel oil. *J. Assoc. Off. Anal. Chem.* **76**, 371–376.
- Tranchida PQ, Zoccali M, Purcaro G, Moret S, Conte L, Beccaria M, Dugo P, Mondello L. 2011. A rapid multi-dimensional liquid-gas chromatography method for the analysis of mineral oil saturated hydrocarbons in vegetable oils. *J. Chromatogr. A*, **1218**, 7476–7480. <http://dx.doi.org/10.1016/j.chroma.2011.06.089>.
- Wagner C, Neukom HP, Grob K, Moret S, Populin T, Conte LS. 2001. Mineral paraffins in vegetable oils and refinery by-products for animal feeds. *Mitt. Lebensmittelunters. Hyg.* **92**, 499–514.
- Wagner C, Neukom HP, Galetti V, Grob K. 2001. Determination of mineral paraffins in feeds and foodstuffs by bromination and pre-separation on aluminium oxide: method and results of a ring test. *Mitt. Lebensmittelunters. Hyg.* **92**, 231–249.