

**UCC Library and UCC researchers have made this item openly available.
Please [let us know](#) how this has helped you. Thanks!**

Title	Biological hydrogen methanation systems—an overview of design and efficiency
Author(s)	Rusmanis, Davis; O'Shea, Richard; Wall, David M.; Murphy, Jerry D.
Publication date	2019-11-03
Original citation	Rusmanis, D., O'Shea, R., Wall, D. M. and Murphy, J. D. (2019) 'Biological hydrogen methanation systems – an overview of design and efficiency', Bioengineered, 10(1), pp. 604-634. doi: 10.1080/21655979.2019.1684607
Type of publication	Article (peer-reviewed)
Link to publisher's version	http://dx.doi.org/10.1080/21655979.2019.1684607 Access to the full text of the published version may require a subscription.
Rights	©2019 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group. This is an Open Access article distributed under the terms of the Creative Commons Attribution License (http://creativecommons.org/licenses/by/4.0/), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited. http://creativecommons.org/licenses/by/4.0/
Item downloaded from	http://hdl.handle.net/10468/9331

Downloaded on 2021-11-27T10:13:32Z



Biological hydrogen methanation systems – an overview of design and efficiency

Davis Rusmanis, Richard O'Shea, David M. Wall & Jerry D. Murphy

To cite this article: Davis Rusmanis, Richard O'Shea, David M. Wall & Jerry D. Murphy (2019) Biological hydrogen methanation systems – an overview of design and efficiency, *Bioengineered*, 10:1, 604-634, DOI: [10.1080/21655979.2019.1684607](https://doi.org/10.1080/21655979.2019.1684607)

To link to this article: <https://doi.org/10.1080/21655979.2019.1684607>



© 2019 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group.



[View supplementary material](#)



Published online: 03 Nov 2019.



[Submit your article to this journal](#)



Article views: 535



[View related articles](#)



[View Crossmark data](#)

Biological hydrogen methanation systems – an overview of design and efficiency

Davis Rusmanis ^{a,b}, Richard O'Shea^{a,b}, David M. Wall ^{a,b}, and Jerry D. Murphy ^{a,b}

^aMaREI Centre, Environmental Research Institute (ERI), University College Cork (UCC), Cork, Ireland; ^bSchool of Engineering, UCC, Cork, Ireland

ABSTRACT


The rise in intermittent renewable electricity production presents a global requirement for energy storage. Biological hydrogen methanation (BHM) facilitates wind and solar energy through the storage of otherwise curtailed or constrained electricity in the form of the gaseous energy vector biomethane. Biological methanation in the circular economy involves the reaction of hydrogen – produced during electrolysis – with carbon dioxide in biogas to produce methane ($4\text{H}_2 + \text{CO}_2 = \text{CH}_4 + 2\text{H}_2\text{O}$), typically increasing the methane output of the biogas system by 70%. In this paper, several BHM systems were researched and a compilation of such systems was synthesized, facilitating comparison of key parameters such as methane evolution rate (MER) and retention time. Increased retention times were suggested to be related to less efficient systems with long travel paths for gases through reactors. A significant lack of information on gas-liquid transfer coefficient was identified.

ARTICLE HISTORY

Received 2 September 2019
Revised 17 October 2019
Accepted 17 October 2019

KEYWORDS

Biological methanation; biomethane; hydrogenotrophic archaea; hydrogen; methane; power to gas; gas-liquid mass transfer coefficient

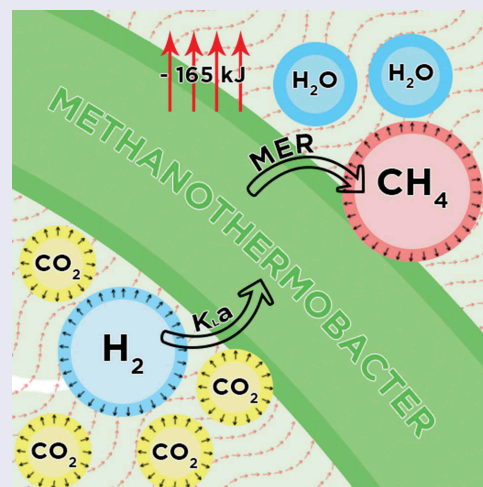

1. Introduction

1.1. Background

As part of the COP21 Paris Agreement, many countries have agreed on action to reduce greenhouse gas (GHG) emissions and meet reduction targets in order to limit global temperature rise below 2°C. It is often misconstrued that electricity can effect a silver bullet solution for decarbonizing energy with emphasis put on solar and wind

energy devices. Of issue with renewable electricity is the variable intermittent nature of electricity production (from wind and solar), the temporal mismatch with variable energy demand (night and day, summer and winter), and differences in energy vectors used in each energy sector (solid, gaseous and liquid fuels for production of electricity, heat and transport). Fossil fuel systems have been optimized over hundreds of years and will be difficult to fully displace in a short period of time.

CONTACT Richard O'Shea  richard.oshea@ucc.ie  MaREI Centre, School of Engineering, University College Cork, Cork, Ireland

 Supplemental data for this article can be accessed [here](#).

© 2019 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group.

This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Fossil fuel systems are dispatchable, easy to store, have high energy density and are cheap. Renewable energy systems are at various stages of maturity and to replace the full extent of fossil fuel systems we must overcome challenges in unpredictability, storage, and cost. Wind and solar systems are the most developed of the renewable energy systems and recently have become price comparative with fossil fuel-generated electricity, but intermittency and storage are still of issue. The energy transition will involve innovative integrated design, generating dispatchable decarbonized electricity, heat and transport fuel, including solid, liquid and gaseous vectors. Hydrogen (H₂) generated from curtailed/constrained solar/wind energy during times of low demand/excess generation can serve as both a means of conversion to renewable gaseous fuel and as a storage mechanism through ‘Power-To-Gas’ concepts [1]. In the energy transition utilizing the natural gas infrastructure of many developed economies, biomethanation involves a circular economy integration of organic waste treatment using anaerobic digestion (AD), coupled with H₂ production from intermittent renewable electricity. Natural gas may be substituted with biomethane and renewable gaseous fuel from non-biological sources (i.e. renewable electricity).


1.2. Anaerobic digestion

Many EU countries are unlikely to meet their 2020 renewable energy share (RES) targets which range from 10% RES (in Malta), to as high as 49% RES (in Sweden). In the case of Ireland, 16% of all energy must be sourced from renewables by 2020; however, as of 2017, overall RES was just 10.6%[2]. Conversion of wastes to biomethane using AD can reduce GHG production (from fugitive methane emissions) and increase RES in the form of green gas [3], reducing the current shortfall in EU targets. Significant resources of biomass including livestock manures and slurries, as well as terrestrial biomass from non-food cellulosic material, may be utilized in AD systems. AD can reduce GHG emissions by replacing open slurry storage (with significant fugitive methane emissions) with the concurrent generation of low carbon (even GHG negative) energy in the form of biogas [4],

and digestate as a valuable bio-fertilizer. The uptake of AD within International Energy Agency (IEA) Bioenergy countries is significant in Germany, the UK, France, and Switzerland [5,6]. Countries such as Estonia, Ireland and Norway have a huge potential for growth in the resource of biogas. Biogas primarily consists of methane (CH₄) (50-70%v/v) and CO₂ (30-50%v/v) [7]. To produce biomethane, the CO₂ is removed from the biogas. The energy content of biomethane is of the order of 35 MJ/m_{STP}³, slightly lower than that of natural gas (39MJ/m_{STP}³) [8]. The use of biomethane is, however, becoming more prevalent as depicted in the latest IEA Bioenergy reports [9], with rapid growth in biomethane production in the UK, France and Denmark [5]. Biogas upgrading can be considered an energy-intensive process, traditional biogas upgrading technologies have an energy demand ranging from 0.05 kWh_e/Nm³ to 0.76 kWh_e/Nm³ raw biogas [7,10].

1.3. Biological hydrogen methanation

More recently, biological hydrogen methanation (BHM) has been investigated as a means of upgrading biogas [7,11]. The process involves the Sabatier reaction, utilizing a carbon source (CO₂) and H₂ to generate CH₄ (Equation 1).



The BHM process utilizes this reaction, catalyzed by specific archaea of *Methanothermobacter* genus, capable of converting H₂ and CO₂ to CH₄ with water as a by-product. This biological method of CO₂ conversion could potentially eliminate the traditional energy-intensive CO₂ separation processes in AD whilst allowing for the potential doubling of the CH₄ yield (depending on biogas composition). In turn, CH₄ could be directly injected into the natural gas grid if grid quality specifications are met.

BHM is a means of capturing CO₂ in biogas that would have been emitted to the atmosphere and converting to an extra quantity of renewable fuel; this is termed gaseous fuel from non-biological origin in the recast Renewable Energy

Directive (RED II) [12]. As such the system can be more sustainable than biogas by itself, if the hydrogen is sourced from renewable electricity that would have been curtailed or constrained [13]. In terms of economics, the BHM system can displace conventional biogas upgrading such as water scrubbing. Thus, the net cost of the system is the cost of BHM less the saved costs of not installing traditional biogas upgrading. Also, the costs per unit of the produced gas are reduced as typically 70% extra gas is produced [11] so the investment is divided between 70% more units of energy.

The BHM process is capable of being carried out both within an anaerobic digester system known as in-situ, or in a separate, adjacent reactor known as ex-situ [7,14]. In-situ biomethanation takes place within the anaerobic digester. H_2 gas is introduced typically through mixing or diffusion, to maximize the contact area with hydrogenotrophic methanogenic archaea, which produce CH_4 from CO_2 and H_2 . Standard anaerobic digestion of feedstock also occurs within the reactor, providing nutrients, contained within the digested substrates, and also CO_2 , needed by various

microbes through acetogenesis, methanogenesis and methanation (Figure 1).

Ex-situ methanation takes place in a separate external reactor, typically tailored to suit the hydrogenotrophic methanogens. Specific nutrient media are supplied to the microbial consortium, under a controlled environment. Gaseous reagent supply is also maintained to ensure optimal growth conditions and product concentrations. Gas purification remains to ensure grid quality gases and usually includes drying of gas to remove water vapor. (Figure 2).

BHM can be an energy-intensive process due to the processes which are required for effective H_2 solubilization to allow H_2 uptake by archaea, such as intense mixing from impellers, compressors and recirculation of gas and liquids. This results in higher parasitic energy demands for the upgrading process. The literature suggests that agitation as a method of H_2 solubilization in the liquid is suitable for BHM [15–17]. However, agitation constitutes a large energy demand for these BHM systems. This is further compounded by the requirement for continuous operation, i.e. minimum power consumption of the plant can be

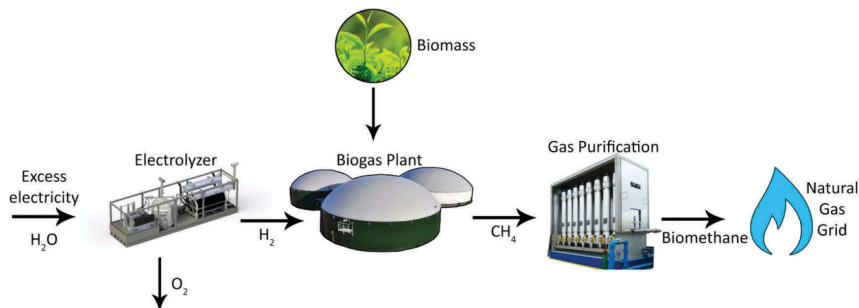


Figure 1. In-situ biological H_2 methanation schematic.

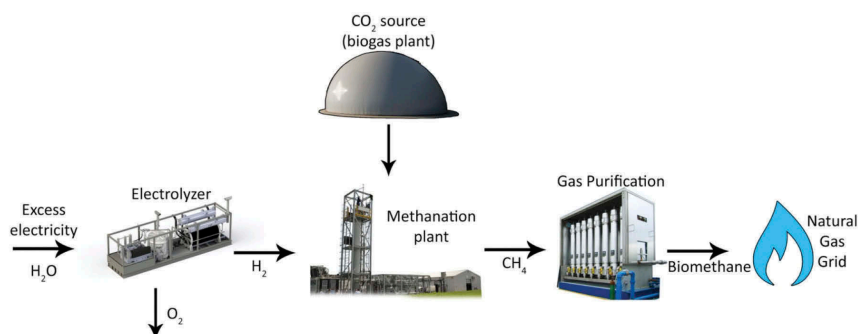


Figure 2. Ex-situ biological H_2 methanation schematic.

assumed to be the power demand of the mixing component at an idle stage. At a large scale, the use of high rate agitation to promote H₂ solubilization may be justified, but a low energy demand alternative would be far more beneficial.

The aim of this paper is to review the current literature on BHM systems with regards to system performance, H₂ solubilization methods used in literature, and to determine the gaps in the state of the art with regards to BHM. This paper will also seek to use a short case study in order to see how biological methanation compares with traditional upgrading technologies.

2. Review of state of the art

The following section investigates the key operational parameters in biomethanation including the interplay between gases, microbiology, nutrient supply, reactor environmental conditions, and methane evolution rates (MER). A number of reactor configurations described in the literature are studied and compared in an effort to assess performance across systems.

2.1. The role of hydrogen in power to gas systems

Hydrogen gas can be generated through electrolysis which is currently the only large-scale viable method for H₂ production that does not require fossil fuels, unlike the reformation of natural gas [18]. Hydrogen has been seen as a viable fuel for future energy systems as storage technologies become mature and more economically viable. Currently, the natural gas grid is not suitable for storing large H₂ volumes (or convey high percentages of hydrogen in natural gas) as most pipelines would not be of the specification to prevent leakage. Small concentrations of H₂ are allowed to be injected into the existing gas grid infrastructure in some countries [19]. However, H₂ concentrations in gas grids are heavily regulated. In Europe, the maximum allowable H₂ concentrations vary from 0.1% to 10% by volume and vary by country [20,21], as shown in Table 1.

Historically, carbon steel, stainless steel, cast iron and nickel steel have been used to transport H₂, but are not considered suitable for high-

Table 1. List of hydrogen limits allowed in the natural gas grid per country.

Country	Maximum H ₂ content in high pressure gas pipeline	
	volume/molar %	% Mass
Czech Republic ^a	0	0
Ireland ^a	0.1	0.013
UK ^a	0.1	0.013
Belgium ^a	0.1	0.013
Sweden ^a	0.5	0.063
Holland ^a	0.5	0.063
Austria ^a	4	0.524
Switzerland ^a	4	0.524
France ^a	6	0.802
Germany ^a	10	1.396
Case 1 ^b	2	0.256
Case 2 ^b	5	0.661
Case 3 ^b	10	1.396

^aAdapted from M. Svensson[21]

^bCases were proposed by Altfeld and Pinchbeck [22].

Case 1 – If a CNG filling station is connected.

Case 2 – If no filling station, gas turbine or gas engines with H₂ specification <5% connected.

Case 3 – If no filling station, gas turbine or gas engines with H₂ specification <10% connected.

pressure H₂ transmission [23]. Furthermore, at elevated temperatures and pressures, H₂ attacks mild steel and other high strength steels, causing decarburization and embrittlement when in contact for extended periods of time, particularly with high purity H₂ [20,23]. As high-quality steel is required to facilitate conveyance and storage of H₂, a large investment is required for a H₂ economy. Studies suggest that the optimum diameter for a transportation pipeline for 100% H₂ is 0.88 m, while for 100% natural gas, it is 0.54 m [20]. Therefore, for a H₂ pipeline with a wall thickness of 10 mm, 1.6 times the volume of steel would be required as compared to a natural gas pipeline.

Typically, where H₂ is produced through electrolysis, it is compressed to high pressures, 200–300 bar for storage in gas cylinders; and up to 800 bar for use in transportation [24]. For the purpose of grid injection, costs may be lower due to gas undergoing direct compression to a grid level pressure. Compression is also an issue when using H₂, owing to its low density (0.09 kg/m³). Transporting H₂ through pipes requires a larger diameter pipe or more compression power as compared to CH₄ to achieve the same energy throughput at the same operational pressure [20], with calculations showing that per kilometer of pipeline, the energy demand of H₂ is significantly

higher than that of CH₄ (see Box S1 in supplementary data). Previous studies have stated that the cost of a large-scale transmission grid for H₂ is approximately 1.5–1.8 times that of natural gas/CH₄ [20,25].

When raw biogas from AD is upgraded to biomethane, it can be injected into the existing natural gas grid infrastructure or compressed into Liquefied Natural Gas (LNG). The existing natural gas grid provides a means of energy storage for biomethane. As such, it is viewed as a solution to the anticipated energy storage issues that may arise in countries such as Denmark who intend to fully transition away from fossil fuels and be based solely on renewables by 2050 [26, 27].

While H₂ may be more efficient in energy density per unit mass, it is four times less dense in volume compared to CH₄. The issues associated with the construction of H₂ gas networks, including for material requirement and other complications relating to density may not justify the large-scale shift to a H₂ gas grid when an existing natural gas grid may be used for biomethane. However, in some instances, localized city micro-gas grids are being built for H₂ such as in the UK [3].

Issues relating to the transportation of H₂ could be mitigated by using H₂ in BHM coupled with AD. While some studies have attempted in-situ upgrading, albeit at lower efficiencies, ex-situ is more developed. Removal of CO₂ from the raw biogas by upgrading to biomethane can almost double CH₄ yields (if biogas is 50% CO₂ and 100% efficiency is achieved). The extra energy obtained in the form of methane far exceeds the

parasitic energy input in upgrading the gas. In essence, this is a fuel produced from biogenic CO₂, sometimes termed gaseous fuel from non-biological origin, which is considered an advanced transport fuel within the recast Renewable Energy Directive (RED II) [12].

Hydrogen may be generated from intermittent wind and solar energy that could otherwise have been curtailed or constrained [13] and used as an energy source or used in conjunction with AD plants to upgrade raw biogas to a grid quality biomethane gas (95% CH₄). As such, the CH₄ produced would allow for an efficient, cost-effective energy storage of surplus/constrained electricity in the form of green gas in the natural gas grid. Integration of H₂ has the potential for the development of circular economy systems, integration of intermittent renewable energy production and elevating the biomethane resource whilst greening the gas grid and using existing infrastructure.

2.2. Microbiology of BHM and AD

The Methanothermobacter genus is responsible for the biological upgrading process. To date, eight main species of this genus have been officially identified in previous literature as functional methanogens [28–32]. Table 2 lists some of the properties of Methanothermobacters. Studies on Methanobrevibacters (mesophilic archaea) are limited and do not discuss BHM applications. There could be merit in researching mesophilic methanogenic archaea for BHM applications if these archaea are capable of matching the production

Table 2. Archaeal data on Methanothermobacters.

Methanothermobacter	Opt. Temp.		Chemical addition g/l	Specific Growth rate /h	Doubling time h	Size µm x µm	Reference
	°C	Opt. pH					
<i>Crinale</i>	65	6.9	0.025 NaCl	3.6	0.193	0.3 x 5	[28]
<i>Defluvii</i>	60	7	0.8–20 NaCl	0.462	1.5	0.42 x 6	[30]
<i>Thermoflexum</i>	55	8.1	0.025 Na ₂ S 30 NaCl	0.198	3.5	0.4 x 20	[29,30]
<i>Wolfeii</i>	60	7.25	0.002 Na ₂ WO ₄ 10 NaCl	0.185	3.75	0.4 x 2.5	[33]
<i>Tenebrarum</i>	70	7.3	2.5 NaCl	0.058	12	0.5 x 10.5	[31]
<i>Marburgensis</i>	65	7.2	0.5 NaCl	0.1	0.288	0.6 x 6	[34,65]
<i>Thermoautotrophicus</i>	67	7.4		0.231	3	0.6 x 7	[43]
<i>Thermophilus</i>	57	7.6	15 NaCl			0.36 x 6.5	[35]

Where values were missing from literature, highlighted results (**bold**, *italic* and underlined) are calculated using the formula for specific growth rate of microbes: $\mu = \ln(N_2/N_1)/(t_2 - t_1)$; where μ is the specific growth rate, and N_1 and N_2 are the biomass at time 1 (t_1) and time 2 (t_2), respectively.

and doubling rates of Methanothermobacters, the lowered environmental temperature at mesophilic conditions would result in increased hydrogen solubility.

A summary of the biological processes which occur in the anaerobic environments of AD and BHM is illustrated in Figure 3. There are two key stages required for a BHM system to function. The first is the formation of CH_4 and CO_2 from the feedstock through processes known as acetogenesis and acetotrophic methanogenesis; which are responsible for the biogas production cycle in AD. The second stage involves the production of CH_4 via H_2 upgrading (hydrogenotrophic methanogenesis, referred to as hydrogenotrophic methanation for BHM stage). Both processes require a specific environment to be maintained, with a pH in the range of

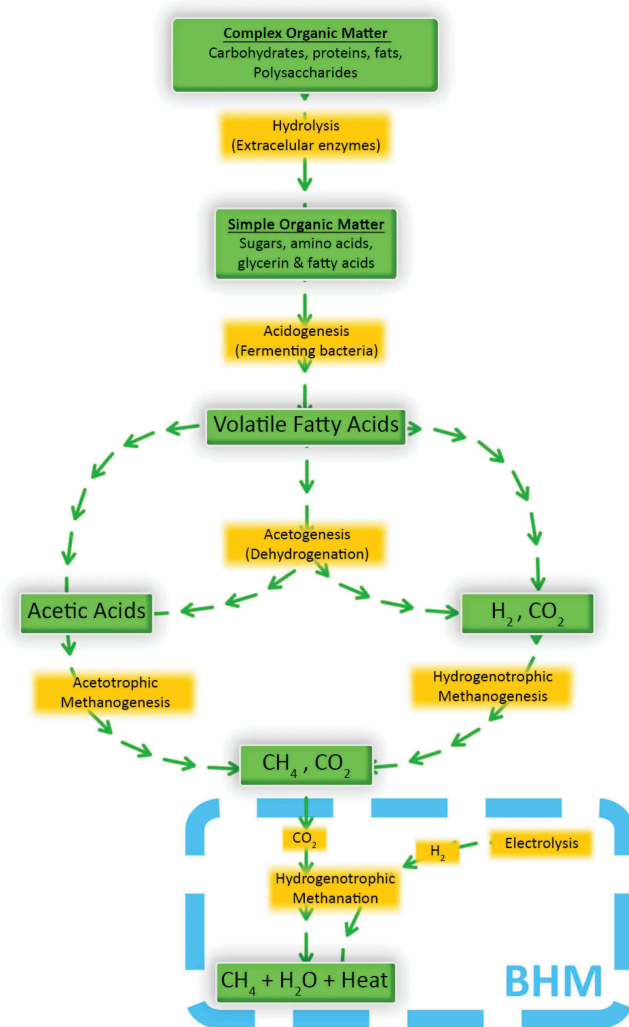


Figure 3. CH_4 formation through anaerobic digestion and biological hydrogen methanation.

6.2–8.5 and a temperature range of 35–40°C (mesophilic) [36], or 55–65°C (thermophilic) [37].

The difference in the reactor environment for the two stages (AD and BHM) lies in the presence of H_2 in the reactor. If an in-situ system is used and H_2 is introduced to the AD reactor, the increase in hydrogen partial pressure can lead to inhibition of volatile fatty acid (VFAs such as propionate and butyrate) degradation and eventual potential breakdown of the system (if not micro-managed) as acetogenesis requires very low H_2 partial pressures [38,39]. This would require an in-situ system to convert close to 100% of H_2 injected, as lower conversion would theoretically lead to build up of unconverted H_2 creating looping inhibition cycles, leading to reactor failure (Figure 4).

Due to differences in the required environment for acetogenesis, acetotrophic methanogenesis and hydrogenotrophic methanation, the viability of efficient in-situ systems with high Methane Evolution Rates (MER) and purity is more challenging than for ex-situ systems. While in-situ systems would reduce the need for additional construction in an AD plant, the fundamental restriction of hydrogen partial pressures within the reactor space can theoretically lead to reactor failure. However, experiments by G. Luo and I. Angelidaki [17,40] (including for hollow fiber membranes) at a small scale have been able to produce and upgrade biogas to a grid level quality at lab scale with in-situ upgrading. The experiment consisted of a 1 L reactor volume, with 4-h retention time, 1.5 barg pressure, and a second 1 L reactor volume with a 0.75 bar pressure and agitation at 150 rpm, respectively. Large-scale studies have yet to be published that depict a stable, functioning in-situ system. Thus, ex-situ systems maintaining a separate environment between acetotrophic methanogens and the biological hydrogen methanation processes are recommended by the authors; this ex-situ process allows separate conditions to be maintained, optimizing both processes and minimizing the risk of reactor failure.

Microbes that undertake methanogenesis respire anaerobically, utilizing oxidized carbon such as CO_2 as an electron acceptor. Methanogens are found commonly in anaerobic environments which do

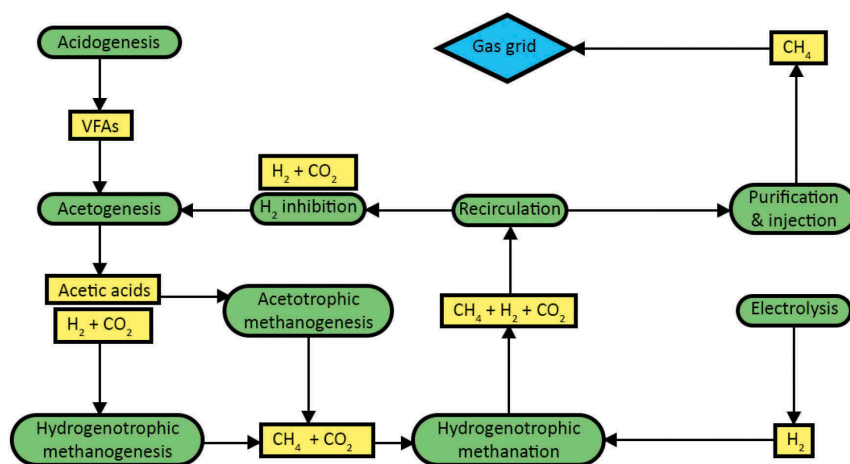


Figure 4. In-situ methanation failure process flow diagram.

not contain many oxygen sources, such as O_2 or NO_3^- . When combining AD and biological hydrogen methanation, it is important to optimize the bioreactor to enable the desired genus to thrive and deter unwanted archaea from multiplying. In relation to sources of carbon in a BHM system, studies have shown that with a larger build up of microbial biomass, a higher fraction of CO_2 is used by microbes due to the need for a carbon source. Burkhardt et al. [41] noted that a molar ratio for H_2 to CO_2 of 3.76:1 gave a higher quality gas in terms of methane content. This resulted in a reduction of available carbon sources, which could result in excess hydrogen. As such, the stoichiometric ratio ($H_2:CO_2$) is reduced to 3.76:1. While this is elucidated by Burkhardt et al. [41], further studies are required to investigate the relationship between biomass density and molar ratio of gases.

2.3. Nutrients in BHM

For archaea to thrive within an environment, a unique mixture of nutrients is necessary to provide key trace elements for replication. Nutrient media relating to BHM vary substantially, depending on the specific cultures and archaea species involved in H_2 upgrading. In order to achieve high upgrading rates, an optimum nutrient feed is required to ensure no limitation from nutrient and elemental deficiencies. Table 3 shows the variation in nutrient media supplied to microbes found in the

literature. This variation can be attributed to the limitation of chemical availability and complexity of nutrient media. Using the 'BacDive' Strain identifier for *Methanothermobacter* suggests an industrial growth culture medium of *Methanobacterium* growth media 141 and 119 as depicted in Table 4. The difference between literature and industry is evident in the variety of elements and concentrations recommended by the industry. As with AD [42], the addition of trace elements and nutrients also proves to be of great benefit to BHM. Such additions allow for higher culture densities to thrive and thus, boost the overall performance of the reactor significantly, by reducing microbial doubling time and thus increasing the microbial population. In ex-situ BHM, nutrient supply becomes a necessity due to the lack of solid feed addition. Excluding H_2 and CO_2 (or raw biogas) fed to ex-situ systems, nothing else is introduced to the reactor, and as such, there is a need for an external nutrient supply. Studies have been carried out on the methanogenic microbiology, investigating the effect of elements on the methanogens, Wolfe et al. [43, 44] specified that sulfur is necessary for biosynthetic reactions and maintenance of a low redox potential. Guneratnam et al. [32] showed that *M. wolfeii* was dominant in thermophilic ex-situ biological hydrogen methanation and suggested, as supported by Winter et al. [45], that the microbes would benefit from the addition of tungsten (W) (8 η M). The presence of tungsten in literature is found in one paper by Schill et al. [46]. The industrial nutrient

Table 4. DSMZ nutrient media for the Methanothermobacter genus (141. for Defluvii and thermoflexus) (119. for Crinale, Marburgensis, Tenebrarum, Thermoautotrophicus, Thermophilus, wolfeii).

141. METHANOGENIUM MEDIUM (/L dist. H ₂ O)		119. METHANOBACTERIUM MEDIUM (/L dist. H ₂ O)	
KCl	3.40 x 10 ⁻¹ g	KH ₂ PO ₄	5.38 x 10 ⁻¹ g
MgCl ₂ x 6 H ₂ O	4.00 x 10 ⁰ g		
MgSO ₄ x 7 H ₂ O	3.45 x 10 ⁰ g	MgSO ₄ x 7 H ₂ O	4.30 x 10 ⁻¹ g
NH ₄ Cl	2.50 x 10 ⁻¹ g	NH ₄ Cl	4.30 x 10 ⁻¹ g
CaCl ₂ x 2 H ₂ O	1.40 x 10 ⁻¹ g	CaCl ₂ x 2 H ₂ O	5.38 x 10 ⁻² g
K ₂ HPO ₄	1.40 x 10 ⁻¹ g		
NaCl	1.80 x 10 ¹ g	NaCl	4.30 x 10 ⁻¹ g
Trace element solution	1.00 x 10 ¹ ml	Trace element solution SL-10	1.08 x 10 ⁰ ml
Fe(NH ₄) ₂ (SO ₄) ₂ x 6 H ₂ O solution	2.00 x 10 ⁰ ml		
Na-acetate	1.00 x 10 ⁰ g	Na-acetate	1.08 x 10 ⁰ g
Yeast extract (OXOID)	2.00 x 10 ⁰ g	Yeast extract (OXOID)	1.08 x 10 ⁰ g
Trypticase peptone (BD BBL)	2.00 x 10 ⁰ g		
Na-resazurin solution (0.1% w/v)	5.00 x 10 ⁻¹ ml	Na-resazurin solution (0.1% w/v)	5.38 x 10 ⁻¹ ml
NaHCO ₃	5.00 x 10 ⁰ g	NaHCO ₃	4.30 x 10 ⁰ g
Vitamin solution	1.00 x 10 ¹ ml		
L-Cysteine-HCl x H ₂ O	5.00 x 10 ⁻¹ g	L-Cysteine-HCl x H ₂ O	5.38 x 10 ⁻¹ g
Na ₂ S x 9 H ₂ O	5.00 x 10 ⁻¹ g	Na ₂ S x 9 H ₂ O	5.38 x 10 ⁻¹ g
		Fatty acid mixture	2.15 x 10 ¹ ml
		Na-formate	2.15 x 10 ⁰ g
		Sludge fluid	5.38 x 10 ¹ ml
		FeSO ₄ x 7 H ₂ O solution (0.1% w/v in 0.1 N H ₂ SO ₄)	2.15 x 10 ⁰ ml
		KH ₂ PO ₄	5.38 x 10 ⁻¹ g

media offered by DSMZ, in Table 4 contains tungsten as a constituent of the trace element solution in 0.40 mg Na₂WO₄ x 2H₂O. Observing the elemental composition of nutrient solutions used in BHM, the elements provided to the microbial population are not very different from those required for AD.

Archaea growth is heavily reliant on nutrient availability and the supply of gaseous feed, determined by the volumetric gas-liquid mass transfer

coefficient ($k_{L,a}$) [47]. As such, gas should also be treated as an essential growth component for archaea. The higher the accessibility of nutrients and gas to microbes, the more populous the reactor and the more efficient the system could be in improving methane yields. Microbial environmental conditions are closely related to the $k_{L,a}$ factor which defines the consumable H₂ availability within the liquid [15, 48].

2.4. Process conditions

2.4.1. Pressure

Pressure plays a key role in the increase of methanation levels [50]. The higher the molecular volume of gases such as H₂ in a fixed volume the higher the gas solubility. The greater the number of H₂ molecules interacting with the gas-liquid interface the greater the interphase contact. As stated by Henry [51], water under pressure of one, two or more atmospheres, absorbs a quantity of two, three or more volumes of gas that is absorbed under normal atmospheric pressure.

Increased pressure gives better gas diffusion rates due to an elevated concentration gradient across the gas and liquid phases. Hydrogenotrophic methanogenic archaea are resistant to extreme pressures of over 100 atm and exhibit improved growth and methanogenesis rates at higher pressure [52]. Many studies have managed to optimize the archaeal growth and activity within systems but are restricted by the gas to liquid transfer limitations. Most commonly, pressure is increased to mitigate this issue, allowing higher gas-liquid mass transfer rates, with minimal alteration to systems.

2.4.2. Temperature

Many studies on the effect of temperature (mesophilic and thermophilic) on archaea in AD can be found in the literature [37, 53, 54]. The effect of temperature relates to two important aspects of biological methanation; the archaea growth rate and dissolution temperature dependence. In order to achieve optimum temperatures for thermophilic Methanothermobacters, temperature ranges of 55-65°C (35-40°C for mesophilic archaea) are required as outlined in Table 2. The

temperature dependence of mass transfer flowrate into the liquid is also seen in Equation 2 through Henry's law constant for H_2 . As stated by Henry [51], under isothermal and isobaric conditions, water takes up the same volume of gas. Most studies examining the temperature effects on anaerobic microbes showed that as the operational temperature is lowered, the maximum specific growth rates of archaea and substrate uptake rate decreases [55]. Variations in temperature alter the physical and chemical characteristics of reactor liquors such as viscosity. Solubility of gases also increases with lower temperatures, giving higher diffusivity levels for CH_4 , CO_2 and H_2 at lower temperatures. This would also mean higher CO_2 diffusion and result in lower pH, where in the case of biomethanation, dissolution of H_2 leads to a pH increase [56]. Diffusivity and temperature can be correlated as per equation 2;

$$\frac{D_L \mu}{T} = Constant \quad (\text{Equation 2})$$

where D_L is the diffusivity of the solute at infinite dilution (cm^2/s), μ is the viscosity of the solution, and T is the absolute temperature (K). Diffusivity, temperature and solution viscosity affect one another, also affecting the $k_{L,a}$ variable. This means that $k_{L,a}$ is unique for each reactor setup and is highly sensitive to the environment created for BHM. This is further discussed in Section 2.5.1.

2.5. Biological hydrogen methanation systems: a comparison

A comparison of the different types of systems used for BHM is presented. Various systems are compared using available key performance metrics. Calculations of these performance metrics are defined in the following sub-sections.

2.5.1. Key operational parameters – $k_{L,a}$ – volumetric gas-liquid mass transfer coefficient

The theory of interphase mass transfer in biological processes is well defined; however, the application of these theories has mainly focused on the oxygen transfer in the aerobic processes of wastewater treatment. In an anaerobic process, multiple gases are produced and consumed, rendering standard estimation methods challenging and/or

unreliable. The volumetric gas-liquid mass transfer coefficient ($k_{L,a}$) (also referred to as the absorption coefficient [57]) is frequently mentioned throughout BHM literature, but $k_{L,a}$ is rarely obtained from experimental reactors [58]. While this data is scarce in the literature, it is crucial in allowing for the determination of the efficiency of a reactor system, and for cross-system performance comparisons. $k_{L,a}$ indicates the system's ability to diffuse specific gases into a liquid. Relying on multiple parameters, $k_{L,a}$ is unique for a given reactor configuration and operating conditions.

The gas-liquid mass transfer rate is widely acknowledged as being the key to elevating the H_2 upgrading rate through mixing and other forms of dissolution. Equation 3 describes the gas-liquid mass transfer rate relationship.

$$r_t = 22.4k_{L,a}(H_{2g} - H_{2l}) \quad (\text{Equation 3})$$

Where; r_t (L/L/h) is the gas-liquid transfer rate; 22.4 is the molar volume; $k_{L,a}$ (/h) is the gas transfer coefficient; H_{2g} (mol/L) is the H_2 concentration in the gas phase; H_{2l} (mol/L) is the H_2 concentration in the liquid phase.

Within this, $k_{L,a}$ is a key coefficient, comprised of two other coefficients [59]:

k_L : The 'film' coefficient, a function of the nature of the gas and of the physiochemical properties of the liquid phase [60](m/h).

a : The specific area of the interface per unit volume of liquid in the reactor (/m).

While carrying out experiments, it is key to determine $k_{L,a}$ for H_2 , CO_2 and CH_4 ; H_2 being the most important due to the necessity of the gas for biological methanation, and its inherent poor solubility. This data is scarce in the literature, but some studies have investigated similar concepts [15,48,58,61].

$k_{L,a}$ can be adjusted by changing parameters such as mixing speed [17], gas recirculation [62] and H_2 diffusion devices [40,61]. In order to accurately approximate $k_{L,a}$ and the resulting mass transfer rates, the factor relies on specific experimental data being collected. The most complex data to collect is the mass transfer of H_2 from gas to liquid phase ($\dot{m}_{H_2,G \rightarrow L}$). Often studies have omitted the collection of these data due to complex procedures in its determination. Work by Díaz et al. [58,61] described the acquisition and

presentation of the $k_L a$ value. Older sources for $k_L a$ include works by Peillex et al. [48,63] that presented a large set of values, which were attributed to the high mixing speeds of Straight Edge and Rushton Impellers, at rates of 300-1200rpm. Research by Nishimura et al. [64] also elucidated the importance of $k_L a$, being directly proportional to the gas produced, as well as the dependence of archaeal growth on the transfer of H_2 gas to the liquid phase.

2.5.2. Key operational parameters – retention time

Retention time, also known as residence time relates to the amount of time a gas spends within the system. The lower the retention time, the more compact a system achieved due to the shorter travel path of gases within the reactor system. Numerous papers have not presented actual retention time data. As per Voelklein et al. [11], equation 4 was used to estimate the values based on available literature data. The equation utilizes the averaging of volumes of gas entering and leaving the reactor system. This includes flows for CO_2 , H_2 and CH_4 . The equation deviates noticeably with retention times extending 50 h when compared to literature-stated values. As a result, care must be taken when working with estimated retention times.

$$RT = \frac{V_R}{(F_{gas\ in} + F_{gas\ out})/2} \quad (\text{Equation 4})$$

Where:

RT is the retention time (unit time); V_R is the reactor volume (L); $F_{gas, out}$ is the volumetric flowrate of gases leaving the reactor (L/unit time); $F_{gas, in}$ is the volumetric flowrate of gases entering the reactor (L/unit time).

2.5.3. Key operational parameters – MER

Methane evolution rate (MER) is a crucial and simple method in calculating system performance. These data relate the volume of methane produced by a unit volume of a working reactor. MER is presented in much of the literature. Some papers have also presented values such as gas throughput, which allows for the calculation of MER. Where

this was the case, manipulation of equation 5 was required.

$$MER = \frac{F_{CH_4, out} - F_{CH_4, in}}{V_R} \quad (\text{Equation 5})$$

Where: MER is the methane evolution rate (L/ L_{vr} /day); $F_{CH_4, out}$ is the volumetric CH_4 flowrate leaving the reactor (L/day); $F_{CH_4, in}$ is the volumetric CH_4 flowrate entering the reactor (L/day); V_R is the reactor volume (L)

2.6. Reactor systems: a comparison

2.6.1. Continuously stirred tank reactors (CSTRs)

CSTRs are the most common type of reactors used in AD, consisting of a cylindrical reactor space. As per the name, the reactors are continuously stirred by a set of impellers or by recirculation of reactor contents which keep the reactor contents homogeneous and in motion. Agitation-oriented diffusion has proven to be amongst the most effective ways to enable hydrogenotrophic methanogenic archaea to come in contact with H_2 [15,26,63,65]. MER ranges from experimental data of 0.86 L CH_4 / L_{vr} /day, up to industry-ready 800 L CH_4 / L_{vr} /day at grid injection purity (>95% CH_4 v/v) can be found across literature and industry (Table 5). Gas retention and interface area are maximized through the reduction of bubble diameter, usually achieved through intensive mixing. CSTRs prove to be the most effective in doing this when exceeding 1200 rpm. However, at such high speeds, high energy consumption can lead to a negative energy balance.

Reduction of bubble diameter is achieved when bubbles break apart due to surface tension forces of the bubble interface being overcome by a higher power density. CSTR systems depend on high impeller rotational speeds in order to increase gas diffusivity. While this is an effective method of increasing the volumetric gas-liquid mass transfer coefficient ($k_L a$), the energy demand of impeller agitation, such as a Rushton impellers, results in significant energy consumption by the system [61], often rendering the process inefficient. Other issues that arise with the Rushton Impellers include them being only effective in the vertical column they occupy. Scale-up would require reactor systems to have a large height to width ratio.

Table 5. Comparison of CSTR BHM throughout literature.

Reactor Configuration	pH	H_2 (L/L_{vrf} /min)	CO_2 (L/L_{vrf} /min)	H_2/CO_2 Ratio	CH_4 out (%)	Pressure (Barg)	Temp. (°C)	Reactor Vol. (L)	MER ($L CH_4 /L_{vrf}/day$)	Retention Time (h)	k_{1a} /h	Method of k_{1a} Increase	L/min	Rate of mixing (rpm)	Gas recirculation (L/min)	Enriched Culture (y/n)	Archaeal strain	Unit normalized to	Author
CSTR Ex-situ	6.8	0.30	0.08	4:1	2	0	60	16	33.3	0.051	-	Agitator	-	1000	0	Yes	M. Thermoautotrophicus	STP	[16]
CSTR Ex-situ	6.85	0.23	0.06	4:1	65	0.75	65	10	75.3	0.090	-	Agitator	-	1500	0	Yes	M. Marburgensis	STP	[65]
CSTR Ex-situ	6.85	0.34	0.09	4:1	58	0.75	65	10	107.5	0.059	-	Agitator	-	1500	0	Yes	M. Marburgensis	STP	[65]
CSTR Ex-situ	6.85	0.58	0.14	4:1	22	0.75	65	10	123.6	0.030	-	Agitator	-	1500	0	Yes	M. Marburgensis	STP	[65]
CSTR Ex-situ	6.85	1.40	0.35	4:1	30	5	65	10	344.1	0.013	-	Agitator	-	1500	0	Yes	M. Marburgensis	STP	[65]
CSTR Ex-situ	6.85	0.40	0.10	4:1	80	5	65	10	137.1	0.054	-	Agitator	-	1500	0	Yes	M. Marburgensis	STP	[65]
CSTR Ex-situ	-	0.89	0.22	4:1	99	8.5	62.5	3750	800	0.050	-	Agitator	-	N/A	0	Yes	Patented Strain	STP	[26,85,86]
CSTR In-situ	7.8	0.0013	0.0003	4:1	94	1.5	55	1	0.5	8	7	Agitator	-	500	0	Yes	-	STP	[69]
CSTR In-situ	7.8	0.0025	0.0006	4:1	95	1.5	55	1	0.9	4	11	Agitator	-	500	0	Yes	-	STP	[69]
CSTR In-situ	7.8	0.01	0.0013	4:1	90	1.5	55	1	1.6	2	20	Agitator	-	500	0	Yes	-	STP	[69]
CSTR In-situ	7.8	0.01	0.0013	4:1	94	1.5	55	1	1.6	2	21	Agitator	-	800	0	Yes	-	STP	[69]
CSTR In-situ	7.8	0.01	0.0025	4:1	91	1.5	55	1	3.2	1	40	Agitator	-	800	0	Yes	-	STP	[69]
CSTR Ex-situ	7.4	1.60	0.40	4:1	18	0	65	1	300.0	0.011	-	Agitator	-	1300	0	No	M. Thermoautotrophicus	N/A	[15]
CSTR Ex-situ	7.4	1.60	0.40	4:1	9	0	65	1	194.4	0.010	-	Agitator	-	1300	0	No	M. Thermoautotrophicus	N/A	[15]
CSTR Ex-situ	6.85	0.03	0.01	4:1	85	0	60	3.5	9.9	0.760	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.06	0.014	4:1	64	0	60	3.5	18.5	0.364	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.11	0.03	4:1	49	0	60	3.5	34.0	0.174	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.23	0.06	4:1	22	0	60	3.5	47.9	0.076	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.46	0.11	4:1	6	0	60	3.5	46.9	0.032	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.33	0.08	4:1	17	0.2	60	3	61.2	0.050	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	7.35	0.67	0.17	4:1	7	0.2	60	3	65.7	0.022	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	7.35	0.13	0.03	4:1	45	0.2	60	3	38.6	0.147	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.27	0.07	4:1	18	0.2	60	3	50.4	0.063	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.53	0.13	4:1	5	0.2	60	3	38.4	0.027	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.07	0.02	4:1	74	0.2	60	3	16.1	0.131	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.13	0.03	4:1	63	0.2	60	3	32.7	0.089	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	6.85	0.53	0.13	4:1	13	0.2	60	3	26.4	0.024	-	Agitator	-	700	0	Yes	M. Thermoautotrophicus	N/A	[70]
CSTR Ex-situ	7.4	4	1	4:1	4	1	65	1	233.3	0.004	-	Agitator	-	1300	0	Yes	KN-15	STP	[64]
CSTR Ex-situ	7.4	4	1	4:1	9	2	65	1	460.2	0.004	-	Agitator	-	1300	0	Yes	KN-15	STP	[64]
CSTR Ex-situ	7.4	4	1	4:1	15	3	65	1	688.1	0.004	-	Agitator	-	1300	0	Yes	KN-15	STP	[64]
CSTR Ex-situ	6.8	0.52	0.13	4:1	42	0	65	1.5	146.7	0.037	1200	Rushton Impeller	-	320	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.64	0.16	4:1	52	0	65	1.5	194.5	0.031	1450	Straight blade	-	320	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	1.92	0.48	4:1	44	0	65	1.5	551.0	0.010	3550	Straight blade	-	660	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.54	0.13	4:1	24	0	65	1.5	118.1	0.033	1100	Rushton Impeller	-	660	0	Yes	M. Thermoautotrophicus	N/A	[48]

(Continued)

Table 5. (Continued).

Reactor Configuration	pH	H_2 ($L/L_{vrf}/min$)	CO_2 ($L/L_{vrf}/min$)	H_2/CO_2 Ratio	CH_4_{out} (%)	Pressure (Barg)	Temp. ($^{\circ}C$)	Reactor		Retention Time (h)	k_{La} /h	Method of k_{La} increase	Rate of mixing (L/min)	Gas recirculation (L/min)	Enriched Culture (y/n)	Archaeal strain	Unit normalized to	
								Vol. (L)	MER ($L CH_4/L_{vrf}/day$)									
CSTR Ex-situ	6.8	1.36	0.34	4 : 1	32	0	65	1.5	334.0	0.013	3250	Rushton Impeller	1015	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	1.68	0.42	4 : 1	40	0	65	1.5	465.3	0.011	3750	Straight blade	1015	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.83	0.21	4 : 1	35	0	65	1.5	219.2	0.023		Straight blade	400	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.83	0.21	4 : 1	76	0	65	1.5	229.0	0.023		Rushton Impeller	300	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.83	0.21	4 : 1	43	0	65	1.5	229.2	0.023		Straight blade	490	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.83	0.21	4 : 1	83	0	65	1.5	249.9	0.024		Rushton Impeller	660	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.83	0.21	4 : 1	52	0	65	1.5	250.4	0.024		Straight blade	660	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.83	0.21	4 : 1	90	0	65	1.5	270.1	0.025		Rushton Impeller	900	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.83	0.21	4 : 1	61	0	65	1.5	271.2	0.025		Straight blade	850	0	Yes	M. Thermoautotrophicus	N/A	[48]
CSTR Ex-situ	6.8	0.83	0.21	4 : 1	97	0	65	1.5	289.8	0.026		Rushton Impeller	1200	0	Yes	M. Thermoautotrophicus	N/A	[48]

- Retention time values presented in papers are noted (**Bold**, underlined and *italic*), but where missing, retention time according to Voelklein et al. [11] calculated to allow comparison.

This was elucidated by Savvas et al. [66], where a 2-L reactor with a Rushton impeller at 1200rpm had a parasitic energy demand of 7%. Scaling up of the 2-L reactor to 5 L showed a 90% parasitic energy demand of the total energy generated. Due to the turbulent nature of stirring gas-liquid contactors, power usage by the impellers is obtained using equation 6.

$$P = P_0 \rho N^3 D^5 \quad (\text{Equation 6})$$

Where: P_0 is the power number, depending on structural characteristic of mixing system (geometry); ρ is the fluid density; N is the angular velocity of impeller; D is the diameter of the impeller.

Increasing the reactor radius results in a significant increase in mixing power consumption (parasitic energy demand) as the impeller power consumption increases proportionally to the diameter raised to the power of 5, as evident in Equation 6. This shows the importance of geometry of impellers also playing a crucial role in reactor performance.

The effect of high shear force exertion due to the impeller has also been raised. Such shear forces form when liquids move at different velocities. Due to the nature of impellers, velocity by the impeller tip will be larger than that near the center. While no clear inhibitions can be deduced as of yet, cell damage may be a possibility due to high shear forces. Cases have shown syntrophic interaction across groups to be limited by shear forces in CSTRs [67]. Some studies have exhibited upper limits for mixing speeds, where biogas production declines [68]. A comparison of the performance indicators of CSTR reactors used in BHM systems is shown in Table 5. Only a few reactor configurations achieve a grid injection level gas quality. These systems are either achieving this by sacrificing higher MER for high gas purity, such as Luo and Angelidaki [69] while also utilizing extended retention times for purity of gas. Other reactors such as those by Peillex et al. [48] or 'Electrochaeta GmbH' [26] achieve high purity by using high mixing rates, elevated pressures and pure strain archaea cultures.

2.6.2. Diffusion-based reactors

Diffusion as a phenomenon has been studied extensively, with research moving to micro ($\phi 40$ -

600 μm) and nano-bubble ($\phi 500$ nm) production at viable levels [60,71,72]. These studies outline some of the common issues that must be overcome in order to achieve this scale of gas diffusion. When looking closer at the bubbles on an individual level, the interface of a bubble is governed by the Young–Laplace Law. Research found on diffusion-based reactors is limited, especially with respect to the determination of optimal diffusion rates. Few papers have studied this method of H_2 solubilization. To the authors' knowledge, no research has focused on the bubble dynamics of H_2 or CO_2 in an AD or BHM setting. Voelklein et al. [11] and Bassani et al. [59] are the only papers found to study plate diffuser equipment to any appreciable degree, but micro bubble diffusion per se was not achieved. A MER range of 1.05–9.1 L $\text{CH}_4/\text{L}_{\text{vr}}/\text{day}$ was achieved, but the CH_4 purity was below 95%. Voelklein et al. [11] were able to achieve a grid injection purity in terms of CH_4 content but this required a 24hr batch duration. Luo and Angelidaki [73] achieved MER of approximately 1.4L/ $\text{L}_{\text{vr}}/\text{day}$ and made an estimation of the k_L a value, presenting a very low range of 6-16/h. This is not comparable to other literature, such as that presented by Peillex et al. [48] which reached up to 3750/h. A comparison of the performance indicators of diffusion-based reactors used in BHM systems is shown in Table 6.

Currently, it is difficult to portray diffusion as a competitive alternative as these methods are still in their infancy. In theory, the use of microbubble diffusers could be effective in providing a large interference area between gas and archaea, without the need for packing or high energy demanding mixing, but further experiments need to be undertaken to verify this hypothesis.

Diffusion relies on the quality and type of diffuser used. This determines the dissolution of H_2 into the liquid. When nano-scale bubbles are formed, they exhibit unique properties when compared to standard bubbles. Nano-bubbles are capable of staying suspended in a liquid, remaining in agitation through Brownian motion for extended periods of time (days), disappearing due to diffusion of the gaseous content [74]. There are some complications with this however as the generation of these nano-bubble types may require considerable energy demand if systems are not optimized

Table 6. Comparison of diffusion BHM throughout literature.

Reactor Configuration	pH	H ₂ (L/L _{up} /min)	CO ₂ (L/L _{up} /min)	H ₂ /CO ₂ Ratio	CH ₄ out (%)	Pressure (Barg)	Temp. (°C)	Reactor Vol. (L)	MER (L CH ₄ /L _{up} /day)	Retention Time (h)	k _L a (/h)	Method of k _L a Increase	Rate of mixing (rpm)	(L/min)	Gas recirculation (L/min)	Enriched Culture (y/n)	Archaeal strain	Unit
																		normalized to
CSTR In-situ	7.93	0.0037	0.0009	4 : 1	6	0.2	55	9.5	0.3	24		Fish stone	4	4	4	No	-	STP [11]
CSTR Ex-situ	8.2	0.0038	0.0011	3.4 : 1	85	0.2	55	9.5	0.9	1.63		Ceramic Diffuser	4	4	4	No	-	STP [11]
CSTR Ex-situ	8.5	0.0051	0.0013	4 : 1	92	0.2	55	9.5	1.7	24		Ceramic Diffuser	4	4	4	No	-	STP [11]
CSTR Ex-situ	8.1	0.0095	0.0024	3.9 : 1	61	0.2	55	9.5	1.7	1.14		Ceramic Diffuser	4	4	4	No	-	STP [11]
CSTR In-situ	7.97	0.0035	0.0009	4 : 1	32	0.2	55	9.5	1.8	24		Fish stone	4	4	4	No	-	STP [11]
CSTR In-situ	8.37	0.0037	0.0009	4 : 1	60	0.2	55	9.5	2.5	24		Fish stone	4	4	4	No	-	STP [11]
CSTR Ex-situ	8.1	0.0102	0.0026	4 : 1	49	0.2	55	9.5	2.9	1.99		Ceramic Diffuser	4	4	4	No	-	STP [11]
CSTR In-situ	8.5	0.0107	0.0027	4 : 1	96	0.2	55	9.5	3.7	24		Ceramic Diffuser	4	4	4	No	-	STP [11]
CSTR Ex-situ	8.2	0.0351	0.0088	4 : 1	23	0.2	55	9.5	5.1	0.41		Ceramic Diffuser	4	4	4	No	-	STP [11]
CSTR Ex-situ	7.1	0.0327	0.0082	4 : 1	32	0.2	55	9.5	8.2	0.57		Ceramic Diffuser	4	4	4	No	-	STP [11]
CSTR Ex-situ	7.4	0.0509	0.0127	4 : 1	15	0.2	55	9.5	9.1	0.33		Ceramic Diffuser	4	4	4	No	-	STP [11]
CSTR In-situ	7.74	0.0022	0.0006	4 : 1	53	0	55	1	1.4	14.42	6.62	Column Diffuser	-	150	0	No	-	STP [73]
CSTR In-situ	7.84	0.0012	0.0003	4 : 1	68	0	55	1	1.2	92.37	11.78	Column Diffuser	-	300	0	No	-	STP [73]
CSTR In-situ	7.89	0.0021	0.0006	4 : 1	75	0	55	1	1.2	12.11	16.05	Ceramic Diffuser	-	150	0	No	-	STP [73]

- Retention time values presented in papers are noted (**Bold**, underlined and *italic*), but where missing, retention time according to Voelklein et al. [11] calculated to allow comparison.

properly. Several companies have developed devices which are capable of creating microbubbles, with the gas flow rates being adequate for research purposes. The current proposed concepts in the industry are:

1. Swirl-type liquid flow method [75]. This method uses a specially designed chamber, utilizing liquids rotating in a whirlpool manner to a narrower outlet. Control of this method is regulated by the supply of gaseous flowrates to the chamber. Patents by H. Ohnari [76] state that the invention is capable of generating micro-bubbles with diameters no larger than 20 μm on an industrial scale.

2. High-pressure dissolution method [77] uses elaborate system setup, increasing pressures and temperatures, followed by pressure decreases to stimulate gaseous diffusion into a liquid solute.

3. Venturi methods are now commercially available devices, utilizing the shearing of bubbles through the circulation of water in a Venturi meter-like flow device. These devices have been studied in depth and bubble diameters are varied by restraining the supply rate of the gas, resulting in a trade-off of gaseous flowrate to bubble diameter.

4. Supersonic vibration method [78] has been a long established method for increased rates of gaseous dissolution in liquids. Using designs based

on a Galton whistle for air vibrations and 'Langevin sandwich' – comprising of currents passed through special quartz slabs, allowing for sending out ultrasonic vibrations into liquid media.

5. Ultrafine pore diffusion methods [60,72,75] utilize specially designed membranes or diffusion devices, utilizing nanopore materials (no greater than 1 μm diameter) which are used to pass gas through, generating nanobubbles. These devices can range from ceramic diffusers and hollow fiber membranes to more unique and carbon-based diffusion devices.

The different methods of diffusion are used for a variety of services such as aquaponics, sterilization, cleaning, environmental purification, wastewater treatment, and paper manufacture. However, the idea of applying nano-bubble technology for H_2 dissolution, and furthermore BHM, to the best of the authors' knowledge, has not been studied. This means a significant gap in the state of the art for BHM is open to investigation as is the viability of nano-bubble diffusion in a BHM environment. Since the system is in its infancy, the reactor topology can be varied to suit the nature of the diffusion method used. This can be carried out by a bubble column type reactor, or an entirely new concept unique to the method. In literature, a basic, modified CSTR was used, where the

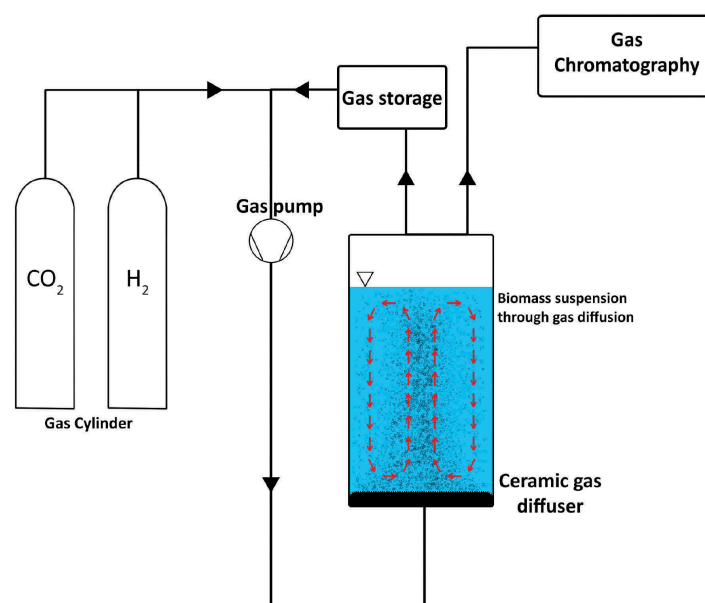


Figure 5. Modified CSTR with a ceramic diffuser base.

stirring mechanism was replaced by a ceramic gas diffuser plate covering the base of the reactor. Figure 5 was adapted from Voelklein et al. [11].

Other reactor system layouts using diffusion in BHM applications are possible and should be assessed in further work.

2.6.3. Fixed film bioreactors

Fixed film bioreactors are set-up where the microbial populations are adhered to a packing material within the reactor such that the maximum surface area is achieved. The purpose of this is to force the maximum interference of liquid and gas. Gas is diffused from the reactor bottom and passed through the packing fixed film layer (Figure 6). Liquids are recirculated and injected in the bottom of the reactor and are allowed to percolate upwards through the packing film with the aid of the influent gas stream, providing nutrients to the archaea. In some cases, both liquid and gas are recirculated, requiring a liquid/gas separation a point before pumping [66]. A comparison of

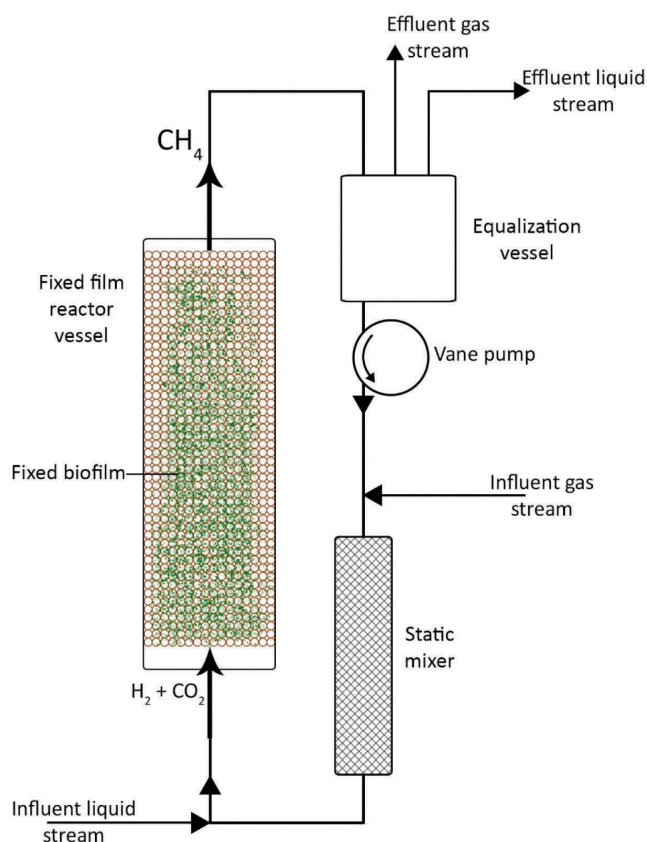


Figure 6. Fixed film/Anaerobic Filter and Soil packed reactor layout.

fixed film BHM reactors in varied stages of development is shown in Table 7.

Work by Bassani et al. [59] compares the performance of two reactors, one with in-situ BHM and another acting as a control AD reactor. The reactor with in-situ methanation had a lower CH_4 concentration in the outlet gas, owing to the presence of unconverted H_2 . This is a common issue across the literature as the dissolution of H_2 is the bottleneck for high H_2 conversion rates. Bassani et al. [59] highlight a reactor with rashig rings with a CH_4 outlet percentage of 40.4%, where the control AD presents 60.6%. However, the MER rates, of the in-situ and control AD were 1.528 $\text{L}/\text{L}_{\text{VT}}/\text{day}$ and 1.350 $\text{L}/\text{L}_{\text{VT}}/\text{day}$, respectively. This highlights the problem encountered by many existing systems, use of BHM results in the reduction in CH_4 purity leaving the reactor, but the MER is larger than the standard AD process.

This trade-off can be observed in Burkhardt et al. [41], where an 88 L reactor system achieved 98-100% CH_4 purity, at a lower MER to that of Bassani et al. [59], 1.2-1.5 $\text{L}/\text{L}_{\text{VT}}/\text{day}$. It is important to observe that the residence time reported by Burkhardt is significantly longer. This also applies for work by Alitalo et al. [79] who depict the reactor's inability to convert the H_2 gas even at large batch retention times of 144 h. This could be due to the lack of an enriched nutrient supply, or lack of pure strain culture use, making high rate methanation difficult to achieve.

2.6.4. Minimal liquid bioreactor

A novel system is presented by Savvas et al., [66] depicted in Figure 7 (adapted from Savvas et al. [66]). A hose-like reactor was set up, packed internally, creating a high surface area where archaea lined the path of the gases throughout the length of the hose reactor. The reactor was first aligned vertically (Figure 7 rotated 90°) with alternating columns of liquid and gas pockets, due to the rise and fall of coils. The complex travel path allowed for alternating stages of gas-liquid transfer. This allows for a plentiful supply of nutrients to the archaea during the rise (liquid) phase, while a large interface of gas-to-archaea during the descending loop phase. The reactor consists of a 7 meter pipe, in a six-loop configuration, with packing wheels throughout. The reactor was later

Table 7. Comparison of Fixed Film reactors in BHM throughout literature.

type	Reactor Configuration	pH	H_2 ($L/L_{VP}/min$)	CO_2 ($L/L_{VP}/min$)	CH_4 out (%)	Pressure (Barg)	Temp. (°C)	Reactor Vol. (L)	MER (L_{VP}/day)	Retention Time (h)	$k_{a,a}$ (/h)	Method of $k_{a,a}$ Increase	Rate of mixing		Enriched Culture	Archaeal strain	Unit normalized to	
													(L/min)	(rpm)				(L/min)
Biofilm	Ex-situ	-	0.0833	0.0208	4 : 1	90	0	37	0.75	30	0.27	Fixed Film	-	0	Yes	-	STP	[66]
Biofilm	Ex-situ	-	0.1278	0.0319	4 : 1	50	0	37	0.75	40	0.16	Biomethanation	-	0	Yes	-	STP	[66]
Biofilm	Ex-situ	-	0.0794	0.0199	4 : 1	75	0	37	0.75	27	0.27	Biomethanation	-	0	Yes	-	STP	[66]
Biofilm	Ex-situ	-	0.0578	0.0144	4 : 1	97	0	37	0.75	20	0.37	Biomethanation	-	0	Yes	-	STP	[66]
UASB	In-situ	8.18	0.0057	0.0014	4 : 1	40	0	55	1.4	1.5	2.82	Rashig Rings	-	0	No	-	STP	[59]
UASB	In-situ	8.38	0.0058	0.0015	4 : 1	45	0	55	1.4	1.5	2.76	Rashig Rings	-	0	No	-	STP	[59]
UASB	In-situ	8.24	0.0057	0.0014	4 : 1	52	0	55	1.4	1.5	2.83	Ceramic	-	0	No	-	STP	[59]
UASB	In-situ	7.83	0.0054	0.0014	4 : 1	66	0	55	1.4	2.1	3.60	Sponge	-	0.006	No	-	STP	[59]
UASB	In-situ	7.93	0.0055	0.0014	4 : 1	66	0	55	1.4	1.8	3.18	Sponge	-	0.006	No	-	STP	[59]
UASB	In-situ	7.9	0.0055	0.0014	4 : 1	68	0	55	1.4	1.8	3.38	Serial	-	0.006	No	-	STP	[59]
UASB	In-situ	7.92	0.0055	0.0014	4 : 1	81	0	55	1.4	1.8	3.29	Chambers	-	0.004	No	-	STP	[59]
TBR	Ex-situ	7.3	0.0034	0.0008	4 : 1	98-100	0	37	88	1.2	4	Trickle bed/Packing	-	0	Yes	-	STP	[41]
TBR	Ex-situ	7.3	0.0042	0.0010	4 : 1	98	0	37	88	1.5	4	Trickle bed/Packing	-	0	Yes	-	STP	[41]
TBR	Ex-situ	7.5	0.0038	0.0009	4.4 : 1	59	0	37	7.54	1.1	2.9	Packing & liquid spraying	-	0	Yes	-	STP	[49]
TBR	Ex-situ	7.5	0.0040	0.0006	6.8 : 1	98	0	37	7.54	0.9	3	Packing & liquid spraying	-	0	Yes	-	STP	[49]
TBR	Ex-situ	7.5	0.0038	0.0005	7.1 : 1	97	0	37	7.54	0.8	3.2	Packing & liquid spraying	-	0	Yes	-	STP	[49]
AF	Ex-situ	7.4	0.0215	0.0052	4 : 1	15	0	55	0.5	6.7	0.96	liquid spraying Cristobalite	0.3	0.3	Yes	-	STP	[80]
AF	Ex-situ	6.6	0.0347	0.0087	4 : 1	16	0	65	0.083	127.2	-	Recirculation	-	0	Yes	M. Thermo autotrophicus	N/A	[81]
AF	Ex-situ	6.6	0.0427	0.0107	4 : 1	58	0	65	0.136	122.7	-	Fixed bed reactor	-	0	Yes	M. Thermo autotrophicus	N/A	[81]
AF	Ex-situ	6.8	0.0138	0.0035	4 : 1	46	0	55	4	4.0	144	Solid packing	-	0	No	-	N/A	[79]
AF	Ex-situ	6.9	0.0076	0.0019	4 : 1	26	0	55	4	1.7	144	Solid packing	-	0	No	-	N/A	[79]
AF	Ex-situ	6.9	0.0049	0.0012	4 : 1	87	0	55	4	1.7	144	Solid packing	-	0	No	-	N/A	[79]

- Retention time values presented in papers are noted (**Bold**, underlined and *italic*), but where missing, retention time according to Voelklein et al. [11] calculated to allow comparison.

orientated horizontally, drained of liquid and operated with gas recirculation (Figure 7), with pulse (10ml/min) liquid addition for moisture and nutrient provision for the biofilm. The small diameter (13 mm) of the reactor allowed the liquid to adhere to the inner surface of the reactor through surface tension forces, allowing for a uniform nutrient dispersal to archaea. The reactor was operated at four different gas loading rates, with a maximum gas throughput of 230 L/L_{VR}/day with 50% CH₄ and a MER of 40 L/L_{VR}/day, the highest rate achieved by a fixed film biomethanation system of this scale. As the experimental setup is part of a fixed film system, the data for the experiment are included in Table 7. The performance of this system is noteworthy, with MER ranges of 20–39 L CH₄/L_{VR}/day at 98–50% purity, respectively. A larger-scale operation of this test is required as the experimental reactor volume measured only 0.75L.

2.6.5. Soil-based fixed film reactors

Work conducted by Alitalo et al. [79] utilized two solid-state bioreactors configured in series for the BHM of H₂ and CO₂ in a fixed-bed reactor. The reactor consisted of a polypropylene pipe with a 75 mm diameter and 500 mm height, with an effective volume of 4 L across both reactors. The

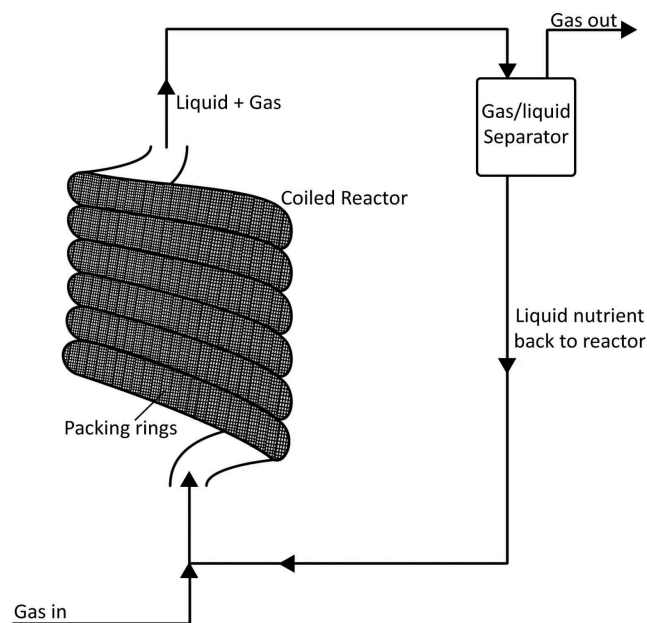


Figure 7. A novel BHM system using tubular reactor setup of narrow diameter pipe and packed fixed biofilm.

bottom 10 cm of the reactor was comprised of pebble stones while the remainder was filled with solid support comprised of vermiculite, perlite, wood ash, hydrated cobalt sulfate and hydrated nickel chloride. The specific surface area was 37.44m²/g. A maximum MER rate of 6.35 L CH₄/L_{VR}/day at a residence time of 144 h was achieved. In comparison, Burkhardt et al. [41] achieved 1.2 L CH₄/L_{VR}/day at a residence of 4 h with a reactor area of 305m²/m³, reaching 20% of MER at 3% of the retention time achieved by Alitalo et al. [79]. While these reactors did not produce large volumes of CH₄, the use of aerated soil is an interesting and novel alternative to custom, plastic packing. However, an issue with this type of packing may arise due to settling of soil, formation of paths of least resistance and dead volume. As a result, modern packing may be a more suited option to promote gas dissolution and archaeal distribution.

Jee et al. [81] documented a reactor packed with granular diatomaceous earth clay as a granular support material of varied size. Tests were carried out with numerous particle sizes, where 2–3 mm particle size proved most productive as a packing material. The diatomaceous earth clay led to a consistent MER of approximately 127 L/L_{VR}/day at 15.5% CH₄ at the outlet. The same clay at 5–6 mm diameter facilitated a MER of under 90 L/L_{VR}/day. Using the better performing packing, the reactor height and volume were increased and operation resumed; methane production peaked at 58% CH₄ purity and a MER of 122.7L/L_{VR}/day. The purity of the gas however steadily decreased over the course of 160 h to a lower value of 34% CH₄ at the outlet. Jee et al. [81] hypothesized the steady decline in gas purity was due to channeling of substrate flows by the surplus cell biomass, decreasing the interference area between gas and archaea. The paper reports such high MER rates due to the inclusion of microbial strains, enriched culture medium and increased surface area, maximizing gas to archaea interference. While these results are impressive, the volumes of the reactors were small, at approximately 0.083 L and 0.136 L. As such, scaling up may yield different results. Due to soil properties, paths of least resistance may form, thus essentially rendering the majority of the soil bed a dead volume. An interesting alteration to this reactor is the injection of gas in

the top of the reactor, forcing the gases to be pushed down through the fixed film and exit through the bottom. Traditional systems typically function in the opposite direction. Such a method is possible due to the reactor being primarily soil packed, allowing for gases to pass through the soil packing, as the liquid is not predominant within the reactor space as in traditional systems.

2.6.6. Hollow fiber reactors (HFR)

Membrane bioreactors are based on specially designed ceramic membranes, typically referred to as hollow fiber membranes. An example of such a system is shown in Figure 8 (adapted from Díaz et al. [61]). These provide a barrier between the reactor liquor and gas supply. The fiber membrane comprises of many fibers, from which gas is forced through small pores, diffusing straight into the surrounding liquid. This process relies on the porosity of the fiber membranes. Designs range from hydrophilic to hydrophobic, which represent a wide variety of hollow fiber materials. Hydrophilic fibers require the membranes to undergo a process called wetting, with membranes absorbing water into the pores. This process ensures no gas bubbles are present in the membrane before commissioning [82]. While hollow fiber membranes provide instantaneous gas to liquid mass transfer, the flow rates of the system are limited due to the porosity and relatively small surface area of these membranes. There are

a number of merits that this system offers; high purity of exit gas, compactness and easier automation [83]. Disadvantages vary from high capital and operation costs from membrane fouling, relating to the build-up of biofilm on the membrane over the system lifespan, decreasing the operational efficiency of the system. A study by Díaz et al. [61] demonstrated the utilization of this system, with significant results achieved. The system produced a MER of 7 L CH₄/L_{VT}/day at 95% H₂ utilization with a 1 h retention time. A noteworthy result was the lack of a biomass film found on the membrane of the module as compared to previous studies. This occurrence is attributed to the high recirculation rates of gas. Other literature setups involving HFR presented yields of 40–50 L CH₄/L_{VT}/day at 25–14% CH₄ purity, respectively. A comparison of HFR used in BHM is shown in Table 8. Once again, the trade-off between purity and MER is evident as higher throughputs allow for higher MER rates, but lower the purity of the exiting gas.

2.7. System key parameter comparison

As discussed, systems throughout literature vary substantially in their capability to achieve a high MER and high purity output gas. The following subsections compare these systems to show the development of each of the technologies, as well as the current state of the art.

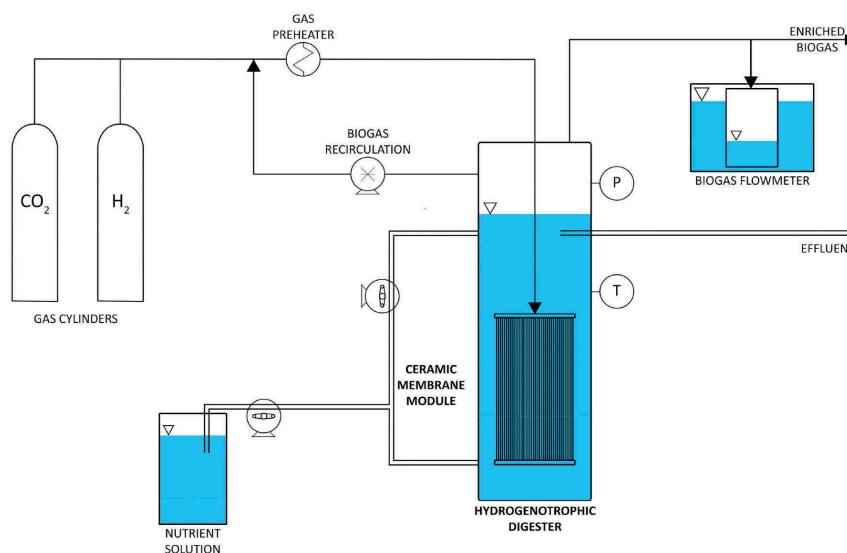


Figure 8. Diagram of a membrane bio-reactor experimental set-up.

Table 8. Comparison of Hollow membrane reactors in BHM throughout literature.

Type	Reactor Configuration		pH	H_2 (L/L_{in} /min)	CO_2 (L/L_{in} /min)	H_2/CO_2 Ratio	CH_4_{out} (%)	Pressure (Barg)	Temp. ($^{\circ}C$)	Reactor		MER ($L CH_4/L_{in}/day$)	Retention Time		$k_L a$ (/h)	Method of $k_L a$ increase	Rate of mixing (L/min) (rpm)	Gas recirculation (L/min) (y/n)	Enriched Culture	Archaeal strain	Unit normalized to Author
	(in/ex-situ)	Vol. (L)								Temp. ($^{\circ}C$)	h		Time								
HFM R	Ex-situ	31	7.2	0.0070	0.0018	4 : 1	84	0	55	31	2.0	2.80	30	HFM + Recirculation	-	0.07	No	-	-	STP	[61]
HFM R	Ex-situ	31	7.2	0.0140	0.0035	4 : 1	75	0	55	31	3.8	1.37	155	HFM + Recirculation	-	1.12	No	-	-	STP	[61]
HFM R	Ex-situ	31	7.2	0.0210	0.0052	4 : 1	68	0	55	31	5.7	0.91	180	HFM + Recirculation	-	1.12	No	-	-	STP	[61]
HFM R	Ex-situ	31	7.2	0.0210	0.0052	4 : 1	79	0	55	31	6.9	1.01	240	HFM + Recirculation	-	1.67	No	-	-	STP	[61]
HFM R	Ex-situ	31	7.2	0.0314	0.0078	4 : 1	65	0	55	31	9.5	0.64	420	HFM + Recirculation	-	3.35	No	-	-	STP	[61]
HFM R	Ex-situ	31	7.2	0.0174	0.0044	4 : 1	82	0	55	31	5.8	1.21	205	HFM + Recirculation	-	1.51	No	-	-	STP	[61]
HFM R	Ex-situ	31	7.2	0.0279	0.0070	4 : 1	78	0	55	31	8.8	0.74	430	HFM + Recirculation	-	3.35	No	-	-	STP	[61]
HFM R	Ex-situ	0.104	7	0.0187	0.0047	4 : 1	25	0	65	0.104	40.3	-	77	HFM	-	0	Yes	M. Thermo autotrophicus	N/A	[84]	
HFM R	Ex-situ	0.104	7	0.0320	0.0080	4 : 1	14	0	65	0.104	50.7	-	87	HFM	-	0	Yes	M. Thermo autotrophicus	N/A	[84]	
MBR	Ex-situ	60	7.4	0.0069	0.0017	4 : 1	79	0	55	60	2.4	3.10	77	Ceramic tubular membrane	-	8	No	-	-	STP	[58]
MBR	Ex-situ	60	7.4	0.0139	0.0035	4 : 1	55	0	55	60	4.3	1.46	87	Ceramic tubular membrane	-	8	No	-	-	STP	[58]
MBR	Ex-situ	60	7.4	0.0139	0.0035	4 : 1	79	0	55	60	4.8	1.55	166	Ceramic tubular membrane	-	12.3	No	-	-	STP	[58]
MBR	Ex-situ	60	7.4	0.0208	0.0052	4 : 1	79	0	55	60	7.1	1.03	268	Ceramic tubular membrane	-	12.3	No	-	-	STP	[58]
HFM R	In-situ	1	7.61	0.0006	0.0003	4 : 1	78	0.32	55	1	0.9	585.37	Magnetic stirrer	-	0	No	-	-	STP	[73]	
HFM R	In-situ	1	7.9	0.0010	0.0003	4 : 1	90	0.56	55	1	0.9	45.89	Magnetic stirrer	-	0	No	-	-	STP	[73]	
HFM R	In-situ	1	8.31	0.0012	0.0003	4 : 1	96	0.75	55	1	0.9	28.74	Magnetic stirrer	-	0	No	-	-	STP	[73]	

- Retention time values presented in papers are noted (**Bold**, underlined and *italic*), but where missing, retention time according to Voelklein et al. [11] calculated to allow comparison.

2.7.1. Comparison of methane evolution rate across reactor systems

Across the systems investigated, MER is a parameter that is shown to vary significantly. With reference to Figure 9, the use of CSTRs generates significantly higher MER than the other reactor systems; however, there is a substantial variation in the MER values achieved in literature. Additionally, it is important to take into account the early development stage of the technologies. From the observation of data in Tables 5–8, in the presence of microbial strains such as *Methanothermobacter thermoautotrophicus* the resulting methane production rates are substantially higher. It is evident that the CSTR technology is the predominant system for assessment of pure strain cultures. This highlights that even minor improvements to the different BHM systems can cause significant jumps in the efficiency as illustrated by the MER. The use of pure cultures is usually omitted due to the additional complications this causes in laboratory-scale experiments.

2.7.2. Comparison of retention time across reactor systems

Figure 10 highlights the variations in retention time across reactor systems. Low retention times in BHM systems are indicative of a higher reactor efficiency, suggesting shorter travel paths and, as

such, more compact and potentially cheaper systems resulting in more cost-effective renewable gas production. Recirculation is a simple method to prolong these travel paths within a compact system but can also be an indication of the lower performance of a reactor system and earlier development stage. Diffusion-based systems are found to have the highest retention times of the different BHM systems assessed. There was however a significant variation in the retention times. CSTR-based BHM systems typically had the lowest retention times. This highlights the performance of CSTR reactors, and also a more mature state of this reactor system when compared to others assessed.

2.8. Analysis of relationship between key operational parameters

As indicated in the analysis and comparisons, cross-system appraisal is difficult at an experimental level. This is mainly due to the various technology development stages. Most research has focused on the use of CSTRs for BHM, due to the fact that this is the most mature reactor technology, and also the simplest. As a result, a more system-by-system comparison should be carried out across reactor set-ups, irrespective of the system implemented. The following sections seek to compare several parameters collated from literature.

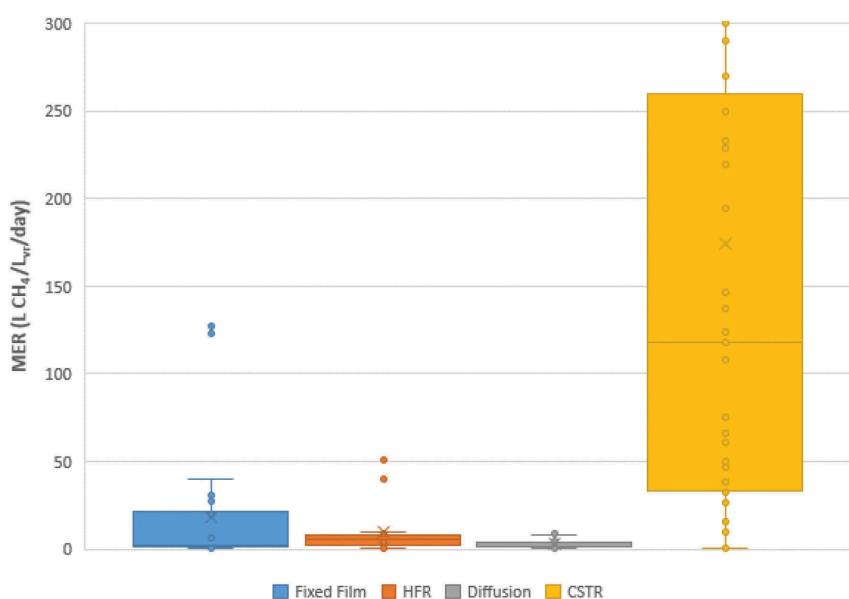


Figure 9. Comparison of MER across reactor systems.

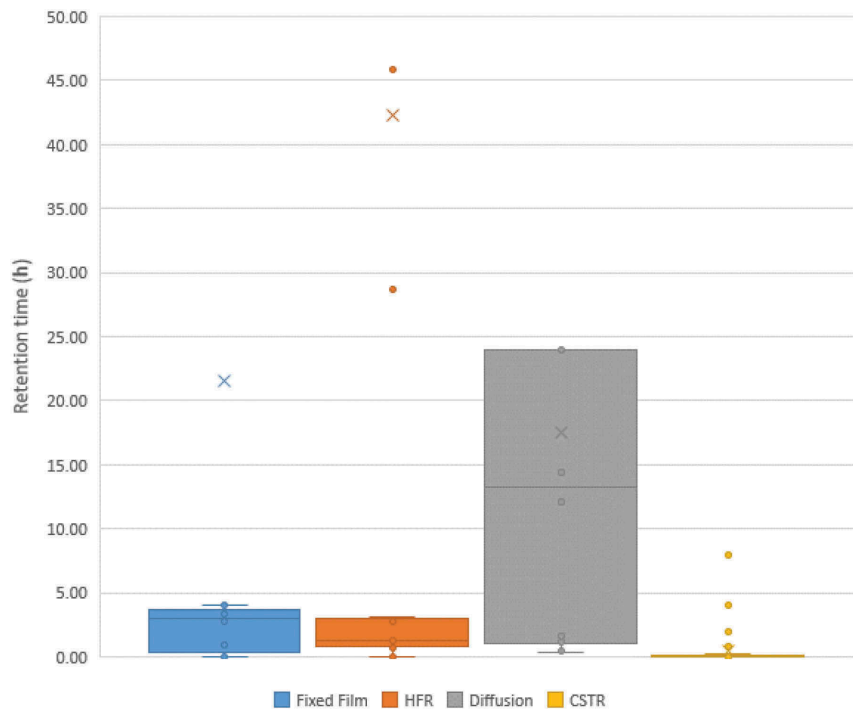


Figure 10. Comparison of retention times across reactor systems.

2.8.1. Relationship between retention time and methane evolution rate

From the analysis of the data compilation in Tables 5–8, a relationship was sought between methane evolution rate and retention time in the BHM reactors. Upon plotting the data, the relationship, as documented in Figure 11 was found. Instead of the expected increase in MER with longer retention time, the opposite appeared to occur. The authors believe that this is an indication of the system

inefficiency at high retention time, in which gas requires longer residence times to be converted in the reactor system. This relationship suggests that smaller more efficient reactor systems will result in the generation of more cost-effective green gas.

2.8.2. Relationship between CH_4 concentration and methane evolution rate

Analysis of the data in Tables 5–8 reveals a weak relationship (Figure 12) between CH_4

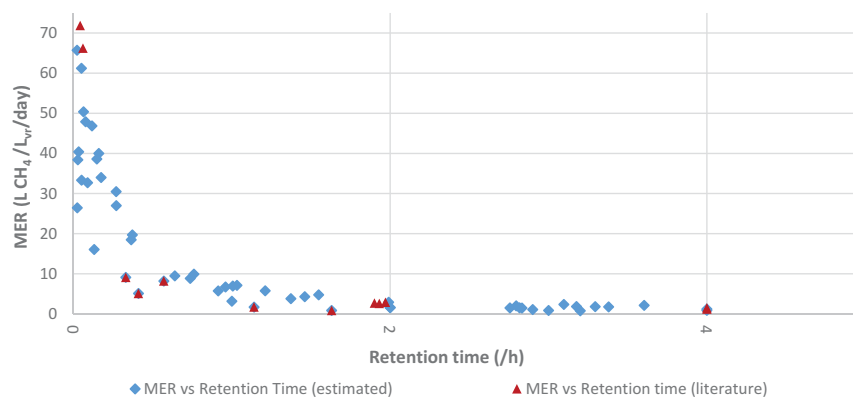


Figure 11.: Relationship between MER and retention times.

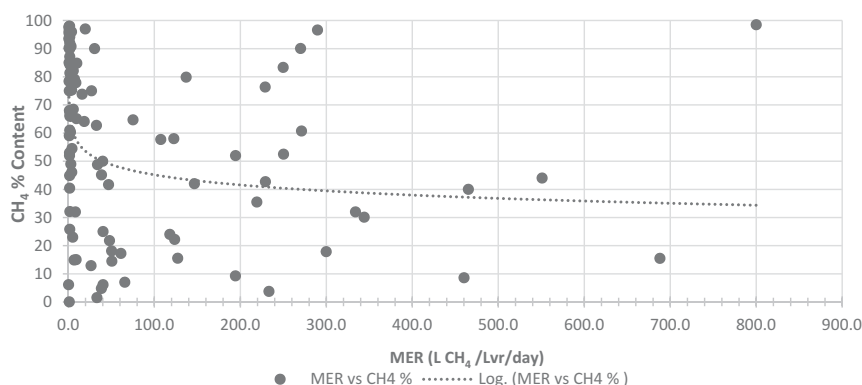


Figure 12.: Relationship between MER and CH₄% content.

concentration and MER, a concept supported by Lecker et al. [14]. While the relationship is weak, the earlier discussion of higher MER levels resulting in lower CH₄ percentages in the outlet gas supports the existence of this relationship. A conclusion can be made that lower MERs tend to yield higher purity exiting gas. Few studies have been able to maximize the values of these two variables. At a full demonstration scale, ‘Electrochaeta GmbH’ [26] was capable of elevating the levels of both of these values, likely due to the refining of the full-scale methanation system, with the use of pure cultures, high agitation rates, high gas throughputs, low retention times and high pressures. Optimal systems with ideal configurations require complex maintenance as imbalances and oversight may lead to reactor contamination and sub-optimal production rates.

2.8.3. Relationship between methane evolution rate and volumetric gas-liquid mass transfer coefficient k_La

Using available data in the literature on k_La and MER, an exercise was carried out in an effort to observe any relationship between the two parameters. The literature data compiled in Table 9 allowed for the production of Figure 13. A cursory examination shows that there is a relationship between MER and k_La , as expected. Increased MER coincided with increased k_La values. However, as outlined previously, data on exact k_La measurement are limited, more data and laboratory research are required to elucidate the exact significance and nature of this relationship.

2.9. Full-scale demonstration plant

To the authors' knowledge, ‘Electrochaeta GmbH’ is the first full-scale methanation plant. It operates at a full load capacity of 1.502 MW (raw biogas case) in Copenhagen, Denmark. Personal communication with the company and conference presentations indicate MER values of 800 L CH₄/L_{vr}/day, at 99% CH₄ content and estimated gas residence times of 3 min [85]. The plant is heated only up to 50°C and the exothermic reaction of archaea brings the reactor temperature up to 60°C. The state-of-the-art plant yields 0.126 MWh_{th} thermal

Table 9. MER vs k_La comparison.

MER (L CH ₄ /L _{vr} /day)	k_La /h	Author
465.3	3750	[48]
551.0	3550	[48]
334.0	3250	[48]
194.5	1450	[48]
146.7	1200	[48]
118.1	1100	[48]
8.8	430	[61]
9.5	420	[61]
7.1	268	[58]
6.9	240	[61]
5.8	205	[61]
5.7	180	[61]
4.8	166	[58]
3.8	155	[61]
4.3	87	[58]
2.4	77	[58]
3.2	39.9	[69]
2.0	30	[61]
1.6	20.5	[69]
1.6	19.9	[69]
1.2	16.1	[73]
1.2	11.8	[73]
0.9	11.4	[69]
0.5	6.8	[69]
1.429	6.62	[73]

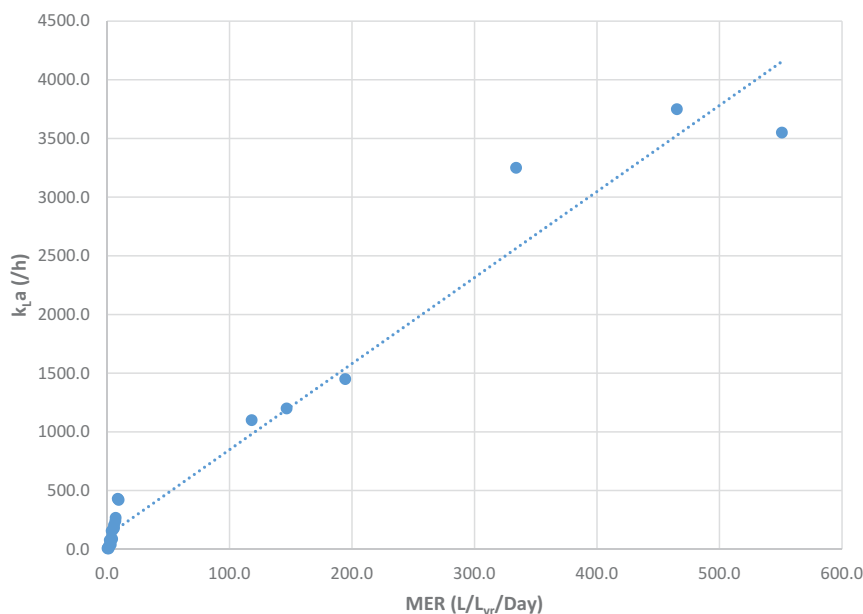


Figure 13. Comparison of MER vs $k_{L,a}$ data in literature.

energy (counter-flow heat exchanger) generated from the bioreactor process, 0.544 MWh_{th} in the form of upgraded CO₂ and H₂, and 0.832 MWh_{th} in the form of injected methane contained in the raw biogas. The additional yield equates to a methane yield increase of over 65%. The report proposed scenarios for sourcing CO₂; purchasing raw biogas (CO₂/CH₄ mixture) from a nearby plant during operational hours, or, using CO₂ obtained from scrubbing raw biogas and injecting into the upgrading plant along with H₂ for upgrading. Hydrogen is sourced from an electrolyzer on-site which operates during periods of excess electrical energy, capitalizing on the availability of ‘waste’ electricity, based on Denmark’s high renewable energy access in the form of wind. This allows for the electrical energy to be stored in gaseous form in the gas grid. Oxygen is also produced in the electrolyzer; however, due to the intermittent generation and relatively low financial value of O₂, it is determined that the capture and use of the O₂ are not profitable. However, consideration was made to use the O₂ in aeration of the nearby wastewater treatment facility. The BHM reactor is designed as a 9 m tall CSTR with a 0.72 m ID (estimated), with four impellers, mixing at a rapid speed, and gas injection of H₂ and CO₂ at the bottom of the tank. A plant layout schematic is depicted in Figure 14. The shear forces exerted

by the impellers cause a breakup of bubbles, and subsequent impellers along the height of the reactor ensure the maintenance of small bubble size. The reactor operates at 60–65°C and 4–9 bar pressure. Due to the height of the reactor, pressure on the bottom will be 1 barg higher than the top. Industry examples suggest the agitation requires 1.6 W/L_{reactor}, and with an estimated total reactor volume of 3750 L this equates to 5.70 kW for CSTR agitation. This matches closely to the industry technical reports [26,85,86]. In terms of energy demand, Electrochaea (approximately 0.32 kWh/Nm³ raw biogas) is similar to traditional gas purification systems whose energy demand can range significantly (Water scrubber: 0.25–0.3 kWh/Nm³; Chemical scrubber: 0.05–0.15 kWh/Nm³; Membrane separation: 0.18–0.2 kWh/Nm³; Pressure Swing Absorption 0.23–0.30 kWh/Nm³; Cryogenic upgrading; 0.76 kWh/Nm³; Organic physical scrubber: 0.2–0.3 kWh/Nm³).

Biologically, a patented, isolated strain of *Methanothermobacter Thermoautotrophicus* UC 120,910 is used in a pure culture. When gases are injected, they undergo screening to ensure no contaminants are brought into the main reactor. Nutrient media are periodically injected. The environment has a pH range of 7–8 and an Oxidation-Reduction Potential (ORP) of 600mV, corresponding to a 0 coliform count per 100 ml of

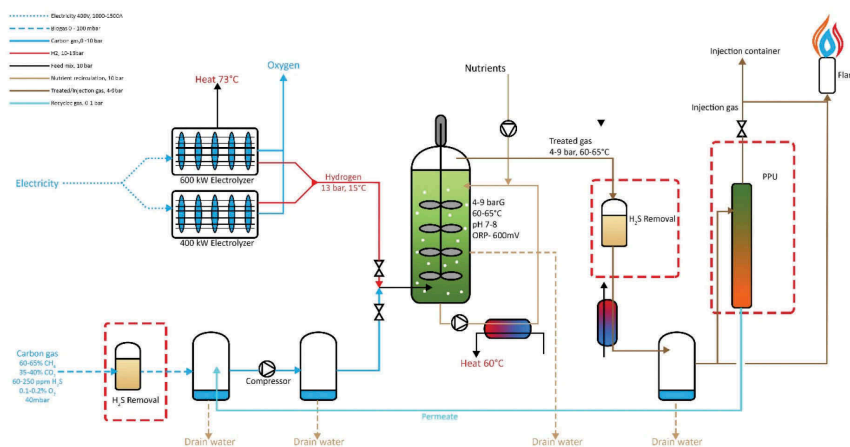


Figure 14. Electrochaeta plant schematic adapted from the plant technical report[26].

water. A Life Cycle Analysis (LCA) baseline performance shows a 75% CO₂ emissions reduction compared to fossil fuel-derived natural gas [26]. The reactor is capable of producing grid quality gas, at pressures greater than 6 barg. The only additional step for grid injection is the removal of water vapor through drying.

3. Conclusions

The energy transition will raise dilemmas to challenge future energy systems. One major challenge is energy storage and the matching of energy production with energy demand. Another being, difficult to decarbonize sectors such as haulage. The circular economy combination of hydrogen produced via electrolysis of curtailed/constrained electricity, biogas production from the digestion of organic waste upgraded to gas grid specification through the reaction of biogas and the aforementioned hydrogen provides a decentralized form of energy storage, and an energy vector for haulage.

The BHM systems reviewed have challenges. In-situ systems need to prevent complicated inhibition pathways due to hydrogen partial pressures. To produce a financially sustainable green gas ex-situ methanation system, optimization of methane evolution rate through maximization of gas transfer rates, while optimizing methane content in the produced gas is required. Retention time was viewed as a method of elevating MER rates by extending the travel path of a unit of gas through the upgrading system. While this is a valid option

for research, long retention times of gases imply an inefficient system producing expensive green gas. As such, prolonged retention times indicate the low efficiency of BHM systems.

The ex-situ technology is at a low technology readiness level. Some literature demonstrates high MER values and high volumetric gas throughput utilizing high rate mixing and agitation (1500rpm), yet the percentage CH₄ in the outlet gas remains low (15.5%) [15]. The energy demand of high rate mixing can be substantial [15,86]. CSTRs appear to be the reactor system most capable of achieving elevated MER. However, this is not indicative of the reactor configuration but rather system optimization (such as patented strains of pure culture) that has been carried out with CSTR reactors. As such, novel systems can currently be portrayed as less successful but may have strong benefits in future energy systems if fully optimized. Indeed, it is suggested by the authors that lower MER in recent publications indicate that optimization has been delayed, as novel reactor systems are studied.

There are evident gaps in the state of the art with regards to system efficiency and optimization. This review has identified that a significant gap may be in the use of diffusion based technology for H₂ dissolution. More work is required to ascertain where diffusion fits in the bigger picture of BHM. In addition, the lack of research into solubilization of H₂ leaves extensive gaps in the state of the art in BHM relating to H₂ diffusion through micro and nanopore diffusers. Research of the smallest possible

bubble diameters achievable in reactor liquors is open to exploration. This would require investigation on liquor viscosity, shear forces, particulate presence, chemical effects; and finally if viable, application of the learned knowledge on an experimental ex-situ methanation reactor would provide a novel research opportunity. Finally, development of a method of evaluation for $k_L a$ would allow for a more time efficient method of evaluating $k_L a$, a key reactor performance parameter when compared to laboratory procedures. This may allow for a better comparison between reactor configurations when coupled with MER and retention time.

Highlights

- Novel technologies are essential for optimal biomethanation.
- Retention time is a poor indication of biomethanation system efficiency.
- Bubble diffusion in biomethanation presents a gap in the state of the art.
- Reactor gas-liquid transfer data is scarce, showing gaps in the state of the art.

Disclosure statement

No potential conflict of interest was reported by the authors.

Funding

This work was supported by Science Foundation Ireland (SFI) through the MaREI centre for Energy, Climate and Marine Grant Number [12/RC/2302_P2 and 16/SP/3829] with industrial funding from Gas Networks Ireland through the Green Gas Innovation Group. Dr. Richard O'Shea recognises the industrial co-funding from Irish Distillers Pernod Ricard.

ORCID

Davis Rusmanis  <http://orcid.org/0000-0002-2718-5071>
 David M. Wall  <http://orcid.org/0000-0001-5802-2884>
 Jerry D. Murphy  <http://orcid.org/0000-0003-2120-1357>

References

- [1] Bensmann B, Hanke-Rauschenbach R, Peña Arias IK, et al. Energetic evaluation of high pressure PEM electrolyzer systems for intermediate storage of renewable energies. *Electrochim Acta* [Internet]. 2013;110:570–580. [cited 2019 Apr 24]. Available from: <https://www.sciencedirect.com/science/article/pii/S0013468613010256>
- [2] Sustainable Energy Authority of Ireland (SEAI). SEAI report. 2019. 52. Available from: <https://www.seai.ie/resources/publications/Renewable-Energy-in-Ireland-2019.pdf>
- [3] Wall DM, Dumont M, Murphy JD, editors. Green gas - facilitating a future green gas grid through the production of renewable gas [Internet]. 2018. Available from: http://task37.ieabioenergy.com/files/daten-redaktion/download/TechnicalBrochures/green_gas_web_end.pdf
- [4] Liebetrau J, Reinelt T, Agostini A, et al. Methane emissions from biogas plants methods for measurement, results and effect on greenhouse gas balance of electricity produced [Internet]. IEA Bioenergy Task. 2017;37. Available from: https://www.ieabioenergy.com/wp-content/uploads/2018/01/Methane-Emission_web_end_small.pdf
- [5] Members of IEA Bioenergy Task 37. Country report summaries [Internet]. 2017. Available from: <http://task37.ieabioenergy.com/>
- [6] Energiforsk. Biogas upgrading - technical review [Internet]. Energiforsk. 2016. Available from: https://energiforskning.dk/sites/energiteknologi.dk/files/slu_trapporter/12164_final_report_p2g_biocat.pdf
- [7] Angelidaki I, Treu L, Tsapekos P, et al. Biogas upgrading and utilization: current status and perspectives. *Biotechnol Adv* [Internet]. 2018;36:452–466. [cited 2019 Mar 22]. Available from: <https://www.sciencedirect.com/science/article/pii/S0734975018300119>
- [8] Sun Q, Li H, Yan J, et al. Selection of appropriate biogas upgrading technology-a review of biogas cleaning, upgrading and utilisation. *Renewable Sustainable Energy Rev* [Internet]. 2015;51:521–532. [cited 2019 Apr 25]. Available from: <https://www.sciencedirect.com/science/article/pii/S1364032115006012>
- [9] IEA. Plant lists - IEA bioenergy task 37 [Internet]. IEA Bioenergy Task 372014. Available from: <http://www.iea-biogas.net/plant-list.html>
- [10] Svenskt Gastekniskt Center AB. Biogas upgrading: review of commercial technologies (SGC report 270/2013). 2013; Available from: <http://www.sgc.se/ckfinder/userfiles/files/SGC270.pdf>
- [11] Voelklein MA, Rusmanis D, Murphy JD. Biological methanation: strategies for in-situ and ex-situ upgrading in anaerobic digestion. *Appl Energy* [Internet]. 2019;235:1061–1071. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0306261918317124>
- [12] European Parliament, Council of the European Union Directive (EU) 2018/2001 of the European Parliament and of the Council on the promotion of the use of energy from renewable resources (recast) Official Journal of the European Union [Internet]. 2018 [cited 2019 Aug 26]. Available from: <https://eur-lex.europa.eu/eli/dir/2018/2001/oj>

- [13] McDonagh S, O'Shea R, Wall DM, et al. Modelling of a power-to-gas system to predict the levelised cost of energy of an advanced renewable gaseous transport fuel. *Appl Energy* [Internet]. 2018;215:444–456.
- [14] Lecker B, Illi L, Lemmer A, et al. Biological hydrogen methanation – A review. *Bioresour Technol* [Internet]. 2017;245:1220–1228.
- [15] Nishimura N, Kitaura S, Mimura A, et al. Growth of thermophilic methanogen KN-15 on H₂-CO₂ under batch and continuous conditions. *J Ferment Bioeng* [Internet]. 1991;72:280–284. Available from: <https://linkinghub.elsevier.com/retrieve/pii/0922338X9190164C>
- [16] Gerhard E, Butsch BM, Marison IW, et al. Improved growth and methane production conditions for *Methanobacterium thermoautotrophicum*. *Appl Microbiol Biotechnol* [Internet]. 1993;40:432–437. [cited 2019 Apr 18]. DOI:10.1007/BF00170406
- [17] Luo G, Johansson S, Boe K, et al. Simultaneous hydrogen utilization and in situ biogas upgrading in an anaerobic reactor. *Biotechnol Bioeng* [Internet]. 2012;109:1088–1094.
- [18] Zoulias E, Varkaraki E, Lymberopoulos N, et al. Water electrolysis [Internet]. In: T. Ohta, editor. *Solar-hydrogen energy systems*. Elsevier; 1979. p. 35–58. Available from: <https://linkinghub.elsevier.com/retrieve/pii/B9780080227139500094>
- [19] de Bucy. J The potential of power-to-gas [Internet]. 2016. Available from: <http://www.enea-consulting.com/wp-content/uploads/2016/01/ENEA-Consulting-The-potential-of-power-to-gas.pdf>
- [20] Oney F, Veziroglu T, Dulger Z. Evaluation of pipeline transportation of hydrogen and natural gas mixtures. *Int J Hydrogen Energy* [Internet]. 1994;19:813–822. Available from: <https://linkinghub.elsevier.com/retrieve/pii/0360319994901988>
- [21] Svensson M. Biomethane standards: gas quality standardisation of biomethane, going from national to international [Internet]. Brussels: 2014. Available from: www.socalgas.com/documents/business/Rule30_BiomethaneGuidance.pdf
- [22] Altfeld K, Pinchbeck D. Admissible hydrogen concentrations in natural gas systems. *Gas Energy* [Internet]. 2013 March;1–16. Available from: www.gas-for-energy.com
- [23] EIGA - European Industrial Gases Association. *Hydrogen Transportation Pipelines* [Internet]. Brussels: European Industrial Gases Association; 2004. Available from: https://h2tools.org/sites/default/files/Doc121_04H2TransportationPipelines.pdf
- [24] Murphy JD, Thamsiroj T. What will fuel transport systems of the future? *Mater Today* [Internet]. 2011;14:518–524. [cited 2019 Aug 26]. Available from: <https://www.sciencedirect.com/science/article/pii/S1369702111702772>
- [25] Nejat Veziroglu T, Sherif SA, Barbir F. Hydrogen energy solutions [Internet]. In: Agardy FJ, Nemerow NL, editors. *Environmental solutions*. Elsevier; 2005. p. 143–180. DOI:10.1016/B978-0-12-088441-4.50008-3
- [26] Strasse E Power-to-gas via biological catalysis (P2G-Biocat) [Internet]. 2014. Available from: https://energiforskning.dk/sites/energiteknologi.dk/files/slutrappporter/12164_final_report_p2g_biocat.pdf
- [27] Danish Government. The Danish climate policy plan. Ministries Clim Energy Build [Internet]. 2013;1:61. Available from: https://ens.dk/sites/ens.dk/files/Analyser/danishclimatepolicyplan_uk.pdf
- [28] Cheng L, Dai L, Li X, et al. Isolation and characterization of methanothermobacter crinale sp. nov., a novel hydrogenotrophic methanogen from the shengli oil field. *Appl Environ Microbiol* [Internet]. 2011;77:5212–5219. DOI:10.1128/AEM.00210-11
- [29] Wasserfallen A, Nolling J, Pfister P, et al. Phylogenetic analysis of 18 thermophilic *Methanobacterium* isolates supports the proposals to create a new genus, *Methanothermobacter* gen. nov., and to reclassify several isolates in three species, *Methanothermobacter thermoautotrophicus* comb. nov., *Methano. Int J Syst Evol Microbiol* [Internet]. 2000;50:43–53. [cited 2019 Apr 24]. Available from: <http://ijs.microbiologyresearch.org/content/journal/ijsem/10.1099/00207713-50-1-43>
- [30] Kotelnikova SV, Obraztsova AY, Gongadze GM, et al. *Methanobacterium thermoflexum* sp. nov. and *Methanobacterium defluvii* sp. nov., thermophilic rod-shaped methanogens isolated from anaerobic digester sludge. *Syst Appl Microbiol* [Internet]. 1993;16:427–435. Available from:
- [31] Nakamura K, Takahashi A, Mori C, et al. *Methanothermobacter tenebrarum* sp. nov., a hydrogenotrophic, thermophilic methanogen isolated from gas-associated formation water of a natural gas field. *Int J Syst Evol Microbiol* [Internet]. 2013;63:715–722. DOI:10.1099/ijs.0.041681-0
- [32] Guneratnam AJ, Ahern E, FitzGerald JA, et al. Study of the performance of a thermophilic biological methanation system. *Bioresour Technol* [Internet]. 2017;225:308–315. [cited 2019 Aug 26]. Available from: <https://www.sciencedirect.com/science/article/pii/S0960852416315875>
- [33] Winter J, Lerp C, Zabel H-P, et al. *Methanobacterium wolfei*, sp. nov., a new tungsten-requiring, thermophilic, autotrophic methanogen. *Syst Appl Microbiol* [Internet]. 1984;5:457–466. [cited 2019 Aug 28]. Available from: <https://www.sciencedirect.com/science/article/abs/pii/S072320208480003X>
- [34] Rittmann S, Seifert A, Herwig C. Quantitative analysis of media dilution rate effects on *Methanothermobacter marburgensis* grown in continuous culture on H₂ and CO₂. *Biomass Bioenergy* [Internet]. 2012;36:293–301. [cited 2019 Apr 18]. Available from: <https://www.sciencedirect.com/science/article/pii/S0961953411005642?via%3Dihub>
- [35] Zabranska J, Pokorna D. Bioconversion of carbon dioxide to methane using hydrogen and hydrogenotrophic methanogens. *Biotechnol Adv* [Internet].

- 2018;36:707–720. [cited 2019 Feb 1]. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0734975017301556>
- [36] Orozco AM, Nizami AS, Murphy JD, et al. Optimizing the thermophilic hydrolysis of grass silage in a two-phase anaerobic digestion system. *Bioresour Technol* [Internet]. 2013;143:117–125. [cited 2019 May 28]. Available from: <https://www.sciencedirect.com/science/article/pii/S0960852413009085#b0095>
- [37] Voelklein MA, Rusmanis D, Murphy JD. Increased loading rates and specific methane yields facilitated by digesting grass silage at thermophilic rather than mesophilic temperatures. *Bioresour Technol* [Internet]. 2016;216:486–493. [cited 2019 Mar 15]. Available from: <https://www.sciencedirect.com/science/article/pii/S0960852416307684>
- [38] Fukuzaki S, Nishio N, Shobayashi M, et al. Inhibition of the fermentation of propionate to methane by hydrogen, acetate, and propionate. *Appl Environ Microbiol* [Internet]. 1990;56:719–723. Available from: <http://www.ncbi.nlm.nih.gov/pubmed/16348146>
- [39] Siriwongrungson V, Zeng RJ, Angelidaki I. Homoacetogenesis as the alternative pathway for H₂ sink during thermophilic anaerobic degradation of butyrate under suppressed methanogenesis. *Water Res* [Internet]. 2007;41:4204–4210. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0043135407003399>
- [40] Luo G, Angelidaki I. Hollow fiber membrane based H₂ diffusion for efficient in situ biogas upgrading in an anaerobic reactor. *Appl Microbiol Biotechnol* [Internet]. 2013;97:3739–3744. DOI:10.1007/s00253-013-4811-3
- [41] Burkhardt M, Koschack T, Busch G. Biocatalytic methanation of hydrogen and carbon dioxide in an anaerobic three-phase system. *Bioresour Technol* [Internet]. 2015;178:330–333.
- [42] Voelklein M, O’Shea R, Jacob A, et al. Role of trace elements in single and two-stage digestion of food waste at high organic loading rates. *Energy* [Internet]. 2017;121:185–192. [cited 2019 Mar 15]. Available from: <https://www.sciencedirect.com/science/article/pii/S0360544217300099>
- [43] Zeikus JG, Wolfe RS. *Methanobacterium thermoautotrophicus* sp. n., an anaerobic, autotrophic, extreme thermophile. *J Bacteriol* [Internet]. 1972;109:707–713. Available from: <https://jlb.asm.org/content/jb/109/2/707.full.pdf>
- [44] Ferry JG. Biochemistry of Methanogenesis. *Crit Rev Biochem Mol Biol* [Internet]. 1992;27:473–503. DOI:10.3109/10409239209082570
- [45] Winter J, Lerp C, Zabel H-P, et al. *Methanobacterium wolfei*, sp. nov., a new tungsten-requiring, thermophilic, autotrophic methanogen. *Syst Appl Microbiol* [Internet]. 1984;5:457–466. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S072320208480003X>
- [46] Schill N, van Gulik WM, Voisard D, et al. Continuous cultures limited by a gaseous substrate: development of a simple, unstructured mathematical model and experimental verification with *Methanobacterium thermoautotrophicum*. *Biotechnol Bioeng* [Internet]. 2000;51:645–658.
- [47] Daniels L, Belay N, Mukhopadhyay B. Considerations for the use and large-scale growth of methanogenic bacteria. In: Scott CD, editor. *Proceedings of the 6th Symposium on Biotechnology in Fuels and Chemicals. Biotechnology and Bioengineering symposium no. 14.* New York, NY: John Wiley & Sons inc., 1984;199–213.
- [48] Peillex J-P, Fardeau M-L, Boussand R, et al. Growth of *Methanococcus thermolithotrophicus* in batch and continuous culture on H₂ and CO₂: influence of agitation. *Appl Microbiol Biotechnol* [Internet]. 1988;29:560–564. [cited 2019 Jan 31]. DOI:10.1007/BF00260985
- [49] Rachbauer L, Voitl G, Bochmann G, et al. Biological biogas upgrading capacity of a hydrogenotrophic community in a trickle-bed reactor. *Appl Energy* [Internet]. 2016;180:483–490. [cited 2019 Apr 16]. Available from: <https://www.sciencedirect.com/science/article/pii/S0306261916310388#b0055>
- [50] Ullrich T, Lindner J, Bär K, et al. Influence of operating pressure on the biological hydrogen methanation in trickle-bed reactors. *Bioresour Technol* [Internet]. 2018;247:7–13. [cited 2019 Mar 26]. Available from: <https://www.sciencedirect.com/science/article/pii/S0960852417316346>
- [51] Henry III William. Experiments on the quantity of gases absorbed by water, at different temperatures, and under different pressures. *Philos Trans R Soc London* [Internet]. 1803;93:29–274. DOI:10.1098/rstl.1803.0004
- [52] Bernhardt G, Jaenicke R, Ludemann H, et al. High pressure enhances the growth rate of the thermophilic archaeobacterium *Methanococcus thermolithotrophicus* without extending its temperature range. 1988; 54:1258–1261. Available from: <https://www.ncbi.nlm.nih.gov/pubmed/16347635>
- [53] Bassani I, Kougiass PG, Treu L, et al. Biogas upgrading via hydrogenotrophic methanogenesis in two-stage continuous stirred tank reactors at mesophilic and thermophilic conditions. *Environ Sci Technol* [Internet] 2015 [cited 2019 Apr 25]; 49:12585–12593.
- [54] Kale MM, Singh KS. Comparison of a mesophilic and thermophilic novel sludge-bed anaerobic membrane bioreactor treating prehydrolysis liquor from a dissolving pulp mill. *J Environ Eng* [Internet]. 2016;142:04016030. [cited 2019 Apr 18]. DOI:10.1061/%28ASCE%29EE.1943-7870.0001103
- [55] Singh KS, Viraraghavan T, Karthikeyan S, et al. Low temperature start-up of UASB reactors for municipal wastewater treatment. In: *Proceedings on 8th International Conference on Anaerobic Digestion.* Sendai, Japan; 1997. p. 192–195.

- [56] Lettinga G. Challenge of psychrophilic anaerobic wastewater treatment. *Trends Biotechnol* [Internet]. 2001;19:363–370. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0167779901017012>
- [57] Cooper CM, Fernstrom GA, Miller SA. Performance of agitated gas-liquid contactors. *Ind Eng Chem* [Internet]. 1944;36:504–509. Available from: <http://pubs.acs.org/doi/pdf/10.1021/ie50414a005>
- [58] Alfaro N, Fdz-Polanco M, Fdz-Polanco F, et al. Evaluation of process performance, energy consumption and microbiota characterization in a ceramic membrane bioreactor for ex-situ biomethanation of H₂ and CO₂. *Bioresour Technol* [Internet]. 2018;258:142–150. [cited 2019 Apr 12]. Available from: <https://www.sciencedirect.com/science/article/pii/S0960852418302840>
- [59] Bassani I, Kougias PG, Angelidaki I. In-situ biogas upgrading in thermophilic granular UASB reactor: key factors affecting the hydrogen mass transfer rate. *Bioresour Technol* [Internet]. 2016;221:485–491. Available from:
- [60] Tesář V. Microbubble generation by fluidics. Part II: bubble formation mechanism. *Inst Thermomechanics v.v.i, Acad Sci Czech Republic, Prague Abstr* [Internet]. 2012; 1:1–25. Available from: http://www.it.cas.cz/files/u1868/tesar2_F.pdf
- [61] Díaz I, Pérez C, Alfaro N, et al. A feasibility study on the bioconversion of CO₂ and H₂ to biomethane by gas sparging through polymeric membranes. *Bioresour Technol* [Internet]. 2015;185:246–253. [cited 2019 Apr 4]. Available from: <https://www.sciencedirect.com/science/article/pii/S0960852415003053?via%3Dihub>
- [62] Guiot SR, Cimpoia R, Carayon G. Potential of wastewater-treating anaerobic granules for biomethanation of synthesis gas. *Environ Sci Technol* [Internet]. 2011;45:2006–2012. DOI:10.1021/es102728m
- [63] Peillex J-P, Fardeau M-L, Belaich J-P. Growth of *Methanobacterium thermoautotrophicum* on H₂ - CO₂: high CH₄ productivities in continuous culture. *Biomass* [Internet]. 1990;21:315–321. [cited 2019 Feb 4]. Available from: <https://www.sciencedirect.com/science/article/pii/0144456590900804?via%3Dihub>
- [64] Nishimura N, Kitaura S, Mimura A, et al. Cultivation of thermophilic methanogen KN-15 on H₂-CO₂ under pressurized conditions. *J Ferment Bioeng* [Internet]. 1992;73:477–480. [cited 2019 Jan 29]. Available from: <http://linkinghub.elsevier.com/retrieve/pii/0922338X9290141G>
- [65] Seifert AH, Rittmann S, Herwig C. Analysis of process related factors to increase volumetric productivity and quality of biomethane with *Methanothermobacter marburgensis*. *Appl Energy* [Internet]. 2014;132:155–162. [cited 2019 Jan 29]. Available from: <https://www.sciencedirect.com/science/article/pii/S0306261914006643?via%3Dihub>
- [66] Savvas S, Donnelly J, Patterson T, et al. Biological methanation of CO₂ in a novel biofilm plug-flow reactor: A high rate and low parasitic energy process. *Appl Energy* [Internet]. 2017;202:238–247. [cited 2019 Mar 1]. Available from: <https://www.sciencedirect.com/science/article/pii/S0306261917306748>
- [67] Hoffmann RA, Garcia ML, Veskivar M, et al. Effect of shear on performance and microbial ecology of continuously stirred anaerobic digesters treating animal manure. *Biotechnol Bioeng* [Internet]. 2008;100:38–48.
- [68] Carliell-Marquet C, Sindall R, Bridgeman J. Effect of mixing speed on lab-scale anaerobic digester stability and biogas production (short paper and poster) [Internet]. 2013. Available from: https://www.researchgate.net/publication/282849322_Effect_of_mixing_speed_on_lab-scale_anaerobic_digester_stability_and_biogas_production_short_paper_and_poster
- [69] Luo G, Angelidaki I. Integrated biogas upgrading and hydrogen utilization in an anaerobic reactor containing enriched hydrogenotrophic methanogenic culture. *Biotechnol Bioeng* [Internet] 2012 [cited 2019 Mar 26]; 109:2729–2736.
- [70] Martin MR, Fornero JJ, Stark R, et al. A single-culture bioprocess of *Methanothermobacter thermoautotrophicus* to upgrade digester biogas by CO₂-to-CH₄ conversion with H₂. *Archaea* [Internet]. 2013;2013. [cited 2019 Apr 17]. Available from: <https://www.hindawi.com/journals/archaea/2013/157529/>
- [71] Yoon S, Chung JT, Kang YT. The particle hydrodynamic effect on the mass transfer in a buoyant CO₂-bubble through the experimental and computational studies. *Int J Heat Mass Transf* [Internet]. 2014;73:399–409. [cited 2019 May 30]. Available from: <https://www.sciencedirect.com/science/article/pii/S0017931014001422>
- [72] Tesář V. Microbubble generation by fluidics. Part I: development of the oscillator. *Inst Thermomechanics* [Internet]. 2012;1–13. Available from: http://www.it.cas.cz/files/u1868/tesar1_F.pdf http://147.231.32.3/files/u1868/tesar1_F.pdf
- [73] Luo G, Angelidaki I. Co-digestion of manure and whey for in situ biogas upgrading by the addition of H₂: process performance and microbial insights. *Appl Microbiol Biotechnol* [Internet]. 2013;97:1373–1381. [cited 2019 Apr 4]. DOI:10.1007/s00253-012-4547-5
- [74] Wu C, Nessel K, Masliyah J, et al. Generation and characterization of submicron size bubbles. *Adv Colloid Interface Sci* [Internet]. 2012;179–182:123–132. [cited 2019 May 30]. Available from: <https://www.sciencedirect.com/science/article/pii/S0001868612000942>
- [75] Russel WS, Scholten B. Compositions containing nano-bubbles in a liquid carrier [Internet]. 2017; 1. Available from: <https://patents.google.com/patent/WO2017156410A1/en>
- [76] Ohnari H. Swirling fine-bubble generator [Internet]. 2002; 1. Available from: <https://patents.google.com/patent/US6382601/en>
- [77] Jamialahmadi M, Emadi M, Müller-Steinhagen H. Diffusion coefficients of methane in liquid hydrocarbons at high pressure and temperature. *J Pet Sci Eng*

- [Internet]. 2006;53:47–60. [cited 2019 Jul 2]. Available from: <https://www.sciencedirect.com/science/article/pii/S0920410506000246?via%3Dihub>
- [78] Richardson EG. Supersonic vibrations and their applications. *J R Soc Arts* [Internet]. 1947;95:90–105. Available from: <http://www.jstor.org/stable/41363337>
- [79] Alitalo A, Niskanen M, Aura E. Biocatalytic methanation of hydrogen and carbon dioxide in a fixed bed bioreactor. *Bioresour Technol* [Internet]. 2015;196:600–605.
- [80] Bugante EC, Shimomura Y, Tanaka T, et al. Methane production from hydrogen and carbon dioxide and monoxide in a column bioreactor of thermophilic methanogens by gas recirculation. *J Ferment Bioeng* [Internet]. 1989;67:419–421. Available from: <https://linkinghub.elsevier.com/retrieve/pii/0922338X89901487>
- [81] Jee HS, Nishio N, Nagai S. Continuous CH₄ Production from H₂ and CO₂ by *Methanobacterium thermoautotrophicum* in a fixed-bed reactor. *J Ferment Technol* [Internet]. 1988;66:235–238. [cited 2019 Mar 4]. Available from: <http://linkinghub.elsevier.com/retrieve/pii/0385638088900544>
- [82] Orgill JJ, Atiyeh HK, Devarapalli M, et al. A comparison of mass transfer coefficients between trickle-bed, hollow fiber membrane and stirred tank reactors. *Bioresour Technol* [Internet]. 2013;133:340–346. [cited 2019 Apr 29]. Available from: <https://www.sciencedirect.com/science/article/pii/S0960852413001569>
- [83] Khanal SK, Giri B, Nitayavardhana S, et al. 10 - anaerobic bioreactors/digesters: design and development [Internet]. Elsevier B.V.; 2017. DOI:10.1016/B978-0-444-63665-2.00010-2
- [84] Jee HS, Nishio N, Nagai S. CH₄ production from H₂ and CO₂ by *Methanobacterium thermoautotrophicum* cells fixed on hollow fibers. *Biotechnol Lett* [Internet]. 1988;10:243–248. [cited 2019 Apr 23]. DOI:<http://link.springer.com/10.1007/BF01024413>
- [85] Hafenbradl D. Industrial scale biological methanation - learnings and insights [Internet]. In: Power2gas Conference. Copenhagen: Electrochaea GmbH; 2018. Available from: <https://p2gconference.com/>
- [86] Energy N. Power-to-gas via biological catalysis WP9 : development of value maximizing strategy [Internet]. 2014. Available from: https://www.energiforskning.dk/sites/energiteknologi.dk/files/slutrapporter/12164_annex_2_p2g_biocat_-_development_of_value_maximizing_trading_strategy.pdf