

Doi: <http://dx.doi.org/10.17584/rcch.2018v12i1.7446>

Brackish water: an option for producing hydroponic *Capsicum annuum* in laminar flows of mineral nutrients

Agua salobre: una opción para la producción de *Capsicum annuum* hidropónicos en flujo laminar de nutrientes minerales




ADAILTON CONCEIÇÃO DOS SANTOS¹
 MAIRTON GOMES DA SILVA¹
 CÁCIO LUIZ BOECHAT^{2, 3}
 DENIZE SAMPAIO CHAGAS¹
 WANDERSON DE SOUSA MENDES²

Sweet pepper greenhouse cultivation in Cruz das Almas-BA, Brazil.

Photo: A.C. dos Santos

ABSTRACT

Sweet pepper plants were grown using a Nutrient Film Technique (NFT) hydroponic system. This study aimed to evaluate the effect of using brackish water on fruit production. The experiment was carried out in a randomized block design with seven treatments and five replications. The electrical conductivity of the water was 0.29, 1.39, 2.75, 4.49, 5.90, 6.76, and 7.09 dS m⁻¹ in the treatments; this water was used for both the nutrient solution preparation and replenishment of crop evapotranspiration. The plant parameters: fruit diameter, fruit length, number of fruits per plant, mean fruit weight, total fruit weight per plant and fruit length/diameter ratio were evaluated 69 days after the transplanting. The use of brackish water with high electric conductivity values did not directly interfere with the sweet pepper production in NFT hydroponic systems, as long as these values did not exceed the sweet pepper salt tolerance of 1.5 to 1.8 dS m⁻¹.



Additional key words: soilless cultivation, semiarid, environmental protection, water reuse.

RESUMEN

Las plantas de pimiento dulce se cultivaron utilizando un sistema hidropónico Nutrient Film Technique (NFT). Su objetivo fue evaluar el efecto del uso de agua salobre en la producción de fruta. El experimento se

¹ Federal University of Recôncavo da Bahia, Cruz das Almas-BA (Brazil). ORCID Santos, A.C.d.: 0000-0001-5753-0246; ORCID Silva, M.G.d.: 0000-0003-2140-201X; ORCID Chagas, D.S.: 0000-0002-6224-8234

² Campus Professora Cinobelina Elvas (CPCE), Federal University of Piauí (UFP), Bom Jesus-PI (Brazil). ORCID Boechat, C.L.: 0000-0002-5086-9156; ORCID Mendes, W.d.S.: 0000-0003-1271-031X

³ Corresponding author. cacioboecat@gmail.com



llevó a cabo en un diseño de bloques al azar con siete tratamientos y cinco repeticiones. La conductividad eléctrica del agua fue 0,29; 1,39; 2,75; 4,49; 5,90; 6,76 y 7,09 dS m⁻¹ en los tratamientos; también, esta agua se usó tanto para la preparación de la solución de nutrientes como para la reposición de la evapotranspiración del cultivo. Los parámetros de la planta: longitud del fruto, número de frutos por planta, peso medio del fruto, peso total de las frutas por planta y la relación longitud/diámetro del fruto se evaluaron 69 días después del trasplante. El uso de agua salobre con altos valores de conductividad eléctrica no interfiere directamente en la producción de chile dulce en los sistemas hidropónicos NFT, siempre que estos valores no excedan la tolerancia a la sal de pimienta dulce de 1,5 a 1,8 dS m⁻¹.

Palabras clave adicionales: cultivo sin suelo, semiárido, protección del medio ambiente, reutilización del agua.

Received for publication: 31-10-2017 Accepted for publication: 30-01-2018

INTRODUCTION

The increasing demand for water resources in recent decades has led to the search for more water-efficient techniques, as well as the rational use of water that is not desirable for drinking. The agricultural production sector puts the highest pressure on water resources. According to Chartzoulakis and Bertaki (2015), of the total annual volume of estimated water diversion worldwide, agricultural production currently uses about 70%, mainly for irrigation.

In this context, according to some authors (Dias *et al.*, 2010; Cosme *et al.*, 2011; Santos Júnior *et al.*, 2015), hydroponic agriculture is a strong ally as a mitigating technology against the quantitative and qualitative depletion scenario of water resources for the following reasons. Firstly, this approach favors water-efficient applications in agriculture.

The other reason involves the use of water that is considered marginal, such as brackish water. Alves *et al.* (2011) reported that, as hydroponic cultivation frequently assumes a matric potential equal to zero because of the saturation of plants, the crop response to salinity increases, as compared to the conventional cultivation system. Moreover, the authors pointed out that the drainage and irrigation system (Nutrient Film Technique) enables the appropriate use of mineral salts at the end of production. Numerous studies have shown (Paulus *et al.*, 2010; Soares *et al.*, 2010; Alves *et al.*, 2011; Maciel *et al.*, 2012; Sarmiento *et al.*, 2014) promising results using brackish water in the hydroponic cultivation of vegetables and some ornamental plants.

Moderately sensitive to salinity (Ayers and Westcott, 1985; Kurunc *et al.*, 2011; Maia *et al.*, 2017), bell peppers (*Capsicum annuum* L.) are one of the most widespread vegetables that are consumed fresh in Brazil. According to Albuquerque *et al.* (2011; 2012), the sweet pepper is among the ten most economically important vegetables in the domestic market. This is due to its fast vegetative growth and impact on production that provides an immediate financial return. Thus, it is widely cultivated by small and medium-sized farms. Sweet peppers originate from Central and South America and can be produced year around in warm climates (Monteiro *et al.*, 2009).

Accordingly, this study aimed to evaluate the effect of brackish water on sweet pepper production under the NFT system at different electrical conductivity levels.

MATERIALS AND METHODS

This experiment was conducted in a greenhouse in the municipality of Cruz das Almas-BA, Brazil (12°40'19" and 39°06'23" W; 220 m a.s.l.). The greenhouse structure used galvanized steel pipe covered with two arches and protected on the sides by a clarite type screen. The plastic film (anti UV, 150 μm thickness) was used to cover the roof and a thermal reflective blanket (Aluminet 50%, Ginegar Polysack, Leme-RJ, Brazil) was used inside, 14 m wide × 32 m long × 4 m high, with a maximum height of 5.5 m. In order to improve the phytosanitary conditions of

the greenhouse and extend the work life of the electric pumps (Brastemp, São Paulo-SP, Brazil), the floor was covered with a Bidim geotextile drainage blanket (Fibratex, Indaiatuba-SP, Brazil).

Sweet pepper seeds (*Capsicum annuum* L.) cv. Rubi Giant were seeded in a 50 mL plastic cups containing a layer of coconut fiber substrate and another layer of vermiculite at a 2:1 ratio (v/v) on November 28, 2013. Four seeds were placed in each cup. Thinning was done 15 days after sowing, leaving only one plant per cup.

During the experiment, the air temperature and relative humidity were monitored inside the greenhouse using a Thermo-Hygrometer sensor (Dostmann electronic GmbH, Wertheim, Germany) (Figs. 1A and B). The temperature was also measured with thermocouples (Copper/Constantan) in two different reservoirs of the nutrient solution. The sensors were connected to a data logger (model CR 1000, Campbell Scientific, São o Paulo-SP, Brazil) and the averages were recorded every 30 min.

The experiment design consisted of 35 experiment units. Each plot represented an independent NFT system (Nutrient Film Technique) containing a plastic reservoir with a 60 L capacity for the nutrient solution and one electric circulating pump. The structure consisted of hydroponic profiles of polypropylene, with a commercial diameter of 100 mm, anti-UV

additives, 3 m length and five holes with a 0.05 m radius, at a spacing of 0.30 m between the profiles.

The profiles were installed in pairs at a height of 1 m from the ground, with four points of support and a gradient of 4%. The spacing between the profiles was 0.5 m and a 0.9 m wide corridor was left between pairs of plots to facilitate transit and operability (Fig. 2).

The nutrient solution was conducted from the reservoir to the upper bench reaches through 0.02 m diameter PVC pipes, through which the solution was injected into the hydroponic profile with extension hoses. In the lower part of the profile, a cap was installed with a hose in order to return the excess nutrient solution to the tank. The surplus that was not injected into the profile was returned to the reservoir with a PVC pipe, where a 90° elbow was installed to improve the aeration of the nutrient solution.

Furthermore, each plot had an automatic supply system built with a solid section of PVC pipe and a nominal diameter of 0.2 m. This type of system allows automatic water output to the nutrient solution tank through a float-tap and automatic restoration of water consumption during evaporation. The system had a graduated scale fixed with a transparent hose, allowing for calculation of the evapotranspiration volume per plant at any time with equation 1.

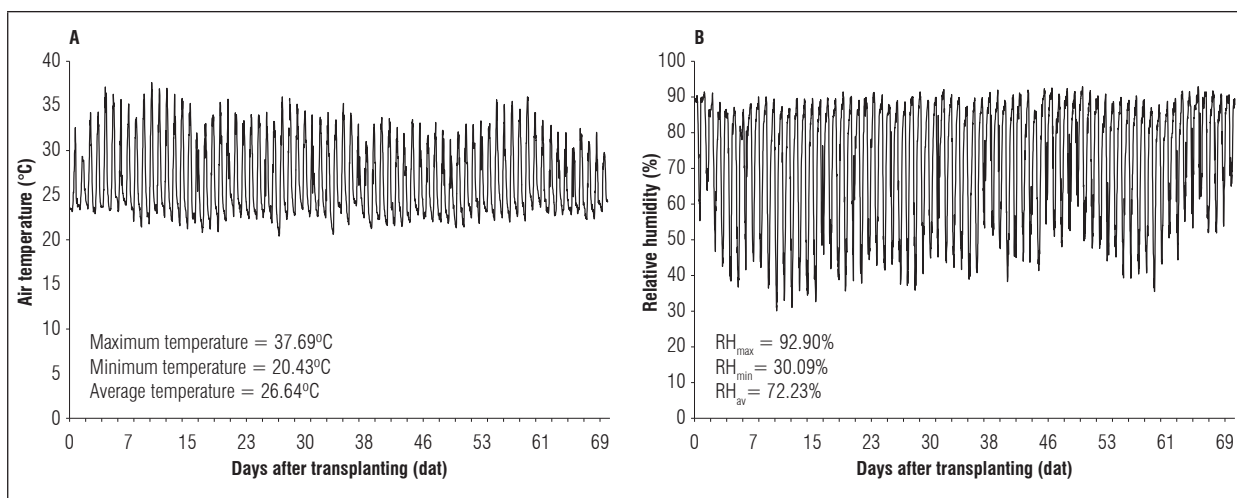


Figure 1. Air temperature (A) and relative humidity (B) inside the greenhouse.

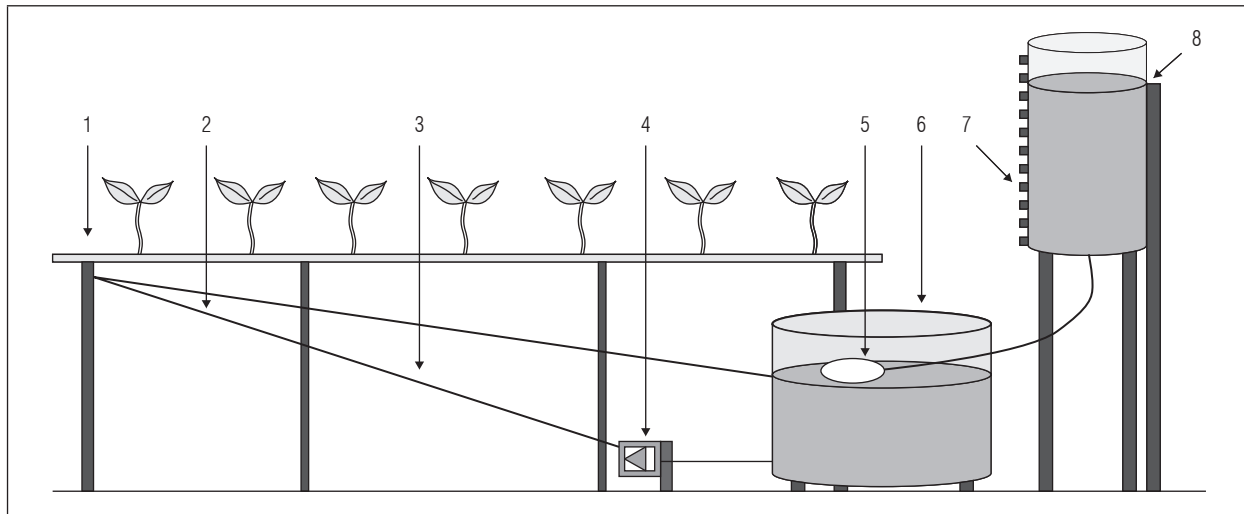


Figure 2. Illustration of hydroponic system NFT with automatic supply reservoir (adapted from Soares, 2007). 1. Hydroponic profile; 2. PVC conduit leading the solution to the injection system; 3. Conductive PVC tube of the solution not injected to the reservoir; 4. Circulation pump; 5. Float cock; 6. Nutrient solution reservoir; 7. Graduated transparent hose; 8. Automatic supply system.

$$V_{ETC} = \frac{(L_f - L_i) \times \pi \times D^2}{4 \times n \times \Delta T} \times 10^6 \quad (1)$$

where:

V_{ETC} : evapotranspiration volume (mL per plant and day);

L_i and L_f : initial and final water level readings, respectively, in the automatic supply reservoir, (m);

D : the inner diameter of the supply tank (m);

ΔT : the time interval between daily readings;

n : the number of plants in the hydroponic profile in the time interval ΔT .

The experiment design was randomized into blocks with seven treatments and five replicates. The treatments comprised the electrical conductivity of the water ($EC_w = 0.29; 1.39; 2.75; 4.49; 5.90; 6.76$ and 7.09 dS m^{-1}) used for both the nutrient solution preparation and replenishment of crop evapotranspiration.

The nutrient solution used to cultivate hydroponic pepper was similar to that recommended by Benoit *et al.* (1987). Table 1 shows the composition of the nutrient solution used in the experiment.

The water ($EC_w = 0.29 \text{ dS m}^{-1}$) came from the municipal supply (tap water), and the brackish water ($EC = 1.39; 2.75; 4.49; 5.90; 6.76$ and 7.09 dS m^{-1}) was

Table 1. Composition of the nutrient solution for the hydroponic cultivation of sweet pepper.

Nutrient source	mg L ⁻¹
Calcium nitrate	750
Potassium nitrate	500
Monoamonic phosphate	150
Magnesium sulfate	400
Copper sulfate	0.15
Zinc sulfate	0.3
Manganese sulfate	1.5
Boric acid	1.8
Sodium molybdate	0.15
Dissolvine® (FeEDTA - 13% Fe)	16

obtained by adding NaCl to the tap water. Therefore, the final EC_{sol} in the nutrient solution preparation was 2.11; 4.13; 5.10; 6.19; 7.26; 8.03 and 8.54 dS m^{-1} , respectively.

The nutrient solution was pumped from the reservoir to the upper bench reaches with an electric circulating pump, which was triggered with a digital programmable timer. It ran at time intervals of 15 min on and 10 min off during the periods from 06:00 to 11:00 am and from 02:00 to 07:00 pm. From 11:00 am to 14:00 pm, the irrigation was uninterrupted. In addition, there was irrigation for 15 min at 9:00 pm, 11:00 pm and 2:00 am.

The plants were manually irrigated with water from the local supply ($EC_w = 0.29 \text{ dS m}^{-1}$) until transplant to the hydroponic profiles. The experiment began on December 21, 2013 (23 d after sowing, das) by transplanting nine seedlings to each hydroponic plot when they presented two pairs of true leaves. During the experiment, the sweet peppers were vertically staked using polythene strips attached to horizontal and parallel strands of wire positioned 2.20 m from the ground. An application of Trichodel biofungicide (0.16 mL L^{-1} of nutrient solution) was done during the experiment and two applications of nim (*Azadirachta indica*) leaf extract (10% v/v) were done within 10 d. The electric conductivity and pH of the nutrient solution were evaluated every two days. The EC_{sol} was monitored with a bench conductivity meter, and, since the nutrient solution was not replaced, it was necessary to replenish the nutrients consumed at 33, 35, 42 and 44 d after transplanting (dat), as shown in table 2. The pH of the nutrient solution was always adjusted when necessary with 20% phosphoric acid in order to maintain the nutrient solution in the

range of 5.5 to 6.5 pH. as proposed by Furlani *et al.* (1999).

The harvest occurred on February 28, 2014, that is 69 dat or 92 das. The parameters: fruit diameter, fruit length, number of fruits per plant, mean fruit weight, total weight of fruits per plant and fruit length/diameter ratio were measured on that day.

The data were submitted to the normality assumption (Shapiro-Wilk) and homoscedasticity test (Bartlett test). The data were submitted to analysis of variance (ANOVA) and, when significant differences were verified by the F test at 5%, the means were submitted to regression analysis in order to verify the optimal concentration for each variable through the first derivative of the estimators β_0 and β_1 . The significance of the models, the biological meaning and the coefficient of determination (R^2) were considered when choosing the equations. The analysis was performed using the statistical program Sisvar[®] (Ferreira, 2011).

RESULTS AND DISCUSSION

Table 2. Nutrient replenishment of the nutrient solution during the experiment.

First replacement	mg L ⁻¹
Calcium nitrate	70
Potassium nitrate	40
Monoamonic nosphate	10
Magnesium sulfate	40
Second replenishment	
Calcium nitrate	350
Potassium nitrate	230
Monoamonic phosphate	70
Magnesium sulfate	180
Third replenishment	
Calcium nitrate	190
Potassium nitrate	130
Monoamonic phosphate	40
Magnesium sulfate	100
Fourth replenishment	
Calcium nitrate	190
Potassium nitrate	130
Monoamonic phosphate	40
Magnesium sulfate	100

The initial salinity of the treatments was variable because of the fertilizer salts added to the water for sweet pepper productivity and NaCl usage for increasing the electrical conductivity (Fig. 3). The initial EC value in the water supply was 0.29 dS m^{-1} and, in the brackish waters, it was 1.39; 2.75; 4.49; 5.90 and 7.09 dS m^{-1} . Thus, the EC after the addition of the nutrient solution (EC_{sol}) was 2.11; 4.13; 5.10; 6.19; 7.26 and 8.54 dS m^{-1} .

It was observed that EC was reduced in the treatment without brackish water (0.29 dS m^{-1}) during the experiment. The other treatments increased their EC until the 59th day of evaluation with similar results. However, after 61 dat, the treatments 5.90, 6.76, and 7.09 dS m^{-1} overlapped (Fig. 3).

The electric conductivity (EC) in the treatment without brackish water was reduced during the experiment because the plants consumed the nutrients as a result of the absence of a corresponding ion inflow by water replacement even though the nutrient replacement occurred at 33; 35; 42 and 44 dat. Similar results were found in growing ornamental sunflowers and lettuce in the NFT hydroponic system by Maciel *et al.* (2012) and Alves *et al.* (2011), respectively. Moreover, according to

these authors, this small reduction in the salinity resulted from a nutrient intake that was greater than the contribution of salts dissolved in this treatment.

The increased salinity from 61 dat in the treatments 5.90, 6.76, and 7.09 dS m^{-1} was due to ion accumulation not absorbed by the sweet pepper plants. This could be because the evaporative water loss was carried out with salt water at each EC in the treatments and linked to increasing water consumption of the bell pepper during the growth stages (Figs. 3 and 5).

As seen in figure 4, only 22.6% of the dependent variable could be explained by the covariates in the model. However, the number of fruits per plant

showed a small decrease as salinity increased in the nutrient solution (Fig. 4). Chartzoulakis and Klapaki (2000) had similar results in their research. They found a drastic reduction in the number of fruits when the salinity level exceeded 7.0 dS m^{-1} . Furthermore, several authors have observed linear reductions in plant dry matter production associated with increasing salinity of the environment and have concluded that this is responsible for reducing the number of fruits and fruit weight per pepper plant (Navarro *et al.*, 2010).

The decrease in these parameters reflects the result of negative osmotic pressure in the nutrient solution because of salt stress. Therefore, the plants responded

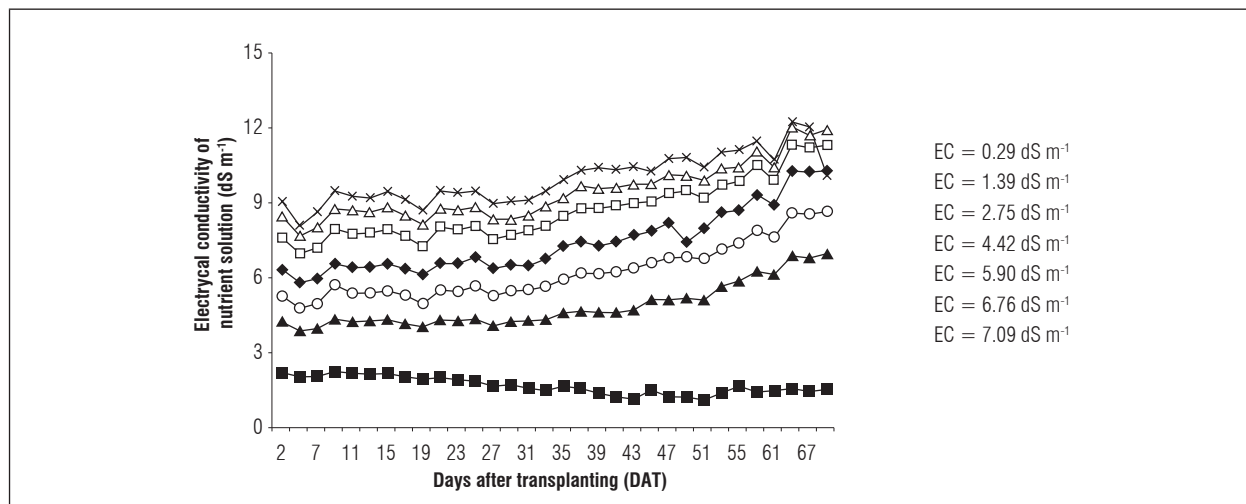


Figure 3. Electrical conductivity of nutrient solution after salt addition to the NFT hydroponic system.

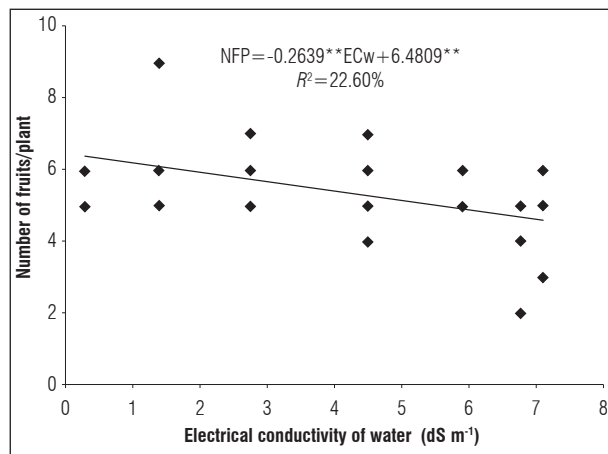


Figure 4. Number of sweet pepper fruits per plant grown in nutrient solution with different salinity levels in the NFT hydroponic system.

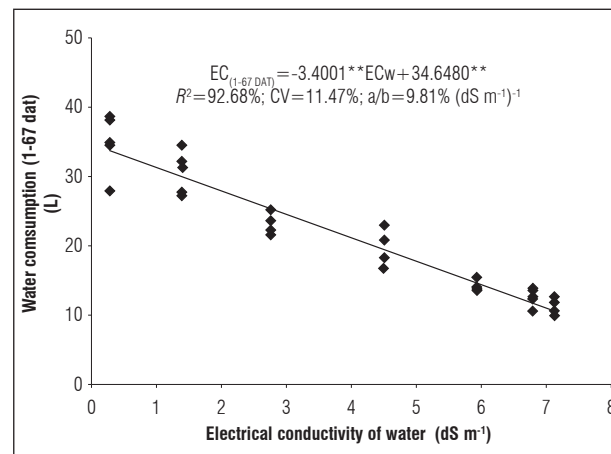


Figure 5. Water consumption of sweet pepper grown in nutrient solution with different salinity levels in the NFT hydroponic system.

physiologically by closing stomata, inhibiting water absorption (Fig. 6) and inducing cell dehydration, toxic salt, and, finally, senescence (Cosme *et al.*, 2011). Moreover, plant growth in saline solutions may be affected by an inverse correlation between K and Na accumulation in the leaf tissue, related to the competition in the plasma membrane of these ions for absorption and transport sites. Thus, K concentrations in leaf tissue decrease by increasing concentrations of Na because of the antagonism between these elements (Soares *et al.*, 2016).

Potassium is vital in the water-plant relationship, helps maintain the internal pressure of plant cells

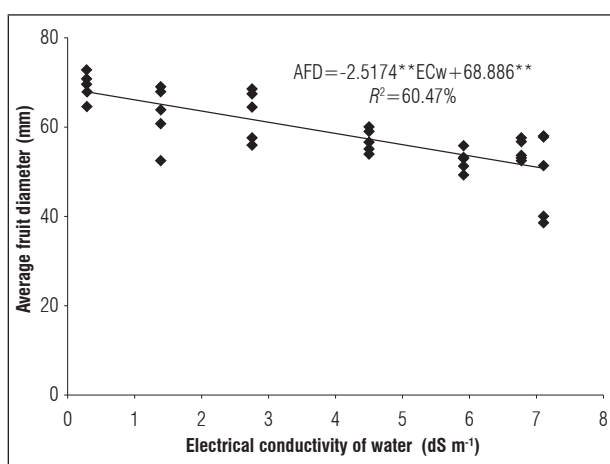


Figure 6. Average fruit diameter of sweet pepper grown in nutrient solution with different salinity levels in the NFT hydroponic system.

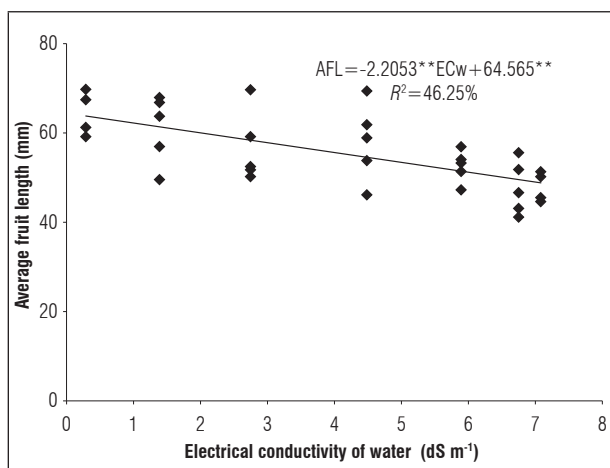


Figure 7. Average fruit length of sweet pepper grown in nutrient solution with different salinity levels in the FT hydroponic system.

and produces more succulent fruits. The root system in potassium deficient plants is poorly developed, which impairs the absorption of water and nutrients. Potassium also plays an important role in enzymatic reactions, carbohydrate and protein metabolism, sugar and starch translocation, water-plant relationships, and cell division (Marschner, 2012).

The nitrogen levels in the solution reduced the effect of salinity on the plant dry weight. This result occurred with irregular concentrations in plants grown in the N salinity of 3.4 dS m⁻¹ and in plants at suitable levels of N with a salinity of 6.2 dS m⁻¹ (Semiz *et al.*, 2014), i.e. the data dispersion in figure 5 may be related to the nutrient content in the NFT system. Water absorption, essential for cell growth, was inhibited by the low potential of water around the roots because of the reduction of the osmotic potential in the saline conditions, causing a water deficit and reduction of the evapotranspiration replenishment when using both the brackish and tap water (Soares *et al.*, 2015).

Fruit width and length are morphological traits that, generally, describe fruit size and appearance in bell peppers. As seen in figures 6 and 7, there were reductions of 26.6 and 25.6% in the fruit diameter and length, as well as an electrical conductivity in the solution of 7.09 dS m⁻¹ when compared to the control treatment (0.29 dS m⁻¹). The other treatments (1.39; 2.75; 4.49 and 5.90 dS m⁻¹) had reductions in the fruit diameter of approximately 8.6; 13.7; 18.9 and 24.0% and in the fruit length of approximately 5.6; 12.4; 20.1 and 24.0%, respectively.

These results were reflected in the average fruit weight per plant (Fig. 8), as well as the number of fruits per plant (Fig. 4), which were affected by the increasing salinity. According to Navarro *et al.* (2010), salinity reduces both fruit size and number of fruits or only fruit size. This corroborates our results. A study conducted by Arruda *et al.* (2011) observed a reduction in weight of marketable fruits of 6.67% for each unit of increased electrical conductivity.

This difference in these results is explained by the initial electrical conductivity of each experiment (2.6 and 0.29 dS m⁻¹, respectively), an almost 9-fold difference. However, De Pascale *et al.* (2000) observed that yield (measured by individual fruit weight and number of fruits per plant) was only significantly reduced by salt stress when NaCl concentrations were higher than 0.25% and electrical conductivity of the soil was greater than 4 dS soil m⁻¹ in the root zone.

The EC was 2.8 dS m^{-1} and 53% between the higher conductivity (2.6 dS m^{-1}) and the control treatment (12.2 dS m^{-1}). Figure 7 shows a reduction of approximately 65.4% in fruit weight between the control treatment (0.29 dS m^{-1}) and the treatment with higher conductivity (7.09 dS m^{-1}).

The behavior of the variables length, diameter and average weight (Figs. 6-8) was similar to that obtained by Leonardo *et al.* (2007), who attributed this physiological crop response to two factors: a negative interaction between the levels of Ca and K in the plant and low availability of Ca for plants in a salt stress environment.

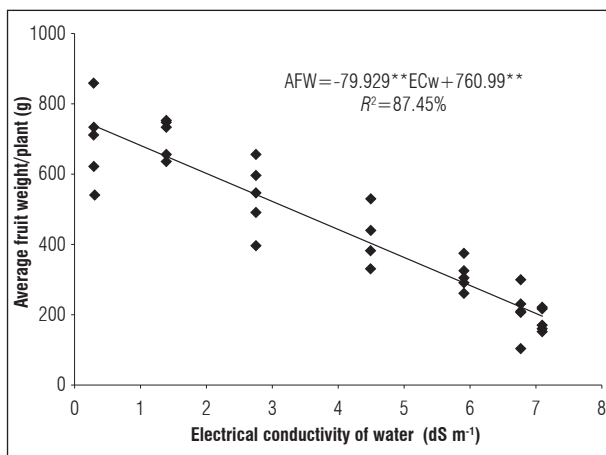


Figure 8. Average fruit weight for sweet pepper fruit grown in nutrient solution with different salinity levels in the NFT hydroponic system.

CONCLUSIONS

The use of brackish water with high EC values does not directly interfere with sweet pepper production in NFT hydroponic systems as long as these values do not exceed the sweet pepper salt tolerance of 1.5 to 1.8 dS m^{-1} .

Conflict of interests: the manuscript was prepared and reviewed with the participation of the authors, who declare that there exists no conflict of interest that puts in risk the validity of the presented results.

BIBLIOGRAPHIC REFERENCES

Alves, M.S., T.M. Soares, L.T. Silva, J.P. Fernandes, M.L. Oliveira, and V.P. Paz. 2011. Strategies for use of brackish water in NFT hydroponic lettuce production. *Rev. Bras. Eng. Agríc. Ambient.* 15, 491-98. Doi: 10.1590/S1415-43662011000500009

Albuquerque, F.S., E.F.F. Silva, J.A.C. Albuquerque Filho, and M.F.F.N. Nunes. 2011. Growth and yield of sweet pepper fertigated under different irrigation depths and potassium doses. *Rev. Bras. Eng. Agríc. Ambient.* 15, 686-94. Doi: 10.1590/S1415-43662011000700006

Albuquerque, F.S., E.F.F. Silva, E. Bezerra Neto, E.R.A. Souza, and A.N. Santos. 2012. Mineral nutrients in fertigated sweet pepper under irrigation depths and potassium doses. *Hortic. Bras.* 30, 681-87. Doi: 10.1590/S0102-05362012000400019

Arruda, C.E.M., N.S. Dias, F.F. Blanco, O.N. Sousa Neto, and M. Ferreira Neto. 2011. Bell pepper cultivation with brine from brackish water desalination. *Rev. Caatinga.* 24, 197-201.

Ayers, R.S., and D.W. Westcot. 1985. Water quality for agriculture. FAO Irrigation and Drainage, Rome.

Benoit, F. 1987. High-technology glasshouse vegetable growing in Belgium. *Soiless. Culture.* 3, 21-9.

Cosme, C.R., N.D.S. Dias, A.D. Oliveira, E.M. Oliveira, and O.D. Sousa Neto. 2011. Hydroponic tomato production using reject of desalination in the nutrient solution applied at different stages. *Rev. Bras. Eng. Agríc. Ambient.* 15, 499-504. Doi: 10.1590/S1415-43662011000500010

Chartzoulakis, K., and M. Bertaki. 2015. Sustainable water management in agriculture under climate change. *Agric. Agric. Sci. Procedia.* 4, 88-98. Doi: 10.1016/j.aaspro.2015.03.011

De Pascale, S., C. Ruggiero, and G. Barbieri. 2000. Effects of irrigating pepper (*Capsicum annuum* L.) plants with saline water on plant growth, water use efficiency, and marketable yield. *Acta. Hort.* 537, 687-95. Doi: 10.17660/ActaHortic.2000.537.81

Dias, N.D.S., R.B. Lira, R.F. Brito, O.N. Sousa Neto, M. Ferreira Neto, and A.M. Oliveira. 2010. Melon yield in a hydroponic system with wastewater from desalination plant added in the nutrient solution. *Rev. Bras. Eng. Agríc. Ambient.* 14, 755-61. Doi: 10.1590/S1415-43662010000700011

Ferreira, D.F. 2011. Sisvar: a computer statistical analysis system. *Ciênc. Agrotec.* 35, 1039-42. Doi: 10.1590/S1413-70542011000600001

Furlani, P.R., L.C.P. Silveira, D. Bolonhezi, and V. Faquin. 1999. Hydroponic plant cultivation.: IAC, Campinas, Brazil.

Kurunc, A., A. Unlukara, and B. Cemek. 2011. Salinity and drought affect yield response of bell pepper similarly. *Acta. Agric. Scand. B.* 61, 514-22. Doi: 10.1080/09064710.2010.513691

Leonardo, M., F. Broetto, R.L.V. Boas, R.S. Almeida, and J.A. Marchese. 2007. Production of sweet pepper fruits in different saline concentrations. *Irriga.* 12, 73-82.

- Maciel, M.P., T.M. Soares, H.R. Gheyi, E.P. Rezende, and G.X. Oliveira. 2012. Production of ornamental sunflower with use of brackish waters in NFT hydroponic system. *Rev. Bras. Eng. Agríc. Ambient.* 16, 165-72. Doi: 10.1590/S1415-43662012000200006
- Maia, S.S.S., R.C.P. Silva, F.A. Oliveira, O.M.P. Silva, A.C. Silva, and W.S. Candido. 2017. Responses of basil cultivars to irrigation water salinity. *Rev. Bras. Eng. Agríc. Ambient.* 21, 44-9. Doi: 10.1590/1807-1929/agriambi.v21n1p44-49
- Marschner, P. (ed.). 2012. *Marschner's mineral nutrition of higher plants*. Elsevier/Academic Press, London.
- Monteiro, M.T.M., V.F.F. Gomes, P.F. Mendes Filho, and F.V.A. Guimarães. 2009. Absorption of nutrients by seedlings of mycorrhizal pepper cultivated on substrate with coconut powder. *Rev. Caatinga.* 22, 95-101.
- Navarro, J.M., C. Garrido, P. Flores, and V. Martínez. 2010. The effect of salinity on yield and fruit quality of pepper grown in perlite. *Span. J. Agric. Res.* 8, 142-50. Doi: 10.5424/sjar/2010081-1153
- Paulus, D., D. Dourado Neto, J.A. Frizzzone, and T.M. Soares. 2010. Production and physiologic indicators of lettuce grown in hydroponics with saline water. *Hortic. Bras.* 28, 29-35. Doi: 10.1590/S0102-05362010000100006
- Santos Júnior, J.A., H.R. Gheyi, A.R. Cavalcante, S.D.S. Medeiros, N.D.S. Dias, and D.B.D. Santos. 2015. Water use efficiency of coriander produced in a low-cost hydroponic system. *Rev. Bras. Eng. Agríc. Ambient.* 19, 1152-58. Doi: 10.1590/1807-1929/agriambi.v19n12p1152-1158
- Sarmiento, J.D.A., P.L.D. Morais, M.L.B. Almeida, O.N. Sousa Neto, and N.S. Dias. 2014. Quality and conservation of lettuce grown with desalination waste. *Rev. Caatinga* 27, 90-7.
- Semiz, G.D., D.L. Suarez, A. Unlukara, and E. Yurtseven. 2014. Interactive effects of salinity and N on pepper (*Capsicum Annuum* L.) yield, water use efficiency and root zone and drainage salinity. *J. Plant. Nutr.* 37, 595-610. Doi: 10.1080/01904167.2013.867985
- Soares, T.M., S.N. Duarte, E.D.F. Silva, and C.A. Jorge. 2010. Combination of fresh and brackish waters for hydroponic lettuce production. *Rev. Bras. Eng. Agríc. Ambient.* 14, 705-14. Doi: 10.1590/S1415-43662010000700004
- Soares, H.R., E.F.F. Silva, G.F. Silva, E.M.R. Pedrosa, M.M. Rolim, and A.N. Santos. 2015. Lettuce growth and water consumption in NFT hydroponic system using brackish water. *Rev. Bras. Eng. Agríc. Ambient.* 19, 636-42. Doi: 10.1590/1807-1929/agriambi.v19n7p636-642
- Soares, T.M. 2007. Use of brackish water in the cultivation of lettuce in hydroponic system NFT as an agricultural alternative, consistent with the Brazilian semi-arid region. Doctoral thesis. Escola Superior de Agricultura "Luiz de Queiroz", USP, Piracicaba-SP, Brazil.