

# **Design concept towards a human-centered learning factory**

Downloaded from: https://research.chalmers.se, 2020-01-17 16:14 UTC

Citation for the original published paper (version of record): Mattsson, S., Salunkhe, O., Fasth Berglund, Å. et al (2018) Design concept towards a human-centered learning factory Procedia Manufacturing, 25(2018): 526-534 http://dx.doi.org/10.1016/j.promfg.2018.06.121

N.B. When citing this work, cite the original published paper.

research.chalmers.se offers the possibility of retrieving research publications produced at Chalmers University of Technology. It covers all kind of research output: articles, dissertations, conference papers, reports etc. since 2004. research.chalmers.se is administrated and maintained by Chalmers Library





Available online at www.sciencedirect.com



**Procedia** MANUFACTURING

Procedia Manufacturing 25 (2018) 526-534

www.elsevier.com/locate/procedia

# 8th Swedish Production Symposium, SPS 2018, 16-18 May 2018, Stockholm, Sweden

# Design concept towards a human-centered learning factory

Sandra Mattsson<sup>a\*</sup>, Omkar Salunke<sup>a</sup>, Åsa Fast-Berglund<sup>a</sup>, Dan Li<sup>a</sup>, and Anders Skoogh<sup>a</sup>

<sup>a</sup>Chalmers University of Technology, Department of Industrial Materials and Science, Hörsalsvägen 7A, 41296 Gothenburg, Sweden <sup>\*</sup>Corresponding author sandra.mattsson@chalmers.se

#### Abstract

Learning factories play an important role when studying multi-disciplinary problems. Such a problem is to support operators in multi-variant assembly. Multi-variants cause problems with product quality, production time as well as cognitive load and therefore it is important to find ways to support operators in this context. To assess the effects of multi variants, a design concept were developed in a learning factory environment (SIILab, CPPS-testbed). The concept was constructed at a conveyer belt with three assembly stations using Casat software for instruction presentations. The following aspects were included in the human-centered learning factory: studying the introduction of advanced automation, managing product variety, supporting operators in finding information and supporting existing human-automation interactions.

© 2018 The Authors. Published by Elsevier B.V. Peer-review under responsibility of the scientific committee of the 8th Swedish Production Symposium.

Keywords: human-centered design, multi-variant, assembly, CPPS-testbed; learning factories.

### 1. Background

Digitalization and Industry 4.0 trends are transforming operators' traditional working environment through increased symbiosis with higher levels of automation and an increased number of different work tasks [1-4]. These trends will increase the complexity of the production system and the need for understanding the operator in such a system [5-7]. Assembly systems are complex partly due to a high product variety [8-11] and since operators are flexible and can manage fast and dynamic changes [12-14] the operator is an invaluable resource [7]. High demands are placed on the operator [15] and therefore companies need to be attentive to operator perceptions and work environment [16,17].

Advances in cognitive automation due to digitalization are e.g. digital tools [18,19], VR glasses [20], visual computing [21] and an increased number of cobots and human-robot collaboration [22-24]. Cognitive automation is defined as "*technical solutions helping the operator, e.g. HOW and WHAT to assemble and situation control*" [25]. The use of Information and Communications Technology systems in manufacturing increases rapidly as these

systems become more capable and inexpensive [26]. However, although these smart technologies exist, they are not fully adapted to the manufacturing industry [27].

Production companies are encouraged to start industrial projects to enable implementations of smart factories [28]. Smart factories include supply networks and warehousing systems, decision-making support for both machines and the production, better control of the engineering processes and a dynamic business models [29]. Since many new smart technologies are emerging, there is a need to test and show implementations of these solutions in industry [27,30,31]. One way to do this is to develop learning factories where companies can, together with academia develop scenarios that are similar to their own production facilities [32]. This way personnell can also train in a realistic manufacturing environment.

The aim of this paper is to develop a learning factory concept that can be used to investigate relevant humancentered issues in complex assembly. The concept is tested in a separate article, focusing on the experiment set-up, in Li et al. [33]. Important issues are presented in the following section.

## 2. Learning factory concept

Important issues connected to multi-variant assembly are adaptive automation and decision-making [2-4] and the learning factory should therefore consider the following:

- *The introduction of advanced automation*. Levels of automation should be adapted to the operator so that the human will perform tasks that are best adapted to the human (and not given left-over automation such as loading a machine) [25,34]. In addition, it is important to consider interoperability [35].
- *Production complexity*. Increasing product variety also increases the importance of the role of humans [36] since they are flexible and can handle the complex and dynamic context [13,14]. In addition, there are high demands on flexible workstations, which means that there are many different types of tools on the same station. One way to manage complexity is to reduce or simplify [37,38].
- *Finding information*. In today's systems it is difficult to find the information. This is partly due to information overload and the operator is therefore less informed than before [39].
- *Existing interactions* between human and automation needs support [40] due to that it is frequently seen to cause problems [41,42]. Since it is difficult to know what are the cause and effects of interactions [43], relevant factors should be assessed.

To handle these issues in future systems, a human centered approach is needed [44,45]. *Human-centered design* (HCD) places the human in center when designing a system. A human centered system should support both physical and cognitive aspects of work [34,46], which make the system more usable so that the operator can function at the highest and safest possible level [47,48]. The advantages of having a usable system are: increased productivity, reduced errors, reduced training and support, improved acceptance, enhanced reputation, improved satisfaction and motivation [49]. The ISO 9241-210 defines HCD as "an approach to systems design and development that aims to make interactive systems more usable by focusing on the use of the system and applying human factors/ergonomics and usability knowledge and techniques"[50]. A learning factory provides an opportunity for testing various HDC approaches with focus on Industry 4.0 operator.

In assembly, cognitive capabilities are often not considered [51-53], and one consequence of that may be that usability factors, which are not included in the production system design. To manage production complexity, complexity can be reduced or avoided through simplifying information presentation [37,38]. Information should therefore be presented according to the operators' active cognitive processes [53]. When the operator is assembling the active cognitive process is intuition and no demanding problem-solving or searching for information should be carried out. This means that text-instructions will not support assembly work. Further task-based information should be presented when and where the operator needs it [54,55], thereby simplifying information presentation.

Today work instructions are often text-based and not connected to the operators learning phase [56,57]. Although studies point towards that an increased learning can be seen with digital tools [18,58-61], learning is often done by tutors or mentors at production companies.

### 2.1. Assessed variables

As part of the CPPS-testbed environment established at the SIILab at Chalmers University of Technology, an assembly system design was set up. The concept consists of a continuous assembly line, connected through a conveyor belt, with three stations that could be manually operated or operated by a cobot (collaborative robot), see Figure 1. Each station is equipped with a touch screen monitor that is used for displaying assembly instructions. The work instructions are displayed though Casat software via a web browser. The web browser is also used for data acquisition through Casat software. The aim of the concept is to support research and secondly to serve as a test environment for operators. The learning targets are to support mainly cognitive capabilities. The cognitive capabilities are connected to how instructions can aid the operator in a multi-variant assembly context. The following aspects should therefore be included in the concept: effect of multi-variants (a randomized order), different information contents, diverse experience levels and different types of assembly stations (where cycle times and types of components vary).

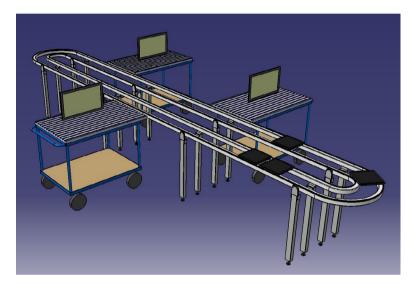


Fig. 1. Learning factory concept set up with three assembly stations.

To be able to study how operators are affected by different product variants presented in different ways (text and text and picture) the following output variables are suggested: Number of Parts Assembles Correctly (NPAC), cycle time, CXI, information quality, NASA TLX and physiological data. NPAC was used as a measurement to assess the quality of assembly work, which considers how well the assembly operator manages to assemble the products (was also used in previous experiments e.g. in [62]). The NPAC values, which are non-negative integers, are calculated by deducting the incorrectly assembled parts from the total number of parts for each assembly station. Efficiency is assessed through Number of Parts Assembles Correctly (NPAC), cycle time and number of disturbances (small and bigger). Cycle time is the total time taken to produce one unit from start to finish. For experimentation purpose, cycle time at each satiation is used for assessing impact of operator performance on overall performance of the system. CXI, information quality and NASA-TLX [63] can be captured through a survey filled in after the assembly. CXI is a method used to assess perceived production complexity at a station level [64]. Some of the questions, previously used to investigate the impact of disturbance handling were used to study the complexity level at each of the stations. The *information quality* of the provided information, i.e. instructions, as perceived by the operators, are mainly assessed by a survey filled out by the participants after the experiments, focused on these aspects of information quality [65]: comprehensiveness, validity, timeliness, accuracy, relevance and accessibility. Physiological data is assessed through Empatica's device E4 which measures skin conductance, blood pulse volume (derived from heart rate variability), heart rate and skin temperature. The E4 was previously used to assess operator wellbeing and empirical results pointed to that a combination of electro dermal activity and blood pulse volume were reliable and useful in industrial applications [66].

### 2.2. Work instructions and products

The work instructions are created using Casat software, which has a built-in function for methods-time measurement (MTM) and station balancing. The MTM approach prompted that all of the intended movements made by operators during assembly, as a standardized assembly method, were assessed with regards to time and entered as a row in the Casat software. One or several of these rows combined constitute a task that is represented with picture and text in the work instructions. These factors influenced the creation of the work instructions. Further, the Casat software also facilitates viewing of work instructions through a web browser, which can be used during experiments or tests.

The chosen product was a LEGO gearbox, which can be seen in Fig. 2. This gearbox has been used in previous experiments and is therefore a relevant product e.g. 50 experiments were carried out to investigate how emotions and cycle time and affected operator performance and experience [62,66,67] and then 10 additional experiments were then carried out and it was seen that productivity and satisfaction were increased. Additional experiments have been carried out studying what type of instruction is connected to the lowest learning time and maintained quality [68].

The product variants for the learning factory concept were designed to be similar to each other with regards to assembly method in order to retain comparability between variants, but contain some differences, enough to create a cognitive challenge in order to be able to evaluate the possible support effects of the work instructions.

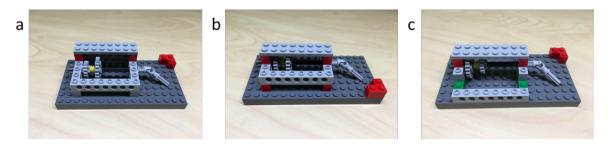


Fig. 2. The products used in the experiments, LEGO gearboxes: (a) variant A; (b) variant B; and (c) variant C.

Further, the product variants should be modular enough to able to be balanced across three workstations, and still maintain the possibility to assess the quality of assembly work for each of the three stations, i.e. it should be able for operators at later stations to assemble correctly even if operators at earlier stations have made mistakes. The balanced distribution of the three assembly stations can be seen in Fig. 3, where variant A stands as an example. variants B and C are balanced similarly. It is noteworthy that station 2 has a slightly longer nominal assembly time in comparison to the other stations.




Fig. 3. The balanced distribution of product variant A across the three assembly stations: (a) station 1; (b) station 2; and (c) station 3.

In the learning factory concept physical aspects are considered in terms of height and reachability. The assembly station is adapted to the operator height and also the screens are placed in such a way so that information is presented in line of sight.

### 3. Discussion

In this paper a concept for human-centered learning factories was developed. The results from experiments performed with students were that the Casat software is useful for presenting work instructions although some bug fixes are needed [33]. In addition, the number of variants were few in the experiment and should be increased to assess differences in the effect of multi-variants. Now the number of variants was three and the assembly work was considered as moderately complex assessed using parts of the CXI method.

In the experiments it was seen that cognitive load was connected to work instruction content. This indicates that the NASA-TLX assessment, CXI and information quality is useful in assessing human-centered aspects of learning factories.

By considering usability and HCD the workstation a higher efficiency and better ergonomics for the operators can be achieved [47,48]. Applying HCD solutions that personalize a working environment could help attract new work force as well as handle problems with short-term working personnel and long-term sick leaves. To avoid that companies invest in solutions that does not fit them, learning factories can be used to increase knowledge of the best appropriate solution.

A concept design for human-centered learning factories should include the following:

- Investigations of the *introduction of advanced automation* [25,34]. This can be studied through using survey tools such as CXI, NASA-TLX, interviews and the Information quality.
- Management of the increasing product variety [36]. Perceived production complexity should be investigated and managed in a learning factory e.g. by CXI or interviews. Since it is difficult to avoid complexity due to that a high product variety cannot be reduced complexity can instead by reduced through balancing tasks so that the assembly content is fewer at each station. In the concept presented in this paper the product variety was supported through presenting three variants balanced at three stations.
- Support in *finding information* [39]. A learning factory should present information according to the operators' cognitive processes [53]. This could be done by using both pictures and text and reduce and simplify the instructions so that only the necessary information is presented. This was supported through real-time information presentation. In addition, instructions for learning should include additional information e.g. why the assembly is carried out in that manner [70].
- Support of *existing interactions* between humans and automation [40-42]. The interaction between humans and automation in the learning factory should be supported through real-time information support and visual feedback. In the learning factory concept pick-and-place operations were supported through cognitive automation support (through text or screen) and operators could see each other, which increases their communication possibilities.

The suggested concept design thereby supports aspects of human-cantered design. Specifically, the cognitive aspects were in focus in the development that could increase the support of cognitive capabilities (which are seen lacking today [51-53]).

#### 4. Conclusions

To optimize the output from future learning factories experiments, it is important to be sure what companies want and need. Since the test environments can be designed to capture many aspects of production work this is crucial in order to produce relevant experiment results. In this paper a human-centered learning factory concept was developed that specifically focused on cognitive capabilities. With introduction of Industry 4.0, challenges and difficulties faced by operators in production are also changing. The learning factory environment provides a good platform to overcome these new challenges. Moreover, learning factories can also be used for testing new methods and design concepts that can be used for human-centered production.

### Acknowledgements

This work has been carried out within the Sustainable Production Initiative and the Production Area of Advance at Chalmers. The support is gratefully acknowledged. The research has been carried out within the research project Demonstrating and testing smart digitalization for sustainable human-centered automation in production at the Stena Industry Innovation Laboratory.

#### References

- Romero, D.; Noran, O.; Stahre, J.; Bernus, P.; Fast-Berglund, Å. Towards a Human-Centred Reference Architecture for Next Generation Balanced Automation Systems: Human-Automation Symbiosis. In *IFIP International Conference on Advances in Production* Management Systems, 2015, 556-566.
- [2] Straeter, O.; Arenius, M. Assessing the Complex Interaction and Variations in Human Performance Using Nonmetrical Scaling Methods. In Numerical Methods for Reliability and Safety Assessment - Multiscale and Multiphysics Systems; Springer International Publishing, 2015; pp.
- [3] Banks, V. A.; Stanton, N. A.; Harvey, C. Sub-systems on the road to vehicle automation: Hands and feet free but not 'mind' free driving. Safety Science 2014, 62, February 2014, 505-514, DOI: 10.1016/j.ssci.2013.10.014.
- [4] Fereidunian, A.; Lesani, H.; Zamani, M. A.; Kolarijani, M. A. S.; Hassanpour, N.; Mansouri, S. S. A complex adaptive system of systems approach to Human-Automation Interaction in smart grid. In Contemporary Issues in Systems Science and Engineering; John & Sons, Inc.: Hoboken, New Jersey, 2015; pp. 888; 978-1-118-27186-5.
- [5] Brinzer, B.; Banerjee, A.; Hauth, M. Complexity Thinking and Cyber-Physical Systems. SSRG International Journal of Industrial Engineering 2017, 4, 1, 14-20, DOI: 10.14445/23499362/IJIE-V411P103.
- [6] Griffin, M. A.; Neal, A.; Parker, S. K. A new model of work role performance: Positive behavior in uncertain and interdependent contexts. *Academy of management journal* 2007, 50, 2, 327-347.
- [7] Toro, C.; Barandiaran, I.; Posada, J. A Perspective on Knowledge Based and Intelligent Systems Implementation in Industrie 4.0. Procedia Computer Science 2015, 60, 362-370, DOI: https://doi.org/10.1016/j.procs.2015.08.143.
- [8] Orfi, N.; Terpenny, J.; Sahin-Sariisik, A. Harnessing Product Complexity: Step 1—Establishing Product Complexity Dimensions and Indicators. *The Engineering Economist: A Journal Devoted to the Problems of Capital Investment* 2011, 56, 1, 59-79, DOI: 10.1080/0013791X.2010.549935.
- [9] Schleich, H.; Schaffer, J.; Scavarda, L. F. Managing Complexity in Automotive Production. In 19th International Conference on Production Research (ICPR-19), Valparaiso, Chile, 29 July - 2 August, 2007.
- [10] Hu, J. S.; Zhu, X.-w.; Wang, H.; Koren, Y. Product variety and manufacturing complexity in assembly systems and supply chains. *CIRP Annals Manufacturing Technology* 2008, 57, 2008, 45-48, DOI: 10.1016/j.cirp.2008.03.138. Available: http://www.sciencedirect.com/science/article/B8CXH-4SG559J-2/2/ca7e54be051ac5c75267186df3418aba.
- [11] MacDuffie, J. P.; Sethuraman, K.; Fisher, M. L. Product Variety and Manufacturing Performance: Evidence from the International Automotive Assembly Plant Study. *Management Science* 1996, 42, 3, 350-369, DOI: 10.1287/mnsc.42.3.350.
- [12] Billings, C. E. Aviation Automation: The Search for a Human-Centered Approach; Lawrence Erlbaum Associates: Mahwah, New Jersey, USA, 1997.
- [13] Jensen, P. L.; Alting, L. Human Factors in the Management of Production. CIRP Annals Manufacturing Technology 2006, 55, 1, 457-460, DOI: 10.1016/S0007-8506(07)60458-2.
- [14] Fasth, Å.; Lundholm, T.; Mårtensson, L.; Dencker, K.; Stahre, J.; Bruch, J. Designing proactive assembly systems Criteria and interaction between Automation, Information, and Competence. In *Proceedings of the 42nd CIRP conference on manufacturing systems* Grenoble, France, 3-5 June, 2009.
- [15] Falck, A.-C.; Örtengren, R.; Rosenqvist, M.; Söderberg, R. Proactive assessment of basic complexity in manual assembly: development of a tool to predict and control operator-induced quality errors. *International Journal of Production Research* 2017, 55, 15, 4248-4260, DOI: 10.1080/00207543.2016.1227103.

- [16] Grote, G. Uncertainty management at the core of system design. Annual Reviews in Control 2004, 28, 2004, 267-274, DOI: 10.1016/j.arcontrol.2004.03.001. Available: http://www.scopus.com/scopus/inward/record.url?eid=2-s2.0-8344270067&partnerID=40&rel=R7.0.0.
- [17] Mavrikios, D.; Karabatsou, V.; Pappas, M.; Chryssolouris, G. An efficient approach to human motion modeling for the verification of human-centric product design and manufacturing in virtual environments. *Robotics and Computer-Integrated Manufacturing* 2007, 23, 5, 533-543, DOI: 10.1016/j.rcim.2006.05.009.
- [18] Fast-Berglund, Å.; Blom, E. Evaluating ICT-Tools for Knowledge Sharing and Assembly Support. In Proceedings of the 5th International Conference on Applied Human Factors and Ergonomics AHFE 2014, Kraków, Poland 19-23 July 2014, 2014.
- [19] Xu, L. D.; He, W.; Li, S. Internet of Things in Industries: A Survey. IEEE TRANSACTIONS ON INDUSTRIAL INFORMATICS 2014, VOL. 10, NO. 4.
- [20] Langley, A.; Lawson, G.; Hermawati, S.; D'Cruz, M.; Apold, J.; Arlt, F., et al. Establishing the Usability of a Virtual Training System for Assembly Operations within the Automotive Industry. *Human Factors and Ergonomics in Manufacturing & Service Industries* 2016, 26, 6, 667-679, DOI: 10.1002/hfm.20406.
- [21] Posada, J.; Toro, C.; Barandiaran, I.; Oyarzun, D.; Stricker, D.; Amicis, R. d., et al. Visual Computing as a Key Enabling Technology for Industrie 4.0 and Industrial Internet. IEEE Computer Graphics and Applications 2015, 35, 2, 26-40, DOI: 10.1109/MCG.2015.45.
- [22] Michalosa, G.; Makrisa, S.; Tsarouchia, P.; Guaschb, T.; Kontovrakisa, D.; Chryssolouris, G. Design considerations for safe human-robot collaborative workplaces. In CIRPe 2015 - Understanding the life cycle implications of manufacturing, 2015.
- [23] Wang, X. V.; Mohammed, A.; Wang, L. Cloud-based Robotic System: Architecture Framework and Deployment Models. In *Flexible Automation and Intelligent Manufacturing, FAIM2015*, Wolverhampton, UK, 2015.
- [24] Surdilovic, D., Schreck, G. and Schmidt, U. Development of Collaborative Robots (COBOTS) for Flexible Human-Integrated Assembly Automation. In *41st International Symposium on and 2010 6th German Conference on Robotics (ROBOTIK)*, 2010, 1-8.
- [25]Fast-Berglund, Å.; Stahre, J. Cognitive automation strategy for reconfigurable and sustainable assembly systems. *Assembly automation* 2013, 33, 3, 294-303, DOI: 10.1108/AA-12-2013-036.
- [26] Kolbeinsson, A.; Lindblom, J.; Thorvald, P. Missing mediated interruptions in manual assembly: Critical aspects of breakpoint selection. *Applied Ergonomics* 2017, May, 61, 90-101, DOI: 10.1016/j.apergo.2017.01.010.
- [27] Weyer, S.; Schmitt, M.; Ohmer, M.; Gorecky, D. Towards Industry 4.0 Standardization as the crucial challenge for highly modular, multivendor production systems. *IFAC-PapersOnLine* 2015, 48, 3, 579-584, DOI: https://doi.org/10.1016/j.ifacol.2015.06.143.
- [28] Cimini, C.; PintoGiuditta, R.; Gaiardelli, P. The Transition Towards Industry 4.0: Business Opportunities and Expected Impacts for Suppliers and Manufacturers. In IFIP Advances in Information and Communication Technology, 513; Springer, Cham, 2017; pp. 119-126; 978-3-319-66923-6. Available: https://link.springer.com/chapter/10.1007/978-3-319-66923-6 14#citeas.
- [29]Monostori, L.; Kádár, B.; Bauernhansl, T.; Kondoh, S.; Kumara, S.; Reinhart, G., et al. Cyber-physical systems in manufacturing. CIRP Ann. - Manuf. Technol. 2016, 65, 2, 621-641.
- [30] Whitmore, A.; Agarwal, A.; Da Xu, L. The Internet of Things—A survey of topics and trends. *Information Systems Frontiers* 2015, 17, 2, 261-274, DOI: https://doi.org/10.1007/s10796-014-9489-2.
- [31] Guler, S. D.; Gannon, M.; Sicchio, K. A Brief History of Wearables. In *Crafting Wearables: Blending Technology with Fashion*; Apress: Berkeley, CA, 2016; pp. 3-10; 978-1-4842-1808-2.
- [32] Abele, E.; Metternich, J.; Tisch, M.; Chryssolouris, G.; Wilfried Sihn; ElMaraghy, H., et al. 2015. In The 5th Conference on Learning Factories 2015, Bochum, Germany, 7-8 July, Learning Factories for research, education, and training; Kreimeier, D., 155.
- [33] Li, D.; Mattsson, S.; Salunkhe, O. Effects of Information Content in Work Instructions for Operator Performance. In submitted to 8th Swedish Production Symposium (SPS 2018), Stockholm, Sweden, 16-18th May, 2018.
- [34] Romero, D.; Bernus, P.; Noran, O.; Stahre, J.; Fast-Berglund, Å. The Operator 4.0: Human Cyber-Physical Systems & Adaptive Automation Towards Human-Automation Symbiosis Work Systems. In Advances in Production Management Systems. Initiatives for a Sustainable World: IFIP WG 5.7 International Conference, APMS 2016, Iguassu Falls, Brazil, September 3-7, 2016, Revised Selected Papers; Springer International Publishing: Cham, 2016; pp. 677-686; 978-3-319-51133-7.
- [35] Åkerman, M.; Fast-Berglund, Å.; Halvordsson, E.; Stahre, J. Modularized assembly system: A digital innovation hub for the Swedish Smart Industry. *Manufacturing Letters* 2018, DOI: https://doi.org/10.1016/j.mfglet.2018.01.004.
- [36] Oborski, P. Social-technical aspects in modern manufacturing. International Journal of Advanced Manufacturing Technology 2003, 22, 11-12, 848-854, DOI: 10.1007/s00170-003-1573-6.
- [37] Corbett, L. M.; Brocklesby, J.; Campbell-Hunt, C. Thinking and Acting: Complexity Management for a Sustainable Business. In Manufacturing Complexity Network Conference, Cambridge, UK, 2002.

- [38] Kaluza, B.; Bliem, H.; Winkler, H. Strategies and Metrics for Complexity Management in Supply Chain; Erich Schmidt Verlag: Berlin, 2006.
- [39] Endsley, M. R. Theoretical underpinnings of situation awareness: a critical review from situation awareness analysis and measurement, 2000.
- [40] Klein, G.; Woods, D. D.; Bradshaw, J. M.; Hoffman, R. R.; Feltovich, P. J. Ten Challenges for Making Automation a "Team Player" in Joint Human-Agent Activity. *IEE Intelligent Systems* 2004, 19, 6, 91-95.
- [41] Sheridan, T. B. Human centred automation: oxymoron or common sense? In Intelligent Systems for the 21st Century, IEEE international, 22-25 October, 1995, 6.
- [42] Sarter, N. B.; Woods, D. D.; Billings, C. E. Automation Surprises, 2, ed., 1997.
- [43] Fast-Berglund, Å.; Mattsson, S.; Bligård, L.-O. Finding Trends in Human-Automation Interaction Research in Order to Formulate a Cognitive Automation Strategy for Final Assembly. *International Journal of Advanced Robotics and Automation* 2016, 1, 2, 2473-3032. Available: http://www.symbiosisonlinepublishing.com/robotics-automation/robotics-automation11.php.
- [44] Endsley, M. R. Designing for situation awareness: An approach to user-centered design; CRC press, 2016; 1420063588.
- [45] Hendrick, H.; Kleiner, B. Macroergonomics: an Introduction to Work System Design, 2001; 0---945289---14---6.
- [46] Guide to improving the work environment. vol. ADI 683 Eng, Authority, S. W. E., Ed.^Eds., ed. Stockholm: Swedish Work Environment Authority, 2016.
- [47] Earthy, J.; Jones, B. S.; Bevan, N. The improvement of human-centred processes-facing the challenge and reaping the benefit of ISO 13407. *International Journal of Computer Studies* 2001, 55, 553-585, DOI: 10.1006/ijhc.2001.0493.
- [48] Harte, R.; Glynn, L.; Rodríguez-Molinero, A.; Baker, P. M.; Scharf, T.; Quinlan, L. R., *et al.* A Human-Centered Design Methodology to Enhance the Usability, Human Factors, and User Experience of Connected Health Systems: A Three-Phase Methodology. *JMIR Hum Factors* 2017, *4*, 1, DOI: 10.2196/humanfactors.5443.
- [49] Maguire, M. Methods to support human-centred design. International Journal of Human-Computer Studies 2001, 55, 587-634, DOI: 10.1006/ijhc.2001.0503.
- [50] Standardization, I. O. f. ISO 9241-210. In Ergonomics of human-system interaction -- Part 210: Human-centred design for interactive systems, Ed.^Eds., ed. Geneva, Switzerland: International Organization for Standardization, 2010.
- [51] Thorvald, P.; Högberg, D.; Case, K. The Effect of Information Mobility on Production Quality. International Journal of Computer Integrated Manufacturing 2014, 27, 2, 120-128.
- [52] Bäckstrand, G.; Brolin, A.; Högberg, D.; Case, K. Supporting Attention in Manual Assembly and its Influence on Quality. In Proceedings of 3rd Applied Human Factors and Ergonomics (AHFE) International Conference, Miami, USA, 17-20 July, 2010; Karwowski, W. and Salvendy, G., 460-469.
- [53] Mattsson, S.; Fast-Berglund, Å. How to support intuition in complex assembly? In 26th CIRP Conference, Stockholm, Sweden, 15-17th June, 2016.
- [54] Fässberg, T.; Berglund, Å. F.; Mattsson, S.; Stahre, J. Cognitive automation in assembly systems for mass customization. In 4th Swedish Production Symposium, Lund, Sweden, 2011.
- [55] Mattsson, S.; Fast-Berglund, Å.; Li, D. Evaluation of Guidelines for Assembly Instructions. In 8th IFAC conference on Manufacturing, Modelling, Management & Control (MIM 2016), Champagne, France, 28-30th June 2016, 2016.
- [56] Fast-Berglund, Ä.; Stahre, J. Task allocation in production systems Measuring and Analysing Levels of Automation. In 12th IFAC/IFIP/IFORS/IEA Symposium on Analysis, Design, and Evaluation of Human-Machine Systems, Las Vegas, USA, 2013, pp. 435-441..
- [57] Fast-Berglund, Å., Åkerman, Magnus, Mattsson, Sandra, Johansson, Pierre, Malm, Anna, Perenstål-Brenden, Anna. CREATING STRATEGIES FOR GLOBAL ASSEMBLY INSTRUCTIONS – CURRENT STATE ANALYSIS. In *The sixth Swedish Production* Symposium, 2014.
- [58] Watson, G.; Butterfield, J.; Curran, R.; Craig, C. Do dynamic work instructions provide an advantage over static instructions in a small scale assembly task? *Learning and Instruction* 2010, 20, 1, 84-93, DOI: http://dx.doi.org/10.1016/j.learninstruc.2009.05.001. Available: http://www.sciencedirect.com/science/article/pii/S0959475209000541.
- [59] Blom, E. QR Codes and Video Instructions: Mobile Learning in an Industrial Setting. Institutionen f
  ör till
  ämpad informationsteknologi, Gothenburg, 2014.
- [60] Thorvald, P.; Brolin, A.; Högberg, D.; Case, K. Using mobile information sources to increase productivity and quality. In Advances in Cognitive Ergonomics; CRC Press (Taylor & Francis): Boca Raton, FL, 2010; pp. 450-459.
- [61] Fässberg, T.; Nordin, G.; Fasth, Å.; Stahre, J. iPod Touch an ICT tool for assembly operators in factories of the future? In Proceedings of the 43rd CIRP International Conference On Manufacturing Systems (ICMS), Vienna, Austria, 2010.

- [62] Li, D.; Landström, A.; Mattsson, S.; Karlsson, M. How changes in cognitive automation can affect operator performance and productivity. In The sixth Swedish Production Symposium 2014, SPS14, Gothenburg, Sweden, September 16-18, 2014.
- [63] Colligan, L.; Potts, H.; Finn, C.; Sinkin, R. Cognitive workload changes for nurses transitioning from a legacy system with paper documentation to a commercial electronic health record. *International Journal of Medical Informatics* 2015, 84, 7, 469-476, DOI: 10.1016/j.ijmedinf.2015.03.003.
- [64] Mattsson, S.; Tarrar, M.; Fast-Berglund, Å. Perceived Production Complexity understanding more than parts of a system. *International Journal of Production Research* 2016, 54, 20, DOI: 10.1080/00207543.2016.1154210.
- [65] Kehoe, D. F., Little, D., & Lyons, A. C. Measuring a company IQ. In Competitive Performance Through Advanced Technology, July, 1992, p. 173-178.
- [66] Mattsson, S.; Fast-Berglund, Å.; Åkerman, M. Assessing Operator Wellbeing through Physiological Measurements in Real-Time—Towards Industrial Application. *Technologies Special Issue: Personal Health and Wellbeing Intelligent Systems Based on Wearable and Mobile Technologies* 2017, 5, 4, 61, DOI: doi:10.3390/technologies5040061.
- [67] Söderberg, C.; Johansson, A.; Mattsson, S. Design of Simple Guidelines to Improve Assembly Instructions and Operator Performance. In Swedish Production Symposium 2014, SPS14, Gothenburg, Sweden, September 16-18, 2014.
- [68] Dean, A.; Nordström, L.; Sthen, D.; Tallroth, F. Kan en instruktion ersätta mänsklig handledning vid upplärning av montörer? Bachelor Institutionen för Produkt och produktionsutveckling, Chalmers Göteborg, Sverige, 2014.
- [69] Parasuraman, R.; Sheridan, T. B.; Wickens, C. D. A model of types and levels of human interaction with automation. *Systems, Man and Cybernetics: Systems and Humans, IEE Transactions on* **2000**, *30*, 3, 286-297.
- [70] Mattsson, S. Towards increasing operator wellbeing and performance in complex assembly. Doctoral Industrial Materials and Science, Chalmers University of Technology, Gothenburg, Sweden, 2018.