

Design and Fabrication of Hairpin Bandpass Filter with Square Shaped Defected Ground Structure

Apurva Misra and Manish Kumar

Deptt. of Electronics and Communication Engineering, MMMUT,
Gorakhpur(U.P.), India
apurvamisra.ei@gmail.com

Abstract— In this paper, the design and simulation of microstrip hairpin bandpass filter with square shaped defected ground structure is described. The method used to design the filter was very efficient and requires less effort. The filter was designed and then simulated on HFSS tool and the results were verified by the fabrication and testing process. The fabrication was performed on the material GaAs. The proposed bandpass filter with a square shaped defected ground structure has good performance. The proposed hairpin bandpass filter showed the return loss of -14.69dB at 4.2 GHz, -14.97 dB at 4.8 GHz, and -19.15 dB at 5.6 GHz, -17.13dB at 6.5GHz, -13.7dB at 7.3 GHz. The insertion losses with square shaped defect were 0.8dB/0.3dB/0.16dB/0.8dB/1.4dB. 3dB and the bandwidth of proposed bandpass filter is 700 MHz/ 150 MHz/ 200 MHz /100 MHz/and 85 MHz at the center frequencies of 4.2 GHz/4.8 GHz/ 5.6 GHz/ 6.5GHz/ 7.3 GHz. In this work, the area has been reduced by 33%.

Index Terms— Bandpass Filter; Hairpin Filter.

I. INTRODUCTION

In the modern communication system, the increasing demands of wireless devices applications have led to further development in the field of microwave solid state devices. The microwave filters and radio frequency are widely used in satellite communications. The radar system and modern warfare also work on the application of microwave. Many other communication techniques such as mobile, TV broadcasting and radio broadcasting are also based on the applications of microwave systems.

For every different communication media, different frequencies are used and different bands are allocated for each of the applications. Nowadays, Radiofrequency (RF) engineering is a growing field of interest due to its advancement in voice, data, and video communication [1]. Bandpass filter is a device that has the quality to select the signals within a specific range, while rejecting the signals which are outside of that particular range. The bandpass filter plays an important role for the selection of the preferred signals in the radio frequency front end devices [2]. Nowadays, the defected ground structure (DGS) has become one of the well-known methods and an area of interest in microwave circuit [3]. DGS also has been used for bandpass filter (BPF) response. Several researches [4-6,10] have been put forward for defected ground structure. M.A. Othman, et.al.[7] designed a compact hairpin filter along with dumbbell shaped DGS. The return loss was improved from -20 to -41dB. K.Vidhya and T. Jayanthi[8] used the defected ground structure for Microstrip Hairpin Bandpass Filter. The Authors used a five pole microstrip hairpin BPF by applying the dumbbell shaped DGS to suppress the second and the

third order harmonics. Open stubs were also used with the dumbbell shaped defects for the efficient suppression of third order harmonics. The return loss was improved from -26dB to -32 dB. The conventional hairpin filter has insertion loss of 1 dB and using DGS hairpin filter has insertion loss of 2dB.

The size of the filter of a normal microstrip coupled line band pass filter is large because it uses the normal $\lambda/2$ resonators. Hairpin filter is the most popular and widely used configuration in microstrip bandpass filters due to their compact design. They are conceptually obtained by folding the arms of normal parallel coupled $\lambda/2$ resonators into U shape to reduce the size of filter. However, when folding the resonators, it is necessary to take into account the reduction of the coupled-line lengths, which reduces the coupling between the resonators.

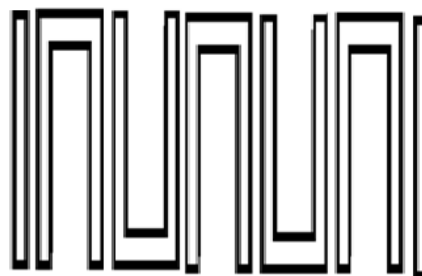


Figure 1: Hairpin bandpass filter

To design the hairpin filter, the central frequency is 6.1 GHz. The low pass prototype parameters are $g_0=g_6=1$, $g_1=g_5=1.1468$, $g_2=g_4=1.3712$ and $g_3=1.9750$, having obtained the low pass parameters, the design parameters can be calculated using equation (1) and (2)

$$Q_{e1}=g_0g_1/FBW \quad (1)$$

$$Q_{en}=g_n g_{n+1}/FBW \quad (2)$$

where, Q_{e1} and Q_{en} are external quality factor of resonator at input and output.

$$M_{i,i+1}=FBW/\sqrt{g_i g_{i+1}} \quad (3)$$

Where $i=1$ to $n-1$ are the coupling coefficient between adjacent resonator.

The input and output quality factor is $Q_{e1}=7.456$, $Q_{e5}=7.45$ and the coupling coefficient $M_{12}=M_{45}=0.1250$, $M_{23}=M_{34}=0.0934$.

II. DESIGN METHODOLOGY

In this work, five pole hairpin bandpass filter were designed and two square shaped defects were created in the ground plane of the hairpin bandpass filter. The filter was designed on the substrate Gallium Arsenide (GaAs), having relative permittivity of 12.9. Table 1 and Table 2 show the dimensions of the designed hairpin bandpass filter with the square shaped defect respectively. The top view and bottom view of the designed filter are shown in Figure 2 and Figure 3 respectively.

Table1
Parameters for hairpin filter

| Parameter | Value |
|----------------------------------|---------|
| Internal gap of hairpin(L_1) | 1mm |
| Length of hairpin(L_2) | 4.1mm |
| Length of feed line(L_3) | 1.55mm |
| Width of feed line(L_4) | 0.12mm |
| Width of hairpin(L_5) | 0.2mm |
| Height of copper | 0.01mm |
| Gap width | 0.06mm |
| Length of substrate | 7mm |
| Width of substrate | 10.79mm |

Table 2
Parameters used in designing square shaped defect

| Parameter | Value |
|-----------|-------|
| a_1 | 2.6mm |
| a_2 | 2.6mm |
| b_1 | 2.6mm |
| b_2 | 2.6mm |
| c_1 | 4.4mm |



Figure 2: Top view of hairpin bandpass filter

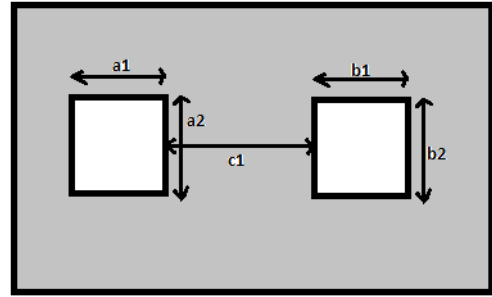


Figure 3: Bottom view of hairpin bandpass filter

III. RESULT ANALYSIS

This designed hairpin bandpass filter shows improved bandwidth and good return loss. The proposed hairpin bandpass filter shows the return loss of -14.69dB at 4.2 GHz, -14.97 dB at 4.8 GHz, and -19.15 dB at 5.6 GHz, -17.13dB at 6.5GHz, -13.7dB at 7.3 GHz. The insertion losses with square shaped defect are 0.8dB /0.3dB/0.16dB/0.8dB/1.4dB. 3dB bandwidth of proposed bandpass filter is 700 MHz/ 150 MHz/ 200 MHz, 100 MHz/and 85 MHz at center frequencies of 4.2 GHz/4.8 GHz/ 5.6 GHz/ 6.5GHz / 7.3 GHz. Area of the bandpass filter in previous work [9] is 75.53mm². Figure 4 shows, S_{11} and S_{21} plot of the hairpin bandpass filter with square shaped DGS. The area of hairpin bandpass filter in proposed work is 50.57mm². Thus, the area is reduced by 33%.

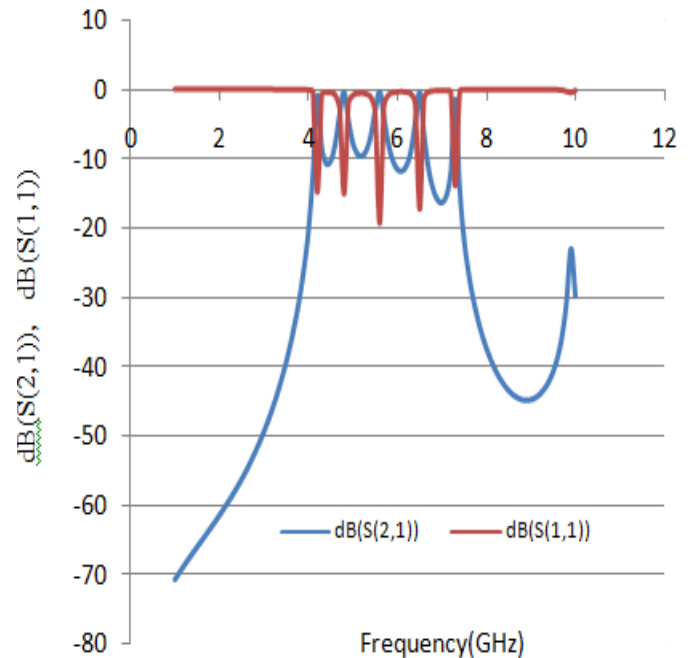


Figure 4: S_{11} and S_{21} plot with square shaped DGS

IV. FABRICATION AND MEASUREMENTS

The microstrip hairpin bandpass filter with Square shaped defected ground structure was also fabricated. The fabricated structure of the bandpass filter is shown in Fig.5 and Fig.6, filter is fabricated on GaAs substrate having dielectric constant 12.9 (ϵ_r) and the thickness of the substrate is 0.3mm. The fabrication of this filter was easy and at a low cost. Figure 7 indicates the S_{11} S_{21} plot of measured results. Figure 8 shows S_{11} plot of simulated and measured.



Figure 5: Top view of fabricated filter



Figure 6: Bottom view of fabricated filter

Table 3
Comparison between measured and simulated results

| Parameters | Simulated | Measured |
|--------------------|---|--|
| S11 | -14.69dB/ -14.97dB/ -19.15dB/ -17.13dB/ -13.7dB | -14.85dB/ -25.23dB/ -16.04dB/ -10.65dB/ -6dB |
| S21 | 0.8dB/ 0.3dB/ 0.16dB/ 0.8dB/ 1.4dB | 0.95dB/ 0.29dB/ 0.22dB/ 0.36dB/ 6.19dB |
| Center frequencies | 4.2GHz, 4.8GHz, 5.6GHz, 6.5GHz, 7.3GHz | 4.3GHz, 4.79GHz, 5.6GHz, 6.5GHz, 7.29GHz |

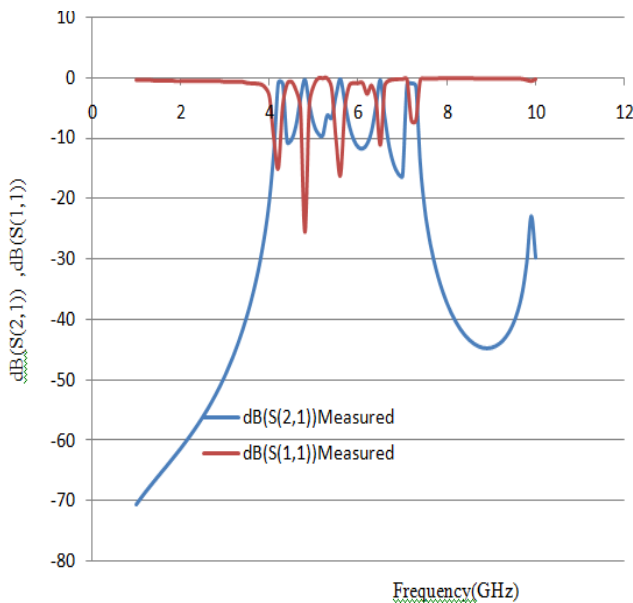


Figure 7: S11, S21 plot of measured result

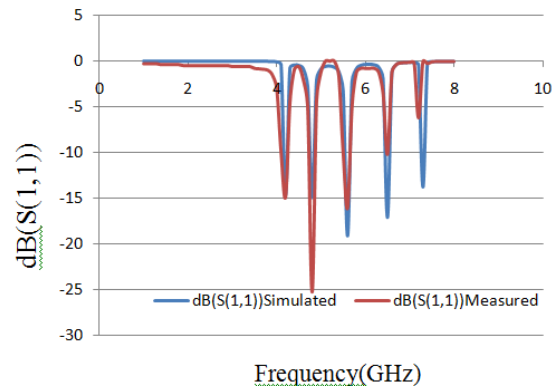


Figure 8: S11 plot of simulated & measured

V. CONCLUSION

In this work, hairpin band pass filter with Square shaped defected ground structure is simulated and fabricated. Measured and simulated results are in good agreement. This hairpin bandpass filter showed improved bandwidth and good return loss. This filter can be used for surface ship radar, weather radar, optical communication, cordless phones, some Wi-fi devices and for satellite applications. Area of the bandpass filter in previous work[9] is 75.53mm², while area of the hairpin bandpass filter with square shaped defected ground structure is 50.57mm²; hence the area is reduced by 33%.

REFERENCES

- [1] Touhami N A, Zakriti A, Lamsalli M, Boussouis M and Tribak A, "Spurious response suppression in three poles hairpin bandpass filter using detected ground structure (DGS)", *1st Annual International Interdisciplinary Conference (AIIC), Portugal*, pp.1991-1995,2013.
- [2] Vidhya K and Jayanthi T, "Design of folded multilayer microstrip tri-band hairpin band pass filter", *Res J App Sci Eng Tech*, vol.6(12), pp. 2283-2287,2013.
- [3] Jialinli, Jianxin Chen, Quenxue, "Compact microstrip lowpass filter based on defected ground structure and compensated microstrip line", *Microwave Symposium Digest, IEEE MTT-S International, 2005*.
- [4] Pie J, Wang A G, Gao S and Leng W, "Miniaturized triple-band antenna with a defected ground plane for WLAN/WiMAX applications", *IEEE Antennas and Wireless Propagation Letters*, vol. 10, pp. 298-301,2011.
- [5] Sung Y, "Bandwidth enhancement of a microstrip line-fed printed wide-slot antenna with a parasitic center patch", *IEEE Transactions on Antennas and Propagation*, vol. 60(4), pp. 1712-1716,2012.
- [6] Guha D, Biswas S, Biswas M, Siddiqui J Y and Antar Y M M, "Concentric ring-shaped defected ground structures for microstrip applications", *IEEE Antennas and Wireless Propagation Letters*, vol. 5(1), pp. 402-405,2006.
- [7] Othman M.A., Mohd. Zaid N.F., Abd Aziz M.Z.A., Sulaiman H.A., "3GHz hairpin Filter with Defected ground structure(DGS) for Microwave imaging application", *International conference on computer communication and control technology*, *IEEE*, pp411-414, 2014.
- [8] Vidhya K. and Jayanthi T., "Design of Microstrip Hairpin Bandpass filter using Defected Ground Structure and Open Stubs", *International Conference on Information and Electronics Engineering*, vol.6, pp. 268-272, 2011.
- [9] Bankey K and Bhargava A, "Design of compact microstrip hairpin multibandpass filter", *International Journal of Scientific Progress and Research*, issue96, vol.34(2), pp66-69,2017.
- [10] Umeshkumar D S and Kumar M, "Design of an ultra-wideband bandpass filter for millimeter wave applications", *Journal of Telecommunication, Electronic and Computer Engineering*, Vol. 10, no. 3, pp57-60, July - September 2018.