

**AUTOMATED PRODUCTION LINE MONITORING SYSTEM
USING EMBEDDED RFID**

by

CHE ZALINA BINTI ZULKIFLI

**Thesis submitted in fulfillment of the requirements
for the degree of
Doctor of philosophy**

November 2013

AUTOMATED PRODUCTION LINE MONITORING SYSTEM

USING EMBEDDED RFID

CHE ZALINA BINTI ZULKIFLI

**UNIVERSITI SAINS MALAYSIA
2013**

ACKNOWLEDGMENTS

My humble gratitude to the Most beneficent Allah S.W.T for granting me the strength and perseverance to go on this quest for knowledge. Firstly, I would like to thank my supervisor, Associate Professor Dr. Widad Ismail whose help, stimulating suggestions and encouragement has kept me steadfast in my research and writing out of the thesis. My deepest gratitude also goes out to my co-supervisor, Dr. Muhammad Ghulam A. Rahman for his valuable support. It has been an honor to have both of you supervise me. I would also like to express my heartfelt thanks to my sponsor, the Ministry of Higher Education for allowing me the opportunity to pursue my studies in this area of interest. My thanks also goes out to Canon Electronic (M) Sdn. Bhd. Perai, Penang which has helped a lot in materializing the collaboration in this research.

Apart from this, my gratitude also goes out to the staff of the School of Electrical and Electronic Engineering, USM, especially the technical staff En Abdul Latip and En Jamal. This special thanks also is dedicated to my friends who have supported me all this while. They are none other than Nurul, Amin, Raed, Ho, Farah Hazwani, Qayum, Khadijah, Alin, Khor and Suzana.

Lastly is my deepest appreciation to my beloved parents, Zulkifli Saman and Che Siah Awang who have never stopped praying for my success. Similarly, thank you to my loving hubby and beloved kids, Mohd Nasri, Inas Iyana, Inas Akmal and Inas Aswad whose sacrifices are really appreciated in realizing this long journey of writing this thesis.

Thank you for your patience and for being my pillar of strength. May this be an inspiration for my children's future undertakings.

Che Zalina Zulkifli

April 2013

TABLE OF CONTENTS

Acknowledgements	ii
Table of Contents	iv
List of Tables	viii
List of Figures	ix
List of Abbreviations	xiii
Abstrak	xvi
Abstract	xviii
CHAPTER 1 – INTRODUCTION	1
1.1 Overview of Embedded System	1
1.2 Research Motivations	2
1.3 Thesis Objectives	5
1.4 Technical Challenges and Requirements	6
1.5 Thesis Outline	7
CHAPTER 2 - LITERATURE REVIEW	9
2.1 Introduction	9
2.2 Overview of Manufacturing	12
2.2.1 The Production Line	12
2.2.2 Factors Affecting Productivity of Production Line	13
2.3 Review of RFID Applications	19
2.4 Review of WSN in Industrial Automation	20
2.5 RFID Technology	23
2.5.1 An Active Tag Power Supply	25
2.5.2 Active Tag Power Supply Management for WSN	26
2.6 Wireless Mesh Sensor Network	26
2.7 Coexistence of Wireless Solution for Industrial Application	28
2.7.1 ZigBee	29
2.7.2 Multi hop Routing in a ZigBee Mesh Network	31
2.7.3 Mode of Operation	34

2.7.4	Transmission Time	35
2.8	Interfacing Requirements	36
2.9	Types of RFID Integration	37
2.10	Machine-to-Machine Communication (M2M)	39
2.11	Web-base data Acquisition and Monitoring System	39
2.12	Functional Software Testing	41
2.13	Summary	42

CHAPTER 3 - DESIGN REQUIREMENT OF HARDWARE SYSTEM ARCHITECTURE

3.1	Introduction	44
3.2	Overview of Proposed System Requirements	44
3.2.1	Facilitation of Communication Platform between Hardware	48
3.2.2	Power Management for WSN Efficiency and Lifetime Issue	48
3.2.3	Real Time Data Delivery	49
3.2.4	Realizing M2M Wireless Communication	50
3.3	Requirement of Hardware Development	52
3.3.1	Proposed RFID Module	54
3.3.2	Active Tag Architectural Design	55
3.3.3	Counter System	58
3.3.4	Microcontroller	60
3.3.5	Memory Allocation	61
3.3.6	Baud Rate	62
3.4	Design Communication Method for ERFIDC	64
3.5	Design Communication Scheme for Active RFID System	69
3.5.1	Tag Talk First	71
3.5.2	WMSN for The Proposed System	72
3.5.3	API Packet Structure	76
3.5.4	Operational States (Modes)	80
3.5.5	Network Communication Development	81
3.6	Machine-to-machine Communication (M2M) Development	85
3.7	Summary	91

CHAPTER 4 - EMBEDDED SYSTEM DEVELOPMENT AND IMPLEMENTATION	93
4.1 Overview	93
4.2 Role of Proposed RFID System On WMSN Platform	99
4.3 Tagged Electronic Counter System Architecture Design	106
4.4 Deployment of Proposed Embedded System	110
4.5 Overview of Software Development and Implementation	113
4.5.1 Software Platform Components	115
4.5.2 Software Development Tools for Web System	121
4.5.3 Software Development Tools for Counter System	122
4.5.4 Database Design Method	125
4.6 System Design	125
4.6.1 System Connectivity	129
4.6.2 Development Method for Data Acquisition	132
4.7 System Operations And Implementations	134
4.7.1 API Applications	134
4.7.2 GUI Applications	137
4.8 Summary	141
CHAPTER 5 - RESULTS AND DISCUSSION	145
5.1 Overview	145
5.2 Application Interface Setup	147
5.3 System Radiation Pattern Measurement	149
5.3.1 H-Plane Polarization Measurement	152
5.3.2 E-Plane Polarization Measurement	154
5.4 Battery Lifetime	153
5.5 Result and Analysis of Communication Range Test	156
5.5.1 Read range measurement for point-to-point method for ERFIDC System	158
5.5.2 Read range measurement using WMSN for ERFIDC System	163
5.5.3 System Installation for WMSN	160

5.6	Current Consumption Analysis	165
5.7	Power Consumption Analysis	171
5.8	Tags Collection Time	176
5.9	Throughput Evaluations	179
5.10	Data Collision Experiment	181
5.11	Measurement of Software Paltform	183
	5.11.1 API Testing	184
	5.11.2 Database Server Performance	187
	5.11.3 Applications Evaluation	190
5.12	Summary of Measurements and Evaluations	191
5.13	Performance Analysis and Contributions	194
 CHAPTER 6 - CONCLUSIONS AND FUTURE WORK		 220
6.1	Conclusions	220
6.2	Research Challenges and Future Work	223
 REFERENCES		 225
 PUBLICATIONS, ACHIEVEMENTS & PATENT		 235
Appendix A: Digi International for X-Bee Module Specifications		
Appendix B: PIC 184523 Specifications		
Appendix C: Schematic of RFID		
Appendix D: Source Code of Counter System		
Appendix E: Source code of Embedded Communication/API/M2M		
Appendix F: Source code of Web-based System		
Appendix G: Raw data measurement and calculation Results		
Appendix H: User Survey		
Appendix I : Photos for Real World Measurement and Application		

LIST OF TABLES

Table 2.1: Communication requirements and constraints	11
Table 2.2: Recent RFID applications	20
Table 2.3: Comparison between RFID and WSN	25
Table 2.4: Current applications of Wireless Mesh Network	27
Table 2.5: Comparison of the ZigBee, Bluetooth and Wi-Fi Protocol	33
Table 2.6: Related system that used web-based system as a monitoring system in industrial manufacturing.	41
Table 2.7: Software testing types	42
Table 3.1: USART and SPI features	60
Table 3.2: Formulas for Baud Rate and SPBRG	62
Table 3.3: Developed API data structure	80
Table 4.1: Existing active RFID tags and proposed solutions	98
Table 4.2: Users function	138
Table 5.1: Results of read range measurement using point to point in LOS and NLOS	159
Table 5.2: Result of read range measurement using WMSN for ERFIDC system in LOS and NLOS	162
Table 5.3: Measured current consumption of existing RFID and ERFIDC system for a period 60 s	168
Table 5.4: Calculated current consumption for proposed ERFIDC system	169
Table 5.5: Calculated current consumption of existing RFID tag and ERFIDC system for a period 60 s	170
Table 5.6: Measured power consumption of existing RFID and ERFIDC system for a period 60 s absed on measured DC charateristics	172
Table 5.7: Tags collection time	177
Table 5.8: Analysis results of system functions	191
Table 5.9: Proposal summarized the cost comparison	201
Table 5.10: Comparison with other patented system	217
Table 5.11: Comparison of system providers	219

LIST OF FIGURES

Figure 1.1: Trend for WSN market potential (EPU, 2011)	3
Figure 1.2: RFID value creation analysis (2011-2015) (EPU, 2011)	4
Figure 2.1: Types of production lines	13
Figure 2.2: Factors affecting productivity of production lines	14
Figure 2.3: Illustration for relationship of workers, output and profit	14
Figure 2.4: Current implementation of output monitoring and report	16
Figure 2.5: Classes of WSN in industrial applications	22
Figure 2.6: RFID system	24
Figure 2.7: ZigBee topologies	30
Figure 2.8: The modes of RFID system in mesh network	35
Figure 2.9: Internal Diagram of Max232	37
Figure 2.10: Illustration of existing technology	39
Figure 3.1: (a) Existing process flow and (b) Developed process flow	45
Figure 3.2: Overall system architecture components	47
Figure 3.3: (a) Typical power supply management for active RFID tag and (b) Proposed power supply design for ERFIDC system	49 49
Figure 3.4: Comparison of wired infrastructure to the proposed WMSN	51
Figure 3.5: Main research steps for hardware development	53
Figure 3.6: XB Series2 module	54
Figure 3.7: Block diagram of comparison for existing and modified active RFID reader and tag according to the proposed system requirements (b) Block diagram of modified RFID tag	56 56 57
Figure 3.8: Active tag architecture design	58
Figure 3.9: Comparison mechanism of communication (a) CEM Counter and (b) HOR Counter	59
Figure 3.10: Developed connection of microcontroller	61
Figure 3.11: Format of data	62
Figure 3.12: Block diagram of basic integration	64
Figure 3.13: Proposed method of data communication between two devices	67
Figure 3.14: Proposed USART data transmission	68

Figure 3.15: a)The connection of RFID reader, b)Data logging on API	69
Figure 3.16: Mechanism of RFID Transmission	70
Figure 3.17: Block diagram of the RFID tag architecture	72
Figure 3.18: IEEE802.15.4 PHY frame format (IEEE, 2009)	73
Figure 3.19: ERFIDC system and WMSN diagram	74
Figure 3.20: API data frame for the proposed ZigBee network	76
Figure 3.21: API structure of transmit request packet	77
Figure 3.22: Integration data format for ERFIDC	78
Figure 3.23: Verification of point to point connection	81
Figure 3.24: Verification of basic ZigBee Network	82
Figure 3.25: Verification of communication method in ZigBee Mesh Network	85
Figure 3.26: M2M stages diagram for proposed system	86
Figure 3.27: Internal Method for flow process of M2M communication	88
Figure 3.28: M2M improvement stages	90
Figure 4.1 : Methodology of hardware and network design and development	96
Figure 4.2 : System architecture components	98
Figure 4.3: Flow chart of process collections multiple ZEDs (ERFIDC)	105
Figure 4.4: (a) Existing RREQ, and (b)Proposed RREQ	106
Figure 4.5: Proposed RREQ packet scheme	107
Figure 4.6: Structure of integration block diagram	108
Figure 4.7: Architecture block diagram of developed counter system	109
Figure 4.8: Fundamental structure of integration for input ERFIDC	110
Figure 4.9: Network map and site	114
Figure 4.10: Developed software components	115
Figure 4.11: Components of MCDAS software platform	116
Figure 4.12: GUI software architecture block diagram	118
Figure 4.13: Block diagram system components	119
Figure 4.14: Flow chart of counter system	125
Figure 4.15: Block diagram of system design	127
Figure 4.16: Developed method of JDBC	131
Figure 4.17: Existing method of JDBC	131
Figure 4.18: The details connection architecture of the MCDAS web system	133
Figure 4.19: Conventional design of data acquisition	134

Figure 4.20: Proposed design of data acquisition	134
Figure 4.21: API MCDAS	136
Figure 4.22: MCDAS main GUI application flow	137
Figure 4.23: The snapshot of production report	141
Figure 4.24: Summary of developed software	
Figure 5.1: Sample of pilot testing and measurement arrangement in real world environment for proof of concept	147
Figure 5.2: Communication port and baud rate setting at API	149
Figure 5.3: Basic hardware installation in one production line	150
Figure 5.4: The experimental of hardware set up for radiation pattern measurement	152
Figure 5.5: The RSSI value (dBm) for radiation pattern	153
Figure 5.6: Position setup of H-plane polarization experiment	154
Figure 5.7: H-plane radiation pattern at (a) 1 meters distance, and b)10 meters distance	155
Figure 5.8: Experimental arrangement of E-plane polarization experiment	155
Figure 5.9: E-plane radiation pattern at (a) 1 meters distance, and b)10 meters distance	156
Figure 5.10: Illustration of point to point for ERFIDC system	160
Figure 5.11: Comparison of maximum read range between RFID (Digi International, 2009) and ERFIDC system	161
Figure 5.12: Layout of WMSN in a production plant	162
Figure 5.13: Comparison of maximum read range between LOS and NLOS environment with variance of transmit power level under WMSN platform	164
Figure 5.14: Layout of multi-hop environment	166
Figure 5.15: Hardware arrangement for current consumption measurement	167
Figure 5.16: : Current consumption for existing RFID tag (a) Transmission cycle and (b) Receiving cycle	168
Figure 5.17: Current consumption for ERFIDC system (a) Transmission cycle and (b) Receiving cycle	169
Figure 5.18: Multi-hop power consumption of transmission process	175
Figure 5.19: Multi-hop power consumption of transmission process	177
Figure 5.20: Total power consumption in WMSN	178

Figure 5.21: Tags collection time	180
Figure 5.22: Tags collection time over five hops	181
Figure 5.23: Throughput over five hops	183
Figure 5.24: Data collision for, a) point-to-point network and b) WMSN	184
Figure 5.25: Experimental set up for API consistency	186
Figure 5.26: Capture data at API and Database log file	187
Figure 5.27: Response time for various mechanism communicate with database log file	189
Figure 5.28: Test components	
Figure 5.29: MCDAS database response time vs file size	192
Figure 5.30: Illustration comparison for, a)Current implementation with wired Infrastructure and b)Proposed solution using RFID	197
Figure 5.31: The snapshot of system installation cost for 1 connection of Wired infrastructure	199
Figure 5.32: The snapshot of system installation cost for 25 connections of Wired infrastructure	199
Figure 5.33: Comparison of Installation time	200
Figure 5.34: The illustration of proposed MCDAS for a) WIP real time display	205 206
and b) Transformation from current implementation to MCDAS	207
Figure 5.35 Installation of counter display in real world production lines	208
Figure 5.36: Comparison of report for, a) Current implementation with manual input and b) MCDAS automated report	209
Figure 5.37: The illustration for, a) Options of report and b) Summary of report	212
Figure 5.38: Cost reduction for fixed labor cost after proposed system Implementation	213 214
Figure 5.39: List of MCDAS data entry	216
Figure 5.40: Flexibility of time shift maintenance	217
Figure 5.41: Downtime analysis based on three months	
Figure 5.42: Productivity performance based on three months	

LIST OF ABBREVIATIONS

ACK:	Acknowledge
ADC:	Analog-Digital-Converter
AODV:	Ad-hoc On-demand Distance Vector
API:	Application Programming Interface
BD:	Baud rate
BFSA:	Basic Framed Slotted Aloha
BFSK:	Binary Frequency-shift Keying
CKE:	Clock Edge
CKP:	Clock Polarity
CMOS:	Complementary Metal-Oxide Semiconductor
CPU:	Central Processing Unit
CRC:	Cyclic Redundancy Check
CS:	Chip Select
CST:	Computer Simulation Technology
DBMS:	Database Management System
DC:	Direct Current
EEPROM:	Electrically Erasable Programmable Read-Only Memory
EIA:	Electronic Industries Association
ERFIDC:	Embedded Counter System with RFID
FFD:	Full Function Device
GND:	Ground
GSM:	Global System for Mobile
GPS:	Global Positioning System
GUI:	Graphical User Interface
HF:	High Frequency
IC:	Integrated circuit
H2M:	Human-to-Machine
ID:	Identification
I ² C:	Inter IC
ICSP:	In-circuit Serial Programming
IDE:	Integrated Development Environment
IEC:	International Electrotechnical Commission

I/O: Input/Output
ISO: International Organization of Standardization
ISM: Industrial, Scientific and Medical
JDBC: Java Database Connectivity
KPI: Key Performance Indicator
LCD: Liquid Crystal Display
LED: Light-emitting Diode
LF: Low Frequency
LOS: Line-Of-Sight
LSB: Least Significant Bit
MCU: Microcontroller Unit
MCDAS: Managerial Control and Data Acquisition System
M2M: Machine-to-Machine
MIS: Management Information System
MySQL: Microsoft Structured Query Language
NLOS: Non-Line-of-Sight
OC: Organization Chart
OS: Operating System
PA: Power Amplifier
PAN ID: Personal Area network Identification
PC: Personal Computer
PCB: Printed Circuit Board
PHY: Physical Layer
PIC: Programmable Interface Controller
RAM: Random Access Memory
ROM: Read Only Memory
RF: Radio Frequency
RFD: Reduce Function Device
RFID: Radio Frequency Identification
RREQ: Route Request
RREP: Route Reply Packet
RSSI: Received Signal Strength Indication
RTC: Real-time Clock
RTF: Reader-Talks-First

RTL: Real Time Location
RX: Receive, Receive Mode
SCLK: Serial Clock
SCK: Serial Clock
SDI: Serial Data In
SDO: Serial Data Out
SCI: Serial Communication Interface
SO: Serial Out
SPI: Serial Peripheral Interface
SPBRG: Synchronous Baud Rate Register Generator
TRFB: The First Response Byte
TRLB: The Last Response Byte
TTF: Tag-Talks-First
TTL: Transistor Transistor Logic
TX: Transmit, Transmit Mode
TXIF: Transmit Interrupt Register
TXREG: Transmit Register
TXSTA: Transmit Status and Control
UHF: Ultra High Frequency
URL: Uniform Resource Locator
USART: Universal Synchronous and Asynchronous Receiver Transmitter
USB: Universal Serial Bus
WISP: Wireless Internet Service Provider
WLAN: Wireless Local Area Network
WSN: Wireless Sensor Network
WMSN: Wireless Mesh Sensor Network
ZC: ZigBee Coordinator
ZED: ZigBee End Device
ZMN: ZigBee Mesh Networking
ZR: ZigBee Router

SISTEM PEMANTAUAN BARISAN PENGELUARAN OTOMATIK MENGUNAKAN RFID TERBENAM

ABSTRAK

Di dalam industri pengeluaran, rangkaian tanpa wayar kebanyakannya digunakan dalam rangkaian bekalan, pengurusan bekalan runcit, kunci keselamatan elektronik dan pencegahan kecurian. Industri pengeluaran memerlukan teknologi komunikasi yang cekap dan tindakbalas dalam masa nyata untuk meningkatkan produktiviti dan menyediakan kos penyelesaian yang berkesan. Kajian ini mencadangkan sistem pemantauan pengeluaran automatik dalam barisan pengeluaran menggunakan frekuensi radio (RFID) terbenam, di aplikasikan dalam Rangkaian Mesh Pengesan Tanpa Wayar (WMSN) dan sistem pemantau dan pemrosesan/pemusatan data melalui teknologi perisian berasaskan web. Peranti tertanam dalam barisan pengeluaran automatik sistem pemantauan mampu bekerja sebagai unit individu atau bekerja bersama-sama dengan terminal rangkaian pelbagai seperti WMSN dan menyediakan penyelesaian komunikasi mesin ke mesin (M2M). Pengujian dan penilaian keseluruhan sistem telah dijalankan dalam syarikat industri yang terpilih. Keupayaan komunikasi membaca sistem yang dicadangkan itu mencapai jarak sehingga 123 m dengan kuasa tertinggi +3 dBm. Penilaian perlanggaran data dalam persekitaran WMSN menunjukkan peratusan purata data yang diterima mencapai hampir 100%. Melalui kaedah rangkaian pelbagai hop sistem yang dicadangkan memberi masa kutipan keseluruhan adalah kira-kira 37 % lebih rendah daripada RFID tag yang sedia ada. Perbandingan antara pangkalan data yang sedia ada, dalam spesifikasi yang sama menunjukkan keupayaan masa tindak balas server yang dibangunkan adalah lebih cepat sebanyak 30%. Ini bersesuaian

dengan sistem pemantauan pengeluaran kerana masukkan data terhadap sistem adalah secara berterusan berdasarkan ketetapan masa sesuatu produk. Cadangan infrastruktur tanpa wayar bersepadu dapat mengurangkan kira-kira 50 % kos berbanding dengan pembekal tempatan yang lain dengan penyelesaian berwayar. Paparan masa nyata dan laporan data juga boleh membantu kedua-dua kumpulan pekerja dan pengurusan untuk mengambil tindakan segera seterusnya menyumbang kepada peningkatan dalam mengurangkan kesilapan campur tangan manusia. Kemampuan sistem yang dibangunkan menyumbang kepada pengurangan 75 % masa berhenti operasi barisan pengeluaran. Manakala sumbangan data pemusatan dan sistem laporan secara automatik dapat mengurangkan tiga jam hingga lima jam sehari masa bagi penyelia menyediakan laporan dan masukan data secara manual yang mana masa ini boleh diperuntukkan bagi tugas-tugas pemantauan pengeluaran. Syarikat industri pengeluaran yang menjalinkan kolaborasi dalam kajian ini juga melaporkan peningkatan kecekapan dan produktiviti selepas mengaplikasikan sistem pemantauan dengan RFID terbenam yang dinamakan Kawalan Pengurusan dan Sistem Perolehan Data (MCDAS).

AUTOMATED PRODUCTION LINE MONITORING SYSTEM USING EMBEDDED RFID

ABSTRACT

In industrial manufacturing, wireless network can be used in supply-chain, retail stock management, electronic security keys, and theft prevention. Manufacturers require an efficient communication and real time feedback to maximize uptime, improve productivity, and provide cost effective solution advancement. This research proposed automated production line monitoring system using embedded RFID through wireless mesh sensor network (WMSN) platform and smart data processing adopted through web-based monitoring system. Embedded devices in the automated production line monitoring system is capable to work as individual units or work together with multiple terminal links such as in WMSN and provide Machine-to-Machine (M2M) communication solution. The reading range capabilities of the proposed system have been tested in the WMSN platform in real world industrial environment. The results obtained shows that the reading range is able to achieve 123 m with the highest power of +3 dBm in Line-of-Sight (LOS). In data collision evaluation with WMSN platform, the average percentage of data received achieved merely 100%. In multi-hop network, the overall proposed system collection time is about 37% lower than the existing RFID tags. Response time within the same specifications shows that the developed server is faster by 30% compared to the existing database. Hence, this is compatible with the output monitoring system since the input is continuously fed based on the standard time of a certain product. The proposed integrated wireless infrastructures are able to minimize approximately 50% of cost compared to other local vendor with wired solutions. In addition, 75% reduction of downtime in the production line which causes the increase in productivity and yield is recorded due to the effective monitoring. On the other

hand, the contribution of automated data centralization and reporting system reduces three to five hours of supervision time per day. Therefore, the hours meant for report preparation and manual input can be assigned to monitor the production line. The collaborator factory also reported a higher efficiency and productivity after implementation of the proposed automated production line monitoring system with embedded RFID named Managerial Control and Data Acquisition System (MCDAS).

CHAPTER 1

INTRODUCTION

1.1 Overview of Embedded System

The first embedded system was introduced by the US Airforce's Minuteman ICBM in year 1961 to control the guidance and stability functions of missile. The development of this missile has proven that implementing embedded system can decrease the cost by several orders of magnitude (Mazidi and Mckinlay, 2006). The second embedded system introduced by the United States Navy's F14 Tomcat fighter in 1970, contained arguably the first microprocessor based embedded system which consists of 8 processors and 19 memory chips (Kia, 2005). Technologies have rapidly grown and now the spacious embedded system may simply be developed by a single chip known as a microcontroller. Microcontrollers are systems-on-a-chip which does not require any peripheral devices to function. Nowadays, consumer products are drivers of embedded systems technology such as iPhone, playstation and other sophisticated machines. Institute of Electrical Engineers (IEE) has described a general purpose embedded system as devices used to control, monitor or assist the operation of equipment machinery or plant. "Embedded" reflects the fact that they are an integral part of the system. In many cases, their "embeddedness" may be such that their presence is far from obvious to the casual observer (Mazidi and Mckinlay, 2006). The wider group of industries such as health care, defense, entertainment, plantations, industrial, until home automation have now gained many benefit of using embedded technology. However, there are deficiencies in optimizing the use of technologies due to time constraint, cost and others limitations.

Focusing in the industrial manufacturing applications, this research has taken up the challenges to propose a new architecture of embedded system.

1.2 Research Motivations

Report from EPU, Economic Planning Unit, WSN and RFID have many potential applications and also are the core enabler of Internet of Things (IoT). Beyond Asia, European framework also includes RFID technologies which will help shape our future. EPU concludes that ‘A global network infrastructure enables the linking of physical and virtual objects through the exploitation of data capture and communications capabilities (EPU, 2011). This infrastructure includes existing and evolving internet and network development. RFID will offer specific object identification, sensor and connection capability as the basis for the development of the independent federated services and applications. These will be characterized by a high degree of autonomous data capture, event transfer, network connectivity and interoperability. Figure 1.1 illustrates the WSN market potential which shows the ability of Asia to grow beyond Europe in the near future.



WSN MARKET POTENTIAL

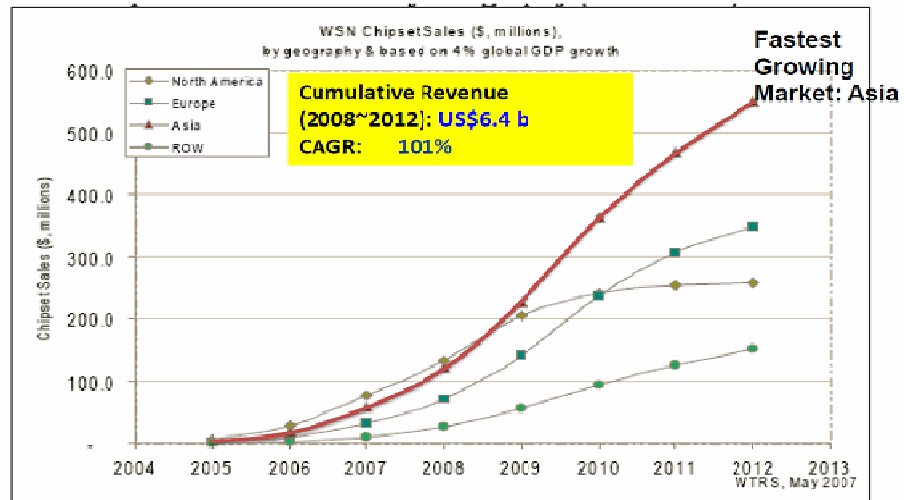


Figure 1.1: Trend for WSN market potential (EPU, 2011)

According to ICT National Roadmap for Malaysia study 2008, the key recommendations are inputs for the formulations of strategic policies, programs and plans to intensify Malaysia's transformation to a knowledge-based economy. There are three technology focus areas for Malaysia to pursue which are Wireless Sensor Networks, Predictive Analytics and Dimensional Internet. RFID technology possesses a high potential in solving many issues especially where innovation is applied. Figure 1.2 depicts the trend for RFID value creation analysis in Malaysia for the year 2011 to 2015.

Method 3(b): RFID Value Creation Analysis to the Malaysian Economy
Value Added Influenced by RFID Through Anticipated Level of Investment

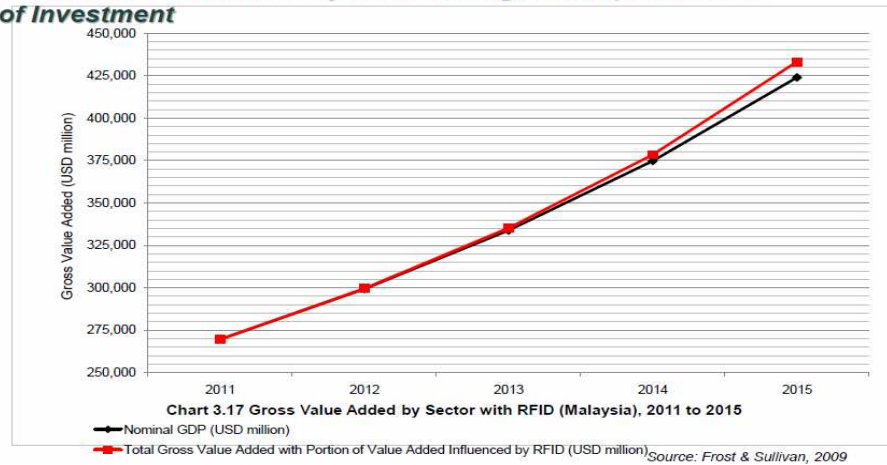


Figure 1.2: RFID value creation analysis (2011-2015)(EPU,2011)

Hence, in an industrial environment, the Industrial Management has wasted up to millions of dollars due to the delay of monitoring output achievement (Thomesse, 2005). This happened due to the weakness in using technologies, communication system and information delivery on production lines. A production line in a manufacturing industry is defined by a series of operation in sequence which has to undergo certain processes based on the specific organization needs involving machine or human. Each production line must be monitored to gain a higher productivity. To monitor the output achievement performance of the production line is not an easy task. It requires the use of technology to facilitate monitoring and real time feedback. To keep up with today's demanding workload, manufacturing plants may require long work shift in multiple areas and departments in one plant. In line with this, they require an efficient communication and real time feedback to maximize uptime and improve productivity.

By seeing the capabilities of WSN and RFID technologies, a decision to embed both has been made. The architecture of this system comprises of RFID tags and sensor nodes with the ability to read the content of active RFID tags, whereby a reader accepts information from the personal computer (PC) and sends signal to tag, and after that sends the received signal back to the PC. The PC is also known as the base station to monitor all the data received from the reader. Each sensor node will be fixed around the area where the objects will be tracked and monitored. RFID tags are mobile and there are three (3) parts of sensor node with RFID Reader which are sensing part, reading part which gathers data from RFID tags, and radio transceiver part which sends data to the sink node.

The studies show that these technologies have a good impact on the production output monitoring systems, owing to their flexibility, cost reduction and cabling minimization, and sharing important information among others. After conducting an investigation into several different options, in line with future market of new technologies deployment, the development and implementation of an Embedded Architecture System with active RFID on Wireless Mesh Sensor Network (WMSN) adopted through web-based system architecture in production area for output monitoring system has been proposed.

1.3 Research Objectives

The general aim of this research is to design and develop a new architecture of embedded system prototype components that comprise of the RFID technology, WMSN platform, counter system and web-based monitoring system. The particular objectives of the research work are outlined as follows:

1. To investigate and design the active RFID systems adopted through ZigBee technology that has the capability to function on WMSN platform, and can function to automate the production line output monitoring.

2. To design and implement a real time system for monitoring output production lines with consists of a embedded counter, RFID systems and web-base system capable of providing real time information in real world industrial manufacturing environment for proof of concept in accomplishing the machine-to-machine communication (M2M).

3. To analyze the performance and characterize the proposed solution of the complete package of embedded systems at a real-world environment for production line monitoring system output to prove it is able to automate its data collection and reporting, reducing downtime and hence improve company productivity.

These objectives are linked together in a continuous process to contribute to a more informed decision-making for the management of industry based on real time feedback and automated monitoring from the proposed system. Better decisions will lead to greater accountability and profit for the organization.

1.4 Technical Challenges and Requirements

In today's world there is a variety of sophisticated equipment, but to design an embedded system requires the understanding of the concept and in-depth technical knowledge for various related areas. In general, the technical challenges that have to

be overcome to meet the embedded system specification are real time communication, complexity, and concurrency and legacy languages. Additionally this implementation involves industrial environment that needs the proper understanding of industrial requirements.

This research involves the designed and development of six main elements which comprise of:

- Hardware requirements including fabrication
- Software architecture and programming tasks
- Embedding and integration platforms and tools for hardware, software and firmware
- Server configuration and WSN tools and requirements
- Deployment and testing in real industrial environment
- Documentation

1.5 Thesis Outline

The thesis has been organized into six chapters as follows. The literature review is presented in Chapter 2 which describes the survey on the important and benefits of implementing the WSN in the industrial applications. This chapter also explains the scenario of the production line in the manufacturing environment and other impactful factors to achieve maximum profit in the industry. Highlighted in this chapter are also the existing technology and those such as ZigBee, WiFi, RFID, network topology, M2M communication as well as a description on the software platform. Specification and operation of the key components used in the research is discussed in Chapter 3. This particular chapter 3 also demonstrates the detailed

aspects of design and development for hardware platform including the embedded mechanism between devices and WMSN platform. The methodology of hardware and network design and development is discussed in chapter 4. Chapter 4 also describes the software development and implementation for data acquisition system and proposed output monitoring system. Chapter 5 presents the results and discussion of the testing that have been conducted for the proof of concept (POC) in the selected real world industrial manufacturing environment located in Seberang Perai Pulau Pinang, Malaysia. Chapter 5 also demonstrates the actual contributions and advantages of the complete package of the proposed system for selected company that has been implemented for pilot testing. The last chapter provides the conclusion and future work that can be realized for this research.

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

The total revenues for wireless sensors and transmitters in industrial applications in 2009 reached \$526.7 million. This market revenue is likely to reach \$1.8 billion in the next four years. The size of the wireless pressure sensors and transmitters market alone is expected to reach \$132.9 million in 2012 (Bekhet, 2012). Wired connections share one significant drawback with other wired industrial networking approaches: Cabling, distance and cost limitations associated with wired links surface quickly on sprawling factory floors and in large industrial settings, and running cable to new or relocated equipment can interrupt production. These hardwiring drawbacks have led many to seek a longer range and more flexible alternative in wireless sensor network.

WSN is no longer a new technology, but the use of WSN in the industry is still not very widely used especially in production areas of a plant. It is probably because the right technology and appropriate architecture of WSN is still not explored. Basically, users tend to consider WSN is a technology that can be developed by itself from its own components. But, a system architecture of WSN is designed in this research which is developed from enhancement and designing of other technology, namely active RFID technology. The proposed system architecture introduces embedding technology of WSN, active RFID, counter system and web-based monitoring system to be a smart architecture suitable for real time output monitoring achievement in industrial applications. A wireless sensor network

(WSN) is a wireless network that consists of spatially distributed sensor nodes comprising devices using sensors that monitor physical or environmental conditions, such as temperature, humidity, speed, pressure, motion or pollutants, at different locations. WSN is a network with low cost of sensing and processing compact devices that are connected among themselves by a wireless medium to perform distributed and cooperative sensing tasks. The system will be implementing one of WSN topology which is mesh network because it can be a good model for large-scale networks of wireless sensors that are distributed over a geographic region. The proposed system is focusing in building mesh network using XBee modules which are ZigBee-compliant chips manufactured by Digi International, Inc. In this proposed system, ZigBee platform 802.15.4 protocol is adopted for the indoor communication of 2.45 GHz active RFID.

This research observes the ability of these four approaches to address the unique requirements and challenges of industrial communications and provides an overview of integrated products designed specifically for industrial applications. Table 2.1 gives an idea about a breakdown of the main requirements for the levels which provide a relevant solution in communication for industrial applications. An initial approach in the proposed system architecture is to adopt the two main focuses from this table of requirements which is the amount of information and the response time needed that suit with the applications for the output achievement monitoring system.

Table 2.1: Communication requirements and constraints (Minan, 2007)

Level	Requirement	Volume data to transmit	Response time	Distance	Network topology
Management	Data exchange, Real time monitoring, Computer security, Software packages	Files Mbits	1min	World	Bus, st
Production Floor	Synchronization of integrated microprocessor's in the same data exchange automation in client/server (supervision). Real time performance	Data Kbits	50-500 ms	2-500 m	Bus, st
Machine	Distributed architecture, Embedded functions and exchange. Transparency. Topology & connection costs	Data Kbits	5-100 ms (PLC cycle)	10 m to 1Km	Bus, st
Sensor	Simplification of distribution wiring for power supply to sensors and actuators. Optimized wiring costs.	Data Bits		1-100 m	No constr

Basically, this research involves four different big areas of technologies that are combined into high resourceful and dynamic solutions. In this proposed system, a ZigBee platform 802.15.4 protocol is adopted for the communication of 2.45 GHz active RFID. The implementation of ZigBee has the following advantages: low cost, range issues, low power consumption, real-time data collection, and fully automated monitoring system. The enhancement in RFID technologies resulting in a wireless mesh sensor network (WMSN) in industrial automation is a novelty for the industrial arena to achieve a higher gain with use of recent technological knowledge. In addition active RFID tags with electronic counter system has to be developed and embedded for device simplicity but are also capable of multiple functions. Furthermore, another additional smart integrated technology to reach a complete solution which is the development of the web-based monitoring systems with M2M functionalities. All this embedded technological convergence produces new system architecture named Managerial Control and Data Acquisition System (MCDAS).

2.2 Overview of Manufacturing

Manufacturing refers to the process in industrial production in which raw materials is transformed into finished goods and ready for sale based on the company requirements. Typically, manufacturing process is performed in the production lines.

2.2.1 The Production Line

A production line in a manufacturing industry is defined by a series of operation in sequence which has to undergo certain processes based on the specific organization needs involving machine or human. Production line in industries can be categorized into three main types which include the line being handled by robot or

automated machine, semi automated machines (human and machines) and by human. Figure 2.1(a), (b) and (c) show the types of production lines respectively. In this research, all the data refers to human types of production line.



(a)

(b)

(c)

Figure 2.1: Types of production lines (a) automated machine
(b) human and machines (c) human

Regardless of the category, each production line must be monitored to gain a higher productivity. To monitor the output achievement performance of the production line is not an easy task. It requires the use of technology to facilitate monitoring and real time feedback. Normally, industries use human intervention in the form of supervisor to monitor and record monitoring data using paper or white board.

2.2.2 Factors Affecting Productivity of Production Line

The industry highlights that the main factors affecting production lines productivity can be classified into four as shown in Figure 2.2. Each element contributes in various consequences to production lines productivity (Siva *et.al.*, 2011).

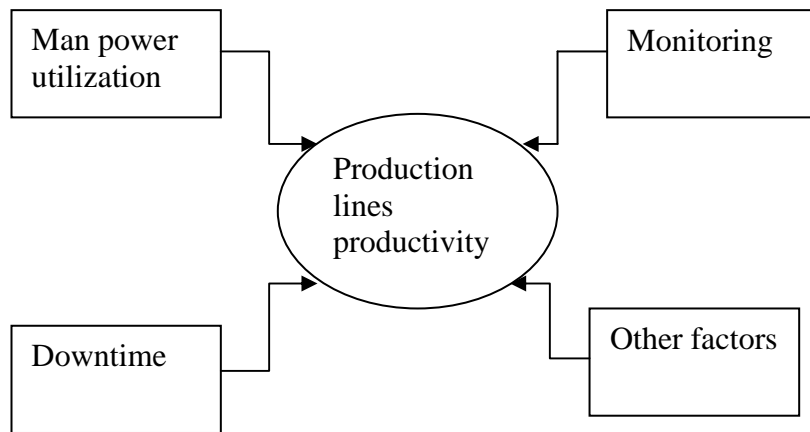


Figure 2.2: Factors affecting productivity of production lines

a) Manpower Utilization

Manpower is the most significant role in any organization in producing any output or in running the production line. Human performance is dependent on working environment, working hours and individual capability. It is a known fact that the performance of workers easily affects the productivity. When performance of the workers drops the production output is reduced and as such this will result in a lower profit. Figure 2.3 illustrates how the manpower performance would impact the companies' profit.

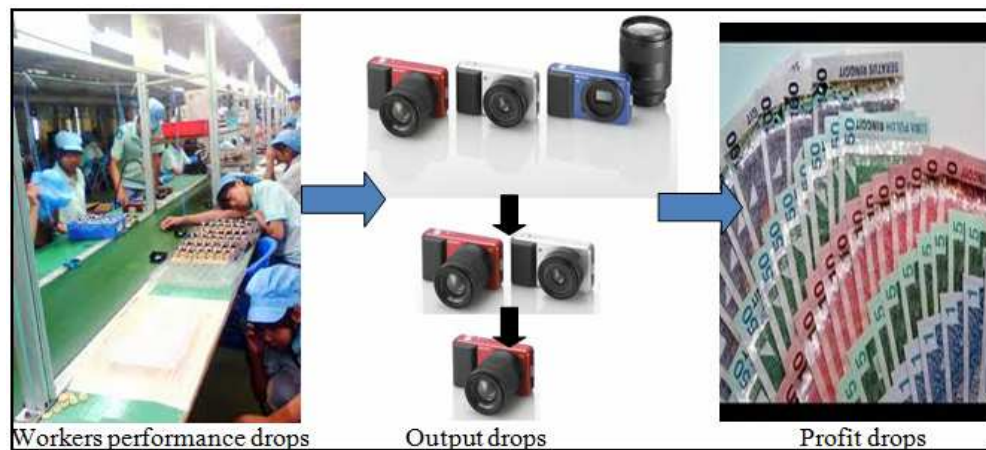


Figure 2.3: Illustration for relationship of workers, output and profit

The manpower utilization is precise from the length of actual working time. For manual process line by human, man power utilization is the ratio of actual production output to the target production output as in Equation 1 (Robert, 1999).

$$\text{Man power utilization} = \text{Actual Production Output} / \text{Target Production Output} \quad (1)$$

b) Monitoring System

Monitoring system is divided into two different forms of monitoring which include human supervision and devices monitoring. Both are very much related to communication and real time feedback. However, when a manufacturing or production company has a wider range of production lines which would in turn require an enormous number of manpower, the output would be affected by the inefficient mode of communication. In fact, the use of technology can enhance the monitoring efficiency rather than merely relying on human intervention. For instance, the uses of internet, wireless connection as compared to cabling and manual recording of data are contributing factors to a more efficient communication (Ziemerink and Bodenstein, 1998).

As such, this research proposes that a new architecture of embedded RFID on WSN platform with a web-based monitoring system be implemented in minimizing human intervention and materializing M2M wireless communication. This would then ensure a better communication, provide a more effective and efficient faster response from management and data centralization instead of the current traditional method of human monitoring.

The processes of data entry and report preparation are very tedious and time-consuming and yet are very significant for the company's reference, observation and intervention. According to (Tom Pherson, 2006) a supervisor would have to spend an average of five hours in a shift to just key in the data and another 2.5 hours to prepare a production line report. As more time is spent on accomplishing these tasks, the supervisor would then spend less time monitoring the production line activity and this directly affects the productivity output. Figure 2.4(a) shows the traditional white board output monitoring system used in the industry and Figure 2.4(b) shows the output manual report that need to be prepared by a supervisor.

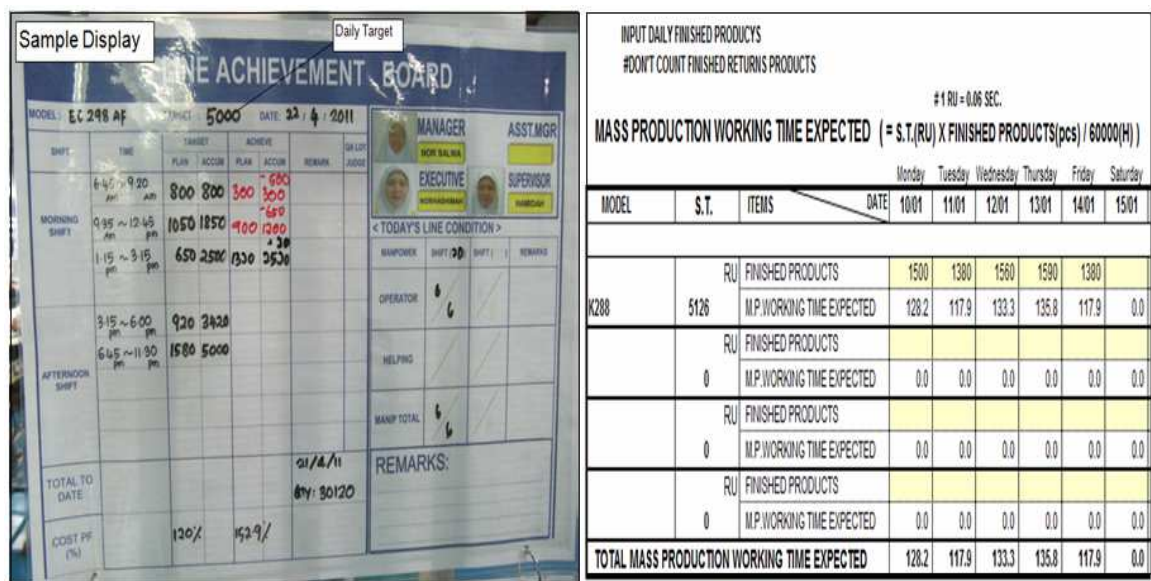


Figure 2.4: Current implementation (a) Output monitoring board (b) Manual report (CEM, 2011)

In relating to a better monitoring system, this also involves the top management and is not just limited to the production plant. Moreover it should not just be confined to certain place but should be made more accessible regardless of time and place. To exemplify, multinational companies such as SONY and CANON

whose top management are based in Japan and yet have to monitor their branch factory output performance. Hence, the web-based system is a very useful technology in providing an efficient communication.

Strategic practices such as Kaizen, Lean Manufacturing and Total Quality Management are used by many organizations to help improved processes and drive productivity (Redlion Whitepaper, 2006). The visual management is used for KPI (Key Performance Indicator) monitoring such as large LED displays to powerful LCD displays. The large displays for visual management manage to displays real-time data and message to drive productivity. This type of monitoring is a innovative solution for industrial automation. Managing productivity and profitability is a key role of plant managers and engineers in world-class manufacturing operation. By estimating financial impact, output from production line or machine within a production facility could be increased up to 20%. Hence, the financial impact will be higher if downtime could be reduced by as much as 15% through visual monitoring (Redlion Whitepaper, 2006). Thus, the real-time displays shows that even the slightly improvement by visual monitoring can result in attractive returns. As such, this condition is suitable with the proposed application that is the production output monitoring system whereby the proposed integrated counter display enables management and workers to gain real time data visibility that drives productivity.

c) Downtime

Downtime refers to the period when a production line stops running. Downtime is divided into two types which are 'Planned Downtime' and 'Unplanned Downtime' (Siva *et al.*, 2007). The planned downtime doesn't affect the target output

achievement since it has been accounted for in the management output schedule. Planned downtime is a period of which the management halts the operation of a particular production line due to a few reasons such as the project betterment, line upgrading, low demand and others. On the other hand, unplanned downtime is a period of which the production line has to be put to a stop, due to the poor production line observation exemplified by the shortage of materials, the absence of workers and others. Unplanned downtime is a condition highly minimized by the industries since it only contributes to lower yield (Tom Pherson, 2006) and lower productivity efficiency.

Meanwhile, the yield of the manufacturing process refers to how many products can be manufactured and sold. Thus, the higher output an industry is able to produce its yield, it would then result in a higher amount of products which in turn gives more profit to the company. The product output yield is directly related to the actual operation time period. Total actual operation time is the period of runtime of production line after it is being deducted from the downtime period and other accompanying period like the workers' recess hours. As such, efficiency of productivity is calculated as in Equation 2 (Robert, 1999).

$$Productivity\ efficiency = \frac{(run\ time\ of\ line) \times (total\ good\ units\ produced)}{(total\ actual\ operation\ time) \times (target)} \quad (2)$$

Downtime of production line is a loss to a company. Supervisors are responsible in ensuring that downtime doesn't take place and minimizing it if it takes place. It can be seen that monitoring and an effective communication system can help minimize the downtime and eventually eliminate it. Communication time and

feedback response are also time-wasters. A display of electronic board of output achievement, centralization of information and real time output data collection that are proposed in this research enable immediate feedback for the management, resulting in a better mechanism to control the downtime of production line.

d) Other Factors

In general, manpower capitalization involves most of the processes in the industries ranging from the management to the operators. In the industrial environment, workers from many departments have to work together to achieve the company's objectives. However, once the target isn't reached, they will start blaming one another. Hence the support department plays a very significant role in maintaining the work consistence on the industrial floor.

2.3 Review of RFID Applications

RFID technologies are used in many applications, such as in the military, education, government service, agriculture, home automation; health and automotive industry. Applications for each of these areas depend on each sector's requirements and specifications. For example, the health and welfare sector needs sensor compactness and wireless connectivity, while low cost is imperative for automotive and home automation sectors (Lionel and Yunhao, 2008). Industrial manufacturing, warehouse facilities, suppliers and government agencies use RFID technology to track, secure and manage items throughout the entire life of the product. In industries, barcodes are popular to be used in most applications. Compared to RFID technology, the barcodes or previous generation of auto ID technology has several weaknesses that include its requirement for human energy, space and the data stored

in the barcode is smaller than RFID tag. What makes this proposed automated monitoring system different is that it will track the accumulated quantity production output achievement by each model running by individual line instead of tracking individual product or location. Furthermore, this embedded system is complete with data acquisition interfacing from wireless mesh network components and real time data processing over the web-based monitoring system. Table 2.2 presents a few famous RFID applications whereby most of the application involves the tracking of product absolutely difference requirements compared to proposed architecture which uses active RFID technology capabilities enhanced to WMSN implementation.

Table 2.2: Recent RFID applications (Fagui et al.,2009)

Organization/System	Applications	RFID	WSN
United Parcel Service of America (UPS)	Supply chain applications that provide RFID services for customers.	Passive	×
Wal-Mart	Its top 100 packaged-goods suppliers must attach RFID tags to cases and pallets	Passive and Active	×
U.S Department of Defense	Requires suppliers to put RFID tags on shipping pallets and cases	Passive and Active	×
Toyota (South Africa)	Toyota's carrier tagged to improve manufacturing and vehicle tracking.	Passive	×

“×”: Does not implemented WSN

2.4 Review of WSN in Industrial Automation

Recently, the use of WSN in industrial automation has gained attention. This efficient technologies will raise especially in the following areas; industrial mobile robots, real time control and data acquisition system, periodic data collection, inventory and tracking, centralization information for management and process control and monitoring (Dermibas, 2005).

According to Low *et al.*, (2005), in industrial environments, the coverage area of WSN as well as the reliability of the data may suffer from noise, co-channel interferences, and other interferers. For example, the signal strength may be severely affected by the reflections from the walls (multi-path propagation) (Werb and Sexton, 2005), interferences from other devices using ISM bands (Low *et al.*, 2005), and by the noise generated from the equipment or heavy machinery. In these circumstances, it is important to sustain data integrity for operation-critical data. Every part of these issues set a special prominence on automation design and the fact that WSN is technically challenging systems, requiring expertise from several different disciplines. Additionally, requirements for industrial applications are often stricter than in other domains, since the failure may lead to loss of production or even loss of lives (Low *et al.*, 2005, Werb and Sexton, 2005). The system designed and implemented in this work is based on embedded architecture that design and develop the active RFID system becoming a WMSN and comprised of a plurality to form a self-healing communications network within indoor infrastructure in a manufacturing environment which also consider the above difficulties such as weak of signal strength.

The proposed work and research is closely related to the work of Young-II *et al.*, (2005). They also studied the application using RFID and integrated WSN technology. They design and implement the power facility management system with RFID tags and sensors in Korea Electric Power Corporation (KEPCO). Since, there are several other differences; a significant difference here is that they use the LAN protocol communication between the node to the access point using TCP / IP whilst the proposed application is upscaling an active RFID with wireless mesh sensor network infrastructure using ZigBee platform. Young-II *et al.*, (2005), work,

attached the RFID reader to the hand-held device and after inspections, the inspector needs to return to the office and connect the hand-held to the PC to run the output. Here, the significant difference is that the proposed system architecture introduces embedding technology of WSN, active RFID, counter system and web-based monitoring system to be a smart architecture suitable for real time output monitoring achievement in industrial applications. From the industrial perspective, based on an industrial analysis, wireless communications are divided into six classes of workgroup on inter-device wireless communication applications (ISA SP100.11, 2006) as shown in Figure 2.5.

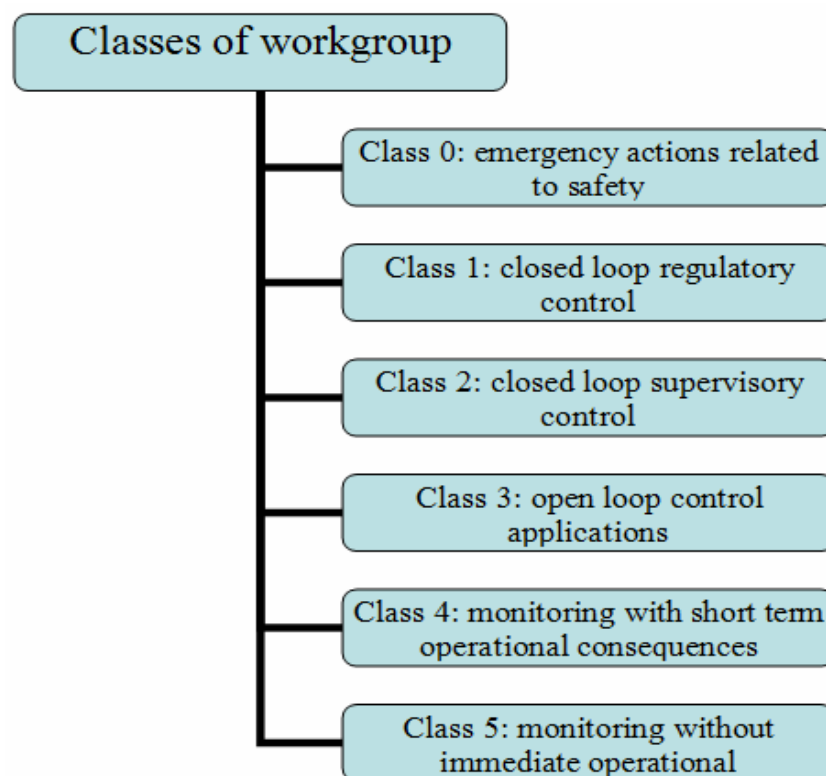


Figure 2.5: Classes of WSN in industrial applications

Class 0, categorized in emergency actions related to safety, which are critical to both personnel and plant. Class 1, closed loop regulatory control, includes motor

and axis control. The timeliness of information in this class is repeatedly critical. Class 2, divide to close loop supervisory control and applications with long time constant and time scale measured in seconds and minutes. Class 3, defines which covers open loop control applications, in which an operator, rather than a controller. Class 4 is cover monitoring with short term operational consequences. This class needs involvement of a human for maintenance which includes alarm and other information. Class 5 is categorized in relation to monitoring without immediate operational consequences and less timeliness requirements. This class may need high reliability requirements (ISA SP100.11, 2006). Based on these six classes of WSN in industrial applications, the proposed system architecture may fall in the Class 2 which needs a long time constant and time scale measures due to deploying of WSN and other technologies as a monitoring system that provides continuous communications between system components in real time.

2.5 RFID Technology

RFID technology is available in two main types: passive RFID, where the tag is small, low cost, low range, and relies on the reader to provide the energy to power the tag; for an active RFID, the tag is larger and offers greater detection range and rich data capacities because it contains its own power source (i.e., battery, or any energy harvesting system). RFID consists of a transponder, a reader, and a software application. The RFID tag has a microchip with data storage, logical functions, and antenna, which receives radio frequency waves produced by the reader or transceiver to permit wireless transmission of data. The RFID reader consists of a radio frequency module, a control unit, and a coupling element to question the tags via radio frequency communication. The reader and the tag are the primary components

of an RFID system. The host computer consists of API (Application Programming Interface) and application software utilizes the data obtained from the tags to perform useful tasks. Figure 2.6 shows typical RFID system components.

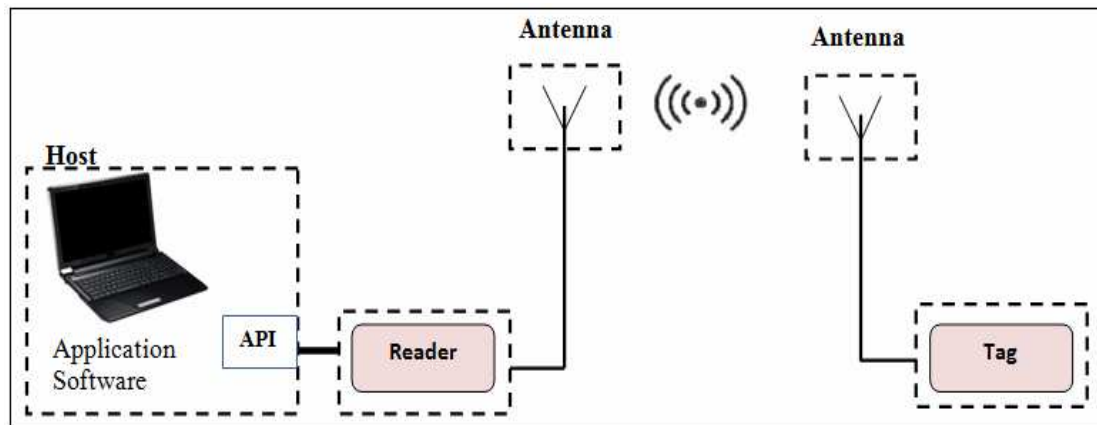


Figure 2.6: RFID system

Readers are usually connected through middleware to a back-end database. The RFID middleware refers to special software that is parked between the reader network and the application software to help on processing significant amount of data generated by the reader network. Middleware is responsible for cleaning the data, eliminating false reads apart from performing aggregation and filtering of data. By monitoring multiple readers, middleware can also detect the movement of RFID tags as they pass from the read range of one reader to another.

The application of RFID now is not only meant for person to machine or machine to person, but demands more for machine to machine communication. Thus, the trait is appropriate to be used in proposed system since it is applied for industrial automation environment which has prompted the communication market to adopt machine to machine communication via RFID. Real time monitoring system