

**CULTIVATION OF *CHLORELLA VULGARIS* USING ORGANIC
FERTILIZER AS NUTRIENT SOURCE FOR BIODIESEL,
MALTODEXTRIN PRODUCTION AND CO₂-BIOMITIGATION**

LAM MAN KEE

UNIVERSITI SAINS MALAYSIA

FEBRUARY 2014

**CULTIVATION OF *CHLORELLA VULGARIS* USING ORGANIC
FERTILIZER AS NUTRIENT SOURCE FOR BIODIESEL,
MALTODEXTRIN PRODUCTION AND CO₂-BIOMITIGATION**

by

LAM MAN KEE

**Thesis submitted in fulfillment of the requirements
for the degree of
Doctor of Philosophy**

February 2014

This thesis is dedicated to my beloved parents and brothers for their persistent support, keen advice and numerous help.

ACKNOWLEDGEMENT

My first thought in this section necessarily goes to my beloved parents, Lam Yee Choy and Tan Mooy Chun and my brothers, Lam Man Wah and Lam Mun Zheng. I will never find the words to thank them for their moral support and guidance throughout my entire PhD study in the School of Chemical Engineering, Universiti Sains Malaysia (USM). I am greatly indebted to them for inculcating in me the dedication and discipline to do whatever I undertake well.

Next, I acknowledge my profound sense of gratitude to my main research supervisor, Associate Professor Dr. Lee Keat Teong. I deeply appreciate for his inspiring, helpful suggestions, and persistent encouragements, not only as a duty of supervisor, but as a friend. I wish to thank Dr. Lee for creating an ideal research environment, allowing almost total freedom in research, while judiciously providing critical advises to me all the time. His patient in reading and correcting my proposal, draft after draft of every journal paper and the thesis I have wrote up continues to amaze me. No one should be subjected to the torture of reading my English writing, and thanks to Dr. Lee, no one will. Thank you to him again for having faith and confidence in me. I shall forever remain grateful for the lessons learned at the hand of such a gifted and revered supervisor.

Special thanks to all the staffs of School of Chemical Engineering, USM, especially our respected Dean, Prof. Dr. Azlina bt. Harun @ Kamaruddin and Deputy Dean, Assoc. Prof. Dr. Ahmad Zuhairi Abdullah and Assoc. Prof. Dr. Mohamad Zailani bin Abu Bakar, all administrative staffs and technicians for their supports and guidance I have received. In addition, I am deeply grateful to Kak Aniza, Kak Normie, Kak Ain, Kak Azni, En. Shamsul Hidayat, En. Arif, En. Roqib, En Rasydan,

En. Faiza, Kak Latifah for their sincere helping hand throughout my entire research work in USM. This dissertation will not be completed without them.

I wish to show my grateful thanks to USM Vice Chancellor's Award for providing me financial support throughout my study. The research funds provided by USM through Research University Grant (1001/PJKIMIA/814146) and Postgraduate Research Grant Scheme (1001/PJKIMIA/8044031) are also duly acknowledged.

Last but not least, I wish to express my appreciation to all my beloved friends for their unselfishly came forward to render unforgettable help during completion of my research work. I have been fortunate to have you guys who cherish me whenever I am in sorrow.

LAM MAN KEE

OCTOBER 2013

TABLE OF CONTENTS

	Page
DEDICATION	ii
ACKNOWLEDGEMENT	iii
LIST OF TABLES	xi
LIST OF FIGURES	xiii
LIST OF PLATES	xx
LIST OF ABBREVIATIONS	xxi
LIST OF SYMBOLS	xxii
ABSTRAK	xxiv
ABSTRACT	xxvi
CHAPTER ONE - INTRODUCTION	1
1.1 Current status of fossil fuel and renewable energy	1
1.2 Introduction to biodiesel	3
1.3 Current status of biodiesel production	6
1.4 First and second generation biodiesel	8
1.5 An outlook of microalgae biomass as the third generation biodiesel	10
1.5.1 Introduction to microalgae	10
1.5.2 Advantages of microalgae biodiesel	11
1.5.3 CO ₂ mitigation and co-product production from microalgae biomass	13
1.6 Problem Statement	15
1.7 Objectives	16
1.8 Scope of study	17
1.8.1 Microalgae cultivation	17
1.8.2 Lipid extraction and transesterification	18
1.8.3 Co-product production	18
1.8.4 Photobioreactor design and scale up study	19
1.8.5 Life cycle energy balance analysis and economic assessment	19
1.8.6 Growth kinetic of microalgae	19
1.9 Organization of thesis	20

CHAPTER TWO - LITERATURE REVIEW	22
2.1 Life cycle assessment (LCA) of microalgae biofuels	22
2.2 Nutrient sources and cultivation methods	27
2.3 Cultivation system: Raceway versus closed photobioreactor	43
2.4 Harvesting of microalgae biomass	49
2.5 Drying of microalgae biomass	57
2.6 Microalgae lipid extraction	57
2.6.1 Solvent extraction	58
2.6.2 Supercritical fluid extraction	64
2.7 Biodiesel production from microalgae	66
2.7.1 Homogeneous catalyst	66
2.7.2 Heterogeneous catalyst	67
2.7.3 In-situ transesterification	69
2.8 Bioethanol production	72
2.9 Prospective of CO ₂ bio-mitigation by photosynthetic microalgae	75
2.9.1 Mass transfer of CO ₂ in water	79
2.9.2 Effect of CO ₂ towards growth rate	80
2.9.3 Effect of CO ₂ towards lipid content	81
2.9.4 Soluble carbonate as alternative carbon source	82
2.10 Life cycle energy analysis and techno-economic of microalgae biodiesel	86
2.11 Kinetic growth of microalgae	91
2.11.1 Logistic model	91
2.11.2 Gompertz model	92
2.11.3 Modified Gompertz model	92
2.11.4 Baranyi model	93
2.11.5 Richards model	94
2.11 Summary	95

CHAPTER THREE - MATERIALS AND METHODOLOGY	96
3.1 Chemicals	96
3.2 Experimental flow chart	96
3.3 Isolation and seed cultivation of <i>Chlorella vulgaris</i>	101
3.4 Cultivation of <i>Chlorella vulgaris</i> with organic fertilizer as nutrients source	101
3.4.1 Organic fertilizer preparation	101
3.4.2 Free cells cultivation	102
3.4.3 Immobilized cells cultivation	103
3.4.3.1 Preparation of immobilized microalgae beads	103
3.4.3.2 Preparation of immobilized microalgae beads with co-immobilized nutrients	104
3.4.3.3 Immobilized microalgae beads culture condition	105
3.4.4 Measurement of microalgae growth	106
3.4.4.1 Free cells cultivation	106
3.4.4.2 Immobilized microalgae beads cultivation	106
3.4.5 Measurement of nitrate content in cultivation medium	107
3.5 Microalgae harvesting and biomass recovery	107
3.5.1 Free cell cultivation	107
3.5.2 Immobilized microalgae beads cultivation	108
3.6 Effect of carbon source	108
3.6.1 CO ₂ gas as carbon source	108
3.6.2 Sodium bicarbonate as carbon source	109
3.6.3 Sequential photobioreactors development	109
3.6.4 Determination of CO ₂ fixation rate	110
3.6.5 Determination of CO ₂ in aqueous (aq)	110
3.7 Lipid extraction from dried microalgae biomass	111
3.8 Optimization of microalgae lipid conversion to biodiesel	112
3.8.1 Transesterification reaction	112
3.8.2 Lipid profile analysis	112
3.8.3 FAME content analysis	113
3.9 Hydrolysis of carbohydrate from lipid-extracted microalgae residue	113
3.9.1 Recovery of microalgae biomass residue	113

3.9.2	Total carbohydrate determination	114
3.9.3	Diluted acid and alkali hydrolysis method	114
3.9.4	Enzymatic hydrolysis method	115
3.9.5	Maltodextrin and reducing sugar analysis	115
3.9.6	Functional group analysis	116
3.10	Scale-up cultivation of <i>Chlorella vulgaris</i>	116
3.10.1	Estimation of mass transfer coefficient of CO ₂ in water	118
3.10.2	Cultivation under indoor environment	118
3.10.3	Cultivation under outdoor environment	119
3.11	Life cycle energy and cost analysis	119
3.11.1	Energy balance analysis	119
3.11.2	Utilities cost analysis	120
3.12	Kinetic growth of <i>Chlorella vulgaris</i> and statistical analysis	121
CHAPTER FOUR - RESULTS AND DISCUSSION		124
4.1	Characteristics of organic fertilizer	124
4.2	<i>Chlorella vulgaris</i> cultivation with organic fertilizer as nutrients source	126
4.2.1	Free cells cultivation	126
4.2.1.1	Effect of nutrients concentration	126
4.2.1.2	Effect of photoperiod	127
4.2.1.3	Effect of initial pH	129
4.2.1.4	Comparison of the growth of <i>Chlorella vulgaris</i> with organic and inorganic fertilizer under indoor and outdoor conditions	131
4.2.1.5	Effect of using recycling water	133
4.2.1.6	Nutrients up-take evaluation	135
4.2.2	Immobilized cells cultivation	137
4.2.2.1	Effect of alginate to microalgae volume ratio	137
4.2.2.2	Effect of Ca ²⁺ concentration	138
4.2.2.3	Effect of nutrients concentration	140
4.2.2.4	Effect of initial pH	141

4.2.2.5	Effect of photoperiod	142
4.2.2.6	Effect of co-immobilization with nutrients	144
4.2.3	Lipid extraction	145
4.2.4	Energy balance of free cells and immobilized cells cultivation	149
4.2.5	Effect of carbon source	151
4.2.5.1	Effect of CO ₂ concentration	151
4.2.5.2	Effect of bicarbonate concentration	154
4.2.5.3	Sequential photobioreactors	158
4.2.5.4	Effect of carbon source towards lipid content and lipid profile	161
4.3	Optimization of microalgae lipid conversion to biodiesel	164
4.3.1	Properties of microalgae lipid	164
4.3.2	Effect of methanol to lipid molar ratio	167
4.3.3	Effect of catalyst concentration	169
4.3.4	Effect of reaction temperature	170
4.3.5	Effect of co-solvent	171
4.3.5.1	Screening of co-solvent	171
4.3.5.2	Effect of methanol to THF molar ratio	173
4.3.5.3	Effect of methanol to oil molar ratio	174
4.3.5.4	Effect of catalyst concentration	176
4.3.5.5	Effect of reaction temperature	177
4.4	Recovery of carbohydrate from lipid-extracted microalgae biomass	179
4.4.1	Carbohydrate content	179
4.4.2	Chemical hydrolysis	180
4.4.2.1	Screening of acid and alkaline concentration	180
4.4.2.2	Effect of hydrolysis temperature	181
4.4.2.3	Effect of hydrolysis time	183
4.4.3	Enzymatic hydrolysis of microalgae biomass and maltodextrin	185
4.5	Scale-up cultivation of <i>Chlorella vulgaris</i> in sequential baffled photobioreactor	189
4.5.1	Mass transfer coefficient of CO ₂ in sequential baffled	189

	photobioreactor	
4.5.2	Cultivation under indoor environment	191
4.5.3	Cultivation under outdoor environment	198
4.6	Energy and economic feasibility study	204
4.6.1	Life cycle energy balance analysis	204
4.6.2	Economic assessment of microalgae biomass and biodiesel	208
4.6.3	Sensitivity analysis of microalgae biomass and biodiesel production	213
4.7	Growth kinetic study	216
CHAPTER FIVE - CONCLUSIONS AND RECOMMENDATIONS		233
5.1	Conclusions	233
5.2	Recommendations	237
REFERENCES		238
APPENDICES		262
	Appendix A	262
	Appendix B	263
	Appendix C	264
	Appendix D	265
	Appendix E	266
	Appendix F	267
LIST OF PUBLICATIONS		271

LIST OF TABLES

		Page
Table 1.1	Common fatty acid composition for different oil sources	4
Table 1.2	Comparison of oil yield for various oil bearing plants and microalgae	13
Table 2.1	Energy efficiency ratio (EER) for various energy crops and microalgae	26
Table 2.2	N-fertilizer consumption for various energy crops and microalgae	29
Table 2.3	Different cultivation methods and nutrient sources for growing microalgae	33
Table 2.4	Photobioreactor designs for microalgae cultivation	46
Table 2.5	Energy consumption in different microalgae culture system	48
Table 2.6	Microalgae biomass harvesting methods	50
Table 2.7	Lipid extraction from various microalgae strains through chemical solvent	59
Table 2.8	Energy efficiency in extracting lipid from <i>Botryococcus sp.</i> through various cells disruptive methods	63
Table 2.9	Carbohydrates content of different microalgae strains (dry matter basis, %)	74
Table 2.10	Bioethanol production from different microalgae strains through various pre-treatment methods	74
Table 2.11	Comparison of optimum CO ₂ fixation rate and biomass yield of different microalgae strains	77
Table 3.1	List of chemicals	97
Table 3.2	Power consumption for equipment used in the present study to produce microalgae biodiesel and maltodextrin	120
Table 3.3	Utilities cost to produce microalgae biodiesel	120
Table 4.1	Characteristics of organic fertilizer medium	125

Table 4.2	Nutrients removal by <i>Chlorella vulgaris</i> cultivated with organic fertilizer as nutrients source. Cultivation conditions: Initial nutrients volume = 100 mL (nitrate content of 26.67 mg/L), pH = 5, 24 hours illumination	136
Table 4.3	Comparison of lipid yield based on cultivation method and solvent type	147
Table 4.4	Biomass productivity, specific growth rate, CO ₂ consumption rate and CO ₂ removal efficiency of <i>Chlorella vulgaris</i> at different concentration of carbon source	153
Table 4.5	FAME profile and lipid content of <i>Chlorella vulgaris</i> cultivated under different concentration of carbon source	162
Table 4.6	Lipid properties extracted from <i>Chlorella vulgaris</i>	165
Table 4.7	Carbohydrate content of <i>Chlorella vulgaris</i> biomass	179
Table 4.8	Nitrate content of batch and semi-batch cultivation medium in 100 L sequential baffled photobioreactor	195
Table 4.9	Growth performance and CO ₂ removal by <i>Chlorella vulgaris</i> in 100 L sequential baffled photobioreactor	198
Table 4.10	R ² values of different growth model for <i>Chlorella vulgaris</i> cultivation in lab-scale and pilot-scale	218
Table 4.11	RMSD values of different growth model for <i>Chlorella vulgaris</i> cultivation in lab-scale and pilot-scale	219
Table 4.12	Variance values of different growth model for <i>Chlorella vulgaris</i> cultivation in lab-scale and pilot-scale	220
Table 4.13	Growth parameters predicted from Richard's model	232

LIST OF FIGURES

	PAGE
Figure 1.1	3
Figure 1.2	7
Figure 1.3	9
Figure 2.1	24
Figure 2.2	44
Figure 2.3	44
Figure 2.4	45
Figure 2.5	45
Figure 2.6	55
Figure 2.7	89
Figure 3.1	100
Figure 3.2	109
Figure 3.3	117
Figure 4.1	127
Figure 4.2	129

Figure 4.3	Effect of initial pH towards the growth of <i>Chlorella vulgaris</i> . Other culture conditions: Initial nutrients volume = 100 mL (nitrate content of 26.67 mg/L), illuminated for 24 hours continuously. The error bars representing the maximum and minimum value obtained in the present experiment	131
Figure 4.4	Comparison of indoor and outdoor culture towards the growth of <i>Chlorella vulgaris</i> . Culture conditions: (a) organic nutrients; initial nutrients volume = 100 mL (nitrate content of 26.67 mg/L) and pH = 5 and (b) inorganic nutrients; BBM medium and pH=5. Photoperiods: (a) indoor: 24 hours illumination and (b) outdoor: 12 hours light and 12 hours dark. The error bars representing the maximum and minimum value obtained in the present experiment	133
Figure 4.5	Effect of using recycled water towards the growth of <i>Chlorella vulgaris</i> . Culture conditions: Initial nutrients volume = 100 mL (nitrate content of 26.67 mg/L) and pH = 5. Photoperiods: (a) indoor: 24 hours illumination and (b) outdoor: 12 hours light and 12 hours dark. The error bars representing the maximum and minimum value obtained in the present experiment	135
Figure 4.6	Effect of alginate concentration. Culture condition: microalgae beads were stabilized with 2 w/v % of Ca ²⁺ , 50 mL of organic nutrients (equivalent to 13.09 mg/L nitrate), pH of 6 and photoperiod of 24 hours. The error bars representing the maximum and minimum value obtained in the present experiment	138
Figure 4.7	Effect of Ca ²⁺ concentration. Culture condition: alginate to microalgae volume ratio of 0.3, 50 mL of organic nutrients (equivalent to 13.09 mg/L nitrate), pH of 6 and photoperiod of 24 hours. The error bars representing the maximum and minimum value obtained in the present experiment	139
Figure 4.8	Effect of nutrients concentrations. Culture condition: alginate to microalgae volume ratio of 0.3, microalgae beads were stabilized with 2 w/v % of Ca ²⁺ , pH of 6 and photoperiod of 24 hours. Nitrate content (mg/L): 10 mL = 2.69, 20 mL = 5.38, 30 mL = 7.98, 50 mL = 13.09, 80 mL = 20.94, 100 mL = 26.67. The error bars representing the maximum and minimum value obtained in the present experiment.	141

Figure 4.9	Effect of initial pH. Culture condition: alginate to microalgae volume ratio of 0.3, microalgae beads were stabilized with 2 w/v% of Ca ²⁺ , 50 mL of organic nutrients (equivalent to 13.09 mg/L nitrate) and photoperiod of 24 hours. The error bars representing the maximum and minimum value obtained in the present experiment	142
Figure 4.10	Effect of photoperiod. Culture condition: alginate to microalgae volume ratio of 0.3, microalgae beads were stabilized with 2 w/v% of Ca ²⁺ , 50 mL of organic nutrients and pH of 5. The error bars representing the maximum and minimum value obtained in the present experiment	143
Figure 4.11	Effect of co-immobilized nutrients. Culture condition: alginate to microalgae/nutrients volume ratio of 0.3, microalgae beads were stabilized with 2 w/v% of Ca ²⁺ , pH of 5 and photoperiod of 24 hours. The error bars representing the maximum and minimum value obtained in the present experiment	145
Figure 4.12	Fatty acids methyl ester profile of <i>Chlorella vulgaris</i> cultivated under free cells cultivation method	148
Figure 4.13	Fatty acids methyl ester profile of <i>Chlorella vulgaris</i> cultivated under immobilized cells cultivation method	148
Figure 4.14	Energy efficiency comparison of free cells and immobilized cells cultivation	150
Figure 4.15	Effect of CO ₂ concentration towards biomass yield. Cultivation condition: 100 mL of organic nutrients, pH 5 and 24 hours illumination. The error bars representing the maximum and minimum value obtained in the present experiment and total flow rate of 0.4 L/minute	152
Figure 4.16	Effect of sodium bicarbonate concentration towards biomass yield at pH 4. Cultivation condition: 100 mL of organic nutrients and 24 hours illumination. The error bars representing the maximum and minimum value obtained in the present experiment	156
Figure 4.17	Effect of sodium bicarbonate concentration towards biomass yield at pH 8.5. Cultivation condition: 100 mL of organic nutrients and 24 hours illumination. The error bars representing the maximum and minimum value obtained in the present experiment	157
Figure 4.18	Effect of sequential photobioreactors towards CO ₂ removal efficiency (5 % CO ₂ supplement)	159

Figure 4.19	Microalgae FAME profile: (a) hexane (solvent), (b) methyl palmitate, (c) internal standard, (d) methyl stearate, (e) methyl oleate, (f) methyl linoleate and (g) methyl linolenate	166
Figure 4.20	Effect of methanol to lipid molar ratio on FAME content. Reaction conditions: catalyst concentration of 35 wt.% and reaction temperature of 60 °C	168
Figure 4.21	Effect of catalyst concentration on FAME content. Reaction conditions: methanol to lipid molar ratio of 180 and reaction temperature of 60 °C	170
Figure 4.22	Effect of reaction temperature on FAME content. Reaction conditions: methanol to lipid molar ratio of 180 and catalyst concentration of 35 wt.%	171
Figure 4.23	Performance of various co-solvent in transesterification at fixed reaction conditions: methanol to lipid molar ratio of 60, methanol to co-solvent molar ratio of 0.25, catalyst concentration of 21 wt.%, reaction temperature of 60 °C and reaction time of 1 hour	173
Figure 4.24	Effect of methanol to THF molar ratio on FAME content. Reaction conditions: methanol to lipid molar ratio of 60, catalyst concentration of 21 wt.%, reaction temperature of 60 °C and reaction time of 1 hour	174
Figure 4.25	Effect of methanol to lipid molar ratio on FAME content in the presence of THF. Reaction conditions: methanol to THF molar ratio of 0.25, catalyst concentration of 21 wt.%, reaction temperature of 60 °C and reaction time of 3 hours	175
Figure 4.26	Effect of catalyst concentration on FAME content in the presence of THF. Reaction conditions: methanol to THF to lipid molar ratio of 60:15:1, reaction temperature of 60 °C and reaction time of 3 hours	177
Figure 4.27	Effect of reaction temperature on FAME content in the presence of THF. Reaction conditions: methanol to THF to lipid molar ratio of 60:15:1, catalyst concentration of 21 wt.% and reaction time of 3 hours	178
Figure 4.28	Effect of acid and alkaline concentration on maltodextrin yield. Operating conditions: hydrolysis temperature at 70°C for 1 hour	181

Figure 4.29	Effect of hydrolysis temperature and H ₂ SO ₄ concentration on maltodextrin yield. Hydrolysis time was fixed to 1 hour	183
Figure 4.30	Effect of hydrolysis time on maltodextrin yield. Operating conditions: 3 vol. % H ₂ SO ₄ and hydrolysis temperature at 90°C	185
Figure 4.31	Effect of enzymatic hydrolysis on the production of maltodextrin and glucose. (1) lipid-extracted microalgae biomass residues as feedstock and α-amylase as enzyme; (2) lipid-extracted microalgae biomass residues as feedstock and α-amylase coupled with amyloglucosidase as enzymes; (3) maltodextrin obtained from H ₂ SO ₄ hydrolysis of lipid-extracted microalgae biomass residues and amyloglucosidase as enzyme; (4) fresh microalgae biomass (without lipid extraction) as feedstock and α-amylase coupled with amyloglucosidase as enzymes; (5) commercial-grade starch as feedstock and α-amylase coupled with amyloglucosidase as enzymes; (6) commercial-grade maltodextrin as feedstock and amyloglucosidase as enzyme	186
Figure 4.32	FT-IR profile of (a) microalgae maltodextrin and (b) commercial-grade maltodextrin	188
Figure 4.33	Variation of total carbon concentration in water with time in sequential baffled photobioreactor. The CO ₂ aeration rate was 0.003 vvm	190
Figure 4.34	Variation of volumetric mass transfer coefficient of CO ₂ with aeration rate	191
Figure 4.35	Growth performance <i>Chlorella vulgaris</i> in 100 L scale-up cultivation under different CO ₂ concentration. Cultivation condition: 2 L of organic nutrients, pH 5 and 24 hours illumination and at 25-28°C	192
Figure 4.36	Semi-batch cultivation of <i>Chlorella vulgaris</i> under different aeration of CO ₂ concentration in 100 L sequential baffled photobioreactor	196
Figure 4.37	Overview of batch and semi-batch cultivation of <i>Chlorella vulgaris</i> under different aeration of CO ₂ concentration in 100 L sequential baffled photobioreactor	196
Figure 4.38	Growth performance of <i>Chlorella vulgaris</i> under indoor and outdoor environment aerated with compressed air	200

Figure 4.39	Effect of light intensity on the growth of <i>Chlorella vulgaris</i> under outdoor environment aerated with compressed air. Cultivation condition: 2 L of organic nutrients and pH 5	202
Figure 4.40	Effect of temperature on the growth of <i>Chlorella vulgaris</i> under outdoor environment aerated with compressed air. Cultivation condition: 2 L of organic nutrients and pH 5	202
Figure 4.41	Life cycle energy balance of producing microalgae biodiesel from <i>Chlorella vulgaris</i> based on different case studies	205
Figure 4.42	Cost breakdown of producing <i>Chlorella vulgaris</i> biodiesel under different case studies	209
Figure 4.43	Microalgae biomass and biodiesel production cost under different case studies	212
Figure 4.44	Sensitivity analysis of microalgae biodiesel production cost based on combined batch and semi-batch cultivation. The circle on each line indicates the biomass yield attained (base case) in the present study	214
Figure 4.45	Sensitivity analysis of microalgae biomass production cost based on combined batch and semi-batch cultivation. The circle on each line indicates the biomass yield attained (base case) in the present study	215
Figure 4.46	Experiment value versus predicted value by Gompertz model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	221
Figure 4.47	Experiment value versus predicted value by Logistic model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	222
Figure 4.48	Experiment value versus predicted value by Modified Gompertz model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	223
Figure 4.49	Experiment value versus predicted value by Baranyi model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	224
Figure 4.50	Experiment value versus predicted value by Richard model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	225

Figure 4.51	Residue plot by Gompertz model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	226
Figure 4.52	Residue plot by Logistic model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	227
Figure 4.53	Residue plot by Modified Gompertz model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	228
Figure 4.54	Residue plot by Baranyi model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	229
Figure 4.55	Residue plot by Richard model (for case study of supplying 0.5 % CO ₂ in 5 L photobioreactor)	220

LIST OF PLATES

		PAGE
Plate 3.1	Experiment set-up for the mass cultivation of <i>Chlorella vulgaris</i> with organic fertilizer as nutrient source	103
Plate 3.2	Immobilized <i>Chlorella vulgaris</i> beads	104
Plate 3.3	Immobilized <i>Chlorella vulgaris</i> beads cultivation	105
Plate 4.1	Cultivation of <i>Chlorella vulgaris</i> in sequential baffled photobioreactor under indoor environment. (A) Cultivation on day-1 aerated with 0.03 % CO ₂ and (B) Cultivation on day-15 aerated with 0.03 % CO ₂	193
Plate 4.2	Cultivation of <i>Chlorella vulgaris</i> in sequential baffled photobioreactor under outdoor environment aerated with 0.03 % CO ₂ (day-26)	200

LIST OF ABBREVIATIONS

AFEX	Ammonia fiber explosion
Aq	Aqueous
BBM	Bold's Basal Medium
BOD	Biochemical oxygen demand
CCM	Carbon concentrating mechanism
CO	Carbon monoxide
CO ₂	Carbon dioxide
COD	Chemical oxygen demand
EER	Energy efficiency ratio
ELSD	Evaporative light scattering detector
EPS	Extracellular polymer substances
EU	European Union
FAEE	Fatty acid ethyl esters
FAME	Fatty acid methyl esters
FID	Flame ionization detector
FFA	Free fatty acid
FFB	Fresh fruit bunch
FT-IR	Fourier Transform Infrared Spectrometer
GC	Gas chromatography
GC-MS	Gas chromatography–mass spectrometry
GHG	Greenhouse gas
HP-LC	High performance liquid chromatography
ILAC	International Laboratory Accreditation Cooperation
LCA	Life cycle assessment
LED	Light emitting diode
LHV	Low heating value
MEA	Monoethanolamine
NREL	National Renewable Energy Laboratory
PGPB	Plant-growth promoting bacteria
RMSD	Root mean square deviation
US	United States

LIST OF SYMBOLS

A	Asymptotic of $\ln X_t/X_0$ as t decreases indefinitely
A_{IS}	Peak area of internal standard (methyl heptadecanoate)
A_0	Free CO_2 (mg/L)
B	B is the relative growth rate at time M (day^{-1})
B_0	Bicarbonate alkalinity (mg/L)
C	Asymptotic of $\ln X_t/X_0$ as t increases indefinitely
C_{carbon}	Carbon content of the microalgae cell (% w/w)
C_e	CO_2 concentration in the liquid equalized with that in gas phase (mol/L)
C_{IS}	Concentration of the internal standard solution (mg/mL)
C_L	CO_2 concentration in the liquid (mol/L)
C_0	Carbonate alkalinity (mg/L)
C_{pi}	Specific heat capacity of reactant and solvent ($\text{kJ/kg}\cdot^\circ\text{C}$)
C_R	Capacity ratio
C_T	Total carbon concentration (mol/L)
E_c	Energy content (kJ/g) of biodiesel or maltodextrin
E_{consumed}	Energy consumption per 1 MJ electricity produced (MJ)
E_e	Electricity conversion factor
E_{equip}	Energy input for equipment (MJ)
E_{output}	Energy output (MJ)
H	Henry coefficient ($\text{kPa/mol}\cdot\text{L}$)
k	Shape parameter
K_{La, CO_2}^A	Liquid volumetric mass transfer coefficient for absorption of CO_2 (minute)
M	Time at which the maximum growth rate is reached (day)
M_c	Molecular weight of carbon
M_{CO_2}	Molecular weight of CO_2
m	Mass of the biodiesel sample (mg)
$m_{\text{biodiesel}}$	Weight of biodiesel produced (kg)
m_i	Weight of reactant and solvent involved in reaction (kg)
m_j	Amount of utility consumed
N_1	Biomass (g/L) at time t_1

N_2	Biomass (g/L) at time t_2
η	Average electricity generation efficiency (%)
OD_{540}	Optical density at wavelength 540 nm
P	Biomass productivity (g/L/day)
$P_{\text{equipment}}$	Power of equipment (Watt)
P_o	Partial pressure of CO_2 (kPa)
Q	Energy input for transesterification and hydrolysis reaction (kJ)
R	CO_2 fixation rate (g/L/day)
R^2	Coefficient of determination
S^2	Variance
T	Total alkalinity (mg/L)
t	Residence time (day)
V_{IS}	Volume of the internal standard solution used (L)
μ	Specific growth rate
μ_{max}	Maximum specific growth rate (day^{-1})
v	Shape parameter
ΔT	Change in temperature ($^{\circ}C$)
Δt	Working time of equipment (seconds)
λ	Lag phase (day)

**PENKULTURAN *CHLORELLA VULGARIS* MENGGUNAKAN BAJA
ORGANIK SEBAGAI SUMBER NUTRIEN UNTUK PENGHASILAN
BIODIESEL, MALTODEKSTRIN DAN BIO-PENGURANGAN CO₂**

ABSTRAK

Dalam kajian ini, baja organik yang berasal dari kompos telah digunakan sebagai sumber nutrien alternatif kepada baja kimia untuk pengkulturan *Chlorella vulgaris*. Kajian ini menunjukkan bahawa *Chlorella vulgaris* bertumbuh baik dengan bekalan 100 mL medium baja organik (kandungan nitrat 26.67 mg/L), 24 jam pendedahan kepada cahaya yang berterusan dan pH 5. Biojisim mikroalga yang berjumlah 0.50 g/L boleh dicapai selepas 12 hari pengkulturan. Kadar pertumbuhan *Chlorella vulgaris* didapati meningkat dengan peningkatan kepekatan CO₂, tetapi, kecekapan penyingkiran CO₂ didapati berkurangan. Kecekapan penyingkiran CO₂ yang tertinggi, 92.2%, dapat dicapai dengan menggunakan udara persekitaran yang mengandungi 0.03% CO₂. Di samping itu, dengan menggunakan pelarut Bligh dan Dyer (nisbah metanol kepada kloroform pada 2:1), 18% lipid boleh diekstrakkan daripada biojisim kering *Chlorella vulgaris*. Sebahagian besar lipid tersebut terdiri daripada asid lemak tak tepu, seperti C18:1, C18:2 dan C18:3. Melalui kajian parameter tindak balas transesterifikasi, 95% asid lemak metil ester (FAME) atau biodiesel telah diperolehi dengan keadaan tindak balas berikut: nisbah molar metanol kepada THF kepada lipid pada 60:15:1, 21 % berat H₂SO₄, suhu 60 °C dan 3 jam masa tindak balas. Tambahan pula, karbohidrat yang masih terkandung dalam sisa biojisim mikroalga selepas pengekstrakan lipid telah berjaya dipulihkan untuk penghasilan maltodekstrin (produk sampingan). 90% maltodekstrin boleh dihasilkan

dengan menggunakan 3 % isipadu H₂SO₄ (atau 0.56 M), pada suhu 90°C dan masa hidrolisis selama 1 jam. Selain itu, skala pilot pengkulturan *Chlorella vulgaris* dengan 100 L photobioreaktor penyekat berturutan juga telah dijalankan dalam kajian ini. Kuantiti tertinggi biojisim mikroalga yang dihasilkan apabila dikultur dalam persekitaran dalaman dan luaran adalah 0.52 g/L dan 0.28 g/L, masing-masing. Walaupun kuantiti biojisim mikroalga yang dihasilkan adalah rendah pada persekitaraan luaran, namun, nisbah kecekapan tenaganya adalah 3.3 kali lebih tinggi daripada pengkulturan dalaman. Akan tetapi, kedua-dua kaedah pengkulturan dalaman dan luaran didapati mempunyai imbalan tenaga yang negatif untuk penghasilan mikroalga biodiesel. Anggaran minimum kos pengeluaran mikroalga biodiesel dalam kajian ini adalah RM 237/L, iaitu lebih tinggi berbanding dengan harga diesel petrol semasa (RM 3.6/L). Sebaliknya, anggaran kos pengeluaran biojisim mikroalga kering adalah RM 46/kg, menunjukkan harga yang lebih rendah berbanding dengan pengkulturan menggunakan baja kimia (RM 111/kg) serta harga pasaran semasa biojisim *Chlorella* (RM 145/kg). Pertumbuhan *Chlorella vulgaris* di dalam kajian ini didapati mematuhi model Richards, dengan nilai R² yang tertinggi serta memaparkan nilai RMSD dan varians yang terendah.

**CULTIVATION OF *CHLORELLA VULGARIS* USING ORGANIC
FERTILIZER AS NUTRIENT SOURCE FOR BIODIESEL,
MALTODEXTRIN PRODUCTION AND CO₂-BIOMITIGATION**

ABSTRACT

In the present study, attempt was made to solve the problems by cultivating *Chlorella vulgaris* using organic fertilizer (derived from compost) instead of depending on chemical fertilizer. Under the supplement of organic nutrients, it was found that *Chlorella vulgaris* grown favourably with 100 mL of organic fertilizer medium (or corresponded to nitrate content of 26.67 mg/L), 24 hours of continuous illumination and pH of 5. About 0.50 g/L of biomass yield was attained after 12 days of cultivation. Increasing the CO₂ concentration to the cultivation could accelerate the growth of *Chlorella vulgaris*, however, reducing the CO₂ removal efficiency. The highest CO₂ removal efficiency, 92.2 %, was achieved by using atmosphere air (0.03 % of CO₂). By using Bligh and Dyer extraction solvents (methanol to chloroform volume ratio of 2:1), about 18 % of lipid can be extracted from the dried *Chlorella vulgaris* biomass. The lipid was mainly comprised of unsaturated fatty acids, such as C18:1, C18:2 and C18:3. Through transesterification reaction parametric study, about 95 % of fatty acid methyl ester (FAME) or biodiesel was attained under the following conditions: methanol to THF to lipid molar ratio of 60:15:1, H₂SO₄ concentration of 21 wt.%, temperature of 60 °C and reaction time of 3 hours. In addition, the carbohydrate left over in the lipid-extracted microalgae biomass residues was successfully recovered for maltodextrin production (co-product). 90 % of maltodextrin yield could be attained by using 3 vol. % of H₂SO₄ (or 0.56 M) at

operating temperature of 90°C after 1 hour of hydrolysis time. Apart from that, pilot-scale cultivation of *Chlorella vulgaris* in a 100 L sequential baffled photobioreactor was carried out in the present study. The highest biomass yield attained under indoor and outdoor environment was 0.52 g/L and 0.28 g/L, respectively. Although low microalgae biomass yield was attained under outdoor cultivation, however, the overall life cycle energy efficiency ratio was 3.3 times higher than the indoor cultivation. It was found that negative energy balance was observed in producing the microalgae biodiesel for both indoor and outdoor cultivation. The minimum microalgae biodiesel production cost was about RM 237/L, which was exceptionally high compared to the current petrol diesel price (RM 3.6/L). On the other hand, the estimated production cost of dried microalgae biomass was RM 46/kg, which was lower than cultivation using chemical fertilizer (RM 111/kg) and current market price of *Chlorella* biomass (RM 145/kg). The growth of *Chlorella vulgaris* in the present study was found to fit well with the Richards model, with the highest R^2 value and displayed the lowest RMSD and variance values.

CHAPTER ONE:

INTRODUCTION

1.1 Current status of fossil fuel and renewable energy

Since the last few decades, fossil fuels have become an integral part of human daily lives. Specifically, fossil fuels are burned to produce energy for transportation and electricity generation, in which these two sectors have played a vital role in improving human living standard and accelerating advance technological development. In 2010, fossil fuels accounted for about 81 % (or 12,717 million tonne of oil equivalent) of the world's primary energy use, in which crude petroleum oil, coal and natural gas contributed 32.4 %, 27.3 % and 21.4 %, respectively, to this total energy supply (International Energy Agency, 2012). Specifically, global consumption of fossil diesel fuel was estimated to be 934 million tonnes per year (Kulkarni and Dalai, 2006).

Thus, there is no doubt that fossil fuels will be exhausted in less than 10 decades as predicted by The World Energy Forum if no new oil well is found (Sharma and Singh, 2009). The concern regarding the stingy crunch of energy resources is caused by rapid growth in human population, industrialization and urbanization (Huang and Wang, 2013). Hence, the era of inexpensive fossil fuel no longer exists; instead, the world is facing a shortage in the fossil fuel supply, bitter conflicts, and an increasing number of undernourished people, especially in the undeveloped countries (Lam et al., 2010).

Furthermore, burning fossil fuels have raised numerous environmental concerns, including greenhouse gas (GHG) emission which is the main cause of global warming. In the recent years, the impacts of global warming have caused

severe damages towards human and environment ecosystem, such as melting of arctic ice that reduces the natural habitat of polar bears, rising of sea level resulted to inundation of low-lying islands, warmer water causing massive dying of sea coral, extreme heat waves continue to hamper agricultural sector and affecting human's health and frequent occurrence of droughts and desertification (Ho et al., 2011, Huang and Wang, 2013). The consequences of all these phenomena combined with the rising prices of energy have raised the public awareness to reduce fossil fuels consumption and to lower their personal shares in GHG emission (Yang et al., 2012).

One of the potential solutions to this problem is the continuous development of renewable and sustainable energy sector for the benefits of human and environment. **Figure 1.1** shows the projection of energy demand by sector indicating that there is an urgent need to find more new renewable energy sources to overcome the global energy crisis and for the benefits of human and environment (Exxon Mobil, 2013). Renewable energy sources such as solar energy, wind energy, hydro energy, and energy from biomass and waste have been successfully developed and used by different nations to limit the use of fossil fuels.

Nevertheless, based on recent study by International Energy Agency (IEA), only energy produced from biofuels and waste has the highest potential among other renewable resources (International Energy Agency, 2012). From the report, biofuels and waste accounted for 10.0% of the total energy supply, compared to hydro energy 2.3 % and other 0.9 % (geothermal, solar, wind and heat). Hence, it was predicted that renewable energy from combustible sources such as biodiesel will play a more crucial role as an alternative renewable fuel in the near future to further diversify the global energy sources.

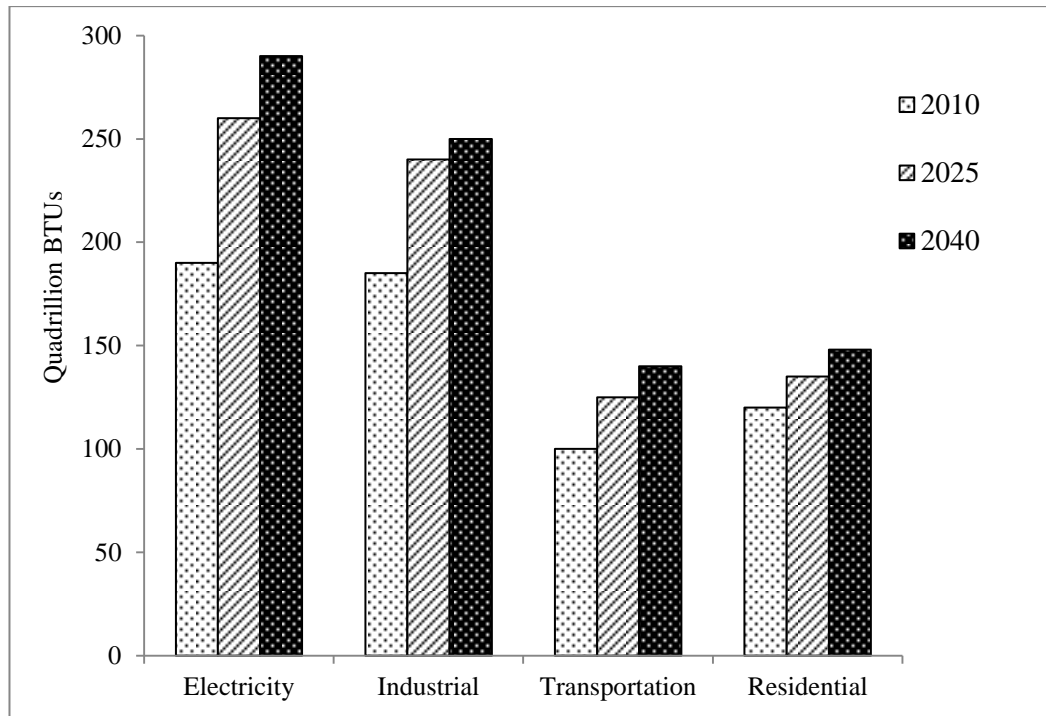


Figure 1.1: Projection of energy demand for the near future (Exxon Mobil, 2013)

1.2 Introduction to biodiesel

Biodiesel is a renewable diesel fuel, mainly derived from triglycerides sources such as vegetable oils, greases and animal fats (Vasudevan and Briggs, 2008). Triglycerides from these sources usually consist of different fatty acids, in which the composition of these fatty acids will be the most important factor influencing the corresponding properties of the produced biodiesel (Ramos et al., 2009). Fatty acids vary in terms of carbon chain length and number of unsaturated bonds (double bonds). For example, fatty acids that have no double bonds are termed "saturated" such as stearic acid. The carbon chains for these fatty acids contain maximum number of possible hydrogen atoms per carbon atom.

On the other hand, fatty acids that have double bonds are termed "unsaturated" such as linoleic acid. These fatty acids carbon chains do not contain maximum number of hydrogen atoms due to the presence of double bond(s) on some carbon atoms. **Table 1.1** summarized several common fatty acids found in edible and non-edible oils.


Table 1.1: Common fatty acid composition for different oil sources (Ma and Hanna, 1999, Balat and Balat, 2010, Yee et al., 2011, Kansedo and Lee, 2012)

Fatty acid	Edible Oil			Non-edible oil		
	Soybean	Rapeseed	Palm	Jatropha	Sea Mango	Microalgae
Lauric (C12:0)	0.1	-	0.1	-	-	-
Myristic (C14:0)	0.1	0.1	1	-	-	2.7
Palmitic (C16:0)	0.2	4.8	42.8	14.4	24.9	20.9
Palmitoleic (C16:1)	-	0.2	-	0.1	-	10.6
Stearic (C18:0)	3.7	1.9	4.5	3.6	5.8	6.9
Oleic (C18:1)	22.8	61.9	40.5	43.2	53	33.3
Linoleic (C18:2)	53.7	19.8	10.1	-	13.7	18.5
Linolenic (C18:3)	8.6	9.2	0.2	38.7	0.1	1.2

Direct use of vegetable oils and animal fats as combustible fuel is not suitable due to their high kinematic viscosity (about 11-17 times higher than diesel fuel) and low volatility (Meher et al., 2006, Mondal et al., 2008). Due to incomplete combustion and non-suitable vaporization characteristics of straight vegetable oils and animal fats, this will caused several severe problems to ignition diesel engine. This include coking and trumpet formation on the injectors to such an extent that fuel combustion does not occur, oil ring sticking and gelling of lubricating oil due to contamination of straight vegetable oils and animal fats (Muniyappa et al., 1996,

Mondal et al., 2008). Consequently, the performance of diesel engine decreases and resulting to higher exhaust gas emissions of CO, NO_x and hydrocarbon. Thus, vegetable oils and animal fats must be subjected to chemical reaction such as transesterification to reduce the viscosity of the oils and to avoid its negative effect on the diesel engine during combustion.

In transesterification reaction, triglycerides are converted into fatty acid alkyl esters (biodiesel), in the presence of short chain alcohol, such as methanol or ethanol, and a catalyst, such as alkali or acid, with glycerol as a by-product (Vasudevan and Briggs, 2008). In the case when methanol is used as reactant, it will be a mixture of fatty acid methyl esters (FAME) whereas if ethanol is used as reactant, the mixture will be fatty acid ethyl esters (FAEE). Methanol is preferred to be used in biodiesel production due to its low cost, widely available in the market and faster reaction rate than ethanol (Lam and Lee, 2011). **Equation 1.1** shows a typical transesterification reaction involving methanol as reactant. Another alternative way to produce biodiesel is through thermal cracking or pyrolysis. However, this process is rather complicated to operate and produce side products that have no commercial value (Sharma and Singh, 2009).

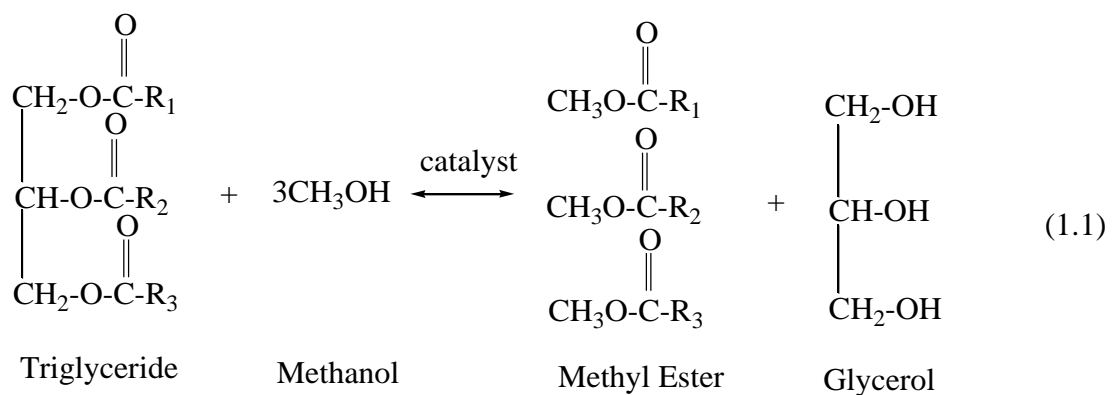

1.3 Current status of biodiesel production

With the crude fossil fuel price near all-time high, biodiesel has emerged as the fastest growing industries worldwide. Several countries especially United States of America (USA) and members of European Union (EU) are actively supporting the production of biodiesel from the agriculture sector. The progress of biodiesel production can be clearly seen in **Figure 1.2** (Hervé et al., 2011). In year 2000, the world production of biodiesel was merely 0.8 billion liters. The total biodiesel production reaches 4 billion liters after 5 years and more than 16 billion liters ten years later (Hervé et al., 2011).

EU countries are the major producer of biodiesel, accounted for 55 % of the market share in year 2010. This is due to substantial support from government such as consumption incentive (fuel tax reduction) and production incentive (tax incentives and loan guarantees) that has and will further accelerate the global market of biodiesel to grow explosively in the next ten years. Other non-EU countries such as Argentina, Brazil and USA are also experiencing an increase in biodiesel production. However, for US, the decreasing trend from 2008 to 2010 is due to the anti-dumping policy that imposed by the EU countries on US exports of biodiesel.

The total biodiesel production from the non-EU countries are 0.16 billion liters in year 2004 and increased to 7.7 billion liters in year 2009. By the year 2020, it is expected that biodiesel production from Brazil, China, India and some Asian countries such as Malaysia, Indonesia and Thailand could contribute as much as 20 % of the total biodiesel production (Multi-Client Study, 2008). The driving forces for development of biodiesel in these countries are economic, energy and environmental security, improving trade balances and expansion of agriculture sector (Zhou and

Thomson, 2009). If governments from these countries continue to aggressively promote biodiesel production and continue to invest in research and development for non-edible feedstock such as jatropha, castor and microalgae, the prospects to achieve biodiesel targets will be realized faster than anticipated.

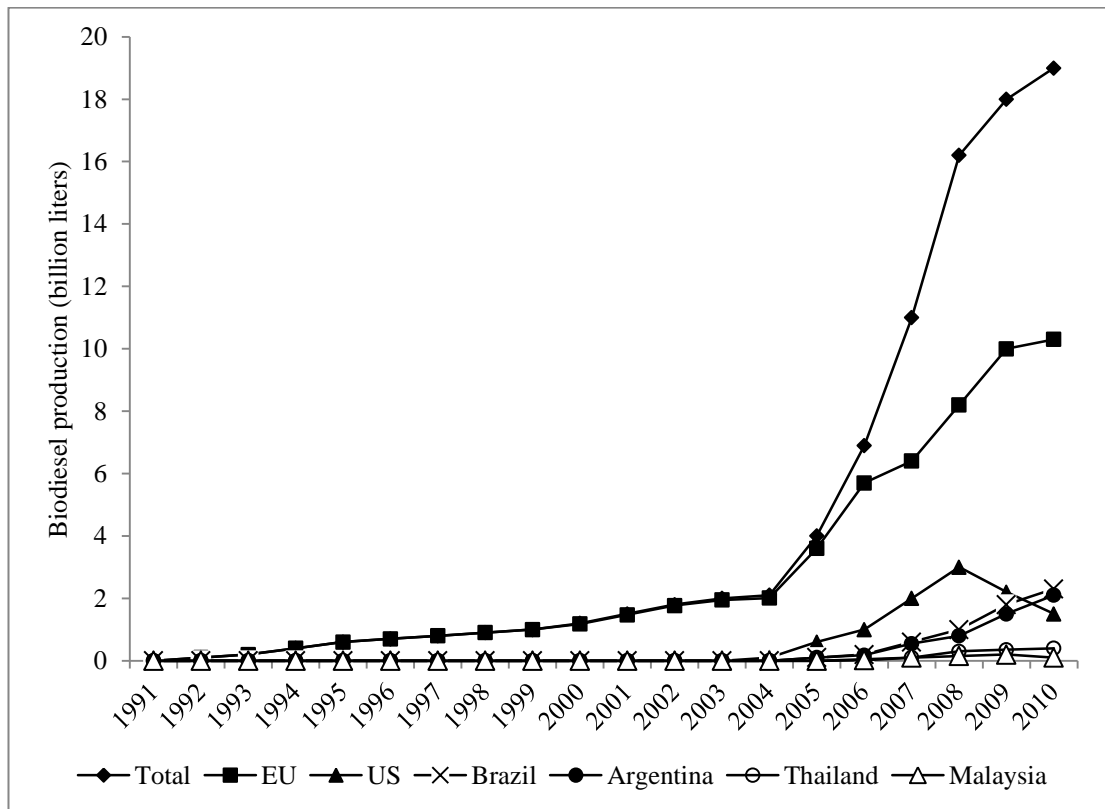


Figure 1.2: Biodiesel production from main producing countries, 1991-2010

(Hervé et al., 2011)

1.4 First and second generation biodiesel

First-generation biodiesel which has attained commercial-scale production in several countries is generally produced from edible oils using conventional technology (Singh et al., 2011b). The edible oils include soybean, rapeseed, palm and sunflower. Normally, the crude edible oil is extracted through mechanical pressing and refined before diverting to biodiesel production process. However, the viability and sustainability of the first-generation biodiesel are questionable, mainly due to the food versus fuel feud, low oil yield that resulted to larger arable land is required to accommodate the increasing oil demand, heavy fertilization, huge water requirement, and issue related to biodiversity conservation (Mata et al., 2010, Singh et al., 2011a, Singh et al., 2011b). This will certainly raises the price of food-grade oils in the global market, causing the production cost of biodiesel to increase and slowly losing its competitive advantages compared to fossil diesel (Lin et al., 2011). In fact, the cost of edible oils contribute nearly 80 % of the overall biodiesel production cost; an important factor that determines its commercial value and economic feasibility (Lam et al., 2009b).

Based on the current edible oils production rate, it is still in the infancy stage to fulfill the EU's target on the 10 % market share of biodiesel by year 2020 due to the limited arable land for bio-energy crops (Mata et al., 2010). This can be clearly seen in **Figure 1.3** which shows that although the overall edible oil production is increasing, the ending stocks of the oil as food feedstock are continuously decreasing due to the expansion of biodiesel (Gui et al., 2008). As a result, one day, the edible oil supply may not be enough to fulfill its demand as food source if new renewable oil source is not explored for biodiesel production.

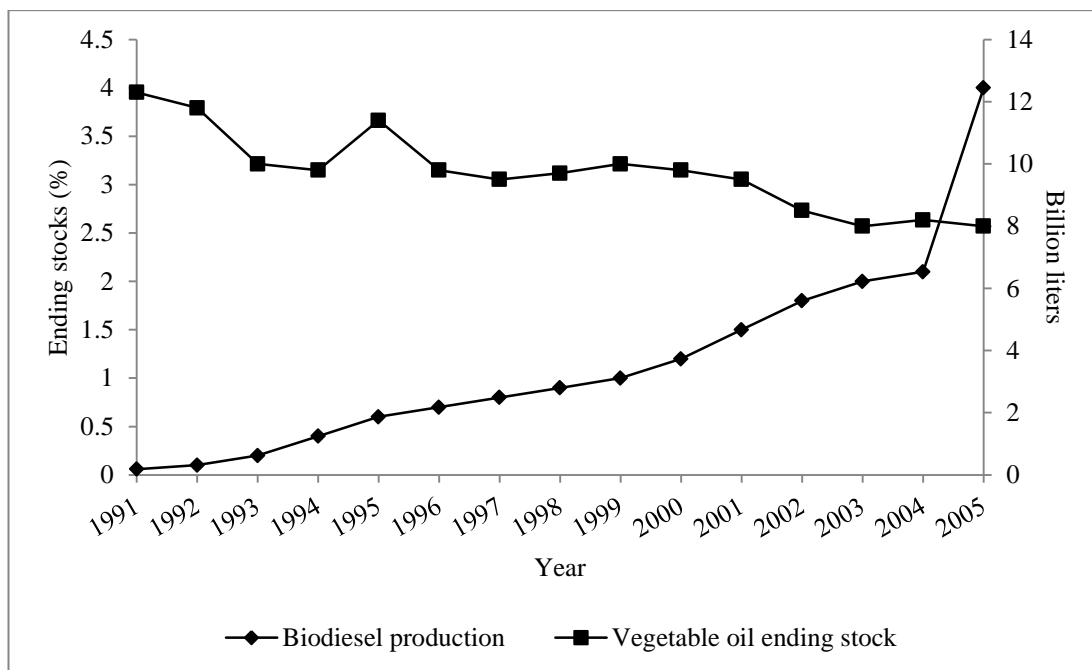


Figure 1.3: Vegetable oil ending stocks and biodiesel production
(Gui et al., 2008, Hervé et al., 2011)

Hence, second-generation biodiesel derived from non-edible oils, such as *Jatropha curcas* L., *Cerbera odollam* (sea mango), *Moringa oleifera* and *Karanja* appeared as an attractive alternative feedstock (Kumar and Sharma, 2008, Kansedo et al., 2009, Kafuku et al., 2010, Lam et al., 2010, Borugadda and Goud, 2012). These non-edible oils usually contain high concentration of toxic compounds which are not suitable for human consumption or as nutrition supplement. For example, the toxic compound found in *Jatropha* oil is protein crucin, gluosidase cerberin in *Cerbera odollam* oil and flavonoids pongamiin and karajiin in *Karanja* oil (Gui et al., 2008, Banković-Ilić et al., 2012).

Among all the non-edible oils sources, *Jatropha* oil is the most promising and widely accepted feedstock for biodiesel production. *Jatropha* is a drought-resistant plant which is widely distributed in the wild or semi-cultivated in areas of Central

and South America, Africa, India and South East Asia (Lam et al., 2009a). The average oil content in the dry *Jatropha* seed is about 34.4% (mass basis) (Achten et al., 2008).

To date, *Jatropha* oil is the main feedstock for biodiesel production in China, with estimated production rate of 170,000 tonnes annually (Yang et al., 2012). Although *Jatropha* plant can be grown on wasteland or non-fertile soil, however the overall seed yield is only 2.38 tonne/hectare/year; instead of 12 tonne/hectare/year when the plant is grown on fertile land (Achten et al., 2008, Lam et al., 2009a). Thus, regular irrigation, heavy fertilization and good management practises are still required to ensure a high seed yield from *Jatropha* plant.

1.5 An outlook of microalgae biomass as the third generation biodiesel

1.5.1 Introduction to microalgae

Microalgae are one of the oldest living microorganisms on Earth (Song et al., 2008). They are single cell organisms, representative of both bacteria and eukaryotes. A significant characteristic that distinguish between bacteria and eukaryotes is that the former lack of discrete internal, sub-cellular structures, organelles (chloroplasts, mitochondria and nuclei) (Williams and Laurens, 2010). Eukaryotes, which comprise of many different types of common microalgae, do have organelles that control the functions of the cell, allowing it to survive and reproduce (Brennan and Owende, 2010). To date, microalgae species are divided into four categories: diatoms (Bacillariophyceae), green algae (Chlorophyceae), blue-green algae (Cyanophyceae) and golden algae (Chrysophyceae), depending on their pigmentation, life cycle and

basic cellular structure (Khan et al., 2009). Carbohydrates, proteins, nucleic acids and lipids are the major constituents of microalgae (Williams and Laurens, 2010).

1.5.2 Advantages of microalgae biodiesel

In the last few years, research on growing microalgae for biofuels production has gained increasing attention from various research groups across the world. Researchers have demonstrated the potential of converting lipid and carbohydrate from microalgae biomass to biodiesel and bioethanol, respectively, which are alternative fuels to existing fossil diesel and gasoline.

One of the reasons that microalgae appear as an attractive renewable energy source is due to its rapid growth rate; 100 times faster than land-based plant and they can double their biomass in less than 1 day (Tredici, 2010). Furthermore, microalgae are able to divide once every 3–4 hours, but mostly divide every 1–2 days under favourable growing conditions (Williams and Laurens, 2010). This is mainly due to their simple cellular structure and large surface to volume ratio that allow them to uptake large amount of nutrients from water sources (Khan et al., 2009).

Apart from that, microalgae can be cultivated either phototrophic or heterotrophic. Phototrophic microalgae such as *Botryococcus braunii* and *Dunaliella salina* require sunlight, CO₂ and nutrients as a basic requirement for growing whereas heterotrophic microalgae such as *Chlorella protothecoides* require organic carbons sources (sugar and organic acids) and nutrients but do not require sunlight (Liang et al., 2009). In some special cases, for example *Chlorella protothecoides* can be grown phototrophically or heterotrophically under different cultivation

conditions. However, heterotrophically growth of *Chlorella protothecoides* is more favourable due to higher accumulation of lipid content in cells (Miao and Wu, 2006).

The potential of microalgae cultivation for biofuels production can be clearly seen in **Table 1.2**. From the table, cultivating microalgae (either high or low lipid content) requires the least land area than other oil-bearing crops such as soybean, sunflower, rapeseed and oil palm in order to meet EU biofuels target in year 2010. According to recent studies, a realistic microalgae biomass production rate should lies between 15 and 25 tonne/ha/year. With an assumption of 30% lipid content in microalgae cells (without optimizing the growth condition), the microalgae lipid production rate is equivalent to 4.5–7.5 tonne/ha/year. This amount is certainly higher compared to the oil production from soybean (0.4 tonne/ha/year), rapeseed (0.68 tonne/ha/year), oil palm (3.62 tonne/ha/year) and jatropha (4.14 tonne/ha/year). An added advantage to microalgae biofuels is it does not compete land area with food production and thus, holding an important key for a sustainable energy development in the future.

Table 1.2. Comparison of oil yield for various oil bearing plants and microalgae (Chisti, 2007, Lam et al., 2009a, Lam et al., 2009b)

Oil crop	Average oil yield (tonne/ha/year)	Area to meet EU biodiesel demand in 2010 (million hectares) ^a	% of current Malaysian's agricultural land area ^b
Soybean	0.4	25.0	379
Sunflower	0.46	21.7	329
Rapeseed	0.68	14.7	223
Oil palm	3.62	2.8	42
Jatropha ^c	0.14	71.4	1082
Jatropha ^d	4.13	2.4	37
Microalgae ^e	126	0.1	1
Microalgae ^f	54	0.2	3

Note:

^aEU biodiesel target in year 2010 is equivalent to 10 million tonnes

^bTotal agricultural land area in Malaysia is equivalent to 6.6 million hectares

^cJatropha are planted without irrigation and fertilization

^dJatropha are planted with irrigation and heavy fertilization

^eMicroalgae synthesized high lipid content (70 % lipid based on biomass weight)

^fMicroalgae synthesized low lipid content (30 % lipid based on biomass weight)

1.5.3 CO₂ mitigation and co-product production from microalgae biomass

Due to the advantages of fast growth rate and high lipid productivity, phototrophic microalgae can convert solar energy to chemical energy with efficiency of 10–50 times greater than terrestrial plants by fixing CO₂ from atmosphere, flue gases or soluble carbonate during photosynthesis (Li et al., 2008b, Khan et al., 2009, Rosenberg et al., 2011). Furthermore, it was reported that microalgae cells contain approximately 50% carbon, in which 1.8 kg of CO₂ are fixed by producing 1 kg of

microalgae biomass; a golden opportunity for carbon credit program (Chisti, 2007). In addition, some microalgae strains have high adaptability and could withstand high concentration of CO₂ (up to 20 %), such as *Chlorella* sp., *Scenedesmus* sp. and *Botryococcus braunii* (Brennan and Owende, 2010, Yoo et al., 2010). Hence, this method is thought to be more technologically feasible and microalgae can act as an effective carbon sink in bio-fixing the CO₂ from atmosphere and flue gases while producing renewable green fuel.

Besides lipid, microalgae cells also consist of a large portion of carbohydrate which has high commercial value. Identified microalgae strains that have high carbohydrates content are such as *Chlamydomonas reinhardtii* (53 %), *C. reinhardtii* (45 %), *Chlorella vulgaris* (12-37 %), *Chlorella* sp. (21-27 %) and *Scenedesmus* sp. (13-20 %) (John et al., 2011). Different from terrestrial plants, microalgae cells are buoyant and do not require lignin and hemicelluloses for structural support. Therefore, it is expected that carbohydrate extraction from microalgae biomass are simpler than lignocellulosic materials (e.g. wood), in which complicated pre-treatment steps to remove the lignin can be avoided. In fact, some of the pre-treatment methods, such as ozonolysis, organosolv, steam explosion and ammonia fiber explosion (AFEX) are usually costly and generate toxic compounds to the environment if proper waste treatment system is not implemented (Cardona and Sánchez, 2007, Alvira et al., 2010). After lipid extraction, the carbohydrate remaining in the microalgae residues can be further hydrolyzed to simple reducing sugar (e.g. glucose) for subsequent fermentation process to produce bioethanol, which is an alternative renewable fuel to gasoline. Besides being used for fermentation, the hydrolyzed carbohydrate has a wide range of industrial applications,

such as water soluble glues, thickening agents in food processing, and binding agents in the pharmaceutical industry (Biswas et al., 2009).

1.6 Problem Statement

In the last few years, researches on growing microalgae for biofuel production have gained increasing attention from various research groups across the world. Researchers have demonstrated the potential of converting lipid and carbohydrate from microalgae biomass to biodiesel and bioethanol, respectively, which are alternative fuels to existing fossil diesel and gasoline. However, several recent life cycle assessments (LCA) on microalgae biofuels have demonstrated that massive energy input are required in producing the biofuels, especially during the cultivation and harvesting of microalgae biomass. One of the limitations to cultivate microalgae at industrial scale is the availability of low cost nutrients sources. Chemical or inorganic fertilizers are commonly used to achieve promising growth rate of microalgae are relatively expensive and not environmentally friendly for long term usage. On the other hand, utilizing secondary or tertiary wastewater as nutrients source to cultivate microalgae appears as a promising choice to reduce the overall energy input. Nevertheless, the key challenges of using wastewater as cultivation medium are serious contamination and inconsistent nutrients composition, in which these factors will significantly retard the growth of microalgae. Other associated problems that directly impede the commercialization of microalgae biodiesel are such as possibility of outdoor cultivation, efficiency of CO₂ capture by microalgae, issue of life cycle energy balance and economic feasibility.

1.7 Objectives

Current research work focused on the following objectives:

1. To optimize the growing conditions of *Chlorella vulgaris* using organic fertilizer as nutrient source and to study the effect of carbon source towards the growth and lipid accumulation in microalgae.
2. To extract the lipid from dried microalgae biomass and to optimize the transesterification of lipid to biodiesel.
3. To optimize the carbohydrate hydrolysis condition from lipid-extracted microalgae biomass residue for maltodextrin production.
4. To scale up the microalgae cultivation in a vertical column photobioreactor (pilot scale).
5. To evaluate the life cycle energy balance and economic assessment of microalgae biodiesel production.
6. To evaluate the growth kinetic of *Chlorella vulgaris* when cultivated using organic fertilizer as nutrients source.

1.8 Scope of study

1.8.1 Microalgae cultivation

Optimization on the growth of *Chlorella vulgaris* using organic fertilizer as nutrient source was performed. *Chlorella vulgaris* was selected in the present study because it is easy to cultivate, able to grow under contaminated environment and is a native species in Malaysia. Two cultivation methods were assessed, which were free cells cultivation and immobilization cultivation. Growth parameters, such as amount of nutrients, cultivation pH, light exposure duration and effect of outdoor cultivation were studied. The growth performance of the microalgae was evaluated based on their specific growth rate, biomass yield and biomass productivity. Since the aim of the present study is to optimize the microalgae biomass productivity, the effect of limited nitrogen source (which was reported to be able to increase the lipid content in microalgae cells, but with lower biomass productivity) was excluded in the study.

The effect of different carbon sources towards the growth of the microalgae was also studied. Two types of carbon source, namely CO₂ gas and sodium bicarbonate, were used as the carbon source to cultivate *Chlorella vulgaris*. Different concentration of CO₂ gas or sodium bicarbonate was varied to optimize the growth of microalgae. The result was tabulated in term of carbon removal efficiency, specific growth rate, biomass yield and biomass productivity. Since the present study focused on phototrophic cultivation, the effect of other carbon source, such as glucose, glycerol and volatile fatty acids, were not assessed because the carbon source will only be utilized by microalgae in the absence of light (heterotrophic cultivation).

1.8.2 Lipid extraction and transesterification

Dried microalgae biomass was subjected to lipid extraction using various chemical solvents, such as hexane, methanol, ethanol and chloroform. The performance of the chemical solvents was determined based on the lipid yield obtained. Then, the extracted microalgae lipid was converted to biodiesel through transesterification. Various reaction parameters will be assessed to optimize the microalgae biodiesel conversion, such as reaction temperature, methanol to lipid molar ratio, catalyst concentration and effect of co-solvents. Only homogeneous acid catalyst (H_2SO_4) was utilized in the present study due to the high free fatty acid (FFA) content in the microalgae lipid. Heterogeneous acid catalyst was not included in this work since the catalyst are mostly still at research and development stage and yet to be commercialized.

1.8.3 Co-product production

The lipid-extracted microalgae residues were utilized for maltodextrin production by hydrolyzing the carbohydrate. Various hydrolysis parameters were assessed to optimize the maltodextrin yield, such as hydrolysis reagents (acid, alkaline and enzymatic), hydrolysis temperature and duration. However, in this study the microalgae residue was not subjected to protein extraction as co-product since the *Chlorella vulgaris* was cultivated under contaminated conditions. The extracted protein (usually used for human and animal consumption) may require extensive purification that will indirectly impede sustainable production of microalgae biodiesel through bio-refinery concept.

1.8.4 Photobioreactor design and scale up study

A pilot-scale column photobioreactor with working volume of 100 L was designed based on the lab-scale experimental results. The lab-scale optimum cultivation conditions were applied in the pilot-scale photobioreactor to validate the reproducibility of the result. Potential of semi-batch cultivation under indoor and outdoor environment in the pilot-scale photobioreactor was also carried out to accelerate the biomass productivity.

1.8.5 Life cycle energy balance analysis and economic assessment

Life cycle energy balance on producing microalgae biodiesel was performed based on the experimental data obtained in the present study. The life cycle boundary includes cultivation of *Chlorella vulgaris*, harvesting and drying of microalgae biomass, lipid extraction, biodiesel and maltodextrin production. Energy efficiency ratio (EER) was used as an indicator to determine the sustainability of microalgae biodiesel production from the energy perspective. Apart from that, economic assessment on producing the *Chlorella vulgaris* biomass and biodiesel was also carried out in the present study to estimate the economic potential of this renewable feedstock. However, the capital cost (cost of land, buildings, equipment and infrastructures) was excluded in the assessment due to limited information available.

1.8.6 Growth kinetic of microalgae

The growth kinetic of *Chlorella vulgaris* was evaluated based on five non-linear mathematical models, namely logistic, Gompertz, modified Gompertz, Baranyi

and Richards model. A non-linear regression technique was used to solve growth models by using POLYMATH 6.0.

1.9 Organization of thesis

This thesis consists of five chapters:

Chapter one gives an outline of the overall research project covering introduction to biodiesel, current status of biodiesel market and potential of microalgae biomass as the third generation feedstock for biodiesel production. Problem statement was then written after reviewing the present scenario and related issues in producing microalgae biodiesel. The problem statement therefore reveals current bottlenecks faced in the bio-refinery of microalgae biodiesel and the need of this research project. The objectives of this research project were then carefully devised with the aim to improve the sustainability of microalgae biodiesel and increase its potential for commercialization purposes. Finally, the organization of thesis highlights the content of each chapter.

Chapter two gives an overall review of microalgae cultivation for biofuel production. The review started with the bio-refinery concept of microalgae biofuel, advantages of microalgae biomass compared with other renewable sources and the opportunity of CO₂ bio-mitigation by microalgae. Then, related problems and issues facing the microalgae biofuels production were critically depicted through the latest findings from LCA. Apart from that, technical information on the entire microalgae biodiesel process chain, ranging from upstream (microalgae cultivation, biomass harvesting and drying) to downstream processes (lipid extraction and biodiesel conversion techniques) are also included in this chapter.

Chapter three mainly discusses on experimental materials and research methodology. This chapter describes detailed information on the flow of this research work, starting from seed cultivation of microalgae until biodiesel and maltodextrin production. Besides, information on the chemicals used in this study as well as several analytical methods and tools were also being described. Kinetic study and modelling on the growth of microalgae was included at the last part of this chapter.

Chapter four is the most important chapter in the thesis. It encompasses detailed discussion on the results obtained in the present research work. The first section discussed the optimization result of using the organic fertilizer as the nutrients source to cultivate *Chlorella vulgaris* via either free cell cultivation or immobilization cultivation. Then, the effect of carbon sources (CO₂ and bicarbonate) towards the growth of microalgae was carefully evaluated. This was followed by study on lipid extraction from dried microalgae biomass and optimization of microalgae lipid conversion to biodiesel through catalytic transesterification. Section four discussed the potential utilization of lipid extracted microalgae residue for maltodextrin production whereas section five discussed the scale up study (pilot scale) of *Chlorella vulgaris* in a vertical column photobioreactor. LCA of producing microalgae biodiesel in this particular study was revealed in section six. At the end of this chapter, kinetic study and modelling on the growth of *Chlorella vulgaris* was presented.

Chapter five is the last chapter in this thesis that gives concluding remarks of all the findings in this research work and recommendations for future study.

CHAPTER TWO: LITERATURE REVIEW

This chapter reviews studies that are related to microalgae cultivation and biodiesel production from this renewable feedstock. This chapter focused on the findings from the life cycle energy balance in the process flow of producing microalgae biodiesel and to identify the actual problems and research that are required to improve the processes. Then, critical reviews and comments on each of the process flow will be provided as a platform to facilitate a better understanding on the actual issues, sustainability and prospective of microalgae biodiesel. The process flow includes the nutrients source, cultivation system, harvesting and drying of microalgae biomass, additional CO₂ supplement, lipid extraction, microalgae biodiesel production methods and potential utilization of lipid-extracted microalgae residue. A summary will be provided at the end of this chapter to outline some important notes on the overall process flow of microalgae biodiesel production.

2.1 Life cycle assessment (LCA) of microalgae biofuels

Although microalgae biofuels (mainly refer to biodiesel and bioethanol) have been predicted to make a significant contribution in diversifying the global renewable energy sector, however, the long term sustainability of this renewable feedstock is still questionable. Up to now, there is still no commercial plant producing and processing microalgae biomass into biofuels. This has subsequently caused a lack of understanding in each of the unit operations in the entire process at industrial scale. A conceptual process flow of producing microalgae biodiesel and

other related co-products is shown in **Figure 2.1**. The process chain can be divided into two sections: (1) up-stream process which includes microalgae cultivation system, harvesting and drying of microalgae biomass, and (2) downstream process which focuses on biodiesel production and utilization of microalgae biomass residue for bioethanol production.

LCA is widely accepted as an effective tool to guide and give a clear idea to researchers and policy makers on revealing the real potential of a particular product that is being evaluated (Lam et al., 2009a). It also can be used to indicate if the production of a particular product can lead to negative environmental phenomena such as eutrophication, global warming, ozone depletion, human and marine toxicity, land competition, photochemical oxidation and etc. so that precautionary steps can be suggested to reduce the negative impacts (Andersson, 2000). In addition, energy balance can be calculated to determine and justify the energy hotspot of all stages within the system boundary of the LCA.

Apparently, there are only a few LCAs performed on microalgae biofuels due to limited comprehensive data. Therefore, parameters related to microalgae biofuels production such as biomass productivity, lipid content and downstream energy consumption (harvesting, drying and transesterification) were obtained based purely on lab scale experimental data. Although the data used in those assessments might be irrelevant when applied to large-scale production, however, most of the studies have concluded that producing biofuels from microalgae is an extremely energy intensive process. This finding is represented by the energy efficiency ratio (EER), defined as energy output to energy input, which is generally used to indicate the sustainability energy index to produce a particular product, in which a ratio higher than 1 designates to net positive energy generated and vice versa.

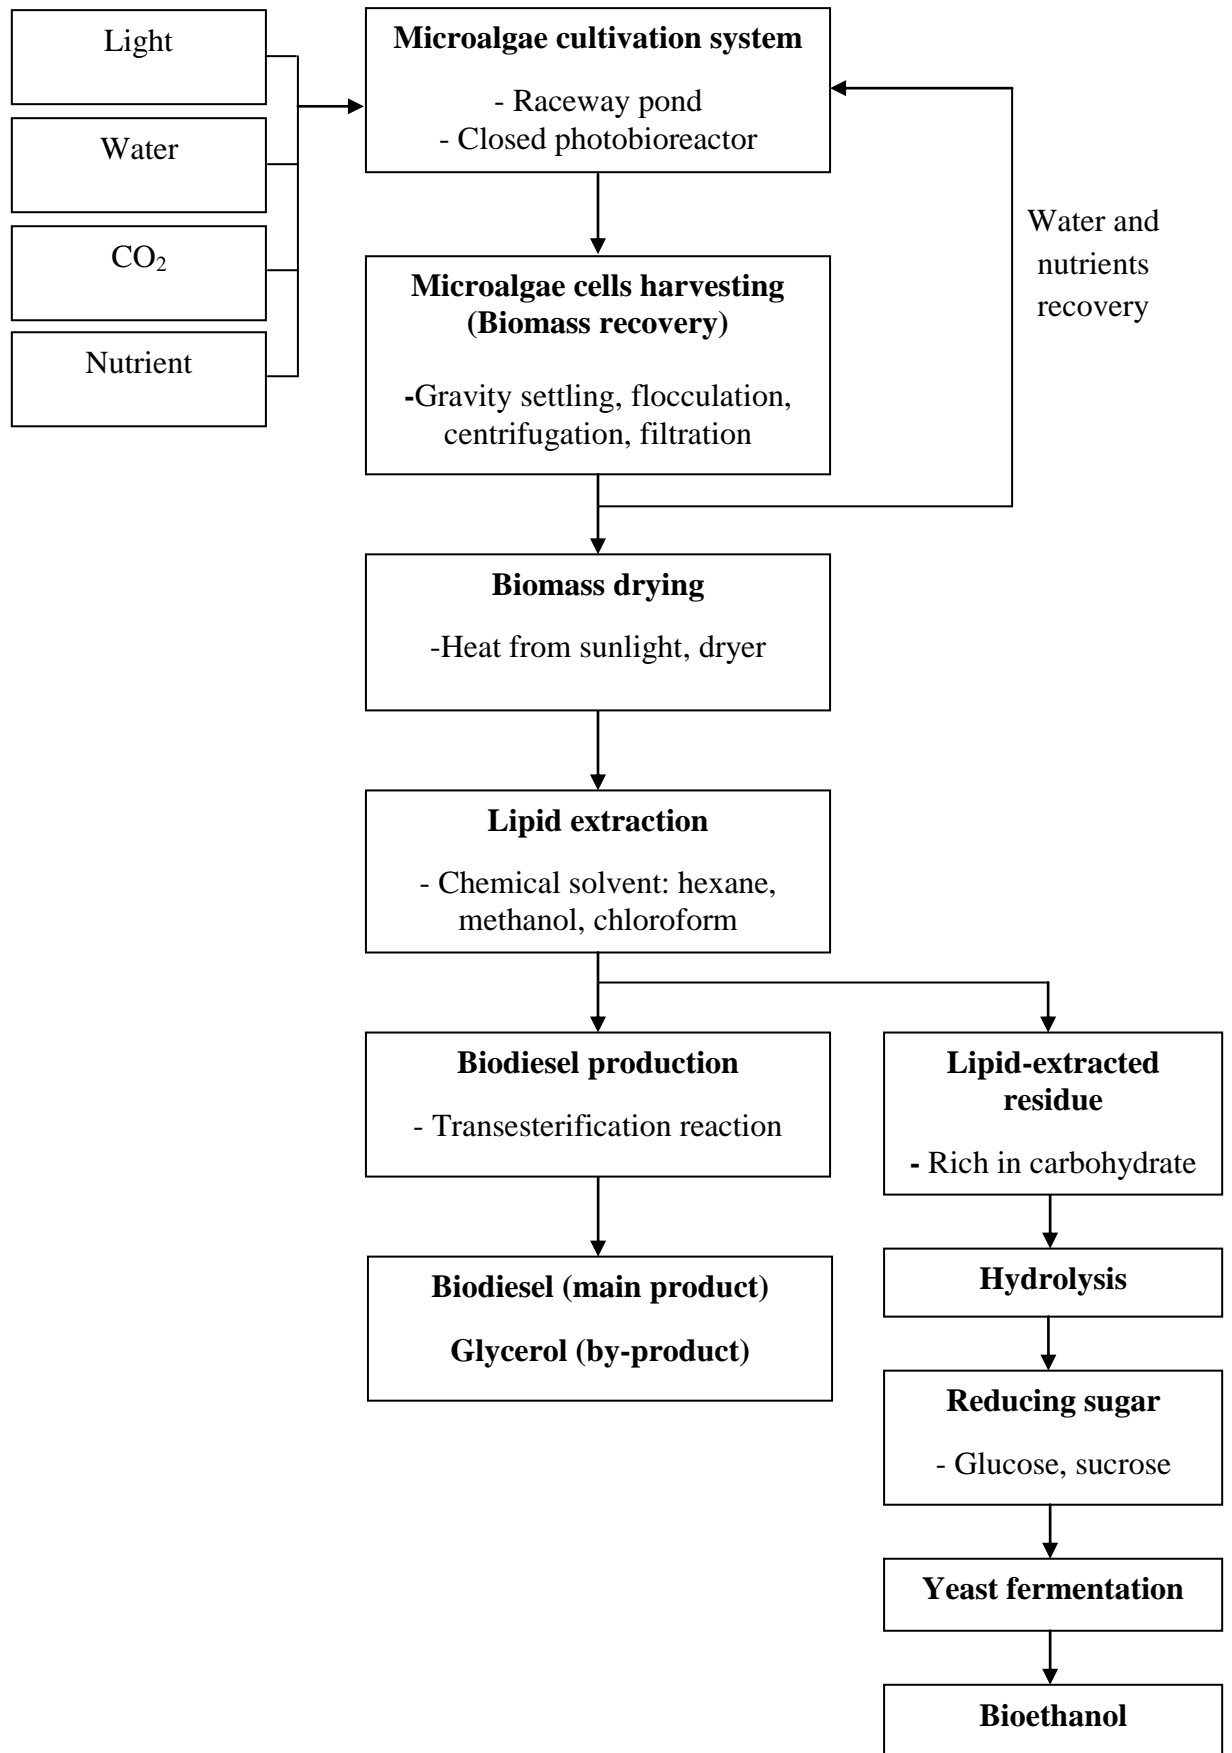


Figure 2.1: Process flow of producing microalgae biodiesel and co-products