



This item was submitted to Loughborough's Institutional Repository (<https://dspace.lboro.ac.uk/>) by the author and is made available under the following Creative Commons Licence conditions.



CC creative commons
COMMONS DEED

Attribution-NonCommercial-NoDerivs 2.5

You are free:

- to copy, distribute, display, and perform the work

Under the following conditions:

BY: **Attribution.** You must attribute the work in the manner specified by the author or licensor.

Noncommercial. You may not use this work for commercial purposes.

No Derivative Works. You may not alter, transform, or build upon this work.

- For any reuse or distribution, you must make clear to others the license terms of this work.
- Any of these conditions can be waived if you get permission from the copyright holder.

Your fair use and other rights are in no way affected by the above.

This is a human-readable summary of the [Legal Code \(the full license\)](#).

[Disclaimer](#) 

For the full text of this licence, please go to:
<http://creativecommons.org/licenses/by-nc-nd/2.5/>

Degradation Study of the Peel Strength of Mini-Modules under Damp Heat Condition

Dan Wu*, Jiang Zhu, Tom Betts, Ralph Gottschalg

Centre for Renewable Energy Systems Technology (CREST), School of Electronic, Electrical and Systems Engineering, Loughborough University, Loughborough, Leicestershire, LE11 3TU, UK

Abstract This paper presents the degradation study results of adhesion strength between backsheet and encapsulant for a commercial mini-module. A concept of environmental dose is established to quantify the cumulative stress suffered by PV module. A degradation model for the adhesion strength is developed and the activation energy is obtained. Outdoor prediction example is given based on environmental data in Loughborough and Denver.

Experiment

Accelerated tests were conducted in environmental chamber at four different damp heat conditions.

T \ RH	85%	65%
95°C	X	
85°C	X	X
65°C	X	



Fig. 1: Mini PV module after laser cutting. 100mm x 120mm, frameless P-Si



Fig. 2: Peel test

The backsheet of PV module is cut by laser into several strips (See Fig. 1). Laser is a quick and precise cutting method with accurate control of cutting depth. Each of the strips is peeled off using a specific peel test machine before and after certain time intervals during ageing (See Fig. 2). The peel angle is 90° and the peel speed is 50mm/min. Visual detection is also conducted after removal from chamber each time.

1

Arrhenius behaviour and Ea

A linear relationship can be obtained by taking natural logarithm of R_D and $\frac{1}{T}$.

$$\ln R_D = -\frac{E_a}{R} \frac{1}{T} + \ln(k \cdot RH)$$

$\ln R_D$ vs. $\frac{1}{T}$ plot is shown in Fig. 7. at constant RH of 85% but varying T of 95°C, 85°C and 65°C. A linear line is observable, allowing E_a to be calculated:

$$-\frac{E_a}{R} = \text{slop} = -6202.4$$

$$E_a \approx 51 \text{ KJ/mol}$$

A linear relationship is obtained by plotting the changes of adhesion strength and temperature dose ($e^{-\frac{E_a}{RT}} \cdot \Delta t$) (Fig. 8). This proved the linear proportional dependent of R_D on RH.

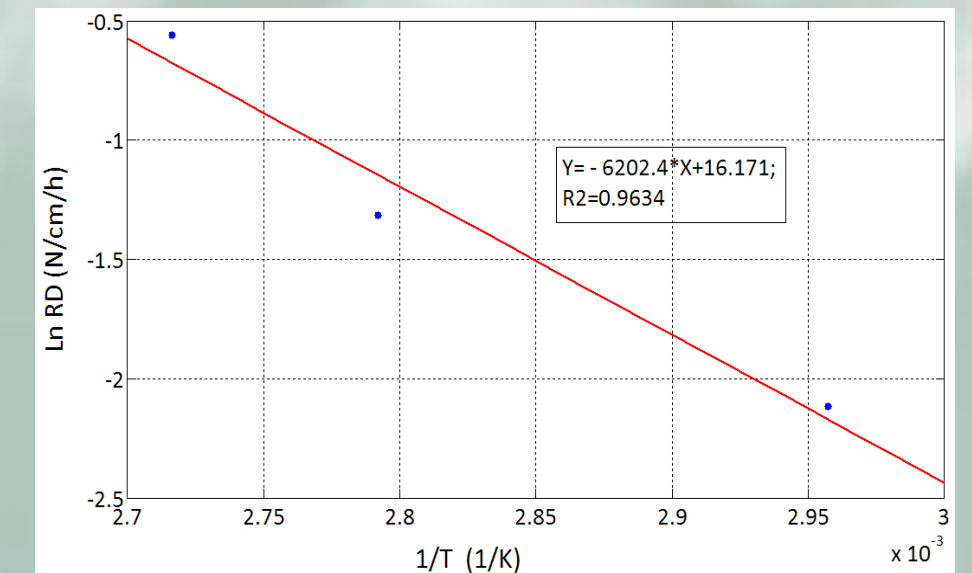


Fig. 7: The relationship between $\ln R_D$ and the reverse of temperature

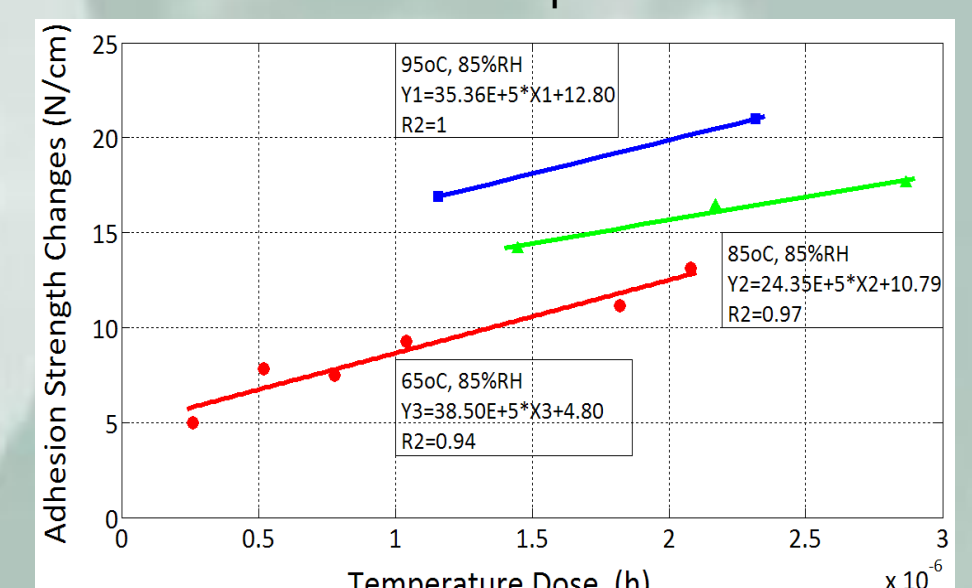


Fig. 8: Changes of adhesion strength vs. temperature dose

4

Degradation Results

Several types of defects are observed after visual inspection. The most severe ones are shown in Fig. 3.



Fig. 3: Visual detection results with bubble near electrode (left), moisture ingress (middle) and edge/corner delamination (right)

Adhesion strength results are plotted in Fig. 4 together with the standard deviation of the results for each sample (Fig. 5). The strength can be modelled by following equation:

$$S = S_0 e^{-\left(\frac{t}{t_{del}}\right)^\beta}$$

Where S is adhesion strength at time t , S_0 is the strength without degradation, β and t_{del} are assumed to be function of stress levels having an influence on degradation slope which need to be further investigated to understand the degradation behaviour.

Both T and RH are accelerators of the degradation. The rate of T acceleration is faster than that of RH .

Acceleration factors around 3-6 in testing time is achieved for the other three conditions compared with that at 65°C T and 85% RH .

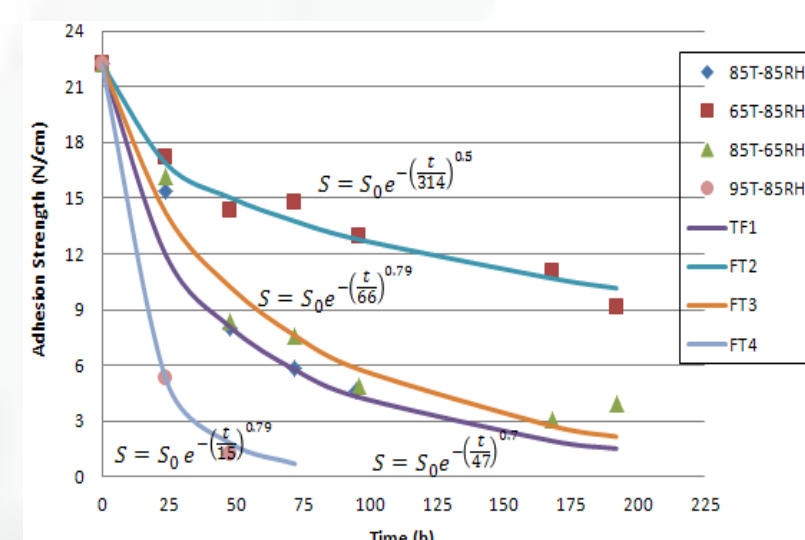


Fig. 4: Adhesion strength vs. time at different damp-heat conditions.

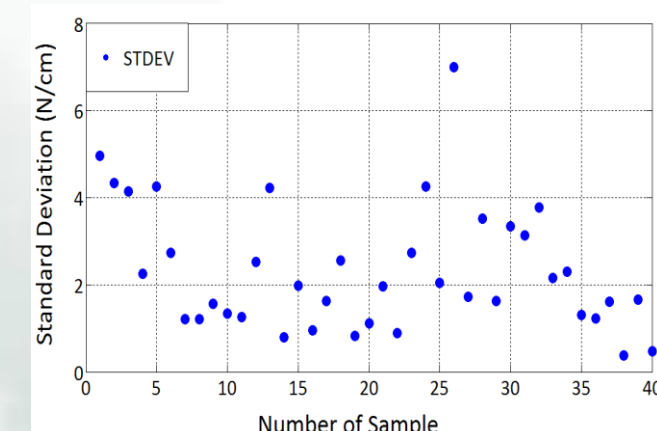


Fig. 5: Standard deviation for each module with ten strips

2

Kinetic Stress Model

An empirical kinetic model is developed by assuming that the rate of adhesion degradation is proportional to moisture concentration at the interface of backsheet / encapsulant and the reaction rate constant is Arrhenius dependent. It can be expressed as following:

$$\frac{\Delta S}{\Delta t} = R_D \propto f(RH) e^{-\frac{E_a}{RT}}$$

Where $f(RH)$ is a function of relative humidity; E_a is activation energy, R is gas constant (8.314J/K·mol) and T is absolute temperature in kelvin.

For the first step, $f(RH)$ is assumed to be proportional to RH in the air:

$$\frac{\Delta S}{\Delta t} = R_D \propto RH \cdot e^{-\frac{E_a}{RT}}$$

A concept of "stress dose" is developed for the quantification of accumulative stresses (Fig. 6) which is actually the right part of the above formula.

E_a need to be obtained which determines the acceleration factor.

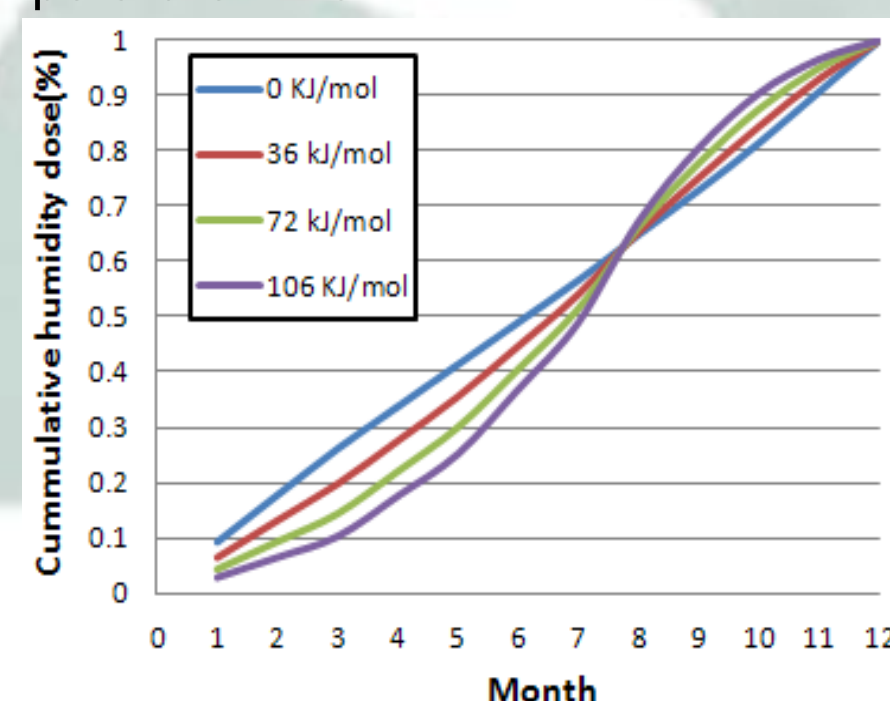


Fig. 6: Relative humidity dose in Loughborough with different E_a values

3

Outdoor & Indoor Prediction

Outdoor exposure time to achieve equivalent indoor degradation can be calculated as following:

$$\Delta t_{out} = \frac{RH_{in} \exp\left(-\frac{E_a}{RT_{in}}\right)}{RH_{out_eff} \cdot \exp\left(-\frac{E_a}{RT_{out_eff}}\right)} \Delta t_{in}$$

Effective T and RH for outdoor is obtained (example in Fig. 9):

$$\sum (RH_{out} e^{-\frac{E_a}{RT_{out_eff}}}) = \sum RH_{out} \cdot e^{-\frac{E_a}{RT_{out}}}$$

$$\sum RH_{out_eff} \cdot e^{-\frac{E_a}{RT_{out_eff}}} = \sum RH_{out} \cdot e^{-\frac{E_a}{RT_{out}}}$$

The subscript of out and out_eff represent measured and effective value for T & RH .

Module T need to be transformed from ambient temperature T_{amb} :

$$T_{mod} = T_{amb} + \frac{(NOCT-20) \times G}{800}$$

NOCT is Nominal Operating Cell Temperature. 47° is taken in this study.

Different E_a :

Exponential increase of outdoor time (Fig. 10). (no other stresses induced degradation is assumed)

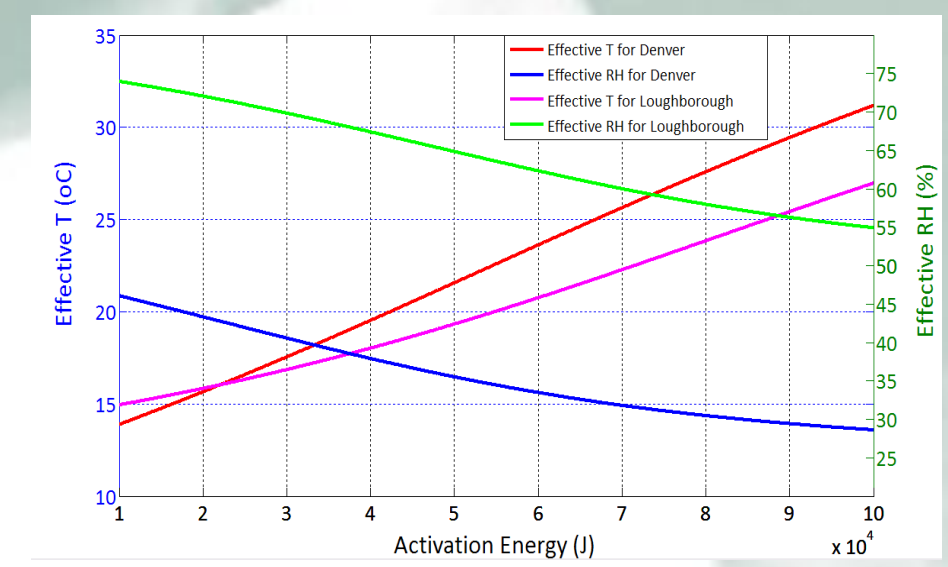


Fig. 9: Effective temperature and relative humidity in Denver and Loughborough

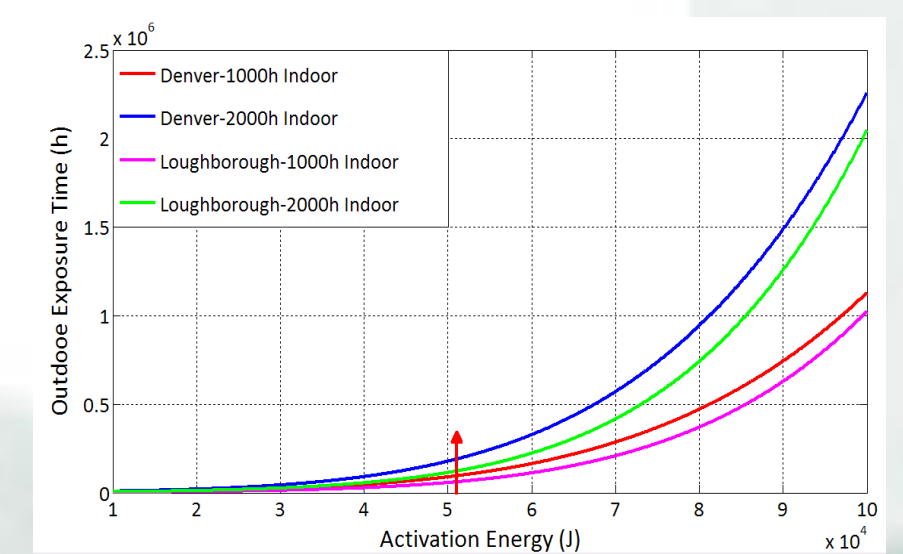


Fig. 10: Corresponding outdoor exposure time at Denver and Loughborough for an indoor exposure of 85°C and 85%RH

5

Conclusions and Future Work

Peel test at different stress levels are conducted for commercial mini-modules. An example of the result is shown in Fig. 11.

A kinetic model for adhesion strength degradation between backsheet and encapsulant of PV module is established with an Arrhenius temperature acceleration and linear proportion of relative humidity.

Activation energy is obtained for the mini-module enabling outdoor prediction.

Future work will focus on analysing the effects of relative humidity on degradation model and how the moisture degrade the strength. More testing conditions are needed to improve accuracy of the fitting results. Delamination prediction will be conducted with cooperation of the University of Nottingham in UK.

As peel test is influenced by factors like mechanical property of polymer, geometry of strips, peel speed, peel angle etc. The mechanics of peeling are also going to be investigated.

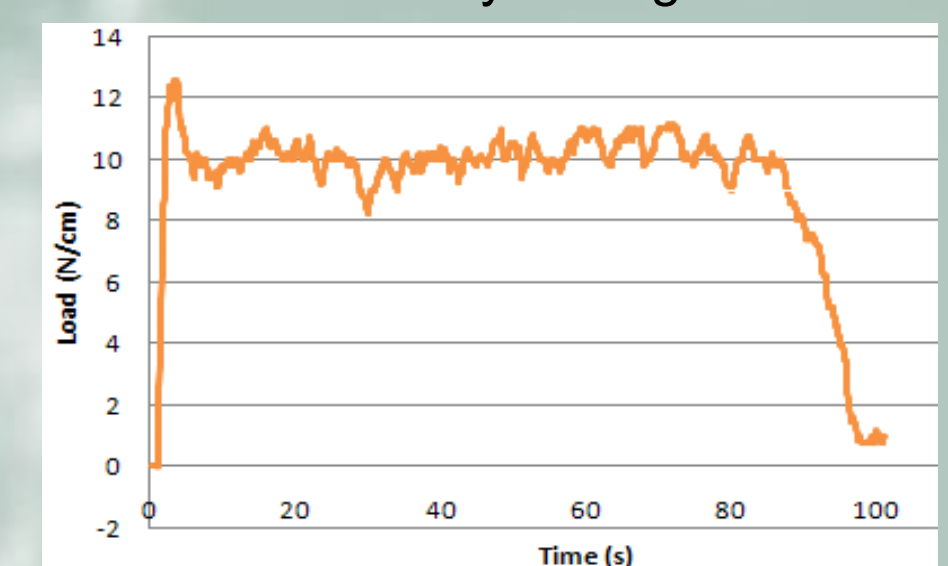


Fig. 11: A peel test result

6