



This item was submitted to Loughborough's Institutional Repository (<https://dspace.lboro.ac.uk/>) by the author and is made available under the following Creative Commons Licence conditions.

A yellow rectangular box containing the Creative Commons Attribution-NonCommercial-NoDerivs 2.5 license summary. At the top is the Creative Commons logo (CC) and the text 'creative commons' in a bold, lowercase font, with 'COMMONS DEED' in a smaller, spaced-out font below it. The license title 'Attribution-NonCommercial-NoDerivs 2.5' is centered. Below this, the text 'You are free:' is followed by a bullet point: 'to copy, distribute, display, and perform the work'. Then, 'Under the following conditions:' is followed by three items, each with a circular icon: 1. 'BY:' icon (a circle with 'BY' inside), followed by the text 'Attribution. You must attribute the work in the manner specified by the author or licensor.' 2. A circle with a dollar sign and a diagonal slash through it, followed by the text 'Noncommercial. You may not use this work for commercial purposes.' 3. A circle with an equals sign inside, followed by the text 'No Derivative Works. You may not alter, transform, or build upon this work.' Below these three items is a list of two bullet points: 'For any reuse or distribution, you must make clear to others the license terms of this work.' and 'Any of these conditions can be waived if you get permission from the copyright holder.' At the bottom of the box, the text 'Your fair use and other rights are in no way affected by the above.' is followed by 'This is a human-readable summary of the [Legal Code \(the full license\)](#).' and a blue link 'Disclaimer' with a small document icon.

For the full text of this licence, please go to:
<http://creativecommons.org/licenses/by-nc-nd/2.5/>

CAR SEAT AND OCCUPANT MODELLING USING CAD

Professor Keith Case*, Dr Di-Chen Xiao* and Dr J Mark Porter**


** Department of Manufacturing Engineering, **Department of Human Sciences,
Loughborough University of Technology, Loughborough, Leicestershire, LE11 3TU*

A current Brite-Euram project is concerned with life-cycle aspects of car seating with Loughborough being responsible for driver comfort assessment. This is being carried out through road and laboratory trials, with the results to be incorporated within the SAMMIE design system. Driver comfort is in part determined by seat pressure distributions which lead to deformation of the human flesh and the seat and movement of important design locations such as the driver's eyepoint. Accommodation of these effects requires a more realistic representation of the human body using surface rather than solid representations. Hence a shadow scanning technique is used to capture human body shape which is processed into the DUCT surface modelling system and via IGES files into SAMMIE. Finite element techniques are then used to predict deformations at the seat/driver interface.

1. Introduction

The modelling of the human body for use in computer aided design systems can be traced back to the very early days of computer graphics. Early research work was to be found in the USA primarily in military and aerospace applications (e.g. BOEMAN) and in the UK (e.g. SAMMIE, Bonney et al, 1972). Today there are a number of systems that have reached commercial maturity and also form the basis for further research (e.g. JACK. and SAMMIE, Porter et al, 1995). Most of this work has involved the use of solid modellers which though appropriate for analysis of interference problems, typically give a symbolic rather than realistic representation of the human body (figure 1). Although this is perfectly adequate for the evaluation of many important human factors such as reach, vision and to a lesser extent fit within the workplace, there are some situations where a more precise representation is required.

Our current Brite-Euram project is concerned with life-cycle aspects of car seating and Lough borough is responsible for road and laboratory trials related to driver comfort assessment and for the creation of a design tool within the SAMMIE computer aided ergonomics design system. Driver comfort is a subtle measure which in part is determined by pressure distributions across the seat. These pressures lead to deformation of the human flesh and the seat at their points of contact which in turn leads to movement in some important design locations such as the driver's eyepoint. The eventual accommodation of these effects has caused us to seek a more realistic representation of the human body using surface rather than solid representations.

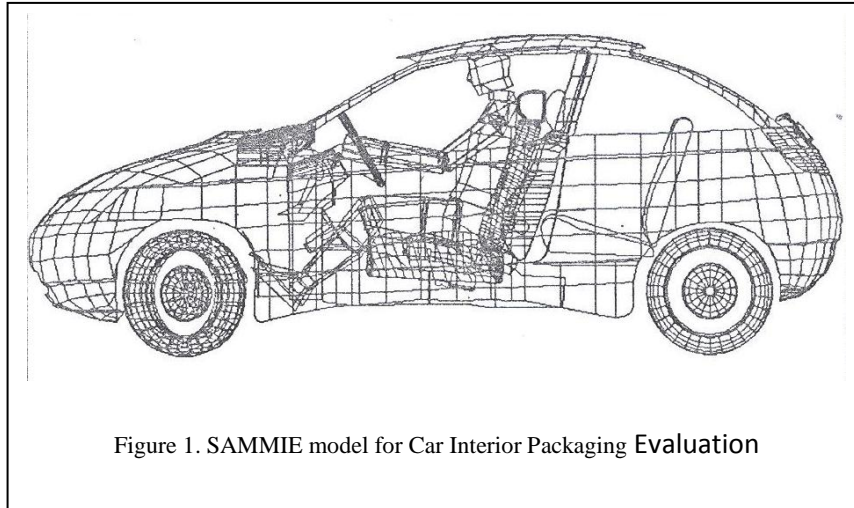

The variety in human body shape and dimension makes it particularly difficult to determine initial shape representations and to subsequently manipulate these to represent individuals or general populations. A shadow scanning technique (LASS, Loughborough Anthropometric Shadow Scanner) developed by the HUMAG (Human Measurement and Growth) Research Group in the Human Sciences Department of Loughborough University was used to capture shape information. The entire human body can be scanned in a matter of minutes and ordered coordinate information provided. This information has been processed for input into the DUCT surface modeller where some data reduction can take place before being output in the form of IGES B-Spline surfaces. These surfaces are then processed into a quadrilateral mesh representation that can be handled by the PHIGS functionality implemented within SAMMIE.

Further work is required within SAMMIE to provide a variational model that allows different anthropometric representations to be generated based on the scanned shape and driven by dimensions collected from field surveys. Finally it is hoped to utilise our empirically obtained pressure distribution maps to provide a design tool capable of predicting the defonnations at the driver/seat interface.


2. Scanning Body Data

Use of the Loughborough Anthropometric Shadow Scanner (LASS) (Jones et al, 1989, Brooke-Wavell et al, 1994) involves standing a subject on a platform which is rotated through 360 degrees in steps of approximately 2.3 degrees in about 3 minutes. At each location strips of light are projected onto the body where they are measured by television cameras. This produces a 'raw' binary data file containing some 64,000 coordinates. This data is processed both to remove 'noise' created by stray reflections and to extrapolate for regions that are obscured during the scanning process (e.g. the part of the torso hidden by the arms).

3. Surface Modelling

The data supplied from the body scanner is used to generate a surface model in the DUCT surface modeller. Figure 2(a) shows a full resolution plot in both its rendered

and wireframe forms and consists of 29 horizontal sections each of which is defined by 29 coordinate points.

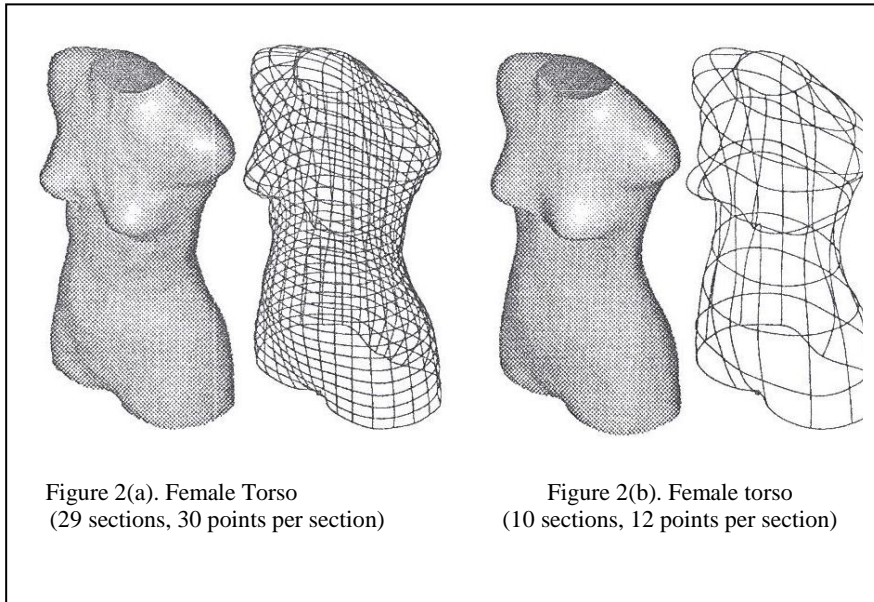

This provides an accurate representation of the human form, but the information can be reduced while maintaining the anthropometric shape integrity. Reduction of the data is achieved by the removal of appropriate horizontal sections and alternate points on each section. Figure 2(b) illustrates that these simple techniques are effective in achieving an eighty-five percent reduction in data.

4. Anthropometric Modelling

An objective of our work is to be able to represent a variety of human body forms through modelling rather than image capture techniques. i.e. the scans represent the shape and dimensions of an individual whereas we wish to be able to synthesise a model from a combination of scan data for shape and data from anthropometric surveys for dimensionality. This remains to be done, but we are helped in this by knowledge of the relationship between scan sections and anthropometric landmarks. The scan data also needs to be modified to allow us to generate a model that has joint articulation. This has required some modification of the surface models in the regions where limbs connect with each other and the torso. Figure 3 illustrates the current status of this work with an 'armless' figure (we have yet to obtain arm scans).

5. Car Seat Modelling

A parametric approach has been adopted in modelling car seats within the DUCT system. Composite car seats can be constructed from elements such as seatpan, backrest, head rest, side supports, etc and some examples are shown as figure 4. Hence we have the man model from modified scan data and the seat model in the same form ready for transfer into the SAMMIE system.

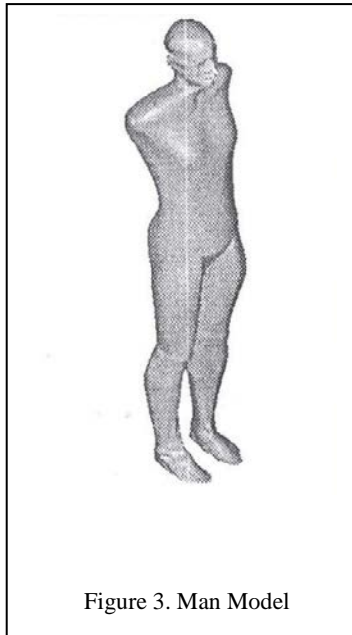


Figure 3. Man Model



Figure 4. Examples of car seats

6. Transfer to SAMMIE


SAMMIE is a boundary representation solid modelling system and its graphics is handled by a commercial implementation of the PHIGS standard. The transfer from DUCT to SAMMIE is achieved by an IGES file containing B-Splines that are readily convertible into a mesh representation which reduces the visual realism of the image but is suited to the next stage of the work which is to use finite element work to investigate the compression between driver and seat.

7. Analysis of driver/seat interface

The creation of more realistic body shapes fulfils an overall objective of improving the performance of the SAMMIE system, but for our Brite contract we wish to investigate and produce algorithms for the way in which the flesh and car set deform when in contact. The Patran finite element package is used for this and its geometric knowledge is obtained from the models described above. Information on the compressibility of the seats is available from earlier experimentation and although the compressibility of human flesh is less easily determined, the HUMAG research group has determined this characteristic whilst creating physical manikins. Our own experimental work has determined pressure contours for a variety of driver/seat configurations (figure 5) and these are used in the validation of our modelling work.

8. Conclusions

There is a considerable way to go before we achieve our ultimate objectives of an improved and more realistic body shape for our man model and an understanding of the implications of seat/flesh compression on car interior design. However the work so far has clearly demonstrated the value of body scan data and how it may be transformed into a geometric model that is amenable to modification to represent the variability found in human populations.

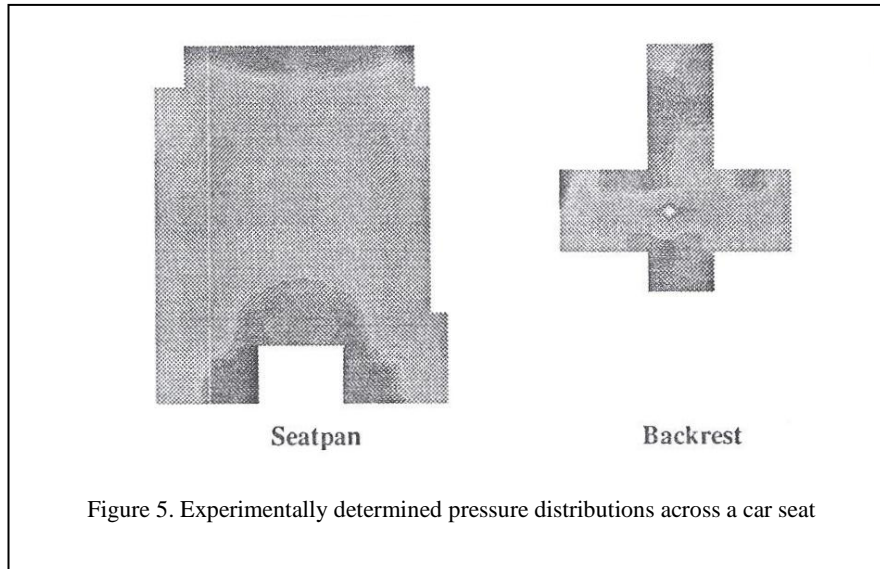

9. Acknowledgements

The research described in this paper is a part of 'Advanced Technologies for Automobile Seat Evaluation and Design (SED)', a BRITE-EURAM Project (BRE2.CT92.0246) carried out in collaboration with Fiat, Courtaulds, Southampton University and Berlin University. The paper has been adapted from a presentation to the Eurographics Conference, Loughborough University of Technology, March 1995. The authors would like to gratefully acknowledge the invaluable support provided by Professor Peter Jones and the staff of the HUMAG Research Group in providing body scan data.

10. References

- Bonney, M C, Case, K, Hughes, B J, Schofield, N A & Williams, R W. "Computer Aided Workplace Design using SAMMIE". Ergonomics Research Society Annual Conference, Cardiff, April 1972.
- Brooke-Wavell, K., Jones, P.R .M. & West, G.M. "Reliability and repeatability of 3-D body scanner (LASS) measurements compared to anthropometry", *European Journal of Applied Physiology and Occupational Physiology*, 68, pp514-518, 1994.
- Jones, P.R.M., West, G.M., Harris, D.H. & Read, J.B. "The Loughborough anthropometric shadow scanner", *Endeavour, New Series*, Vol 13, No 4, pp162-168, 1989.
- Porter, J M, Freer, M T, Case, K & Bonney, M C. "Human Computer Modelling". In 'Evaluation of Human Work. A Practical Ergonomics Methodology'. 2nd Edition. Edited by J R Wilson & E N Corlett, Taylor & Francis, London. *In Press*.