



This item was submitted to Loughborough's Institutional Repository (<https://dspace.lboro.ac.uk/>) by the author and is made available under the following Creative Commons Licence conditions.



**CC creative commons**  
COMMONS DEED

**Attribution-NonCommercial-NoDerivs 2.5**

**You are free:**

- to copy, distribute, display, and perform the work

**Under the following conditions:**

**BY:** **Attribution.** You must attribute the work in the manner specified by the author or licensor.

**Noncommercial.** You may not use this work for commercial purposes.

**No Derivative Works.** You may not alter, transform, or build upon this work.

- For any reuse or distribution, you must make clear to others the license terms of this work.
- Any of these conditions can be waived if you get permission from the copyright holder.

**Your fair use and other rights are in no way affected by the above.**

This is a human-readable summary of the [Legal Code \(the full license\)](#).

[Disclaimer](#) 

For the full text of this licence, please go to:  
<http://creativecommons.org/licenses/by-nc-nd/2.5/>

## Fabrication of biodegradable poly(lactic acid) particles in flow focusing glass capillary devices

[G.T. Vladisavljević<sup>1</sup>, W.J. Duncanson<sup>2</sup>, H.C. Shum<sup>3</sup>, D.A. Weitz<sup>2</sup>]

<sup>1</sup>Department of Chemical Engineering, Loughborough University, Loughborough, LE11 3TU, UK; <sup>2</sup>Department of Physics, Harvard University, Cambridge, MA 02138, USA; <sup>3</sup>Department of Mechanical Engineering, University of Hong Kong, Hong Kong.

G.Vladisavljevic@lboro.ac.uk

Abstract:

Poly(dl-lactic acid) (PLA) particles with a diameter in the range from 12 to 100  $\mu\text{m}$  were fabricated in flow focusing glass capillary devices shown in Figure 1. The disperse phase was 5% (w/w) PLA in dichloromethane (DCM) containing small amount of Nile red and the continuous phase was 5% (w/w) poly(vinyl alcohol) in Milli-Q water. The two immiscible liquids were introduced from the two ends of the same square capillary in opposite directions and both liquids were collected and exit through the inner circular capillary. The disperse phase was hydrodynamically flow focused by the continuous phase in the tapered section of the circular capillary, which caused the disperse phase to break into drops inside the collection tube. PLA particles were formed by DCM evaporation at room temperature. In order to prevent wetting of the collection tube with the disperse phase, the hydrophilicity of the glass surface was enhanced by 2-[methoxy(polyethyleneoxy)propyl]trimethoxysilane. Experimentally, we show that the droplet size is influenced by the operating conditions and orifice size, as shown in Fig. 1. The drop formation occurs near the orifice in the dripping regime (Fig. 1a-b) and farther downstream in the jetting regime (Fig. 1c). The drops formed in the jetting regime are significantly bigger than those formed in the dripping regime and have a broader size distribution.

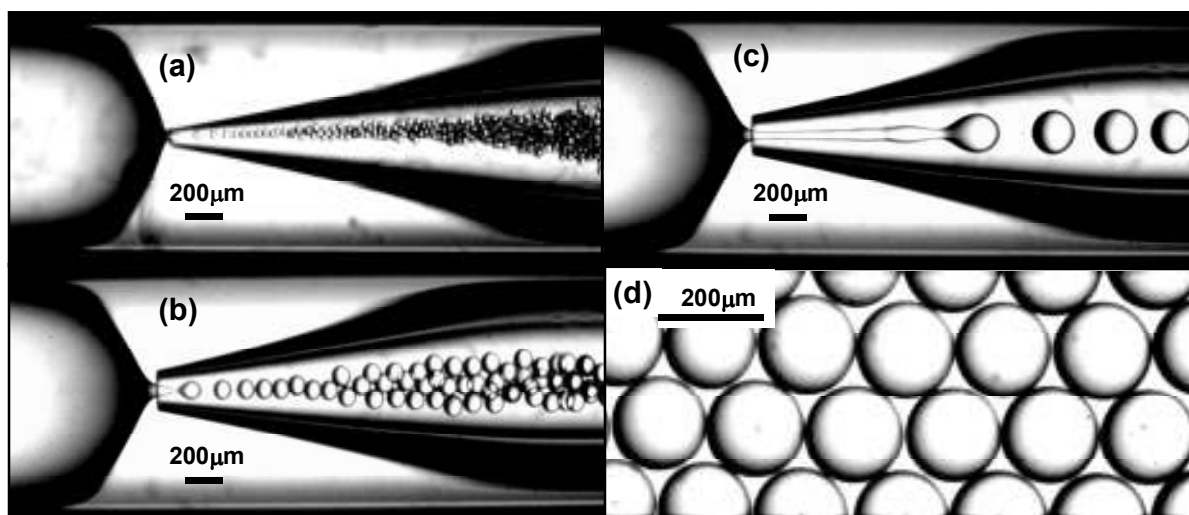


Fig. 1. (a)  $Q_c=0.5 \text{ mL h}^{-1}$ ,  $Q_d=0.003 \text{ mL h}^{-1}$ ,  $d_{\text{orifice}}=60 \mu\text{m}$ ,  $d_{\text{droplet}}=33 \mu\text{m}$ . (b)  $Q_c=5 \text{ mL h}^{-1}$ ,  $Q_d=1 \text{ mL h}^{-1}$ ,  $d_{\text{orifice}}=130 \mu\text{m}$ ,  $d_{\text{droplet}}=100 \mu\text{m}$ . (c)  $Q_c=6.5 \text{ mL h}^{-1}$ ,  $Q_d=0.7 \text{ mL h}^{-1}$ ,  $d_{\text{orifice}}=130 \mu\text{m}$ ,  $d_{\text{droplet}}=230 \mu\text{m}$ . (d) Collected monodispersed droplets.

### Acknowledgment

The work was supported by the Engineering and Physical Sciences Research Council (EPSRC) of the United Kingdom (grant reference number: EP/HO29923/1).