



This is a postprint version of the following published document:

Antevski, K., Martín-Pérez, J., Molner, N., Chiasserini, C.F., Malandrino, F., Frangoudis, P., Ksentini, A., Li, X., SalvatLozano, J., Martínez, R., Pascual, I., Manges-Bafalluy, J., Baranda, J., Martini, B. y Gharbaoui, M. (2018). Resource Orchestration of 5G Transport Networks for Vertical Industries. In: *IEEE 29th Annual International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC)*, pp. 158-163.

DOI: [10.1109/PIMRC.2018.8581029](https://doi.org/10.1109/PIMRC.2018.8581029)

©2018 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

Resource Orchestration of 5G Transport Networks for Vertical Industries

K. Antevski¹, J. Martín-Pérez^{1,2}, Nuria Molner^{1,2}

¹Universidad Carlos III de Madrid, Spain

²IMDEA Networks Institute, Spain

C. F. Chiasserini, F. Malandrino
Politecnico di Torino, Italy

P. Frangoudis, A. Ksentini
EURECOM, France

X. Li, J. SalvatLozano

NEC Laboratories Europe GmbH, Germany

R. Martínez, I. Pascual, J. Mangués, J. Baranda
Centre Tecnològic de Telecomunicacions de Catalunya
(CTTC/CERCA)
Castelldefels, Spain

B. Martini, M. Gharbaoui
Scuola Superiore Sant'Anna, Italy

Abstract—The future 5G transport networks are envisioned to support a variety of vertical services through network slicing and efficient orchestration over multiple administrative domains. In this paper, we propose an orchestrator architecture to support vertical services to meet their diverse resource and service requirements. We then present a system model for resource orchestration of transport networks as well as low-complexity algorithms that aim at minimizing service deployment cost and/or service latency. Importantly, the proposed model can work with any level of abstractions exposed by the underlying network or the federated domains depending on their representation of resources.

Index Terms—Network slicing, resource orchestration, resource federation, system architecture, algorithms.

I. INTRODUCTION

5G transport networks are envisioned to expand the service scope of current mobile networks to support various vertical services, such as eHealth, automotive, media, or cloud robotics, hence enriching the telecom network ecosystem. To enable such vision, the EU H2020 5G-PPP phase 2 5G-TRANSFORMER project [1] proposes a flexible and adaptable SDN/NFV-based transport and computing platform, capable of simultaneously supporting the needs of different vertical industries to meet their diverse range of resource and service requirements. In this design, Network Function Virtualization (NFV) and Network Slicing are the key solutions to address this challenge.

The 5G-TRANSFORMER solution consists of three novel building blocks, as illustrated in Figure 1:

1) **The Vertical Slicer (5GT-VS)** is the common entry point for all verticals and MVNOs (Mobile Virtual Network Operators) into the system. It dynamically creates and maps the vertical services onto network slices according to their requirements, and it manages their lifecycle. It also translates the vertical and slicing request into an NFV Network Service (NFV-NS) and sends it to

the 5GT-SO, where a slice will be deployed as an NFV-NS instance.

- 2) **The Service Orchestrator (5GT-SO)** offers service or resource orchestration and federation. Orchestration entails managing end-to-end services or resources that may be split into multiple segments belonging to different administrative domains based on requirements and availability. Federation entails managing administrative relations at the interface between the 5GT-SOs of different domains and handling abstraction of services and resources.
- 3) **The Mobile Transport and Computing Platform (5GT-MTP)** is the underlying unified transport (and computing) stratum, responsible for providing the resources required by the NFV-NSs orchestrated by the SO. This includes their instantiation over the underlying physical transport network, computing, and storage infrastructure. It also needs to (de)abstract the 5GT-MTP resources offered to the 5GT-SO.

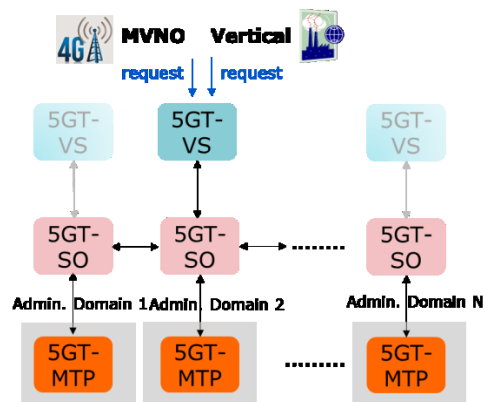


Figure 1: The 5G-TRANSFORMER concept

This paper focuses on the orchestration layer of the 5G-TRANSFORMER system and on how the 5GT-SO orchestrates resources across one or multiple

instead, allows an administrative domain to request, use, and manage resources that are owned by other peering administrative domains. As shown in Figure 2, out of the five reference points on the E/WBI, two are used for service federation and three for resource federation.

The decision about service federation is done during service instantiation/modification. Then, the 5GT-SO (consumer) sends an instantiation request to a peering 5GT-SO (provider), specifying the NFV-NS segment to be deployed in the peering domain. This request is sent through the So-So-LCM reference point of the E/WBI. The peering 5GT-SO can approve or reject the request (e.g., based on both service and resource availability). In case of acceptance, the peering 5GT-SO becomes the provider of that service segment (i.e., it is responsible for orchestrating the service segment in its own domain) and will send monitoring information back to the consumer 5GT-SO via the So-So-MON reference point. Near the end of the service instantiation operation, the consumer 5GT-SO completes the end-to-end service by linking the “consumed” federated segment with the others, through connection points.

Next, let us consider that a 5GT-SO has to instantiate a service, or a segment of it. Then the 5GT-SO needs to decide *which resources* should be used to that end. Note that, in case of resource shortage in its own administrative domain, the 5GT-SO may be entitled to use resources in other domains (*resource federation*), possibly, at a higher cost. In order to implement resource federation, the 5GT-SOs bidirectionally exchange information on the resources they have and that are available for federation, using the So-So-RAM reference point of the E/WBI. At each 5GT-SO, the resources available in other domains are stored into a database, which is kept up-to-date thanks to the dynamic repetition of the above information exchange. Upon any decision for resource federation, the requests for consuming federated resources are sent through the So-So-RM reference point of the E/WBI. Unlike in service federation, the consumer 5GT-SO has full access, management, and control of the (potentially abstracted) federated resources in the provider domain (through the So-So-RM reference point) in addition to their monitoring information (through the So-So-RMM reference point) and connection points.

III. RESOURCE ABSTRACTION

In the 5G-TRANSFORMER architecture, the 5GT-MTP is responsible for providing the 5GT-SO with the information about the available resources, so that the 5GT-SO can make decisions on service instantiation. Because of the varying level of trust among organizations and the complexity associated to resource management, the 5GT-MTP, in general, does not provide all of its infrastructure details. Rather, it presents to the 5GT-SO the information with a certain *level of abstraction*. (For similar reasons, provider

domains in resource federation may also abstract resources.)

Specifically, the resources controlled by an 5GT-MTP can be divided in two groups: computing resources and network transport resources. Computing resources are the physical machines that can accommodate VNFs and are typically characterized by CPU, memory and storage capabilities. Computing resources are grouped by location in NFVI Points of Presence (NFVI-PoPs), and the physical machines of an NFVI-PoP are managed by the so-called VIM (Virtual Infrastructure Manager), i.e., the software entity that actually manages (and reports on) the computing resources. Transport resources are represented by the network forwarding units and the physical links interconnecting them. WIMs (WAN Infrastructure Managers) are the entities that control network resources, also reporting the network topology and the available link bandwidth and latency.

An infrastructure can thus be represented as a composition of network and computing resources controlled by WIMs and VIMs, respectively. Since the nature of these resources is intrinsically different, the abstraction mechanisms for these two types of resources can also be different and can be combined as follows.

Level 1: also named WIM level because only WIM resources are abstracted. The 5GT-MTP reports all details about computing resources while the network resources are abstracted as a set of virtual links connecting the physical machines, with each link being characterized by a given bandwidth and latency.

Level 2: also named VIM level because, besides the WIM abstraction of level 1, the computing resources are aggregated per VIM. The 5GT-MTP reports the computing capabilities, CPUs, memory, storage, with an NFVI-PoP granularity instead of by physical-machine granularity as in Level 1. Regarding the network resources, only the connections between NFVI-PoPs are reported, as virtual links with a given bandwidth and latency.

Level 3: also named MTP level because all resources, both computing and network resources, are aggregated with 5GT-MTP granularity. This level may be useful for resource federation, as it allows a 5GT-SO to expose to peer 5GT-SOs the resources available within its administrative domain while hiding the complexity and the infrastructure details. In general, this higher level of abstraction is handled by the 5GT-SO, as it is the one to decide which levels of abstraction to be exposed to other 5GT-SOs, due to administrative or agreement on information constraints.

Our algorithms can conveniently work with any of the above levels of abstractions. We also remark that the selected abstraction levels between 5GT-MTP and 5GT-SO, and between the peer 5GT-SOs, may be different.

IV. RESOURCE ORCHESTRATION ALGORITHMS

Below, we start by introducing the model, along with the variables and the constraints that characterize our system (Sec. IV.A). As shown in [7], the problem of resource orchestration in SDN/NFV system is NP-hard, which makes an optimal solution impractical in real-world conditions. Thus, we leverage on a heuristic approach and propose three swift, yet efficient, resource orchestration algorithms (Sec. IV.B).

A. System model

We consider that the 5GT-SO receives two main pieces of information, on which it can leverage to make orchestration decisions. The former is provided by the 5GT-VS and is given in the form of the service VNF Forwarding Graph (VNFFG), i.e., the set of VNFs and edges connecting them, and the deployment flavours, representing the service to be deployed and the associated requirements. The latter is provided by the 5GT-MTP and refers to the available resources. As discussed above, the representation of the resources depends on the abstraction that is used, however our algorithms can work with any level of abstraction. Thus, in the following we will refer to the resource representation as a host graph, where hosts (i.e., vertices) can be either physical machines, as per Level 1, or NFVI-PoPs, as per Level 2, and edges are virtual links (VLs) connecting hosts.

As far as the **VNFFG** is concerned, we denote its VNFs (i.e., vertices) by $v \in V$, each requiring an amount $r(v, \rho) \geq 0$ of resource type $\rho \in R$. Elements of the resource type set R can include CPU, memory, and storage. r -values account for both the quantity of traffic each VNF has to process (e.g., in Mbits), and the amount of computational resources needed to process each unit of traffic (e.g., in CPU cycles per Mbit). Each time a request traverses a VNF, it incurs a delay $d(v)$. For each pair of VNFs $v_1, v_2 \in V$, i.e., for each edge of the VNFFG, we know the amount of traffic $f(v_1, v_2) \geq 0$ flowing from v_1 to v_2 . Clearly, $f(v_1, v_2) = 0$ means that there is no traffic between those VNFs.

The 5GT-SO also knows the set of **services** to be deployed, $S = \{s\}$, the number of times $n(s, v)$ requests of service s visit VNF v , the probabilities $P(v_2|v_1, s)$ that they visit v_2 immediately after v_1 , and the maximum acceptable delay for that service $D^{max}(s)$.

The **host graph** has hosts $h \in H$ as vertices, each with capabilities $C(h, \rho) > 0$ for each resource type. Links (VLs) between hosts have a capacity $T(h_1, h_2)$, expressing the maximum *total* quantity of traffic that can flow per second from VNFs hosted at h_1 to VNFs hosted at h_2 . Similarly, requests traveling a link incur a delay $\delta(h_1, h_2)$.

The main **decision** to make at the 5GT-SO is whether to place an instance of VNF v at host h , expressed through a binary variable $x(h, v) \in \{0, 1\}$. Each VNF placement incurs a cost $\kappa(h, v, op)$. A very relevant factor contributing to κ is represented by the fees charged by different mobile operators, op , for the usage of their infrastructure by placing VNF v at host h . The fees are pre-determined and defined by each operator. The maximum cost per service is denoted by $\kappa^{max}(s)$.

Two **constraints** must be honored, concerning the capabilities of hosts and the capacity of links, i.e.,

$$\sum_{v \in V} r(v, \rho)x(h, v) \leq C(h, \rho), \quad \forall h \in H, \rho \in R,$$

$$\sum_{v_1, v_2 \in V} x(h_1, v_1)x(h_2, v_2)f(v_1, v_2) \leq T(h_1, h_2),$$

$$\forall h_1, h_2 \in H.$$

Also, delay constraints, accounting for both processing and propagation delays, and cost constraints have to be met. For each service $s \in S$, the following must hold:

$$\sum_{v \in V} n(s, v)d(v) + \sum_{v_1, v_2 \in V} n(s, v_1)P(v_2|v_1, s) \cdot$$

$$\sum_{h_1, h_2 \in H} x(h_1, v_1)x(h_2, v_2)\delta(h_1, h_2) \leq D^{max}(s).$$

$$\sum_{v \in V, h \in H, op} k(h, v, op)x(h, v)n(s, v) \leq k^{max}(s).$$

B. Minimizing service deployment cost and/or service latency

We now introduce three heuristics that aim at minimizing the service cost and/or the service latency, while fulfilling all of the above constraints.

1) Cluster-based approach

The high-level goal of the cluster-based approach is to find the best tradeoff between the cost for the operator, as expressed by the κ -parameters, and the service latency. Our strategy is to take care of delay constraints and cost separately, in two different stages:

- first, we divide both the VNFFG and the host graph into *clusters* in such a way to guarantee low network delays;
- then, we assign VNFs in each VNFFG cluster to hosts in the corresponding host cluster so as to ensure low costs $\kappa(h, v, op)$.

Clustering stage. The intuition behind this stage is that, in order to meet service delay constraints, we must keep network delays low, and this in turn means having as little traffic as possible flowing on high-delay links between hosts. Therefore, we *cluster* both the VNFFG and the host graph in the same number of clusters, ensuring that: (i) in the VNF graph, high-traffic edges connect VNFs of the same cluster and low-traffic edges connect VNFs of different clusters; (ii) in the host

graph, low-delay links connect hosts of the same cluster and high-delay links connect hosts of different clusters.

We adopt an iterative, hierarchical clustering technique, presented in [11] and implemented in [12]: at the first iteration, each node starts in its own cluster (*singleton*). At subsequent iterations, the two clusters connected by the highest-traffic edge in the VNFFG, and the two connected by the lowest-delay edge in the host graph, are joined together.

Assignment stage. In this stage, we have to decide at *which host* each VNF shall run. Thanks to the previous clustering stage, network delays can be ignored, while processing delays d only depends on the VNF and not on the host at which it runs. Therefore, we can assign VNFs to hosts with the sole purpose of minimizing costs; specifically, we start from the VNF with the largest delay and place it at the cheapest host with enough spare resources to run it.

In many situations, multiple hosts will be associated with the same cost. In these cases, we break ties by trying to *balance* the load across different hosts. Formally, we choose the VNF to place and the host at which it should be placed so that the following quantity is minimized:

$$\max_{h \in H} \max_{\rho \in R} \frac{\sum_{v \in V} x(h, v) r(\rho, v)}{C(h, \rho)}.$$

In the expression above, the fraction represents how close to exhaustion resource ρ is at host h . We seek to minimize the maximum of such ratios among all resources and hosts, thus reducing the risk to have, e.g., hosts with plenty of spare CPU but no free memory.

Importantly, each step of our approach has linear time complexity in the number of VNFs, hosts, and links; therefore, the global complexity is linear as well. This guarantees very quick decisions, enabling the 5GT-SO to quickly react to new requests and changed conditions.

Furthermore, the approach can be easily extended to *multi-domain scenarios* where federation can be exploited in case of lack of resources in the domain controlled by the 5GT-SO that is in charge of deploying the service requested by the 5GT-VS. In particular, the algorithm can be extended as follows:

- in the clustering stage, edges connecting hosts belonging to different domains should be assigned higher weight, so as to limit the amount of traffic flowing across different domains;
- in the assignment stage, hosts belonging to foreign domains should be assigned higher costs, so as to model the fact that resources from foreign domains ought to be used only when necessary.

2) *Minimum-distance approach.*

This strategy aims at minimizing the consumption of network resources as well as the network latency (i.e., propagation delay) experienced by data while traversing

VLs. In particular, the propagation delay is considered when data traverses the distance between network nodes connected to hosts. For ease of presentation, we describe the strategy by considering a VNFFG composed of two VNFs to be placed into as many hosts. The algorithm seeks for the pair of hosts with the shortest distance provided that the network path connecting them fulfills the bandwidth demand, the candidate hosts have sufficient available resources to meet CPU, memory and storage demand, and the candidate pair of hosts and network path satisfies the overall latency constraint. This strategy tends to consolidate utilizations in terms of both network and hosts resources at the cost of not achieving the lowest overall latency performance.

3) *Minimum-latency approach.*

We now aim at minimizing the overall latency experienced by data while they are elaborated at VNFs into hosts and while they traverse the VLs. Thus, the selection is not constrained by the hosts distance, but by the overall latency offered by the 5GT-MTP at both network and host levels. More specifically, this strategy seeks for the pair of hosts and for the VLs that minimize the accumulated processing latency at hosts and the network latency at the VLs, provided that bandwidth, CPU, memory and storage capacity demands are fulfilled and the overall latency constraint is honored. This strategy offers the lowest overall latency performance at the cost of spreading the resource utilization across both hosts and network links.

V. PERFORMANCE EVALUATION

We now assess the performance of our solution by focusing on the cluster-based approach; the performance evaluation of the other schemes is omitted due to the lack of space. Our reference scenario is a $k = 4$ fat-tree [15] with *Level 1* abstraction (16 hosts in a fully-connected topology), and three services, each including between 5 and 10 VNFs.

We compare our strategy against a stochastic optimization approach, which is based on a genetic algorithm (GA), introduced in Sec. V.A.

A. *Our benchmark*

As a benchmark for our heuristic, we consider a genetic algorithm [13]. In GAs, a solution is represented as a *chromosome*, which is in turn composed of a number of *genes*, each encoding a specific property. In our case, a chromosome is a specific VNF placement solution, while a gene corresponds to a specific host, together with the set of VNF instances placed at it. Starting from a pool of initial chromosomes, which in our case contains K random VNF-to-host assignments, a GA operates iteratively for a number of *generations* applying genetic operations to selected chromosomes to produce *offspring* (i.e., new chromosomes) of better

quality according to a *fitness* function. The main genetic operations are *crossover* and *mutation*:

Crossover. At each generation, with rate rc , the genes of two chromosomes are combined to derive a new one. To improve the quality of the offspring, we introduce a specific gene-quality metric, and select the highest-quality genes of the two parents [14]. In other words, if we are minimizing cost, each gene is characterized by the sum of the costs of the VNFs placed at its host.

Mutation. With a very low probability (rm), each chromosome is subject to random changes to avoid being trapped into local optima. In our GA, this is implemented by randomly swapping VNFs between two genes.

At the end of each generation, a new solution pool is created by selecting the top- K chromosomes of the population according to a *fitness function*. A cost-minimizing algorithm uses as fitness functions the overall placement cost and latency, respectively, as defined in Section IV.A. The algorithm terminates by returning the chromosome with the highest fitness function value. Note that for a chromosome to be included in the pool, the capacity and delay constraints are always checked.

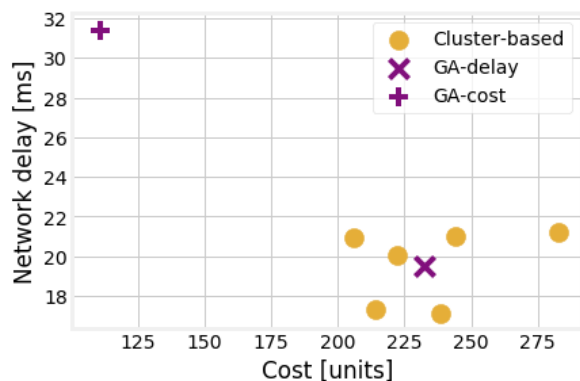


Figure 3: Cost and delay yielded by the cluster-based approach for different number of clusters (yellow dots) and the benchmark (purple markers).

B. Performance of the cluster-based approach

Figure 3 shows the cost and delay associated with the clustering-based approach; each yellow dot therein corresponds to a specific number of clusters, varying from 1 to 7. It is easy to see that changing the number of clusters leads to different cost/delay trade-offs.

The two purple markers correspond to the results of the GA-based benchmark under the two objectives it supports: when it is set to minimize delay, the resulting configuration is similar to the one generated by the cluster-based approach. Setting the GA algorithm to minimize costs results in significantly lower costs than the cluster-based approach, but in a much higher delay.

Finally, it is worth mentioning that the execution time is below one second for the cluster-based approach, against one minute for the GA benchmark.

VI. CONCLUSION

We addressed the relevant problem of designing a service orchestrator in 5G systems that efficiently supports vertical services while exploiting (if needed) services and resources made available by other administrative domains. We proposed a system architecture and discussed different levels of abstraction of physical resources that can be used at the orchestrator to make decisions. We then presented low-complexity algorithms that aim to minimize the network provider's cost and/or the service latency, while meeting the verticals' service requirements.

Beside extending our numerical performance evaluation, future work will be conducted mainly along the two following lines. First, resource orchestration is one of the components of the service instantiation or modification operations performed at the 5GT-SO. Further research is needed to devise efficient algorithms for the segmentation of NFV-NSs and mechanisms for service federation. Note that these tasks also require verification procedures to check, e.g., service availability in a peering domain. Second, within the 5G-TRANSFORMER project we plan to realize a proof-of-concept of the proposed 5GT-SO architecture and resource orchestration algorithms, showing their scalability and efficacy in real-world situations.

ACKNOWLEDGMENTS

This work has been partially funded by the EU H2020 5G-Transformer Project (grant no. 761536).

REFERENCES

- [1] A. de la Oliva et al., 5G-TRANSFORMER: Slicing and Orchestrating Transport Networks for Industry Verticals, IEEE Communications Magazine, June 2018, (accepted for publication)
- [2] A. Hirwe and K. Kataoka, "LightChain: A lightweight optimization of VNF placement for service chaining in NFV," in *IEEE NetSoft*, 2016
- [3] T. W. Kuo, B. H. Liou, K. C. J. Lin, and M. J. Tsai, "Deploying chains of virtual network functions: On the relation between link and server usage," in *IEEE INFOCOM*, 2016.
- [4] A. Marotta and A. Kessler, "A Power Efficient and Robust Virtual Network Functions Placement Problem," in *IEEE ITC*, 2016.
- [5] M. Mechtri, C. Ghribi, and D. Zeghlache, "A scalable algorithm for the placement of service function chains," *IEEE Trans. on Network and Service Management*, 2016.
- [6] J. Cao, Y. Zhang, W. An, X. Chen, J. Sun, and Y. Han, "VNF-FG design and VNF placement for 5G mobile networks," *Science China Information Sciences*, 2017.

- [7] S. Agarwal, et al., "Joint VNF Placement and CPU Allocation in 5G", IEEE INFOCOM, Apr. 2018.
- [8] B. Martini, M. Gharbaoui, I. Cerutti and P. Castoldi, "Network and datacenter resource orchestration strategies for mobile virtual networks over telco clouds," in *IEEE ICTON*, 2016.
- [9] B. Martini, F. Paganelli, P. Cappanera, S. Turchi, P. Castoldi, "Latency-aware composition of Virtual Functions in 5G," in *IEEE NetSoft*, 2015.
- [10] ETSI GS NFV-IFA 011, V2.3.1, Network Functions Virtualisation (NFV) Release 2; Management and Orchestration; VNF Packaging Specification, 2017.
- [11] F. Murtagh, "A Survey of Recent Advances in Hierarchical Clustering Algorithms", *The Computer Journal*, 1983.
- [12] AgglomCluster: <https://pypi.org/project/AgglomCluster>
- [13] M. Mitchel, *An Introduction to Genetic Algorithms*, 5th ed. Cambridge, MA, USA: MIT Press, 1999.
- [14] J. Xu, J. A. Fortes, "Multi-objective virtual machine placement in virtualized data center environments," in *Proc. IEEE/ACM GreenCom*, 2010.
- [15] M. Al-Fares, A. Loukissas, and A. Vahdat, "A Scalable, Commodity Data Center Network Architecture," *SIGCOMM Comput. Commun. Rev.*, vol. 38, no. 4, pp. 63–74, Aug. 2008. [Online]. Available: <http://doi.acm.org/10.1145/1402946.1402967>