

Boston University**OpenBU****<http://open.bu.edu>**

Physics

BU Open Access Articles

2018-07-18

Control energy of complex networks towards distinct mixture states

This work was made openly accessible by BU Faculty. Please [share](#) how this access benefits you. Your story matters.

Version	Published version
Citation (published version):	Sen Nie, H Eugene Stanley, Shi-Ming Chen, Bing-Hong Wang, Xu-Wen Wang. 2018. "Control energy of complex networks towards distinct mixture states." Scientific Reports, Volume 8. https://doi.org/10.1038/s41598-018-29207-x

<https://hdl.handle.net/2144/39572>*Boston University*

SCIENTIFIC REPORTS



OPEN

Control energy of complex networks towards distinct mixture states

Sen Nie^{1,2}, H. Eugene Stanley², Shi-Ming Chen¹, Bing-Hong Wang³ & Xu-Wen Wang¹ 

Controlling complex networked systems is a real-world puzzle that remains largely unsolved. Despite recent progress in understanding the structural characteristics of network control energy, target state and system dynamics have not been explored. We examine how varying the final state mixture affects the control energy of canonical and conformity-incorporated dynamical systems. We find that the control energy required to drive a network to an identical final state is lower than that required to arrive a non-identical final state. We also demonstrate that it is easier to achieve full control in a conformity-based dynamical network. Finally we determine the optimal control strategy in terms of the network hierarchical structure. Our work offers a realistic understanding of the control energy within the final state mixture and sheds light on controlling complex systems.

Because it can accurately characterize such real-world systems as social networks^{1–3}, biological networks^{4–7}, technical networks^{8,9}, and financial networks^{10–13}, network science has been a popular research topic for decades. In recent years in particular, various ways of controlling them have been devised^{14–20}, which aims to figure out whether external inputs can be used to drive a networked system from an initial state to any desired final state within a finite period of time²¹. Controllability, i.e., the minimum number of inputs (driver nodes) required to achieve the full control, has been examined theoretically both from the structural controllability of directed networks with random link weights²² and of networks with arbitrary structures and link weights²³.

When achieving control, it is expected to minimize the control energy required to steer a system from any arbitrary initial state to a desired final state. The control energy relies strongly on the controllability Gramian^{24–29}, which includes topological properties, control time, initial and final states, and the number of inputs. It has been proved that the time regime and degree correlation can confine the lower and upper bounds of the control energy²⁶. When exploring the eigenspace of the controlled system, we find that the eigen-energies can be either heterogeneous or homogeneous, depending on how we control the different node fractions²⁷.

Although prior works have focused on the selection of driver nodes that can reduce the control energy^{30–32}, the goal when controlling a networked system is usually to steer each node towards an identical state. For example, an entire swarm of honeybees can be drawn into the same nest only by a few “shepherding” honeybees³³. Because synchronization—where all individuals reach a consistent phase—is prevalent in nature^{34–36}, we need to know whether it requires more control energy to realize this identical final state than a non-identical mixed final state. In addition, nodes tend to tune their states to synchronize with those of their network neighbors. This conformity behavior is prevalent in both natural and social systems^{37,38}. Since conformity behavior-based dynamics facilitates the controllability of an identical state³⁹, we examine the control energy of such a conformity-based dynamical network.

Here, we explore the control energy by examining the number of driver nodes needed to direct the system from an initial state to either an identical or non-identical final state. We incorporate conformity dynamics into the general model to determine how nodal dynamics affect the control energy. Using simulations of synthetic and real networks, we find the relationship between the minimal driver nodes and control energy and determine the optimal set of driver nodes for minimizing the control energy.

¹School of Electrical and Automation Engineering, East China Jiaotong University, Nanchang, Jiangxi, 330013, China.

²Department of Physics and Center for Polymer Studies, Boston University, Boston, MA, 02215, USA. ³Department of Modern Physics, University of Science and Technology of China, Hefei, Anhui, 230026, China. Correspondence and requests for materials should be addressed to X.-W.W. (email: xwwang@ecjtu.jx.cn)

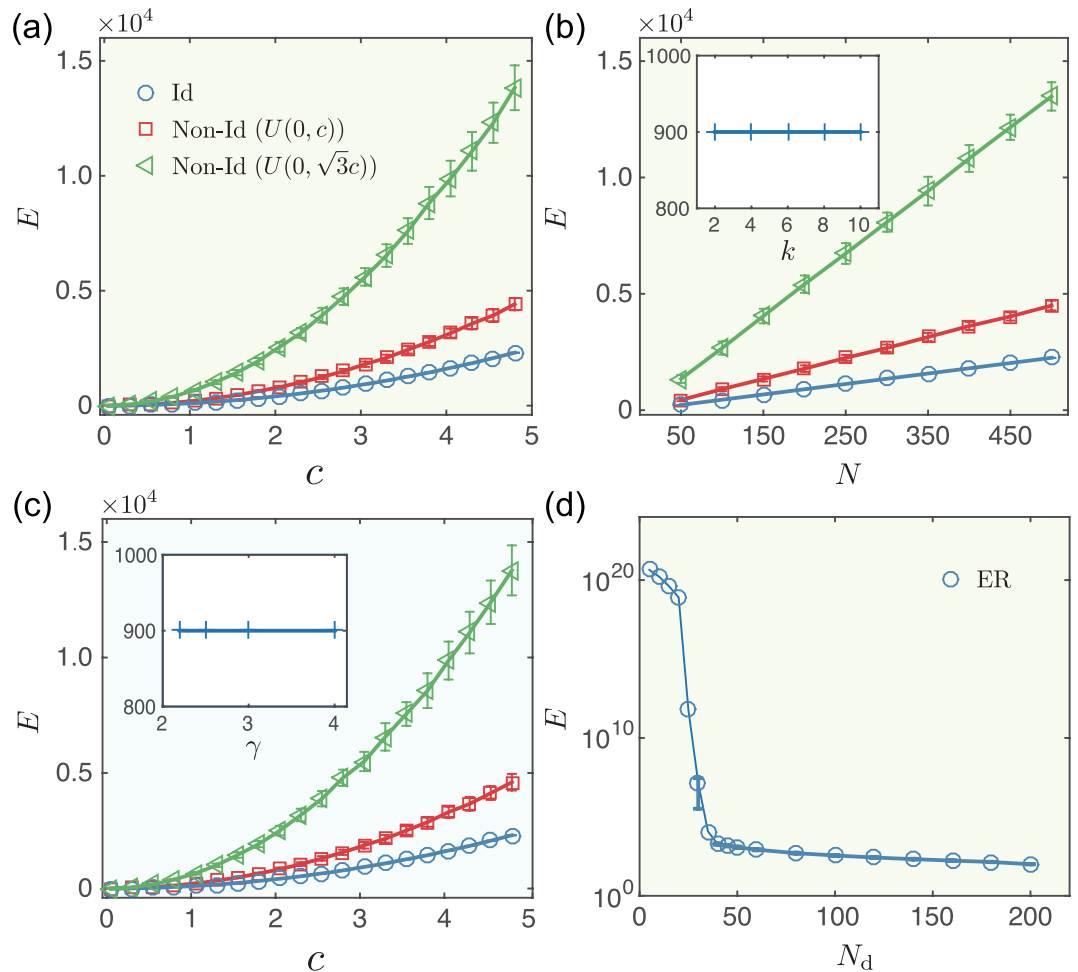


Figure 1. Control energy for undirected networks with identical (Id) and non-identical (Non-Id) final state modes. **(a)** Control energy E as a function of distance c in directing the random network to distinct final state modes. Network size $N=200$ and the average degree $k=5$. **(b)** Control energy E as a function of network sizes N in directing the random network to distinct final state modes. Inset: Control energy as a function of average degrees k in directing the random network to the identical final state ($c=3$). **(c)** Control energy E as a function of distance c in directing the scale-free network to distinct final state modes ($\gamma=2.5$, $k=5$). Inset: Control energy as a function of power exponents γ in directing the scale-free network to the identical final state ($k=5$, $c=3$). **(d)** Control energy E as a function of the number of driver nodes N_d in directing the random network to the identical final state ($c=1$). The link weights of all networks are uniformly drawn from $U(0, 1)$. The error bars represent standard deviations and each data point is an average over 100 independent realizations.

Results

Canonical linear model.

We use a dynamical system governed by the canonical linear equation (see Method) for modeled Erdős-Rényi⁴⁰ and scale-free⁴¹ networks to determine the control energy required to steer the system from the initial state \mathbf{x}_0 to the following final state with different mixtures by choosing all of the nodes as driver nodes: (i) an identical final state $\mathbf{x}_f^{(ID)}$, where the final state of each node $x_i(t_f)$ is a constant c , (ii) a non-identical final state $\mathbf{x}_f^{(NI1)}$, where the final state of each node is drawn from the uniform distribution $x_i(t_f) \sim U(0, c)$, and (iii) a non-identical final state $\mathbf{x}_f^{(NI2)}$, where the final state of each node is drawn from the uniform distribution $\mathbf{x}_i(t_f) \sim U(0, \sqrt{3}c)$. This setup guarantees the fairness of comparison between $\mathbf{x}_f^{(ID)}$ and $\mathbf{x}_f^{(NI2)}$ because their norms are the same.

Figure 1(a) shows there are no prominent differences among the control energies of the identical mode E_{ID} and the two non-identical modes E_{NI1} and E_{NI2} for small c , i.e., the final state is not far from the initial state. However, this energy gap expands with parameter c , indicating that it is easier to direct the networked system to an identical final state than to non-identical ones if the control distance is greater (see Fig. 1(a)).

For a specific final state mode, i.e., $c=3$, the control energy E is linearly dependent on network size N , regardless of whether $\mathbf{x}_f^{(ID)}$, $\mathbf{x}_f^{(NI1)}$ or $\mathbf{x}_f^{(NI2)}$ is considered. Although we expect that the control energy in networks with different link densities (as in the random networks) and with different power exponents (as in the scale-free networks) to differ, after all, the controllability Gramian matrix $G(t_f) = \int_0^{t_f} e^{A^t} B B^T e^{A^1 t} dt$ includes the term of the coupling matrix A (see Method), but the control energy E for an identical final state mode is virtually independent with the average degree and power exponent (see inset of Fig. 1(b,c)). Figure 1(d) in particular shows that a slight

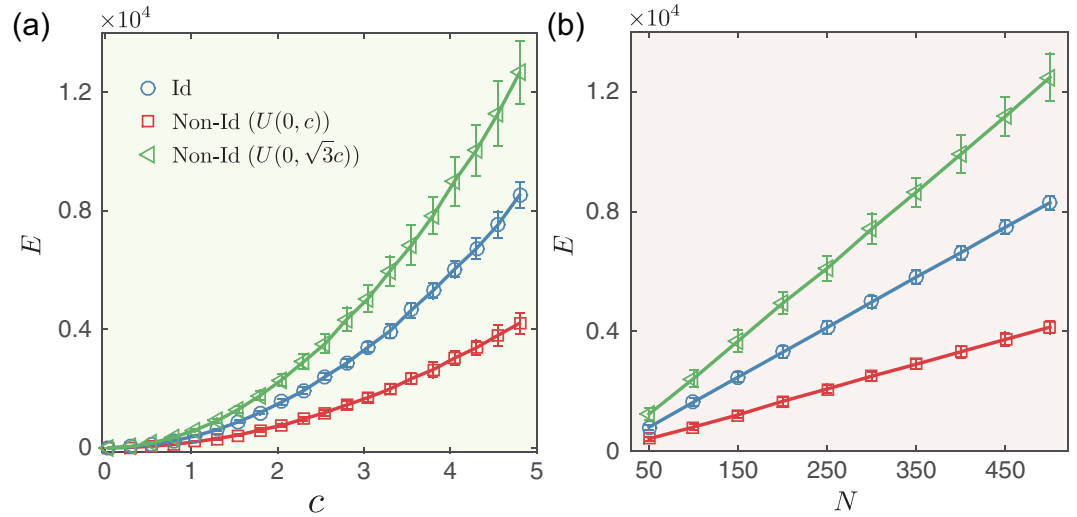


Figure 2. Control energy for directed random networks with identical (Id) and non-identical (Non-Id) final state modes. **(a)** Control energy E as a function of distance c . Network size $N=200$ and average degree $k=5$. **(b)** Control energy E as a function of network size N ($c=3$). The error bars represent standard deviations and each data point is an average over 100 independent realizations.

increase in the number of inputs dramatically reduces the control energy needed to reach an identical final state. Thus network size is the significant contributor to the control energy of a networked system achieving identical mode and not the average degree or the power exponent. We also examine the control energies E_{ID} , E_{NI1} and E_{NI2} for directed random networks, and generally find that E_{NI2} is higher than E_{ID} , whereas E_{NI1} is lower than E_{ID} (see Fig. 2(a)).

To systematically examine the energy gap between final states with different mixtures, we compare $\Delta E_1 \equiv E_{NI1} - E_{ID}$ and $\Delta E_2 \equiv E_{NI2} - E_{ID}$ on the $N-c$ plane. Figure 3(a,b) show the results in undirected networks. Note that (i) $E_{NI1} < E_{ID}$ for small network size N and short distance c , and (ii) $E_{NI1} > E_{ID}$ as N and c exceed the critical values. Figure 3(c,d) show the results in directed networks, in which we find that $E_{NI1} < E_{ID}$ for all combinations of N and c in directed networks, and that E_{NI2} is always higher than E_{ID} in both undirected and directed networks.

To heuristically explain why E_{ID} is generally smaller than E_{NI} , we examine a simple networked system with two nodes and assume the inverse of the Gramian matrix $G^{-1}(t_f)$ to be

$$G^{-1}(t_f) = \begin{bmatrix} g_{11} & g_{12} \\ g_{21} & g_{22} \end{bmatrix}. \tag{1}$$

Note that in undirected networks $g_{12} = g_{21}$. We denote the final state of non-identical modes as $\mathbf{x}_f^{(NI)} = [x_{f1}, x_{f2}]^T$, and the final state of identical mode to be $\mathbf{x}_f^{(ID)} = [c, c]^T$. Because the final state of non-identical mode is drawn from uniform distribution $U(0, c)$, we assume $x_{f1} < x_{f2} = c$ (Note that this can be extended to the case $x_{f1} > x_{f2}$). The control energy E required to direct a networked system from an initial state to a final state is (see Method for details)

$$E(t_f) = \mathbf{x}_f^T G^{-1}(t_f) \mathbf{x}_f. \tag{2}$$

Substituting the final states into Eq. (2), we obtain the control energies E_{NI} and E_{ID}

$$\begin{aligned} E_{NI} &= x_{f1}^2 g_{11} + x_{f2}^2 g_{22} + x_{f1} x_{f2} g_{21} + x_{f1} x_{f2} g_{12}, \\ E_{ID} &= c^2 g_{11} + c^2 g_{22} + c^2 g_{21} + c^2 g_{12}. \end{aligned} \tag{3}$$

The energy gap between two modes is

$$\Delta E = (x_{f1}^2 - c^2) g_{11} + (x_{f1} c - c^2) (g_{21} + g_{12}). \tag{4}$$

Equation. (4) indicates that ΔE is supported by two terms, one determined by node 1—which is reasonable because the final state of node 2 is the same for two modes—and a second that is the coupling effect between node 1 and node 2. From Eq. (4) we conclude:

- (i) That $g_{21} = g_{12} = 0$, i.e., there is no association between nodes 1 and 2. For any $c > 0$, Eq. (4) yields $\Delta E < 0$, indicating that it is easier to control this system towards a non-identical final state than an identical one.
- (ii) That $g_{21} < 0 \wedge g_{12} < 0$. Thus the sign of Eq. (4) is simultaneously determined by an isolated effect (the first term) and a coupling effect (the second term). To guarantee $\Delta E > 0$, we derive

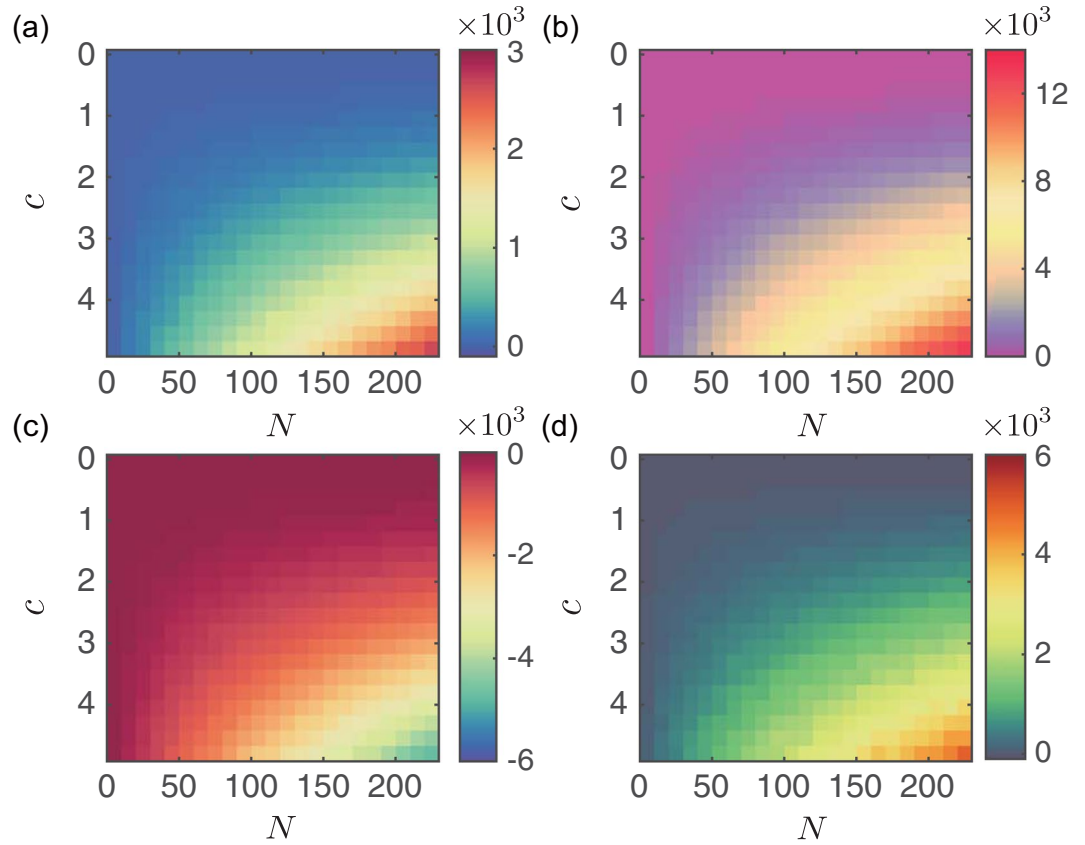


Figure 3. Energy gap between the non-identical and identical final state modes for random networks. (a) Energy gap $\Delta E_1 \equiv E_{NI1} - E_{ID}$ as functions of network size N and distance c for undirected random networks. (b) Energy gap $\Delta E_2 \equiv E_{NI2} - E_{ID}$ as functions of network size N and distance c for undirected random networks. (c) Energy gap ΔE_1 as functions of network size N and distance c for directed random networks. (d) Energy gap ΔE_2 as functions of network size N and distance c for directed random networks. The average degree $k = 5$. Each data point is an average over 100 independent realizations.

$$c + x_{f1} < - \frac{c(g_{21} + g_{12})}{g_{11}}. \tag{5}$$

A simple example is an undirected chain with two nodes in which the adjacency matrix elements are $a_{12} = a_{21} = 1$ and $a_{11} = a_{22} = -1.25$ (see Method for details). For simplicity, we set $c = 1$ and simplify Eq. (5) to be $x_{f1} < 0.6$. Selecting $x_{f1} = 0.5$ and substituting these parameters into Eq. (4), we obtain $\Delta E = 0.125$. Although it is nearly impossible to define the condition of ΔE in networks with complicated topological structures, the competition between two kinds of term allows us to conclude that $E_{NI} > E_{ID}$ ($\Delta E > 0$).

To verify that these synthetic network findings occur in real-world systems, we investigate the control energy required to drive an undirected network (the Zachary Karate Club) and a directed network (the Seagrass Food Web) towards non-identical and identical final states in Fig. 4. Although the results are consistent with those in modeled networks, the energy gap ΔE is narrower.

Conformity-based model. We now examine a more complicated and realistic model that can capture the dynamics among individuals as they achieve a globally identical final state. We incorporate conformity behavior, i.e., each node tends to follow the state predominating in its neighborhood. Thus the state of individual i at time $t + 1$ is

$$x_i(t + 1) = \sum_{j=1}^{k_i} x_j(t)/k_i, \tag{6}$$

where $x_j(t)$ is the state of node i 's neighbor j at time t and $k_i = \sum_{j=1}^N A_{ij}$ is the degree of node i . Equation (6) indicates that an individual's state at the next time step $t + 1$ is the average state of its neighbors at the current step t . We extend Eq. (6) to the networked system, and the dynamics of the conformity behavior of N nodes are

$$\mathbf{x}(t + 1) = K^{-1}A\mathbf{x}(t) + B\mathbf{u}(t), \tag{7}$$

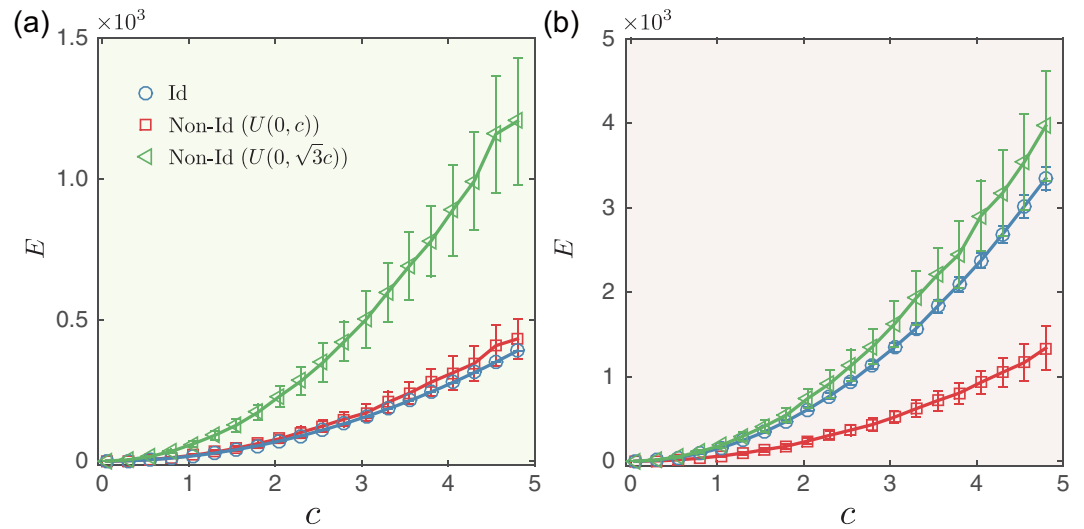


Figure 4. Control energy of directing the real networks to identical (Id) and non-identical (Non-Id) final state modes. Control energy E as a function of distance c for (a) Zachary karate club network and (b) Seagrass food web network. The error bars represent standard deviations and each data point is an average over 100 independent realizations.

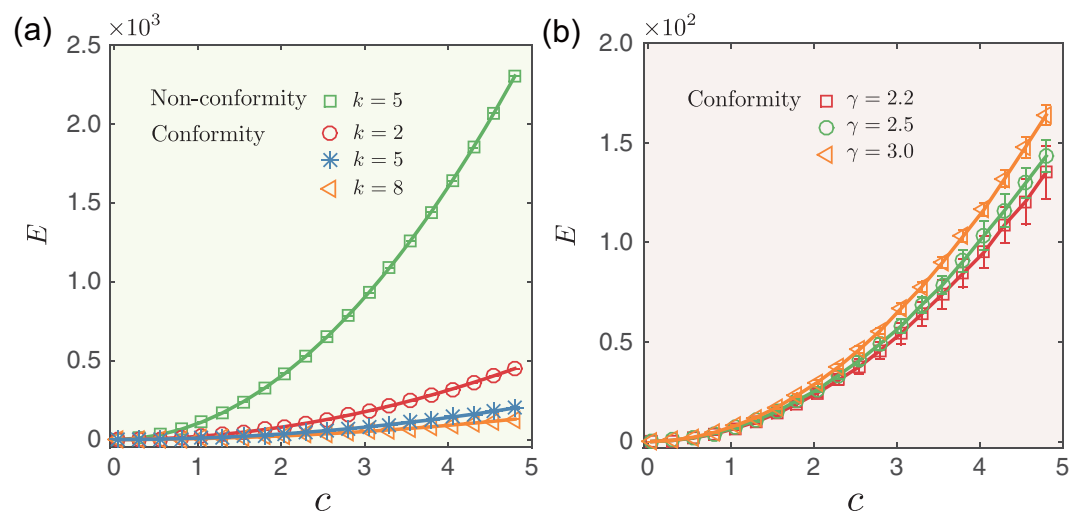


Figure 5. Control energy of directing the undirected random network with conformity dynamics to identical final state. Control energy E as a function of distance c for (a) random networks and (b) scale-free networks. Average degree $k=5$ and network size $N=200$. Since the control energy for scale-free network without conformity is the same as that for the random network shown in (a), it is not presented in (b). The error bars represent standard deviations and each data point is an average over 100 independent realizations.

where K^{-1} is the diagonal matrix of the inverse of the node degrees that captures the overall conformity behavior. The system described by Eq. (7) remains linear. Though the controllability framework of the discrete-time system is similar to that in a continuous-time system⁴², the final time t_f should be larger than or equal to $N-1$ to guarantee the controllability Gramian matrix of discrete-time system is invertible (we choose $t_f \rightarrow \infty$). Note that control energy E is simultaneously determined by the matrix K^{-1} and the coupling matrix A of the system, which allows the control energy to differ from that when conformity is absent.

Figure 5 shows the control energy E required for a conformity-based dynamical system to achieve an identical final state. We find that conformity behavior facilitates the control energy of random networks towards identical final states. Because conformity is strongly encouraged in dense networks, the required control energy E is lower in networks with a larger average degree or in networks that are heterogeneous.

Optimal control strategy. To determine the optimal driver nodes set for minimizing the control energy, we note that the control energy E decays as the length of the longest path from external inputs becomes shorter³⁰.

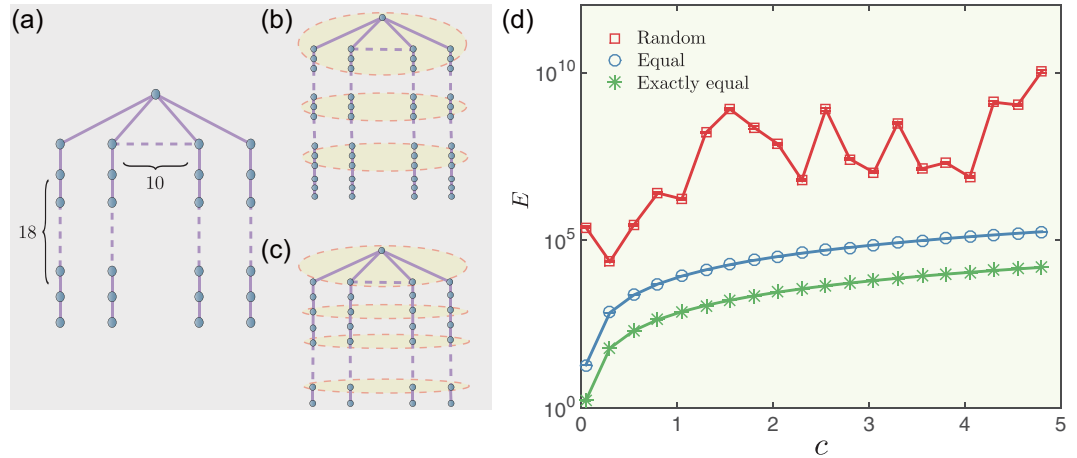


Figure 6. Optimal selection of driver nodes with lower control energy. (a) A simple network consisting of 10 chains, and each chain has 18 nodes. (b) Equally distributed control strategy. The driver nodes set consists of 3 parts and each part includes 30 driver nodes. (c) Exactly equal control strategy. The driver nodes set consists of 9 parts and each part includes 10 driver nodes. The driver nodes in panels (b) and (c) are all marked by yellow. (d) Control energy E as a function of distance c in directing the multi-chain network in three control strategies. The error bars represent standard deviations and each data point is an average over 100 independent realizations.

To achieve an identical final state, we use a multi-chain network and compare the control energy of different selection strategies applied to the driver nodes set.

Figure 6(a) shows a chain-like network (with 10 nodes in each subchain) with $N = 181$ nodes in which the first node of each chain shares the same ancestor. We compare the control energy E by using three strategies to select a fraction of $f = 0.5$ nodes as driver nodes, (i) a randomly-distributed set in which the driver nodes are chosen randomly, (ii) an equally-distributed set in which the driver nodes are distributed equally in order to divide the chains into equal segments in a hierarchical structure (see Fig. 6(b)) and (iii) an exactly equal set in which the driver nodes can divide the chains into exactly equal segments in a hierarchical structure (see (Fig. 6(c)). Figure 6(d) shows that the exactly equal set can lead to the minimum control energy, and E exponentially grows with the control distance c . Thus the key driver nodes for the optimal control are those in a topological position that equally divides the hierarchical structure.

Discussion

We have combined conformity-based dynamics and complex networks to determine the control energy required to direct a network towards non-identical and identical final states, respectively. In undirected networks, although there is a longer distance between the identical final state and its initial state, the control energy is less than that required to reach a non-identical final state. The critical factor in the role of control energy is the network size, not the network topology. Thus the degree distribution does not significantly affect the level of control energy required to reach an identical final state in either undirected random or scale-free networks. We examine the role of conformity dynamics in directing networks towards an identical final state and find that when there is conformity the control energy is reduced. Using a multi-chain, we find that the driver nodes corresponding to the optimal control strategy are those that divide the hierarchical structure equally.

Our results indicate a possible connection between network control and the mixture of the desired final state. This could shed light on how nodal dynamics and the desired final state affect the control of a complex networked system. We also present an optimal control strategy for energy reduction that suggests a possible direction for future research.

Methods

The dynamics of an N -dimensional linear time-invariant is governed by:

$$\dot{\mathbf{x}}(t) = \mathbf{A}\mathbf{x}(t) + \mathbf{B}\mathbf{u}(t), \tag{8}$$

where $\mathbf{x}(t) = [x_1(t), x_2(t), \dots, x_N(t)]^T$ is the state of the system at time t , $\mathbf{u}(t) = [u_1(t), u_2(t), \dots, u_M(t)]^T$ is the external control inputs, and \mathbf{A} is the adjacency matrix that captures the interaction strength between nodes. \mathbf{B} is the control matrix that specifies how the inputs are connected to network nodes. Here \mathbf{B} is a diagonal unit matrix since all nodes are chosen as driver nodes. A dynamical networked system described by Eq. (8) is controllable if a finite number of inputs can steer it from any initial state to any final state within a finite period of time. The driver nodes are the set of nodes driven by external inputs. Given an input $\mathbf{u}(t)$, the corresponding control energy is $E(t) = \int_0^t \|\mathbf{u}(\tau)\|^2 d\tau$. Using classical control theory²¹, from the initial state \mathbf{x}_0 at time $t = 0$, the minimal energy required to drive the system to any final state \mathbf{x}_f at time $t = t_f$ is

$$E(t_f) = \mathbf{x}_f^T \mathbf{G}^{-1}(t_f) \mathbf{x}_f, \tag{9}$$

where $G(t_f) = \int_0^{t_f} e^{At} B B^T e^{A^T t} dt$ is the symmetric controllability Gramian matrix. Because the control energy decays quickly when the control time t_f increases, we set $t_f \rightarrow \infty$ and focus on the control energy $E \equiv E(t_f \rightarrow \infty)$ ²⁷. Here \mathbf{x}_0 and \mathbf{x}_f are two vectors with N rows for each denoting the initial and final states, respectively. Eq. (9) indicates that the energy $E(t)$ is determined by both the input signals and the nature of the final state. Prior research has investigated the non-identical final state (NI), but we focus on the minimal energy required to control the system to achieve an identical final state (ID). Here we compare the distinct mixture modes of final state, (i) an identical final state $\mathbf{x}_f^{(ID)}$, where the state of each node $x_i(t_f)$ is a constant c , (ii) a non-identical final state $\mathbf{x}_f^{(NI1)}$, where the state of each node is drawn from the uniform distribution $x_i(t_f) \sim \mathbf{U}(0, c)$, and (iii) a non-identical final state $\mathbf{x}_f^{(NI2)}$, where the final state follows the uniform distribution $x_i(t_f) \sim \mathbf{U}(0, \sqrt{3}c)$. Note that we use the constant c to adjust the distance between the initial state \mathbf{x}_0 and the final state \mathbf{x}_f . Following the common convention, we add a self-loop $A_{ii} = -(\delta + \sum_{j=1}^N A_{ij})$ to each node²⁷, where $\delta = 0.25$ is a small perturbation that guarantees the stability of the system by which the eigenvalues of the adjacency matrix A are all negative. The discrete system may be unstable as $\delta = 0.25$, while we can guarantee it is stable by increasing δ .

References

- Newman, M. E. Assortative mixing in networks. *Physical Review Letters* **89**, 208701 (2002).
- Palla, G., Derényi, I., Farkas, I. & Vicsek, T. Uncovering the overlapping community structure of complex networks in nature and society. *Nature* **435**, 814–818 (2005).
- Petersen, A. M. *et al.* Reputation and impact in academic careers. *Proceedings of the National Academy of Sciences* **111**, 15316–15321 (2014).
- Jeong, H., Mason, S. P., Barabási, A.-L. & Oltvai, Z. N. Lethality and centrality in protein networks. *Nature* **411**, 41–42 (2001).
- Rubinov, M. & Sporns, O. Complex network measures of brain connectivity: uses and interpretations. *Neuroimage* **52**, 1059–1069 (2010).
- Yan, G. *et al.* Network control principles predict neuron function in the caenorhabditis elegans connectome. *Nature* **550**, 519 (2017).
- Vinayagam, A. *et al.* Controllability analysis of the directed human protein interaction network identifies disease genes and drug targets. *Proceedings of the National Academy of Sciences* **113**, 4976–4981 (2016).
- Pagani, G. A. & Aiello, M. The power grid as a complex network: a survey. *Physica A: Statistical Mechanics and its Applications* **392**, 2688–2700 (2013).
- Gao, J., Barzel, B. & Barabási, A.-L. Universal resilience patterns in complex networks. *Nature* **530**, 307–312 (2016).
- Mantegna, R. N. & Stanley, H. E. Scaling behaviour in the dynamics of an economic index. *Nature* **376**, 46–49 (1995).
- Lux, T. & Marchesi, M. Scaling and criticality in a stochastic multi-agent model of a financial market. *Nature* **397**, 498–500 (1999).
- Mantegna, R. N. & Stanley, H. E. *Introduction to econophysics: correlations and complexity in finance* (Cambridge University Press, 1999).
- Gabaix, X., Gopikrishnan, P., Plerou, V. & Stanley, H. E. A theory of power-law distributions in financial market fluctuations. *Nature* **423**, 267–270 (2003).
- Nepusz, T. & Vicsek, T. Controlling edge dynamics in complex networks. *Nature Physics* **8**, 568–573 (2012).
- Jia, T. & Barabási, A.-L. Control capacity and a random sampling method in exploring controllability of complex networks. *Scientific Reports* **3**, 2354 (2013).
- Gao, J., Liu, Y.-Y., D'Souza, R. M. & Barabási, A.-L. Target control of complex networks. *Nature Communications* **5**, 5415 (2014).
- Xiao, Y.-D., Lao, S.-Y., Hou, L.-L. & Bai, L. Edge orientation for optimizing controllability of complex networks. *Physical Review E* **90**, 042804 (2014).
- Chen, S.-M., Xu, Y.-F. & Nie, S. Robustness of network controllability in cascading failure. *Physica A: Statistical Mechanics and its Applications* **471**, 536–539 (2017).
- Liu, Y.-Y. & Barabási, A.-L. Control principles of complex systems. *Reviews of Modern Physics* **88**, 035006 (2016).
- Nie, S., Wang, X.-W., Zhang, H.-F., Li, Q.-L. & Wang, B.-H. Robustness of Controllability for Networks Based on Edge-Attack. *PLoS ONE* **9**, e89066 (2014).
- Rugh, W. J. *Linear system theory* (Prentice-Hall, Inc., 1996).
- Liu, Y.-Y., Slotine, J.-J. & Barabási, A.-L. Controllability of complex networks. *Nature* **473**, 167–173 (2011).
- Yuan, Z., Zhao, C., Di, Z., Wang, W.-X. & Lai, Y.-C. Exact controllability of complex networks. *Nature Communications* **4**, 2447 (2013).
- Sun, J. & Motter, A. E. Controllability transition and nonlocality in network control. *Physical Review Letters* **110**, 208701 (2013).
- Nie, S., Wang, X.-W., Jiang, L.-L. & Wang, B.-H. Effect of correlations on controllability transition in network control. *Scientific Reports* **6**, 23952 (2016).
- Yan, G., Ren, J., Lai, Y.-C., Lai, C.-H. & Li, B. Controlling complex networks: How much energy is needed? *Physical Review Letters* **108**, 218703 (2012).
- Yan, G. *et al.* Spectrum of controlling and observing complex networks. *Nature Physics* **11**, 779–786 (2015).
- Pasqualetti, F., Zampieri, S. & Bullo, F. Controllability metrics, limitations and algorithms for complex networks. *IEEE Transactions on Control of Network Systems* **1**, 40–52 (2014).
- Tzoumas, V., Rahimian, M. A., Pappas, G. J. & Jadbabaie, A. Minimal actuator placement with bounds on control effort. *IEEE Transactions on Control of Network Systems* **3**, 67–78 (2016).
- Chen, Y.-Z., Wang, L.-Z., Wang, W.-X. & Lai, Y.-C. Energy scaling and reduction in controlling complex networks. *Royal Society Open Science* **3**, 160064 (2016).
- Lindmark, G. & Altafini, C. Minimum energy control for complex networks. *arXiv preprint arXiv:1612.03082* (2016).
- Li, G., Ding, J., Wen, C. & Pei, J. Optimal control of complex networks based on matrix differentiation. *EPL (Europhysics Letters)* **115**, 68005 (2016).
- Chen, G. Pinning control and controllability of complex dynamical networks. *International Journal of Automation and Computing* **1–9** (2017).
- Motter, A. E., Zhou, C. & Kurths, J. Network synchronization, diffusion, and the paradox of heterogeneity. *Physical Review E* **71**, 016116 (2005).
- Arenas, A., Daz-Guilera, A., Kurths, J., Moreno, Y. & Zhou, C. Synchronization in complex networks. *Physics Reports* **469**, 93–153 (2008).
- Li, Z., Duan, Z., Chen, G. & Huang, L. Consensus of multiagent systems and synchronization of complex networks: A unified viewpoint. *IEEE Transactions on Circuits and Systems I: Regular Papers* **57**, 213–224 (2010).
- Szolnoki, A. & Perc, M. Conformity enhances network reciprocity in evolutionary social dilemmas. *Journal of The Royal Society Interface* **12**, 20141299 (2015).
- Boyd, R. & Richerson, P. J. *Culture and the evolutionary process* (University of Chicago Press, 1988).
- Wang, X.-W., Nie, S., Wang, W.-X. & Wang, B.-H. Controlling complex networks with conformity behavior. *EPL (Europhysics Letters)* **111**, 68004 (2015).

40. Erdos, P. & Rényi, A. On the evolution of random graphs. *Publ. Math. Inst. Hung. Acad. Sci* **5**, 17–61 (1960).
41. Goh, K.-I., Kahng, B. & Kim, D. Universal behavior of load distribution in scale-free networks. *Physical Review Letters* **87**, 278701 (2001).
42. Lewis, F. L., Vrabie, D. & Syrmos, V. L. *Optimal control* (John Wiley & Sons, 2012).

Acknowledgements

This work was funded by The National Natural Science Foundation of China (Grant Nos. 61763013, 61703159, 61403421), The Natural Science Foundation of Jiangxi Province (No. 20171BAB212017), The Measurement and Control of Aircraft at Sea Laboratory (No. FOM2016OF010), and China Scholarship Council (201708360048). The Boston University Center for Polymer Studies is supported by NSF Grants PHY-1505000, CMMI-1125290, and CHE-1213217, and by DTRA Grant HDTRA1-14-1-0017.

Author Contributions

X.-W.W. conceived and designed the project. S.N. did the numerical calculations and analyzed the results. X.-W.W., S.N. and H.E.S. wrote the manuscript. S.-M.C. and B.-H.W. edited the manuscript.

Additional Information

Competing Interests: The authors declare no competing interests.

Publisher's note: Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons license and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>.

© The Author(s) 2018