

Sustainability **2015**, *7*, 6321–6335; doi:10.3390/su7056321

OPEN ACCESS

sustainability

ISSN 2071-1050

www.mdpi.com/journal/sustainability

Article

Thermoeconomic Analysis of Biodiesel Production from Used Cooking Oils

Emilio Font de Mora *, César Torres and Antonio Valero

Centre of Research for Energy Resources and Consumption – CIRCE, University of Zaragoza, Mariano Esquillor 15, 50018 Zaragoza, Spain; E-Mails: ctorrescuadra@gmail.com (C.T.); valero@unizar.es (A.V.)

* Author to whom correspondence should be addressed; E-Mail: emilio.fontdemora@gmail.com; Tel.: +34-976-76-18-63; Fax: +34-976-73-20-78.

Academic Editor: Tatiana Morosuk

Received: 5 March 2015 / Accepted: 12 May 2015 / Published: 22 May 2015

Abstract: Biodiesel from used cooking oil (UCO) is one of the most sustainable solutions to replace conventional fossil fuels in the transport sector. It can achieve greenhouse gas savings up to 88% and at the same time reducing the disposal of a polluting waste. In addition, it does not provoke potential negative impacts that conventional biofuels may eventually cause linked to the use of arable land. For this reason, most policy frameworks favor its consumption. This is the case of the EU policy that double-counts the use of residue and waste use to achieve the renewable energy target in the transport sector. According to different sources, biodiesel produced from UCO could replace around 1.5%–1.8% of the EU-27 diesel consumption. This paper presents an in-depth thermoeconomic analysis of the UCO biodiesel life cycle to understand its cost formation process. It calculates the ExROI value (exergy return on investment) and renewability factor, and it demonstrates that thermoeconomics is a useful tool to assess life cycles of renewable energy systems. It also shows that UCO life cycle biodiesel production is more sustainable than biodiesel produced from vegetable oils.

Keywords: biodiesel; UCO; exergy; exergy cost; ExROI; renewability

1. Introduction

As its name indicates, used cooking oils (UCO) are vegetable oils that have been used in cooking, normally for frying purposes. Once the consumer considers the oil to have been sufficiently used, the oil is replaced and becomes a waste. UCO produced in the EU are considered non-hazardous wastes according to the Consolidated European Waste Catalogue. They are classified as municipal wastes (household waste and similar commercial, industrial and institutional wastes), including separately-collected fractions, under the code 20 01 25 (edible oils and fats).

The wrong disposal of UCO can have important negative effects on the environment: the increased amount of nutrients in the drains augments the number of rats and other plagues. If the waste is not eliminated in waste water treatment plants, it can produce a negative effect on the capacity of the auto-regeneration of rivers, fauna and flora and can increase the population of jelly fish on coastlines [1]. Other negative effects are the increase in the cost of sewage treatment and clogging problems in drains with the consequent repair costs [1].

With the current legislation in place in the European Union, the use of UCO for biodiesel production has gained importance. According to Article 21 of the Renewable Energy Directive [2], the contribution made by biofuels to the 2020 targets produced from wastes, residues, non-food cellulosic material and ligno-cellulosic material is considered to be twice that made by other biofuels. Biofuels produced from these resources are called advanced or second generation biofuels. Biodiesel from UCO is one of them. The importance of UCO-derived biodiesel will increase even more when a limit to the production of crop-based biofuels will be introduced in the European legislation, as recently agreed by the European Parliament and the Member States.

This regulation has had unexpected counter effects [3–5]: as international imports of UCO have started to take place, the price of UCO has scaled up to even exceed the price of edible vegetable oils, such as palm oil, and finally, it has opened the door to fraud. As there is no real definition of used cooking oil and no possible way nowadays to determine when a vegetable oil is used or not, some actors are claiming to have UCO when, in reality, the vegetable oil has only been used once, and they have used high quantities of oil to fry a small portion of food. In light of the revision of the Renewable Energy Directive, there are voices suggesting eliminating UCO from the list of advanced biofuels benefiting from double counting [4].

Be it considered or not an advanced biofuel, biodiesel produced from UCO will still play a role in achieving the renewable energy in transport 2020 target in the EU, in view of its beneficial lower GHG emissions. In the Annex V of the Renewable Energy Directive, while the typical GHG emission reduction for biodiesel produced from unused vegetable oils ranges from 40 to 62%, biodiesel from UCO shows reductions of 88%, which still makes it attractive for mandated operators [2].

2. UCO-Based Biodiesel Potential

Estimating the potential of UCO collection that could be used in biodiesel production is a challenge. In the EU, the consumption of vegetable oils in 2011 was about 19 million tons for rapeseed, soybean, sunflower and palm oils [6]. The worldwide vegetable oil production was about 145 million tons for

the same oils plus olive oil [7]. However, from these data, knowing the quantities of UCO that could be effectively recovered is not easy. This is especially the case in the household sector.

There are three types of producers of used cooking oils: households, the HORECA sector (*i.e.*, hotel, restaurants and caterers) and the food industry. According to the Waste Framework Directive [8], EU Member States shall take measures to encourage the separate collection of bio-waste and treatment in a way that fulfills a high level of environmental protection. In line with these requests, normally, the HORECA sector and food industry have a high degree of implementation of selective collection systems by means of authorized collectors. These sectors are easily controllable from the waste authority viewpoint.

In households, the collection of UCO is not as manageable as in the other sectors, and countries do not have established collection plans in place. The existing collection systems are generally encouraged by regional or local governments or stem from private initiatives. In this sector, the consideration of used oil is left to the discretion of the owner, and normally, the used oil is thrown away through the drain or disposed at the bin in a used container (empty plastic bottle or brick).

Some initiatives and institutions have made attempts to calculate how much biodiesel could be produced from UCO following two methodologies. One of these methodologies follows a top-down approach. Knowing the vegetable oil consumption of an area, a certain percentage of losses is assumed (e.g., around 85%) in terms of the oil ingested by the consumer and potential shortfalls in oil collection and recycling.

The other methodology follows a bottom-up approach. By means of practical experiences, it obtains the quantity of vegetable oil consumed per person/year. Knowing the population of a defined area with the same cultural conditions, one can calculate the quantity of vegetable oil consumed in the entire region. Assuming a certain loss in UCO collection and recycling, one obtains a final number.

The weakness in both methodologies is related to the assumptions made in terms of UCO losses in collection and recycling. The bottom-up approach also adds uncertainty to the data obtained per person/year and the extrapolation of these data to an entire region. As an example, the quantities obtained in the Intelligent Energy–Europe (IEE) project OILECO range from 4 to 18 kg/person/year [9] in EU countries (Italy, Spain, Hungary, Slovakia and Bulgaria).

Being this the situation, some projects have estimated the potential biodiesel production in the EU. The IEE project RecOil states that biodiesel produced from UCO could replace 1.5% of the EU-27 diesel consumption [10]. The final report of the IEE project BioDieNet [11] states that the total amount of recoverable UCO available in the EU-27 in 2009 was about 3.5 million tons (3950 million liters). As the EU-27 diesel consumption was 214 billion liters in 2007, around 1.8% of the EU-27 diesel consumption could have potentially been replaced with biodiesel produced from UCO.

3. UCO-Based Biodiesel Life Cycle

The life cycle (see Figure 1) starts by the collection from households, HORECA and industry and is followed by recycling, where the oil is filtered and decanted in order to separate solid particles and water. Once the oil is refined, it is sent to the transesterification plant.

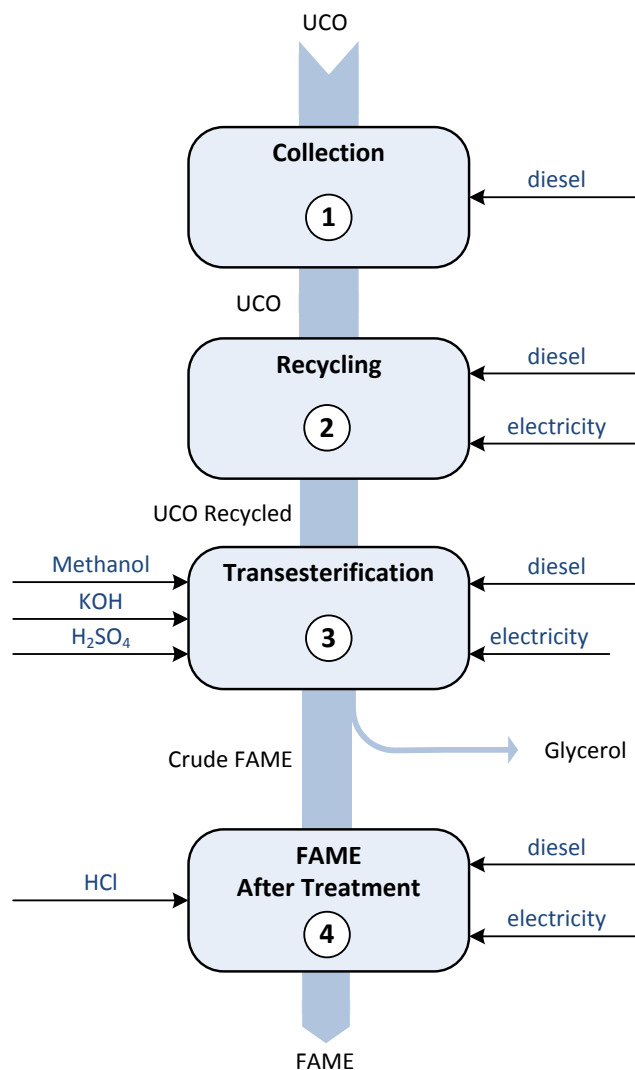


Figure 1. Flow diagram of a biodiesel plant producing with used cooking oil. Source: CIEMAT [12].

The UCO collection potential from households can be higher than the HORECA one. This is the case of Spain. According to GEREGRAS, the Spanish association of vegetable oil and fat residues management companies, the potential for UCO collection in Spain in 2020 is about 280,000 tons from which more than 120,000 tons are from the HORECA sector and 160,000 tons from the domestic sector. However, in 2011, the quantity of UCO collected was about 90,000 tons, which were mostly coming from the HORECA sector [13]. The main problems that the UCO collection from households is facing are non-technological. They are related to the lack of awareness of the possibility to collect UCO, the lack of promotion about the benefits to the environment and making the collection more attractive to the UCO holders, for example, by reducing the distances to the UCO collection points and having a strong hygiene maintenance of the containers.

The collection and transport of the UCO is done by an authorized agent for waste management. In this phase, the only input is diesel fuel needed to run the vans and trucks that are used to transport the containers of UCO to recycling, also called the refining unit.

The collection can be organized in different ways. In the HORECA sector and food industry, normally, the collection is done on-site by the authorized agent in medium-to-big containers that are transported via van or truck. In the case of households, there are different possibilities: door-to-door collection or distributed collection at points throughout an area with well-identified containers. These containers can be adapted to receive UCO in used bricks, bottles or reusable bottles designed for this purpose, or have a hole through which the oil can be poured. According to the results of IEE projects OILECO and RecOil, the best practices, showing higher acceptance, are those having collection points with adapted containers [9,10]. This system can also be the most sustainable if the transport of the oil to the collection point by the household consumer is not accounted for in the life cycle assessment.

In the recycling process, the inputs are normally electricity and gas oil or natural gas. The gas oil or natural gas is consumed to produce steam, which is used to clean the containers, so that they can be reused again.

As far as the transesterification is concerned, the UCO normally follows a different process compared to the case of crude vegetable oils, which affects the consumption of materials and energy sources. The main differences are:

- The pre-treatment is not so elaborated, because the oil comes already “clean” from the recycling unit. Normally, cleaning is only done via centrifugation and drying to eliminate possible small particles and excess water.
- Afterwards, the oil is esterified with an acid catalyzer to transform into esters the high quantity of free fatty acids that are normally present in UCO; this esterification is followed by a basic catalyzed transesterification. Some plants have the esterification and transesterification tanks in parallel. They treat in the esterification plant those oils having high FFA (more than 4%) and in the transesterification plant those oils with less FFA [12].
- The ester obtained follows a cleaning and drying process. Other plants have opted to distillate it to ensure the fulfillment of the quality standards, EN 14214 [14] in the EU.
- The glycerol does not follow an after-treatment process. The crude glycerol is either treated as a residue or sold as a low added-value co-product or to be used as fuel in cement kilns [15]. Some plants have after-treatment processes similar to the ones using vegetable oils to obtain a high-quality glycerin product; these after-treatment processes normally consist of adding an acid, e.g., HCl, to split the soaps into FFA and salts, which can then be separated by decantation, and distilling the remaining flow up to 130 °C to evaporate the remaining methanol [15].

Some biodiesel producers that do not have their plants adapted to work with UCO, if they aim to use UCO, normally add a small part (e.g., 10%) to their main streams, e.g., rapeseed oil. With this, they do not need to adapt their plants to deal with this lower quality resource, while producing a high-quality biodiesel.

The inputs and outputs of the transesterification phase can be seen in Table 1 together with the flow diagram of Figure 1. These data have been obtained from an LCA carried out by CIEMAT [12], based on a supply chain established in the north of Spain and with data of two real biodiesel production plants using this resource. It is important to note that in this case, for the production of steam, diesel fuel is considered instead of natural gas.

Table 1. Consumption data for processes considered in the life cycle analysis for UCO.
Source: CIEMAT [12].

Process	I/O	Value	Units
Collection			
Diesel	Input	0.48316	MJ/kg UCO
Recycling			
Diesel	Input	0.036	MJ/kg oil
Electricity	Input	0.35	MJ/kg oil
Transesterification			
Recycled oil	Input	1.03	kg/kg FAME
Methanol	Input	0.155	kg/kg FAME
KOH	Input	0.02770	kg/kg FAME
H ₂ SO ₄	Input	0.017	kg/kg FAME
Diesel	Input	0.455	kWh/kg FAME
Electricity	Input	0.137	kWh/kg FAME
FAME	Output	1.00	kg/kg FAME
Glycerol crude	Output	0.20	kg/kg FAME

4. Thermoeconomic Analysis

The methodology applied in this paper has been introduced in previous works [16–18]. Thermoeconomic input-output analysis, formerly symbolic exergoeconomics [19], applies the mathematical framework of input-output analysis [20] to exergy cost theory [20]. It provides general relationships between the production demand and the resource cost of an energy system with the efficiency and irreversibilities of each individual process of that system. The distinguishing element in thermoeconomics from conventional energy and exergy analysis is purpose. Matter and energy flows entering and exiting a given system are classified into fuel and product. Fuel (F) refers to the resources that the component uses to achieve its purpose, and product (P) corresponds to the flows related to that purpose [21].

The system interactions are represented by means of the fuel-product table (see Table 2), which describes how the production processes are related.

Table 2. Fuel-product table.

	Final Product	Process Resources					Total	
		1	...	j	...	n		
External Resources		E_{01}	...	E_{0j}	...	E_{0n}	P_0	
	1	E_{10}	E_{11}	...	E_{1j}	...	E_{1n}	P_1
	⋮	⋮	⋮		⋮		⋮	⋮
Process Products	i	E_{i0}	E_{i1}	...	E_{ij}	...	E_{in}	P_i
	⋮	⋮	⋮		⋮		⋮	⋮
	n	E_{n0}	E_{n1}	...	E_{nj}	...	E_{nn}	P_n
Total		F_0	F_1	...	F_j	...	F_n	

Let us consider a system formed by, say n processes, and the environment named as process Number 0. Let P_i denote the exergy of the process i production, which is used in part to meet the intermediate requirement as input resources of other processes and in part to meet the final demand of the system. If E_{ij} denotes the exergy that process i uses as a resource for process j and E_{i0} denotes the final demand produced in process i , the following expression is formed:

$$P_i = E_{i0} + \sum_j^n E_{ij}, \quad i = 1, \dots, n \tag{1}$$

Note that, in this model, the production of the environment P_0 is the total exergy of the external resources. On the other hand, the input resources of each process i , say F_i , is in part coming from external resources, say E_{0i} , and in part from the production of other processes, then we have the condition:

$$F_i = E_{0i} + \sum_j^n E_{ji}, \quad i = 1, \dots, n \tag{2}$$

where F_0 is the total system demand.

The second law states that the difference between fuel and product is a positive value and equal to the irreversibility (I), accounting for the losses appearing in the process: $F_i - P_i = I_i \geq 0$. Furthermore, the unit exergy consumption is defined as the ratio between fuel and product: $k_i = F_i/P_i \geq 1$

The exergy cost of the products of a system refers to the exergy of the resources consumed to obtain such products. Therefore, the exergy cost of the production of a process, denoted as $C_{P,i}$, is the sum of the cost of the resources consumed by the process: system internals, *i.e.*, products of other processes C_{ji} and the cumulative exergy of the external resources $C_{0,i}$.

$$C_{P,i} = C_{0,i} + \sum_j C_{ij} \tag{3}$$

To calculate the production exergy cost, the assumption that the costs of the products obtained in a process are proportional to its exergy is made; see [22]:

$$\frac{C_{ij}}{C_{P,i}} = \frac{E_{ij}}{P_i} = y_{ij} \quad (4)$$

where y_{ij} is the distribution exergy ratio, which means the portion of production of process i uses as resources of process j .

Combining Equations (3) and (4), the exergy cost can be calculated by solving the following set of linear equations:

$$C_{P,i} = C_{0i} + \sum_{j=1}^n y_{ji} C_{P,j} \quad i = 1, \dots, n \quad (5)$$

which could be written in matrix form as:

$$\mathbf{C}_P = \mathbf{C}_e + {}^T\langle \mathbf{FP} \rangle \mathbf{C}_P \quad (6)$$

where $\langle \mathbf{FP} \rangle$ is a $(n \times n)$ matrix, whose entries are the distribution exergy ratios, and \mathbf{C}_e is a $(n \times 1)$ vector, whose entries are the cumulative exergy of the external resource uses in each process.

Therefore, the production cost could be obtained as:

$$\mathbf{C}_P = {}^T\langle \mathbf{P}^* | \mathbf{C}_e \quad \text{where} \quad \langle \mathbf{P}^* | \equiv (\mathbf{U} - \langle \mathbf{FP} \rangle)^{-1} \quad (7)$$

where $\langle \mathbf{P}^* |$ is called the production cost matrix, and its elements π_{ij}^* are the global distribution ratios, which represent the amount of external resources (measured in exergy) of process i required to obtain one exergy unit of the product of the process j .

Table 3 shows the exergy of flows and the cumulative exergy of external resources of the UCO biodiesel pathway. From this information, the F-P table of the UCO pathway model is built; see Table 4.

Table 3. Exergy and cost of flows of the UCO biodiesel pathway.

Material	Process	I/O	Unit (u)	u/kg FAME	Exergy		Cost	
					MJ/u	MJ/kg FAME	MJ/u	MJ/kg FAME
Diesel	1	Input	MJ	0.6459	1.0000	0.6459	1.1773	0.7604
UCO	1	Output	kg	1.3368	39.5994	52.9364	-	-
Diesel	2	Input	MJ	0.0371	1.0000	0.0371	1.1773	0.0437
Electricity	2	Input	MJ	0.4679	1.0000	0.4679	2.8690	1.3423
UCO recycled	2	Output	kg	1.0300	39.5994	40.7873	-	-
Methanol	3	Input	kg	0.1550	23.1540	3.5889	30.3074	4.6977
KOH	3	Input	kg	0.0277	0.8229	0.0228	13.3852	0.3708
H ₂ SO ₄	3	Input	kg	0.0170	1.6417	0.0279	2.6295	0.0447
Diesel	3	Input	MJ	1.5651	1.0000	1.5651	1.1773	1.8426
Electricity	3	Input	MJ	0.4713	1.0000	0.4713	2.8690	1.3522
Crude FAME	3	Output	kg	1.0100	39.8548	40.2533	-	-
Crude Glycerol	3	Output	kg	0.2000	23.6779	4.7356	-	-
HCl	4	Input	kg	0.0406	1.3409	0.0544	5.2484	0.2131
Diesel	4	Input	MJ	0.0749	1	0.0749	1.1773	0.0882
Electricity	4	Input	MJ	0.0187	1.0000	0.0187	2.869	0.0535
FAME	4	Output	kg	1	39.8376	39.8376	-	-

Table 4. F-P (fuel-product) tables for UCO biodiesel (MJ/kg FAME).

	F_0	F_1	F_2	F_3	F_4	Total
P_0		53.58	0.51	5.68	0.15	59.91
P_1	0.00	0.00	52.94	0.00	0.00	52.94
P_2	0.00	0.00	0.00	40.79	0.00	40.79
P_3	4.74	0.00	0.00	0.00	40.25	44.99
P_4	39.84	0.00	0.00	0.00	0.00	39.84
Total	44.58	53.58	53.44	46.46	40.40	

The local and global distribution matrices, are obtained from Table 4 using Equations (4) and (7):

$$\langle \mathbf{FP} \rangle = \begin{bmatrix} 0.0000 & 1.0000 & 0.0000 & 0.0000 \\ 0.0000 & 0.0000 & 1.0000 & 0.0000 \\ 0.0000 & 0.0000 & 0.0000 & 0.8947 \\ 0.0000 & 0.0000 & 0.0000 & 0.0000 \end{bmatrix} \quad \langle \mathbf{P}^* | \rangle = \begin{bmatrix} 1.0000 & 1.0000 & 1.0000 & 0.8947 \\ 0.0000 & 1.0000 & 1.0000 & 0.8947 \\ 0.0000 & 0.0000 & 1.0000 & 0.8947 \\ 0.0000 & 0.0000 & 0.0000 & 1.0000 \end{bmatrix}$$

The production exergy cost can be decomposed [18], considering the different types of resources required. The resources cost vector can be separated into two terms:

$$\mathbf{C}_e = \mathbf{C}_e^{\text{rs}} + \mathbf{C}_e^{\text{nrs}} \quad (8)$$

The first term represents the cumulative exergy of the renewable resources and the latter the non-renewable or fossil resources. Therefore, the exergoecologic cost can be broken down into the renewable and fossil parts: $\mathbf{C}_P = \mathbf{C}_P^{\text{rs}} + \mathbf{C}_P^{\text{nrs}}$, where:

$$\begin{aligned} \mathbf{C}_P^{\text{rs}} &\equiv \mathbf{T} \langle \mathbf{P}^* | \mathbf{C}_e^{\text{rs}} \\ \mathbf{C}_P^{\text{nrs}} &\equiv \mathbf{T} \langle \mathbf{P}^* | \mathbf{C}_e^{\text{nrs}} \end{aligned} \quad (9)$$

This distinction depending on the origin of the resources allows calculating the sustainability indicator. Font de Mora *et al.* [16] defined the concept of ExROI and renewability. ExROI measures the amount of product obtained with one unit of non-renewable resources:

$$\text{ExROI} = \frac{P}{C_P^{\text{nrs}}} \quad (10)$$

A production process is sustainable if $\text{ExROI} > 1$. The higher the ExROI value, the more sustainable a production process will be.

Font de Mora *et al.* [17] introduced the concept of the renewability ratio, defined as:

$$\rho = \frac{C_P^{\text{rs}}}{C_P} \quad 0 \leq \rho \leq 1 \quad (11)$$

the portion of renewable resources per total resources used or the weight of the renewable exergy cost with respect to the total cost.

The results of the cost analysis, obtained by applying Equation (9), are shown in Table 5. In this case, the primary UCO stream is considered as a renewable resource, and its cost is equal to its exergy.

From these values, it is possible to compute the ExROI and renewability factor, which are 4.10 and 0.83, respectively. This means that from each unit of non-renewable sources, *i.e.*, fossil fuels, it is possible to obtain 4.10 units of energy and that the percentage of renewable energy contained in the fuel is about 83%. These values can be increased if the conventional methanol of fossil origin is substituted by a bioproduct, either bioethanol or methanol from biomass.

Table 5. Cost analysis for UCO biodiesel (MJ/kg FAME).

No.	Process	C_e^{nrs} MJ/Kg	C_P MJ/kg	C_P^{rs} MJ/Kg	C_P^{nrs} MJ/kg	ρ %
1	Collection	0.76	53.697	52.936	0.760	98.58
2	Refining	1.39	55.083	52.936	2.146	96.10
3	Esterification	8.31	63.391	52.936	10.454	83.51
4	FAME after treatment	0.35	57.073	47.364	9.709	82.99

The values obtained for the UCO biodiesel can be compared to the ones obtained for biodiesels from vegetable oils in Figure 2. The values for vegetable oils were calculated in [15]. As can be seen, biodiesel production from UCO has the highest ExROI value and the second highest renewability factor, only exceeded by palm oil-based biodiesel. The high renewability of palm oil is due to the use of biomass resources to cover part of the energy needs in the cycle. In addition, UCO biodiesel has the lowest non-renewable exergy cost, which means that, overall, it consumes less non-renewable resources, *i.e.*, mainly fossil fuels, than its counterparts. The left graphic, in Figure 2, shows also the renewable and non-renewable exergy cost per produced unit of the different biodiesels analyzed in the paper. This analysis could be extended to cover also non-edible vegetable oils, for example castor and Jatropha oils, and their blends with UCO [23].

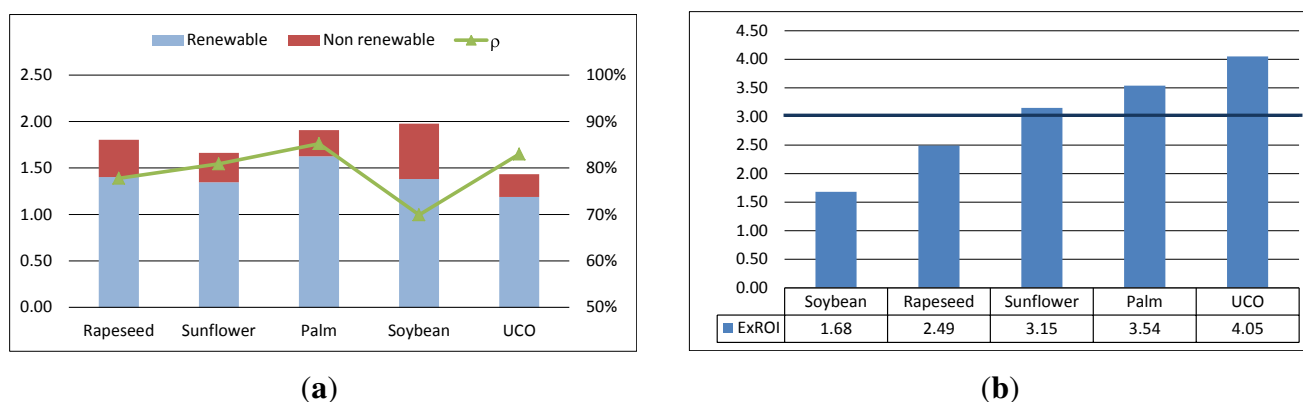


Figure 2. Comparison of ExROI and renewability factors of different biodiesel life cycles. (a) Renewability ratio; (b) ExROI.

5. Analysis of Potential Improvements

As shown in the previous section, the exergy cost of biodiesel depends on the exergy cost values of the external resources. Therefore, depending on the boundary limits defined by the LCA and from the data provided by LCA databases, whose values may be based on general hypothesis and conversion factors, the results may vary considerably. In order to understand the effect that variations in the consumption of external resources may have on the production cost values, a sensitivity analysis must be performed.

According to Equation (7), the cost of the external resources does not depend on the production matrix; thus, the effect in the exergy cost due to the variation in the external cost could be calculated as:

$$\Delta C_P = {}^T \langle \mathbf{P}^* | \Delta C_e \quad (12)$$

Introducing the elasticity coefficient $\% \Delta x = \Delta x / x$, Equation (12) could be rewritten as:

$$\% \Delta C_{P,i} = \sum_{j=1}^n \frac{C_{0,j}}{C_{P,i}} \pi_{ji}^* \% \Delta C_{0,j} \quad (13)$$

This expression is also valid to compute the variation of renewable and non-renewable costs, and Equation (13) could be written in terms of non-renewable costs, as:

$$\% \Delta C_P^{\text{nrs}} = [\mathbf{A}_P^e] \% \Delta C_e^{\text{nrs}} \quad (14)$$

where $[\mathbf{A}_P^e]$ is called the elasticity matrix, whose elements are defined as $a_{ij} = C_{0,j} \pi_{ji}^* / C_{P,i}$.

Equation (14) could be used to analyze the potential improvements, in terms of sustainability, of replacing non-renewable resources by alternative renewable resources. In the case of the life cycle of UCO, its elasticity matrix is:

$$[\mathbf{A}_P^e] = \begin{bmatrix} 1.0000 & 0.0000 & 0.0000 & 0.0000 \\ 0.3543 & 0.6457 & 0.0000 & 0.0000 \\ 0.0727 & 0.1326 & 0.7974 & 0.0000 \\ 0.0702 & 0.1277 & 0.7656 & 0.0365 \end{bmatrix}$$

From the elasticity matrix, in combination with the information of external resource consumption provided in Table 3, it is possible to obtain the relative impact of the cost of each external resource in the production cost of biodiesel (FAME), which is shown in Table 6. Note, that the sum of each row in the elasticity matrix must be equal to one.

Table 6. Relative impact of external resources on the production cost of FAME from UCO.

Flow	Collection	Recycling	Esterification	FAME
Diesel	1.0000	0.3746	0.2532	0.2530
Methanol	0.0000	0.0000	0.4433	0.4273
Electricity	0.0000	0.6254	0.2594	0.2554
KOH	0.0000	0.0000	0.0350	0.0337
H ₂ SO ₄	0.0000	0.0000	0.0042	0.0041
HCl	0.0000	0.0000	0.0000	0.0217

The non-renewable resource having higher impact in the production cost of FAME is methanol 42.73%. This means that, if we replace methanol by bio-methanol obtained from wood [3,15], the non-renewable production cost of FAME produced from UCO decreases by 42.73%, and the ExROI value is increased up to 7.07.

By recycling 7% biodiesel (82% renewable source) to produce the required electricity in the production of FAME, the production cost is reduced $0.2554 \times 82.8\% = 21.15\%$, and the ExROI is increased up to 5.10.

By using part of the produced biodiesel in the collection process, in order to substitute the consumption of diesel, the production cost will be reduced $0.0692 \times 82.8\% = 5.73\%$, and the ExROI will be increased up to 4.28.

Finally, if several measures are combined, like the use of organic methanol and the recirculation of 16% of the biodiesel (6.3 MJ/kg) to substitute part of the energy needs in the process, the ExROI would be increased to 69 and the renewability to 98.7%.

6. Conclusions

This paper applies the methodology and concepts introduced in [16–18] to the life cycle production of biodiesel produced from used cooking oils. Used cooking oils have the potential to replace 1.5% to 1.8% of the EU-27 diesel consumption with a GHG emission reduction potential of 88% compared to fossil diesel. Given the importance that this alternative fuel is gaining and the support that is given by the energy and transport policy frameworks worldwide, it is important to assess its life cycle from the thermoeconomic perspective, analyze how the process can be improved and compare the results with other biodiesel types. The results show that biodiesel from used cooking oil is the most sustainable biodiesel from the point of view of the use of non-renewable resources. The ExROI value is higher than three, which is, according to Hall *et al.* [24], the minimum ExROI value that society must attain from its energy exploitation to support continued economic activity and social function. The most important measure to improve the production cycle is substituting the fossil-derived methanol by an alcohol of biological origin, which provides an ExROI increase of 75%.

Author Contributions

Emilio Font de Mora designed the research and written the sections related to UCO-Based Biodiesel. Thermoeconomic Analysis is written by César Torres. Antonio Valero reviewed the research. All authors have read and approved the final manuscript.

Nomenclature

c	Unit Exergy Cost (MJ/MJ)
n	Number of processes
C	Exergy Cost (MJ/kg FAME)
F	Exergy of Fuel (MJ/kg FAME)
P	Exergy of Product (MJ/kg FAME)
y	Exergy distribution ratios (MJ/MJ)

- ρ Renewability ratio (%)
 π^* Global distribution ratios (MJ/MJ)

Matrix and Vectors

- $\langle \mathbf{FP} \rangle$ Exergy distribution ratios matrix ($n \times 1$)
 \mathbf{C}_e Vector of external resources ($n \times 1$)
 $\langle \mathbf{P}^* \rangle$ Production cost operator matrix ($n \times n$)
 \mathbf{U}_n Identity Matrix ($n \times n$)
 $[\mathbf{A}_p^e]$ Elasticity Matrix ($n \times n$)

Subscripts and superscripts

- 0 Environment process
e External resources
F Fuel
nrs Non renewable resources
P Product
rs Renewable resources
T Transpose Matrix

Abbreviations

- CIEMAT Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas
EC European Commission
EROI Energy Return of Energy Investment
EU European Union
EU-27 European Union comprising 27 member states (excluding Croatia)
ExROI Exergy Return of Exergy Investment
FAME Fatty Acid Methyl ester (biodiesel)
FFA Free Fatty Acid
GEREGRAS Spanish association of vegetable oil and fat residues management companies
HORECA Sector of the food service industry
LCA Life Cycle Analysis
UCO Used Cooking Oil

Conflicts of Interest

The authors declare no conflict of interest.

References

1. LIFE Programme. *Ecobus—Collecting Used Cooking Oils to Their Recycling as Biofuel for Diesel Engines*; Technical Report; European Commission: Brussels, Belgium, 2012.
2. European Union. Directive 2009/28/EC of the European Parliament and the Council of 23 April 2009 on the promotion of the use of energy from renewable sources and amending and subsequently repealing Directives 2001/77/EC and 2003/30/EC, 2009. Available online: http://europa.eu/legislation_summaries/energy/renewable_energy/en0009_en.htm (accessed on 12 May 2015).
3. Bailey, R. The Trouble with Biofuels: Cost and Consequences of Expanding Biofuel Use in United Kingdom. *Energy Environ. Resour.* **2013**, *1*, 1–24.
4. ePURE. *Double Counting, Half Measures: Study on the Effectiveness of Double Counting as a Support for Advanced Biofuels*; Technical Report; European Renewable Ethanol Association: Bruxelles, Belgium, 2013.
5. Policy toolkit to improve the support mechanisms for advanced biofuels. Available online: <http://biofuelstp.eu/policy/policy-toolkit-ebtp-06-10-2011.pdf> (accessed on 14 May 2015).
6. FEDIOL. Vegetable oils production, import, exports and consumption 2011 annual statistics. Available online: <http://www.fediol.be/web/statistics2011/1011306087/list1187970179/f1.html> (accessed on 14 May 2015).
7. United States Department of Agriculture Foreign Agricultural Service (USDA). PDS - Production. Available online: <https://apps.fas.usda.gov/psdonline/> (accessed on 14 May 2015).
8. European Union. Directive 2008/98/EC of the European Parliament and of the Council of 19 November 2008 on waste and repealing certain Directives. Available online: <http://faolex.fao.org/docs/pdf/eur83580.pdf> (accessed on 12 May 2015).
9. OilECO Project Project OILECO, supported by the Intelligent Energy – Europe (IEE) Programme of the European Commission, 2013. Available online: <http://www.oileco.org> (accessed on 15 May 2015).
10. Paraiba, O.; Tsoutsos, T.; Tournaki, S.; Antunes, D.; Lino, J.; Manning, E. Strategies for the optimization of the domestic used cooking oil to biodiesel chain, the European project RecOil. In Proceedings of the 20th European Biomass Conference and Exhibition, Milan, Italy, 18–22 June 2012.
11. BioDieNet Project. *The Future of Small Scale, Localised Biodiesel Production from Used Cooking Oil and Its Use in Higher Blends*; Technical Report; Project supported by the Intelligent Energy–Europe (IEE) Programme of the European Commission: Brussels, Belgium, 2009.
12. Lechon, Y.; Cabal, H.; de la Rúa, C.; Lago, C.; Izquierdo, L.; Saez, R.M.; Fdez. San Miguel, M. *Análisis de ciclo de vida de Combustibles Alternativos para el Transporte. Fase I. Análisis de ciclo de vida Comparativo del Biodiesel de Cereales y de la Gasolina*; Technical Report; Ministerio de Educación y Ciencia y Ministerio de Medio Ambiente: Madrid, Spain, 2005.
13. Instituto para la Diversificación y Ahorro de la Energía (IDAE). *Plan de Energías Renovables (PER) 2011–2020*; IDAE: Madrid, Spain, 2011.

14. EN14214—Liquid petroleum products—Fatty acid methyl esters (FAME) for use in diesel engines and heating applications—Requirements and test methods. Available online: <http://www.sis.se/en/petroleum-and-related-technologies/fuels/liquid-fuels/ss-en-142142012a12014-ac2014> (accessed on 12 May 2015).
15. Font de Mora, E. Application of Thermoconomics to Assess and Improve the Efficiency of Bioenergy Production Plants and Land-to-Tank Cycles. Ph.D. Thesis, Universidad de Zaragoza, Zaragoza, Spain, 2013.
16. Font de Mora, E.; Torres, C.; Valero, A. Assessment of biodiesel energy sustainability using the exergy return on investment concept. *Energy* **2012**, *45*, 474–480.
17. De Mora, E.F.; Torres, C.; Valero, A.; Zambrana, D. Defossilisation assessment of biodiesel life cycle production using the ExROI indicator. *Int. J. Thermodyn.* **2013**, *16*, 81.
18. Torres, C.; Valero, A.; Valero, A. Exergoecology as a tool for ecological modelling. The case of the US food production chain. *Ecol. Modell.* **2012**, *255*, 21–28.
19. Torres, C. Symbolic thermo-economic analysis of energy systems. In *Exergy, Energy System Analysis and Optimization, from Encyclopedia of Life Support Systems (EOLSS)*; Frangopoulos, C., Ed.; EOLSS Publishers: Oxford, UK, 2006.
20. Miller, R.E.; Blair, P.D. *Input-Output Analysis: Foundations and Extensions*; Cambridge University Press: Cambridge, UK, 2009.
21. Tsatsaronis, G.; Winhold, M. Exergoeconomic analysis and evaluation of energy-conversion plants. *Energy* **1985**, *10*, 69–80.
22. Lozano, M.; Valero, A. Theory of the exergetic cost. *Energy* **1993**, *18*, 939–960.
23. Sankaranarayanan, S.; Kannan, S. Sonochemistry: A simple and efficient route for biodiesel production from neat and blended vegetable oils using LDH-derived base catalysts. *Int. J. Adv. Eng. Sci. Appl. Math.* **2013**, *5*, 210–218.
24. Hall, C.A.S.; Balogh, S.; Murphy, D.J. What is the minimum EROI that a sustainable society must have? *Energies* **2009**, *2*, 25–47.