

SJR

Scimago Journal & Country Rank

Enter Journal Title, ISSN or Publisher Name





[Home](#)[Journal Rankings](#)[Country Rankings](#)[Viz Tools](#)[Help](#)[About Us](#)





Applied Mechanics and Materials

Country [Switzerland](#)**Subject Area** [Engineering](#)**Subject Category** [Engineering \(miscellaneous\)](#)**Publisher** [Trans Tech Publications Ltd.](#)**Publication type** Book Series**ISSN** 16609336**Coverage** 2005-ongoing

17

H Index

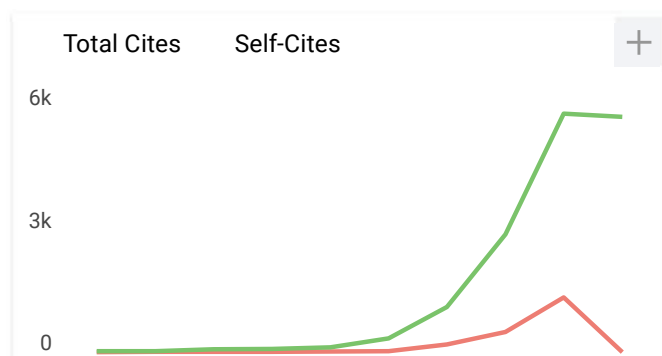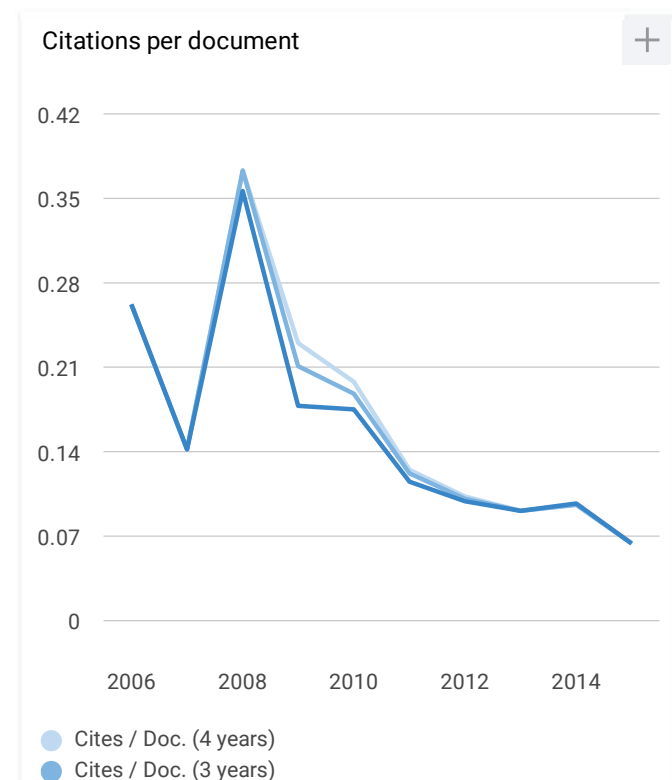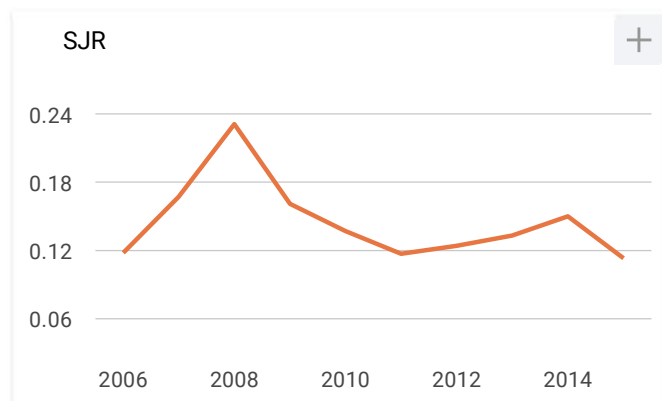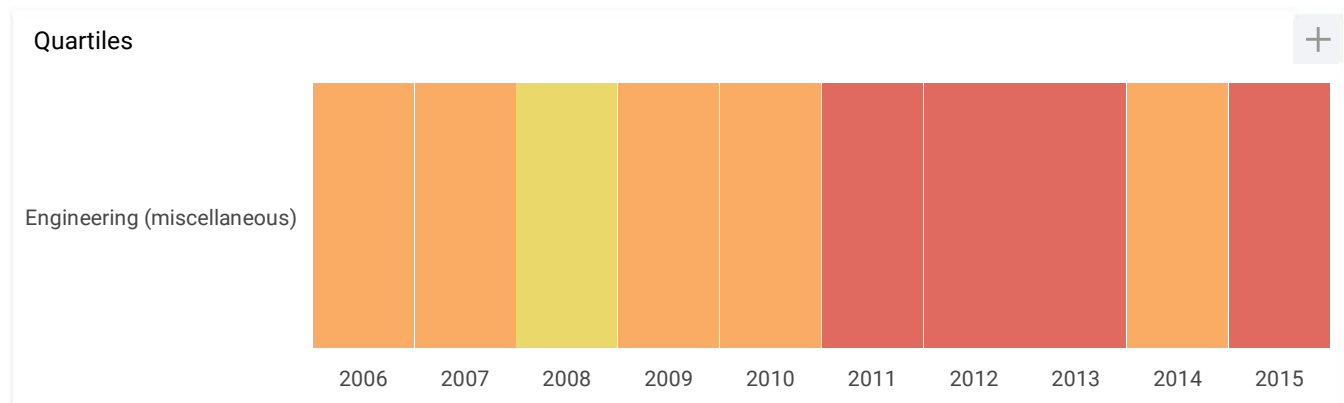

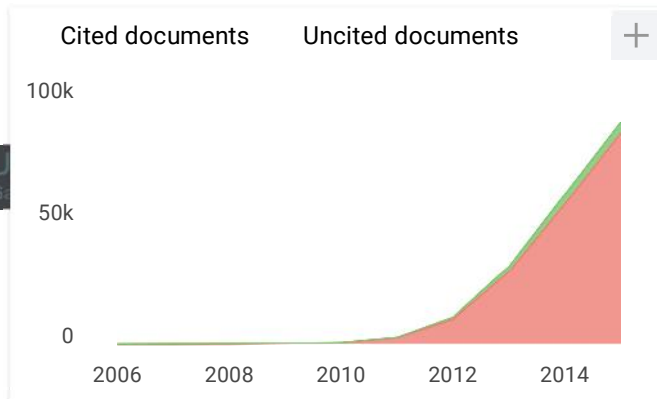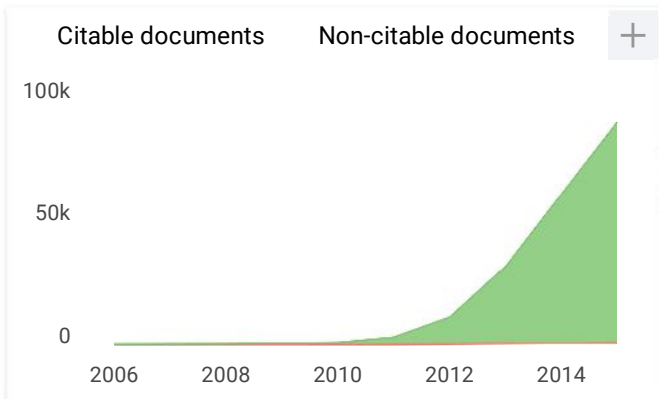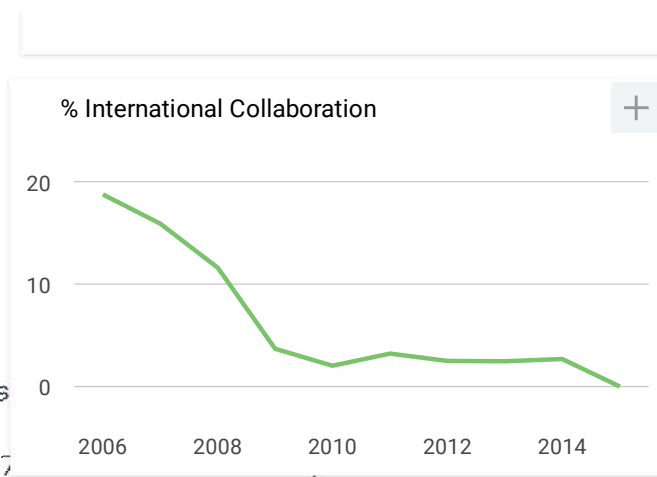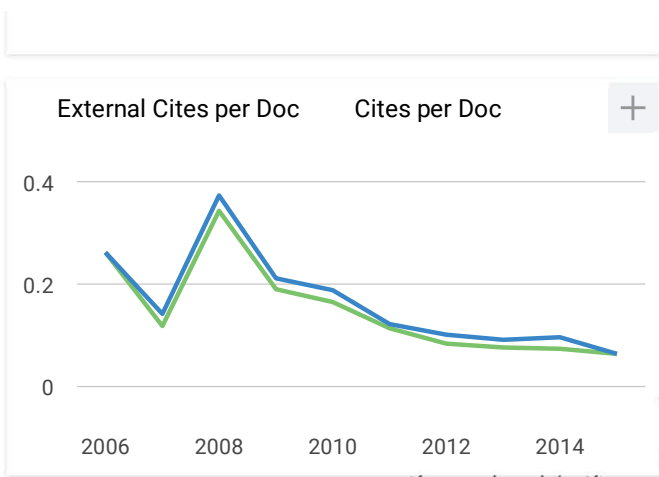

Applied Mechanics and Materials

Indicator	2008-2015	Value
SJR		0.11
Cites per doc		0.06
Total cites		5295

www.scimagojr.com

Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="http://www.scima
```

This is a preview of SCOPUS.

[Click here](#) to learn more about accessing SCOPUS with our Integration Services. Visit also our [SCOPUS Info Site](#).

The Scopus Author Identifier assigns a unique number to groups of documents written by the same author via an algorithm that matches authorship based on a certain criteria. If a document cannot be confidently matched with an author identifier, it is grouped separately. In this case, you may see more than 1 entry for the same author.

Print | E-mail

Nurhadi, Hendro

Institut Teknologi Sepuluh Nopember, Department of Ocean Engineering, Surabaya, Indonesia

Author ID: 25646368600

[About Scopus Author Identifier](#) | [View potential author matches](#)

Other name formats: Nurhadi

Documents: 12

[Analyze author output](#)

Citations: 9 total citations by 9 documents

h-index: 1

[View *h*-graph](#)

Co-authors: 14

Subject area: Engineering , Computer Science [View More](#)

Follow this Author [Receive emails when this author publishes new articles](#)

[Get citation alerts](#)

[Add to ORCID](#)

[Request author detail corrections](#)



12 Documents | Cited by 9 documents | 14 co-authors

12 documents

[View in search results format](#)

Sort on: **Date** [Cited by](#) [...](#)

[Export all](#) | [Add all to list](#) | [Set document alert](#) | [Set document feed](#)

Author History

Publication range: 2009 - 2015

References: 129

Source history:

Proceedings of 2014 International Conference on Intelligent Autonomous Agents, Networks and Systems, INAGENTSYS 2014 [View documents](#)
 Applied Mechanics and Materials [View documents](#)
 Proceedings of 2013 International Conference on Robotics, Biomimetics, Intelligent Computational Systems, ROBIONETICS 2013 [View documents](#)
[View More](#)

[Show Related Affiliations](#)

Ensemble kalman filter with a square root scheme (EnKF-SR) for trajectory estimation of AUV SEGOROGENI ITS	Herlambang, T., Djatmiko, E.B., Nurhadi, H.	2015	International Review of Mechanical Engineering	0
Show abstract Related documents				
Control simulation of an Automatic Turret Gun based on force control method	Moh. Naszir, T., Pramujati, B., Nurhadi, H., Pitowarno, E.	2015	Proceedings of 2014 International Conference on Intelligent Autonomous Agents, Networks and Systems, INAGENTSYS 2014	0
Show abstract Related documents				
Preliminary numerical study on designing navigation and stability control systems for ITS AUV	Herlambang, T., Nurhadi, H., Subchan	2014	Applied Mechanics and Materials	1
Show abstract Related documents				
Experimental-based TGPID motion control for 2D CNC machine	Nurhadi, H., Subowo, Hadi, S., Mursid, M.	2014	Applied Mechanics and Materials	0
Show abstract Related documents				
Preliminary study on magnetic levitation modeling using PID control	Patriawan, D.A., Pramujati, B., Nurhadi, H.	2014	Applied Mechanics and Materials	0
Show abstract Related documents				
Sliding-mode (SM) and Fuzzy-Sliding-Mode (FSM) controllers for high-precisely linear piezoelectric ceramic motor (LPCM)	Nurhadi, H.	2013	Proceedings of 2013 International Conference on Robotics, Biomimetics, Intelligent Computational Systems, ROBIONETICS 2013	0
Show abstract Related documents				
Multistage rule-based positioning optimization for high-precision LPAT	Nurhadi, H.	2011	IEEE Transactions on Instrumentation and Measurement	0
Show abstract Related documents				
Experimental PC based TGPID control method for 2D CNC machine	Nurhadi, H., Tarnag, Y.-S.	2011	Expert Systems with Applications	1
Show abstract Related documents				
Study on controller designs for high-precisely linear piezoelectric ceramic motor (LPCM): Comparison of PID-sliding-fuzzy	Nurhadi, H., Kuo, W.-M., Tarnag, Y.-S.	2010	Proceedings of the 2010 5th IEEE Conference on Industrial Electronics and Applications, ICIEA 2010	0
Show abstract Related documents				
Two-stage rule-based precision positioning control of a piezoelectrically actuated table	Kuo, W.M., Tarnag, Y.S., Nian, C.Y., Nurhadi, H.	2010	International Journal of Systems Science	0
Show abstract Related documents				
Open- and closed-loop system of computer integrated desktop-scale CNC machine	Nurhadi, H., Tarnag, Y.-S.	2009	IFAC Proceedings Volumes (IFAC-PapersOnline)	0
Show abstract Related documents				
Experimental approached optimisation of a linear motion performance with grey hazy set and Taguchi analysis methods (GHST) for ball-screw table type	Nurhadi, H., Tarnag, Y.-S.	2009	International Journal of Advanced Manufacturing Technology	7
Show abstract Related documents				

Display results per page

Page 1

[Top of page](#)

The data displayed above is compiled exclusively from articles published in the Scopus database. To request corrections to any inaccuracies or provide any further feedback, please [contact us](#) (registration required).
The data displayed above is subject to the privacy conditions contained in the [privacy policy](#).

About Scopus

[What is Scopus](#)
[Content coverage](#)
[Scopus Blog](#)
[Scopus API](#)
[Privacy Matters](#)

Language

[日本語に切り替える](#)
[切换到简体中文](#)
[切换到繁體中文](#)

Customer Service

[Help and Contact](#)

ELSEVIER

[Terms and Conditions](#) [Privacy policy](#)

Copyright © 2016 Elsevier B.V. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.
Cookies are set by this site. To decline them or learn more, visit our [Cookies page](#)

Preliminary Numerical Study on Designing Navigation and Stability Control Systems for ITS AUV

¹ Teguh Herlambang, ² Hendro Nurhadi, ³ Subchan

¹ Department of Ocean Engineering, FTK ITS

² Department of Mechanical Engineering, FTI ITS

³ Department of Mathematic, FMIPA ITS

¹teguh.ftkits@gmail.com, ²hdnurhadi@me.its.ac.id (corresponding author),

³subchan@matematika.its.ac.id

Keywords: AUV, numerical study, hydrodynamic, navigation, stability, control system

Abstract. In this paper, the numerical study of designing on navigation and stability control system for AUV is studied. The study started by initiating hydrostatic forces, added masses, lift force, drag forces and thrust forces. Determining the hydrodynamic force which is the basic need to know the numerical case study on designing on navigation and stability control system for AUV where Autonomous Underwater vehicles (AUV). AUV is capably underwater vehicle in moving automatically without direct control by humans according to the trajectory. The result of numerical study is properly to be the reference for the next developing for AUV.

1. Introduction

Over than 70%, Indonesia is over ocean, so Indonesia potency need attention and good technology is able to determine the full potential of the Indonesians oceans. Underwater robotics technology is very necessary in this case to assist the human to exploration in Indonesian oceans. AUV can be used for underwater exploration, mapping, underwater defense system equipment, sensor off board submarines, inspection of underwater structures natural resources, the condition of earth's surface plates etc). Its ability can be controlled, location of its can be monitored from distance even be programmed to move itself through a particular trajectory. But there are many difficulties that need to be resolved before AUV moved as desired are internal and external disturbance.

This study emphasized on basic development of an AUV controlling the navigation and stability.

2. Autonomous Underwater Vehicle (AUV) model

Two important things needed to analyze the Autonomous Underwater Vehicle (AUV) that is Earth Fixed Frame (EFF) and Body Fixed Frame (BFF) [1]. EFF is used to describe the position and orientation of the AUV with the position of the x axis direct to the north, the y-axis to the east and the z-axis toward the center of the earth while BFF used to describe the speed and acceleration of the AUV with the starting point is at the center of gravity. X-axis direct to the ship's bow, the positive y axis direct to the right side of the ship and the positive z-axis direct down [2,3].

Motion of AUV have 6 DOF where 3 DOF for translational motion and 3 DOF for rotational motion in point x, y and z. The dynamics of the AUV there are external forces influencing the movement follows as [4]:

$$\tau = \tau_{hidrostaticis} + \tau_{addedmass} + \tau_{drag} + \tau_{lift} + \tau_{control} \text{ (Eq. 1)}$$

General equation of motion in 6 DOF AUV consists of 3 first equation for translational motion and 3 second equation for rotational motion contained in equation 2.

Table 1 Notation of AUV Motion Axis [4]

DOF	Translational And Rotational	Force / Moment	Linear and Angular Velocity	Potition/Angle Euler
1	Surge	X	U	x
2	Sway	Y	V	y
3	Heave	Z	W	z
4	Roll	K	P	ϕ
5	Pitch	M	Q	θ
6	Yaw	N	R	ψ

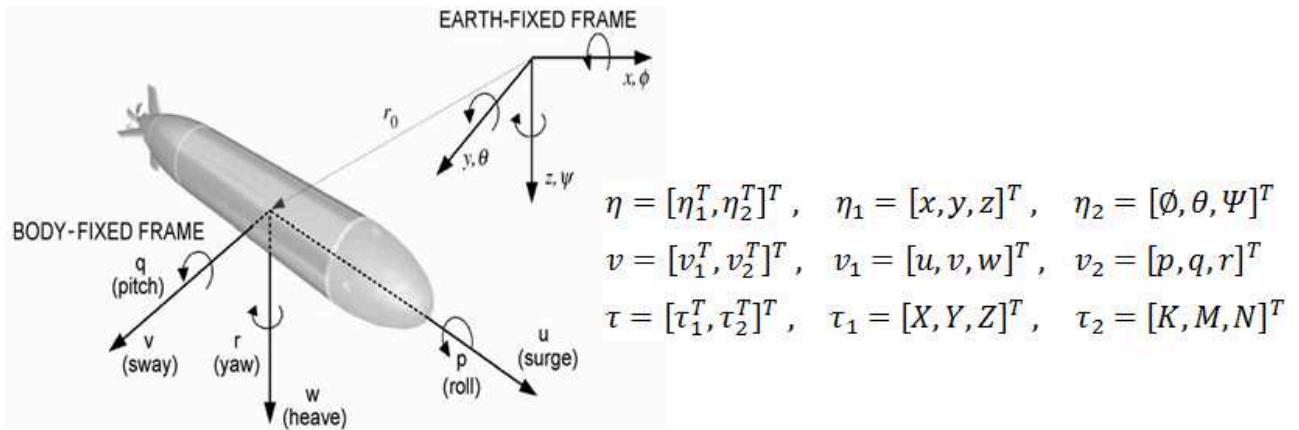


Fig. 1 6 DOF in AUV

Where η vector position the position and orientation of the EFF, v vector velocity of linear and angular of the BFF, the position and orientation of the BFF, and τ description of force and moment in AUV of the BFF.

By combining equations hydrostatic force, lift force, added mass force, drag, thrust force and assuming a diagonal tensor of inertia (I_o) is zero then the total forces and moments of models obtained from the following [1,4].

Translational x :

$$m[\dot{u} - vr + wq - x_G(q^2 + r^2) + y_G(pq - \dot{r}) + z_G(pr + \dot{q})] =$$

$$X_{res} + X_{|u|u}u|u| + X_{\dot{u}}\dot{u} + X_{wq}wq + X_{qq}qq + X_{vr}vr + X_{rr}rr + X_{prop}$$

Translational y :

$$m[\dot{v} - wp + ur - y_G(r^2 + p^2) + z_G(qr - \dot{p}) + x_G(pq + \dot{r})] =$$

$$Y_{res} + Y_{|v|v}v|v| + Y_{r|r|r}|r| + Y_{\dot{v}}\dot{v} + Y_{\dot{r}}\dot{r} + Y_{ur}ur + Y_{wp}wp + Y_{pq}pq + Y_{uv}uv + Y_{uu\delta_r}u^2\delta_r$$

Translational z :

$$m[\dot{w} - uq + vp - z_G(p^2 + q^2) + x_G(rp - \dot{q}) + y_G(rq + \dot{p})] =$$

$$Z_{res} + Z_{|w|w}w|w| + Z_{q|q|q}|q| + Z_{\dot{w}}\dot{w} + Z_{\dot{q}}\dot{q} + Z_{uq}uq + Z_{vp}vp + Z_{rp}rp + Z_{uw}uw + Z_{uu\delta_s}u^2\delta_s \quad (\text{Eq. 2})$$

Translational x, y and z are representation of surge, sway and heave. With the position of the x axis direct to the north, the y-axis to the east and the z-axis toward the center of the earth

Rotational x:

$$I_x\dot{p} + (I_z - I_y)qr + m[y_G(\dot{w} - uq + vp) - z_G(\dot{v} - wp + ur)] =$$

$$K_{res} + K_{p|p|p}|p| + K_{\dot{p}}\dot{p} + K_{prop}$$

Rotational y :

$$I_y \dot{q} + (I_x - I_z)rp + m[z_G(\dot{u} - vr + wq) - x_G(\dot{w} - uq + vp)] = M_{res} + M_{w|w|}w|w| + M_{q|q|}q|q| + M_w \dot{w} + M_q \dot{q} + M_{uq}uq + M_{vp}vp + M_{rp}rp + M_{uw}uw + M_{uu\delta_s}u^2\delta_s$$

Rotational z :

$$I_z \dot{r} + (I_y - I_x)pq + m[x_G(\dot{v} - wp + ur) - y_G(\dot{u} - vr + wq)] = N_{res} + N_{v|v|}v|v| + N_{r|r|}r|r| + N_v \dot{v} + N_r \dot{r} + N_{ur}ur + N_{wp}wp + N_{pq}pq + N_{uv}uv + N_{uu\delta_r}u^2\delta_r \quad (\text{Eq. 3})$$

Rotational x, y and z are representation of surge, sway and heave. This type of AUV using only one propeller on the tail AUV which will produce x_{prop} and additional moment K_{prop} . External forces and moments acting on the AUV are the hydrostatic force, thrust force and hydrodynamic force and where every object in the water will have a hydrostatic force consisting of gravity and buoyancy forces. While hydrodynamic component consists of added mass force, drag force and lift force. Thrust force use fin to control the balance of the ship will require a constant rate. Propellers produce forces and moments due to the surge only used only a single propeller.

In this paper there are three case study, te first case study is rotational of z (yawing), the second case study is rotational of y (pitching) and the third case study is rotational of x (rolling).

1. Rotational of z (yawing)

in this paper, the different of case study is hydrostatic force, in the first case study it assumed only yawing influence, while rolling and pitching no effect and yawing is influenced by gravity and buoyancy force. So we get equation of $(X_{res}, Y_{res}, Z_{res}, K_{res}, M_{res}, N_{res})$ as follows

$$\begin{bmatrix} X_{res} \\ Y_{res} \\ Z_{res} \\ K_{res} \\ M_{res} \\ N_{res} \end{bmatrix} = \begin{bmatrix} -(W - B) \sin \theta \\ (W - B) \cos \theta \sin \phi \\ (W - B) \cos \theta \cos \phi \\ (y_G W - y_b B) \cos \theta \cos \phi - (z_G W - z_b B) \cos \theta \sin \phi \\ -(z_G W - z_b B) \sin \theta - (x_G W - x_b B) \cos \theta \cos \phi \\ (x_G W - x_b B) \cos \theta \sin \phi + (y_G W - y_b B) \sin \theta \end{bmatrix} \quad (\text{Eq. 4})$$

2. Rotational of y (pitching)

In the second case study it assumed only pitching influence, while rolling and yawing no effect and pitching is influenced by horizontal fin angle and vertical fin angle. So we get equation of $(X_{res}, Y_{res}, Z_{res}, K_{res}, M_{res}, N_{res})$ as follows

$$\begin{bmatrix} X_{res} \\ Y_{res} \\ Z_{res} \\ K_{res} \\ M_{res} \\ N_{res} \end{bmatrix} = \begin{bmatrix} (\delta_{re} + \delta_{se}) \sin \Psi \cos \theta \\ (\delta_{re} + \delta_{se})(\cos \Psi \sin \theta + \sin \phi \sin \theta \sin \Psi) \\ -(\delta_{re} + \delta_{se})(\cos \Psi \sin \phi - \cos \phi \sin \theta \sin \Psi) \\ (\delta_{re} + \delta_{se})(-y_G(\cos \Psi \sin \phi - \cos \phi \sin \theta \sin \Psi) - z_G(\cos \Psi \sin \theta + \sin \phi \sin \theta \sin \Psi)) \\ (\delta_{re} + \delta_{se})(z_G \sin \Psi + x_G(\cos \Psi \sin \phi - \cos \phi \sin \theta \sin \Psi)) \\ (\delta_{re} + \delta_{se})(x_G(\cos \Psi \sin \theta + \sin \phi \sin \theta \sin \Psi) - y_G \sin \Psi \cos \theta) \end{bmatrix} \quad (\text{Eq. 5})$$

3. Rotational of x (rolling)

In the third case study it assumed only rolling influence, while pitching and yawing no effect and rolling is influenced by horizontal and vertical ocean force. So we get equation of $(X_{res}, Y_{res}, Z_{res}, K_{res}, M_{res}, N_{res})$ as follows

$$\begin{bmatrix} X_{res} \\ Y_{res} \\ Z_{res} \\ K_{res} \\ M_{res} \\ N_{res} \end{bmatrix} = \begin{bmatrix} (g_1 + g_2) \cos \Psi \cos \theta \\ (g_1 + g_2)(-\sin \Psi \cos \phi + \cos \Psi \sin \phi \sin \theta) \\ (g_1 + g_2)(\sin \Psi \sin \phi + \cos \Psi \cos \phi \sin \theta) \\ (g_1 + g_2)(y_G(\sin \Psi \sin \phi + \cos \Psi \cos \phi \sin \theta) - z_G(-\sin \Psi \cos \phi + \cos \Psi \sin \phi \sin \theta)) \\ (z_G \cos \Psi \cos \theta - x_G(\sin \Psi \sin \phi + \cos \Psi \cos \phi \sin \theta)) \\ (g_1 + g_2)(x_G(-\sin \Psi \cos \phi + \cos \Psi \sin \phi \sin \theta) - y_G \cos \Psi \cos \theta) \end{bmatrix} \quad (\text{Eq. 6})$$

3. Result and Discussion

Translational and rotational initiative are representation of three case studies. Translational initiative is surge, sway and heave in figure 2 and rotational initiative is roll, pitch and yaw in figure 3. The numerical result of Translational and rotational initiative in table 2.

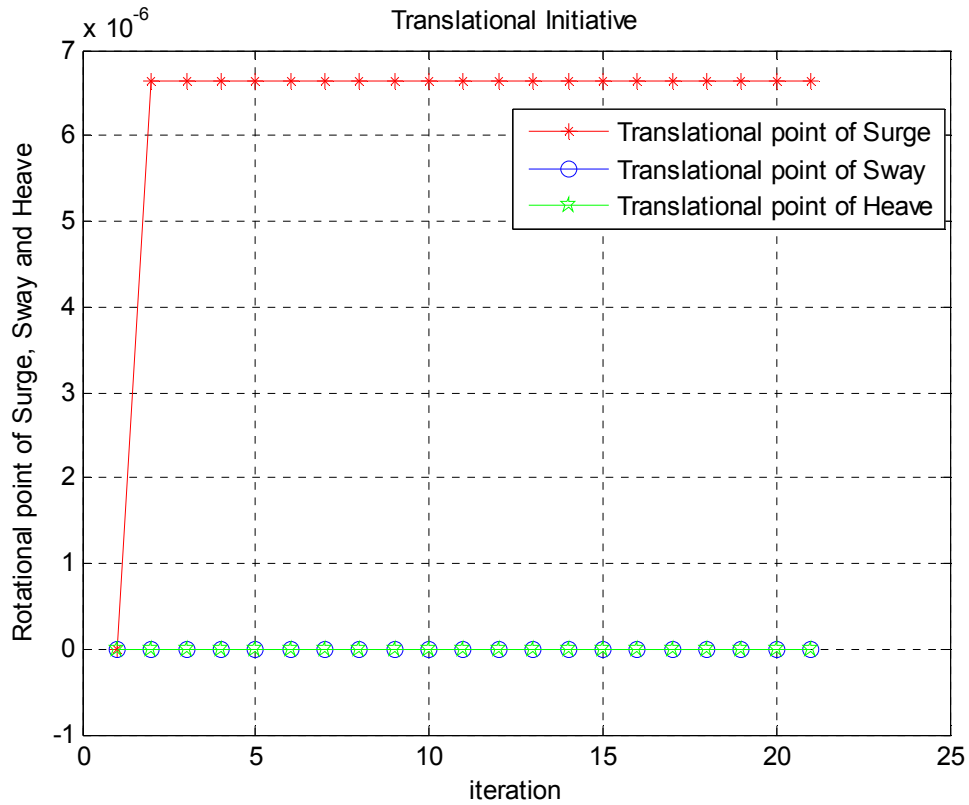


Fig.2 Translational of Surge, Sway and Heave

In figure 2 shows AUV move forward or move to surge axis. While no move to direct sway and heave axis. AUV move to surge axis around 7×10^{-6} m/sec while to sway axis around $1,335 \times 10^{-6}$ m/sec and to heave axis around $0,5 \times 10^{-6}$ m/sec.

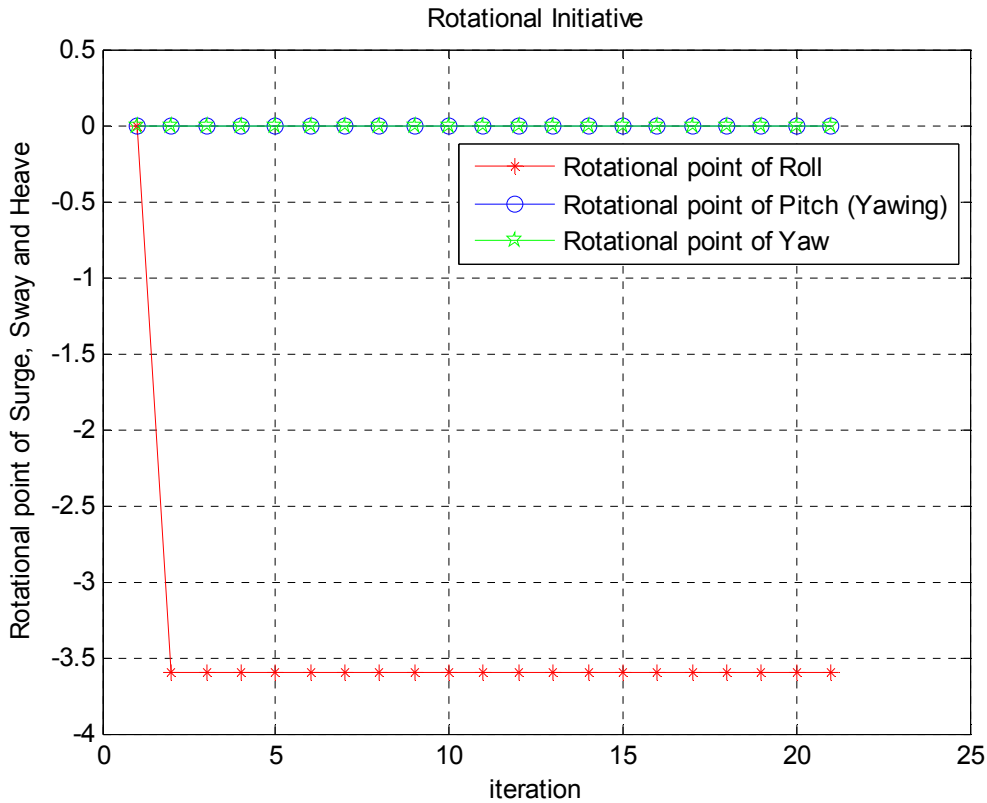


Fig. 3 Rotational of Roll, Pitch and Yaw

In figure 3 shows AUV only rolling while pitch and yaw no move. Rotational point of roll around $1,995 \times 10^{-5}$ rad/sec while Rotational point of pitch around $0,06775 \times 10^{-5}$ rad/sec Rotational point of yaw around $0,015 \times 10^{-5}$ rad/sec.

Assumed in this case is AUV move to forward because disturbance of resistance so rolling effect from translational and rotational initiative can be reference to control and navigation system.

The purpose of the graph to illustrate the validation of the model in real AUV system without control, navigation and guidance system. So from model validation can be used as numerical preliminary control and navigation design system.

Table 2 Result of translational and rotational initiative Simulation

Translational initiative	Surge	$6,45 \times 10^{-6}$	-
	Sway	$1,335 \times 10^{-6}$	-
	Heave	$0,5 \times 10^{-6}$	-
Rotational initiative	Roll	-	$1,995 \times 10^{-5}$
	Pitch	-	$0,6775 \times 10^{-5}$
	Yaw	-	$0,5 \times 10^{-5}$

4. Conclusion

Table 2 representation of result simulation translational and rotational initiative. from translational and rotational initiative case can be reference to control and navigation system. In this paper, the result of preliminary study properly orientation on designing navigation and stability control.

References

- [1] Hendro Nurhadi, Subchan, Gustiyadi Fathur R, Design of Position Estimation Algorithm of Navigation and Trajectory System for Unmanned Underwater Vehicle ITS AUV-01 using Ensemble Kalman Filter (EnKF) Method, *13th Seminar on Intelligent Technology and Its Applications (SITIA 2012)*, Surabaya, 23 May 2012.
- [2] T. Perez. O. N. Smogeli, T.I Fossen and A.J Sorensen. 2005. An Overview of marine Systems Simulator (MSS): A Simulink Toolbox for Marine Control System . SIMS2005-Scandinavian Conference on Simulation and Modelling.
- [3] T. I. Fossen 2005. A Nonlinear Unified State-space Model for Ship Maneuvering and Control in A Seaway-Journal of Bifurcation and Chaos.
- [4] Yang, C. 2007. *Modular Modelling and Control for Autonomous Vehicle (AUV)*. Department of Mechanical Engineering National University of Singapore

Advances in Applied Mechanics and Materials

10.4028/www.scientific.net/AMM.493

Preliminary Numerical Study on Designing Navigation and Stability Control Systems for ITS AUV

10.4028/www.scientific.net/AMM.493.420