

VTT Technical Research Centre of Finland

The future of food packaging

Harlin, Ali; Kangas, Heli; Forsström, Ulla; Vähä-Nissi, Mika

Published: 12/06/2018

Document Version
Other version

License
Unspecified

[Link to publication](#)

Please cite the original version:

Harlin, A., Kangas, H., Forsström, U., & Vähä-Nissi, M. (2018). *The future of food packaging*. Abstract from 12th International Conference on Coatings on Glass and Plastics, ICCG12, Würzburg, Germany.



VTT
<http://www.vtt.fi>
P.O. box 1000FI-02044 VTT
Finland

By using VTT's Research Information Portal you are bound by the following Terms & Conditions.

I have read and I understand the following statement:

This document is protected by copyright and other intellectual property rights, and duplication or sale of all or part of any of this document is not permitted, except duplication for research use or educational purposes in electronic or print form. You must obtain permission for any other use. Electronic or print copies may not be offered for sale.

The Future of Food Packaging

Ali Harlin, Heli Kangas,
Ulla Forsström, Mika Vähä-Nissi

ICCG 12, June 12th 2018,
Frankfurt, Introduction session



**NEXT 30 YEARS
MORE FOOD THAN IN HISTORY**





Background and Trends


- Increasing number of consumers want to use less time for cooking, and therefore they prefer to eat on move or easy to cook meals,
- Consumers and NGOs demand for materials made from bio-based and sustainable resources that are recyclable, carbon neutral, and have low environmental and health impacts,
- Brand owners and packaging industry see a trend towards green materials a fact with real value, and there is a need to replace potentially hazardous materials,
- Packaging remains an excellent and sustainable tool for preserving food, avoiding food waste, and ensuring efficient use of limited resources with an ever increasing value.



29/06/2018

3

VTT Pilot Plants for Packaging and Bio and Circular Economy 2018

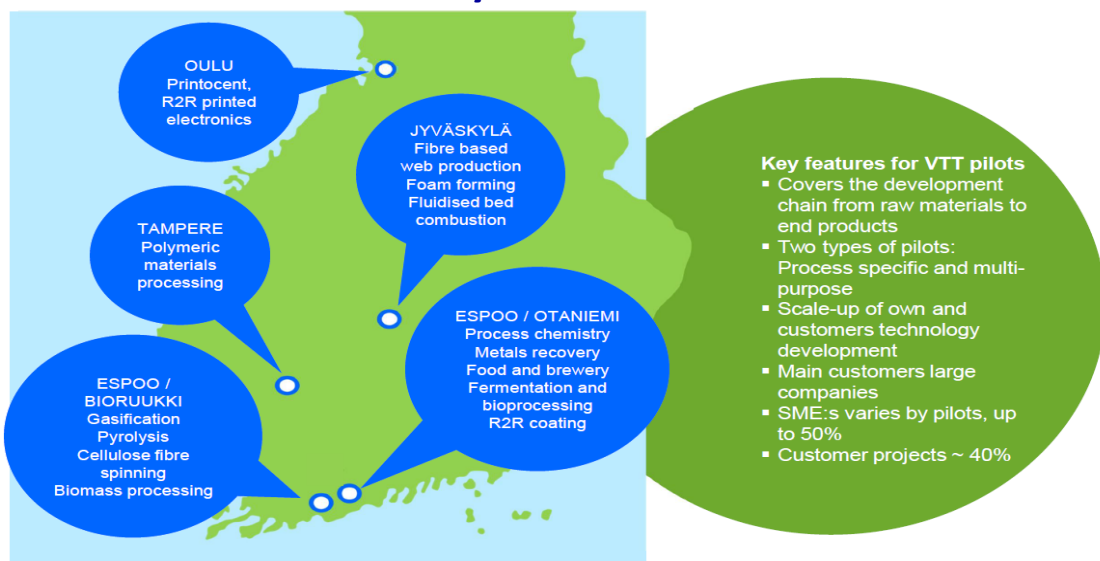

4

Bioruukki Pilot Centre - Efficiency, Speed and Low Risks to Development with Piloting and Demonstrations



- A new piloting ecosystem for process industry scale-up and demonstrations.
- A former printing plant transformed to world scale R&D centre.
- Located close to Otaniemi campus.




**BIORUUKKI IS THE LARGEST OPEN
PILOT FACILITY IN BIOECONOMY
IN NORTHERN EUROPE**

4

5

Bioruukki Pilot Ecosystem – An Integrated Enabler to Accelerate High Value Business in Bio & Circular Economy

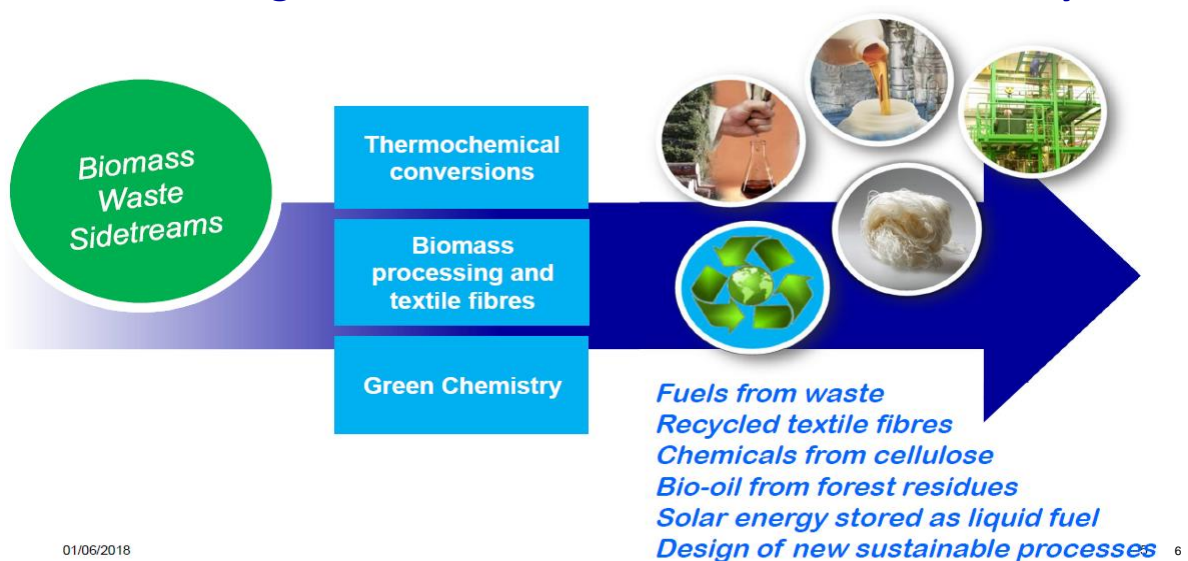


01/06/2018

6



Biomass Processing and Products

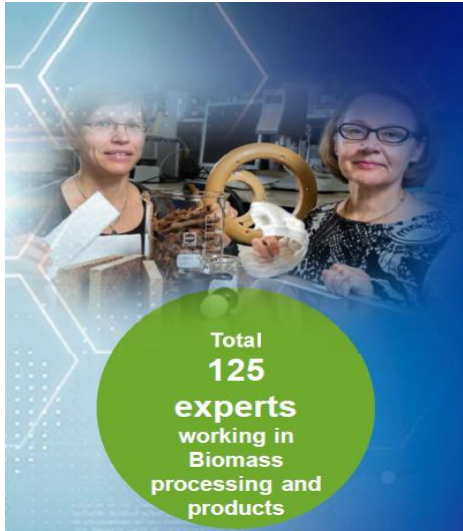

Total
125
experts
working in
Biomass
processing and
products

Development of resource efficient and cost competitive process and product concepts based on renewable raw materials

BIOMASS PRETREATMENT

- Mechanical, chemical and enzymatic processing of raw materials

UPGRADING FRACTIONS

- Lignin up-grading technologies
- Recovery of high-value components
- Sustainable dissolution processes

WEB BASED FIBRE PRODUCTS

- Foam forming of thin and thick webs
- Moldable web
- NFC films and membranes
- Barriers and functional coating

BIO-BASED HYBRID STRUCTURES

- Biocomposite production technologies, esp. extrusion
- Man-made fibres and yarns
- Biopolymer foams, 3D-structures and functional materials

29/06/2018

7



Biomaterial Products



Expertise from
idea generation to
market-ready applications

Our competence areas are


- Biopolymer and fibre foams
- High-performance fibre composites
- Tailoring of fibres and biopolymers
- Biomaterial process development
- Bio- and circular economy materials

8



Our Vision

Replace or reinvent!

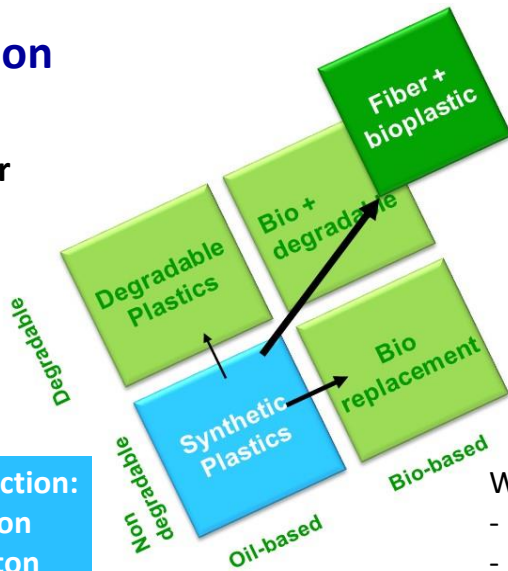

Many options, better optisms!

Plastics production:
 1950 ~ 1.5 Mton
 2015 ~ 322 Mton
 2025 ~ 400 Mton

- With existing P&P capacity we can
- Increase recycling from 22% to 36%
 - Reduce waste by 74 Mton
 - Increase biodegradable by 12 Mton
 - Increase biocontent 0.6% -> 23%



Examples of Structures Possible From Cellulose

Paper like pouches

- Aesthetic layer
- Support
- Barrier
- Hot melt adhesive



Clear packaging films

- Aesthetic layer
- Support
- Barrier
- Hot melt adhesive




Moldable board trays

- Aesthetic layer
- Support
- Barrier
- Hot melt adhesive



From Natural Composites to Bio-based Polymers

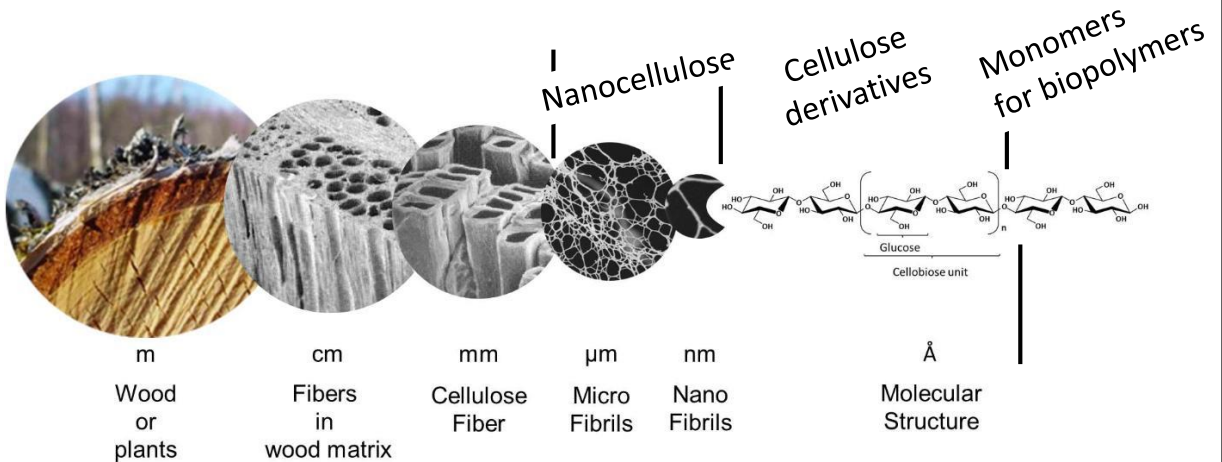



Plastic Like Nanocellulose Films

- Produced with a roll-to-roll SutCo surface treatment pilot line using casting method,
- Several meters of "plastic-like" film
- Properties depend on formulation,
- Good:
 - OTR <math>< 0.1 \text{ cm}^3/\text{m}^2/\text{d}</math> (0% RH; 15 μm)
 - Temperature resistance (200°C)
 - Tensile strength (200 MPa)



Based on patent application (Tammelin et al.,
Method for the Preparation of NFC films on Supports)

29/06/2018

13



SutCo Surface Treatment Line





- Modular semi-pilot for evaluation of new product concepts
- Selection of coating methods
- Possible applications:
 - Nanocellulose films
 - Enhancement of bioplastics
 - Barrier development
 - Simple electronics
 - Functional surfaces
 - Bioactive functionalities
 - Other customized applications

29/06/2018

14



Nanocellulose Films and Barrier Coatings



29/06/2018




WO2013/060934,
PCT/FI2015/050835,
FI2016/5075

15



CNF Films for Optoelectronics and Smart Packages

- Thin, inexpensive, flexible and biodegradable material as substrate for conductive structures and organic transistors,
- Paper not a viable option due to its structure, and printing on plastics can be challenging,
- Smooth and dense film surface,
- Silver ink can be used to print conductive structures on the surface,
- Structures sintered at 150°C for 1 h,
- Micropillar patterns create optical effects

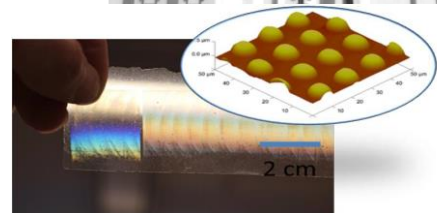

29/06/2018

16

RESEARCH CASE



Hybrid Package: Bag-In-Box

Current state-of-the-art
100% fossil-based inner pouch

- Moisture barrier



VTT's solution
100% bio-based inner pouch

- Moisture barrier
- Oxygen barrier
- Mineral oil barrier



29/06/2018

17

RESEARCH CASE



40-50% Reduction in Light Absorption



Commercial 1 HDPE



Commercial 2 Multilayer



Bio-HDPE + CNF coating

29/06/2018

18

RESEARCH CASE



Bio-HDPE + CNF Coating as Mineral Oil Barrier: Reduction in Mineral Oil Migration vs Uncoated film

n-decane (C10, linear aliphatic)	98%
isobutylbenzene (C10, aromatic)	98%
1-cyclohexylbutane (C10, cyclic aliphatic)	98%
1-cyclohexylheptane (C13, cyclic aliphatic)	97%
1-cyclohexyldecane (C16, cyclic aliphatic)	83%

In addition,
99% reduction in oxygen transmission!



29/06/2018

Disclaimer: The commercial product used herein not related to the invention

19

RESEARCH CASE



Stand-up Pouches from Renewable Materials and CNF



- **Lightweight 100% bio-based stand-up pouches,**
- **High performance in both oxygen, grease and mineral oil barrier properties,**
- VTT's HefCel technology provides a low-cost method for the production of nanocellulose,
- Resulting in a tenfold increase in the solids content of nanocellulose.

29/06/2018

20


RESEARCH CASE



Cellulose Fiber Reinforced Thermoformable Materials

Bio-based **poly(lactic acid) (PLA)** and **polypropylene (PP)** as matrix polymers

- **Wood based cellulose fibres** with 3 different lengths were tested
 - Micro-sized cellulose fibers gave smooth and thermoformable film
 - Compounds with fiber loadings of **10-30 wt-%** could be thermoformed
- The stiffness was improved slightly
 - Plasticizing effect of the additives had an opposite effect than fibres



Technical University
of Denmark




29/06/2018

21

RESEARCH CASE



3D Forming & Formability of Paper and Paperboard

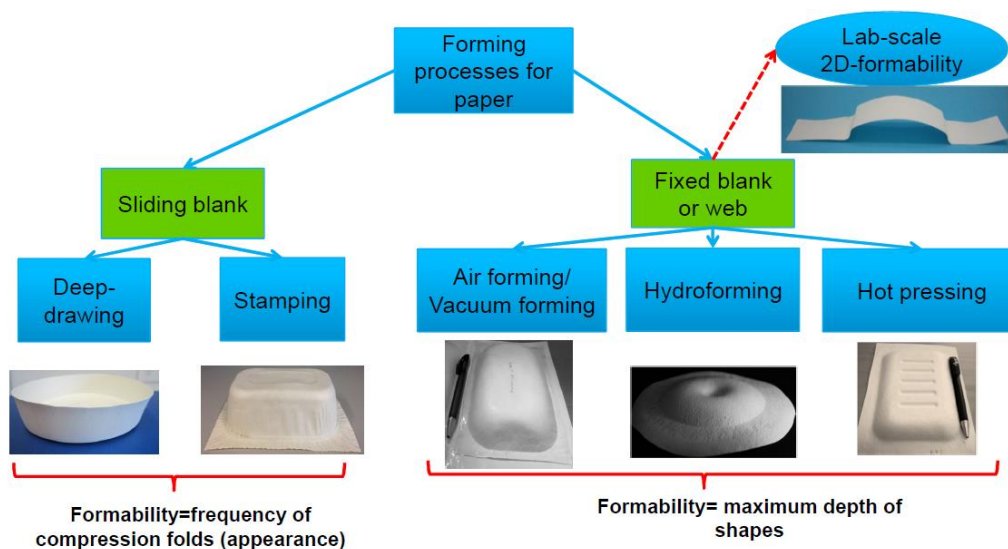


22

RESEARCH CASE



Light-weight PLA Foam Development



Extrusion foamed and expanded PLA

- Sustainability by replacing oil-based components
- Light-weight, high insulation
- 100% bio-based

Applications in e.g. packaging, construction and transport


29/06/2018

23

Biodegradability



- Pure lignocellulosic materials biodegradable,
- To produce regenerated cellulose films, cellulose need to dissolved in viscose process,
 - Green alternative is ionic liquids
- Cellulose derivatives soluble in common solvents, and derivatives with low DS biodegradable,
- CNF and paper are naturally biodegradable, but with no water resistance
 - If biodegradable wet strength agent or all-cellulose approach used, the biodegradability of the material could be retained.

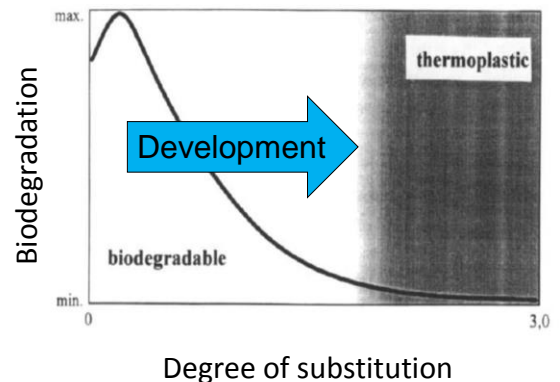


29/06/2018

24





Cellulose vs. Polyethylene

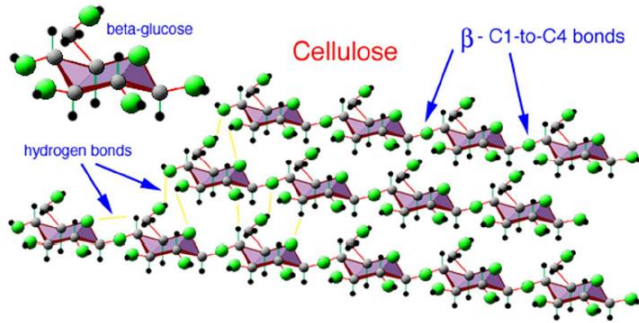

Complex structure

Controlled structure

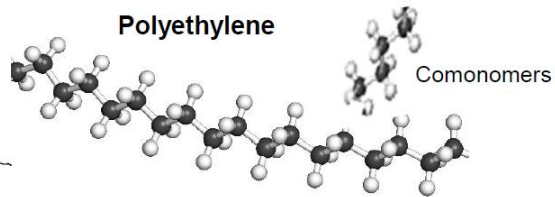

29



25

RESEARCH CASE




Thermoplastic Cellulose

Repulsive groups + external plasticizer

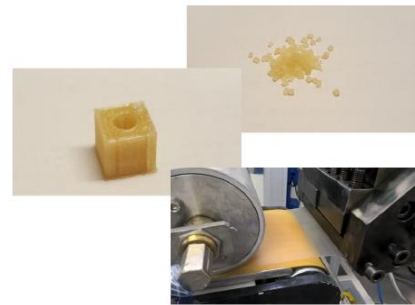

Modified cellulose chain + internal plasticizer

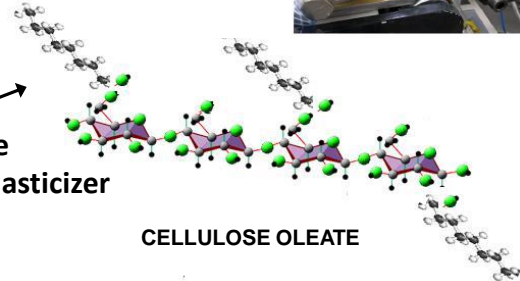

CELLULOSE OLEATE


29/06/20

26

RESEARCH CASE



Cellulose-based Multilayer Packaging Material (Ellen MacArthur Foundation & EcoPack Challenge Winner 2018)

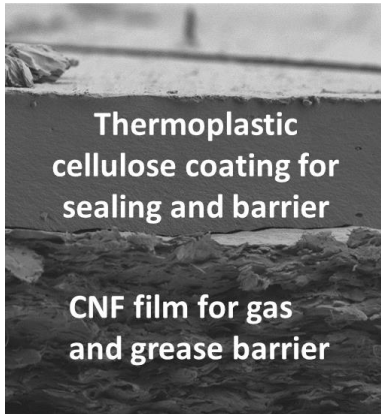


29/06/2018

27



Barrier properties of typical coatings (normalized to 100µm thickness)

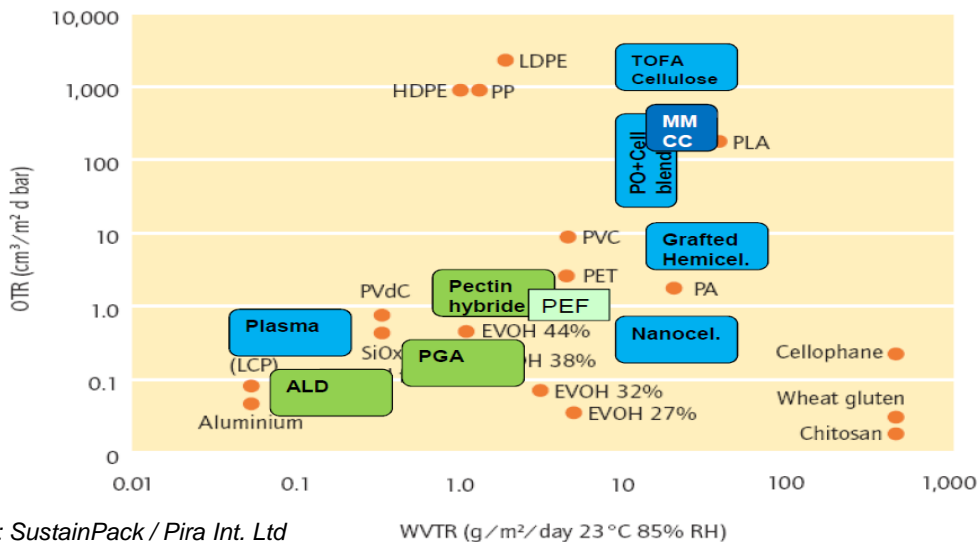

Source: SustainPack / Pira Int. Ltd


WVTR (g/m²/day 23°C 85% RH)

28



RESEARCH CASE

2,5-Furandicarboxylic acid (FDCA)

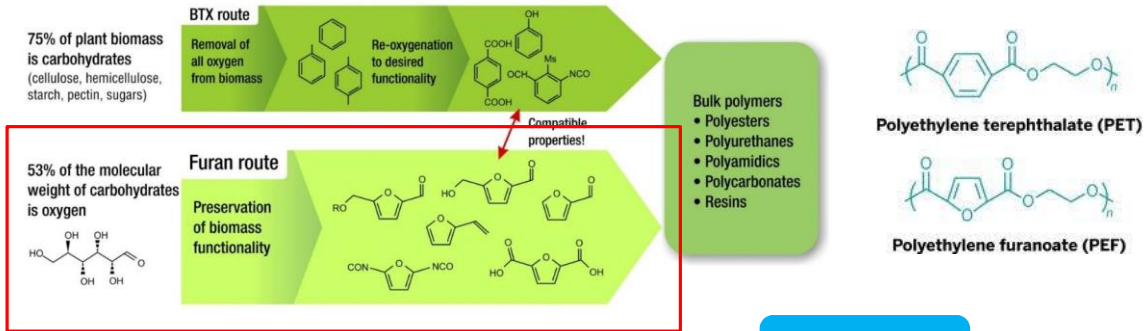

- Bio-based aromatics (furans) can be produced from carbohydrates with high atom economy.
- They can be produced with a small number of process steps from a renewable raw material – even side stream or waste can be utilized.

Better barrier properties than PET

A chance to replace certain markets


29/06/2018

29



RESEARCH CASE

High Performance Biopolymers

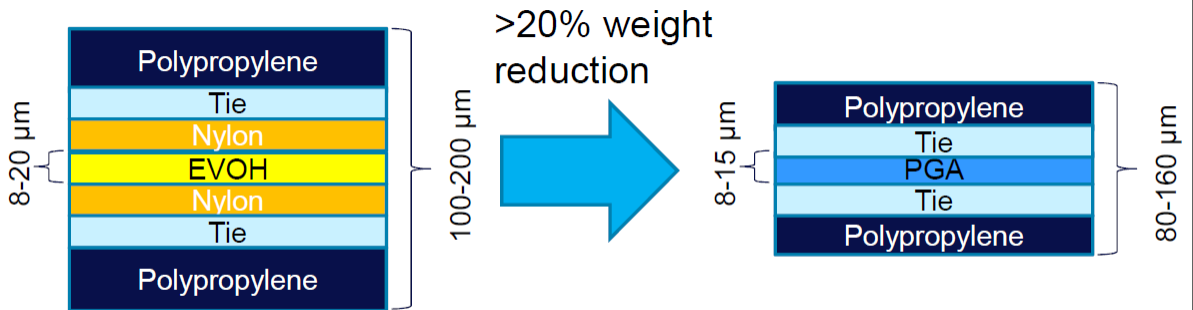

20% light-weighting potential in flexible retort packaging films.

PGA = Polyglycolic acid

29/06/2018


30

RESEARCH CASE



Enabling Thin Layers on Paper: Foam CNF Application

KCL pilot coater

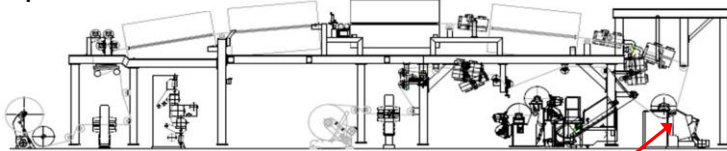


CNF, solids content 3.0%



Foamed CNF, 90% air



Foam applicator



Multilayered coating with oxygen and water vapor barriers


29/06/2018

31

RESEARCH CASE



Improved Barrier with 25 nm of ALD Al₂O₃

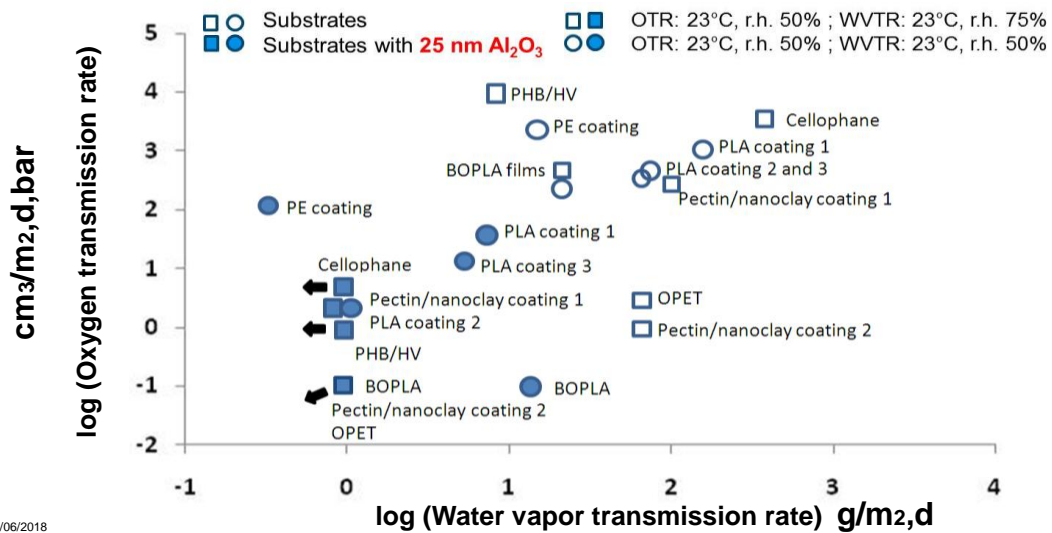


29/06/2018

32

RESEARCH CASE



Effect of Oxidant & Pretreatment on PLA-coated Board

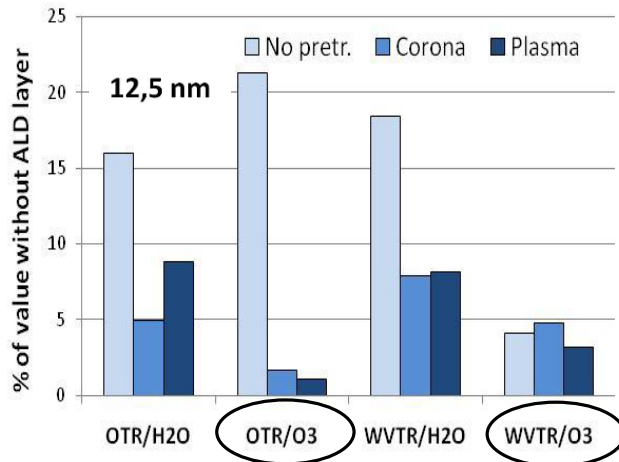

- Pre-treatments prior to the ALD can improve barrier properties,
- Surface chemistry affects nucleation and initial growth rate,
- Choice of oxidant affects barrier properties – denser Al_2O_3 films with O_3 ,
- Evenness of polymer-coating is of high importance for the ALD.

29/06/2018



33

RESEARCH CASE



Flexibility Through Structural Tailoring

- Metal oxide layers are brittle
- Mechanical stresses and thick layers lead to impaired barrier
- There are indications that chemical bonding with base substrate is beneficial

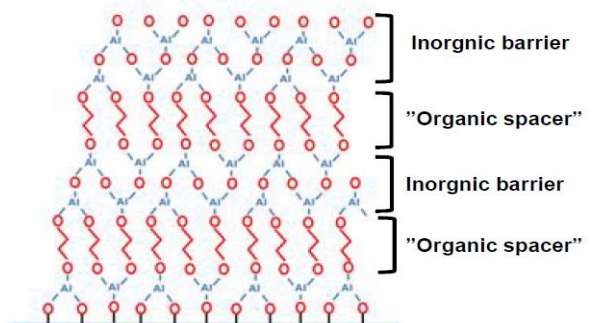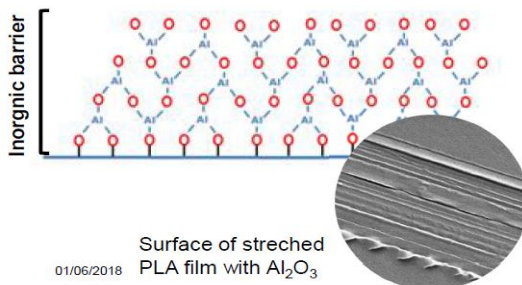

- Flexibility & elasticity improved by dividing thick barrier layer into thinner stacks and separating these with flexible "organic spacer" layer


01/06/2018

35

RESEARCH CASE



Understanding Nucleation & Film Growth on Polymers


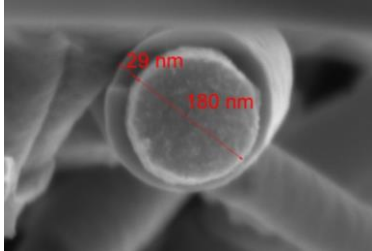


TiNbOx ALD layer on carbon fibres (made from PAN electrospun precursors)



Funded by: EC, FP7, FCH-JU, Grant agreement n° 325268) & Tekes

Cellulose acetate electrospun fibers with 2 and 30 nm Al₂O₃ ALD layer



29/06/2018

35



Our solution will never become plastic waste




Next on: Material as Service

Complete offering:

- Raw material
- Recycling
- Waste management

New requirements:

- High flexibility
- Rapid applicability
- Consumer orientation
- Food processing technologies

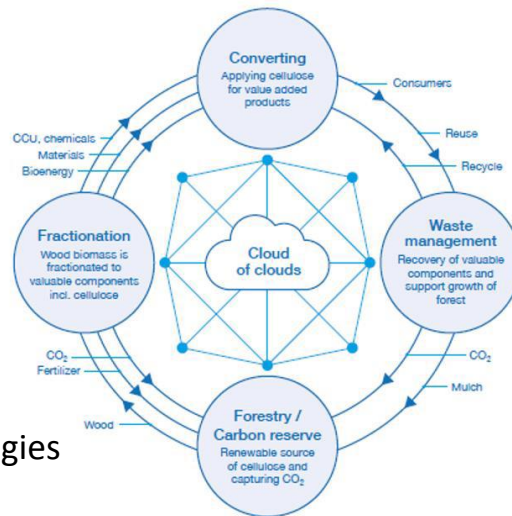

29/06/2018

37



www.vttresearch.com
#vttpeople / @VTTFinland