1 Hazards threatening underground transport systems

- 2 Edwar Forero-Ortiz ^{a,b*}, Eduardo Martínez-Gomariz ^{a,b}
- 3 "CETaqua Water Technology Centre, Barcelona, Spain. ORCID 0000-0002-5238-278X
- 4 bFlumen Research Institute, Civil and Environmental Engineering Department, Technical University of
- 5 Catalonia, Spain. ORCID 0000-0002-0189-0725

6 *Corresponding author. Email: <u>eaforero@cetaqua.com</u>

Abstract. Metro systems perform a significant function for millions of ridership worldwide as urban passengers rely on a secure, reliable, and accessible underground transportation way for their regular conveyance. However, hazards can restrict normal metro service and plans to develop or improve metro systems set aside some way to cope with these hazards. This paper presents a summary of the potential hazards to underground transportation systems worldwide, identifying a knowledge gap on the understanding of water-related impacts on Metro networks. This is due to the frequency and scope of geotechnical and air quality hazards, which exceed in extreme magnitude the extreme precipitation events that can influence underground transportation systems. Thus, we emphasize the importance of studying the water-related hazards in Metro systems to fill the gaps in this topic.

Keywords: urban climate adaptation; hazards assessment; critical infrastructure networks; metro system; subway.

1. Introduction

The globalization process has grown these last sixty years, considering as Africa and Asia are urbanizing quicker than the rest of the continents in the coming decades. (UN 2018). As shown in Figure 1, projections indicate a growth of the world's urban population by more than two thirds by 2050, with almost 90 per cent of that increase in urban areas of Asia and Africa.

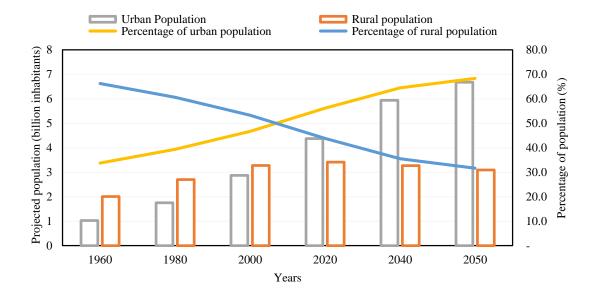


Figure 1. Historical and projected evolution of the urban population compared to the world's rural population, 1960 to 2050 (UN 2018).

A wide range of environmental hazards including extreme weather events, droughts, biodiversity loss and stress on natural resources are impacting on cities worldwide. The most significant hazards rank since 2011 concerning probability and global impact are the extreme weather events and the lack of adaptation to climate change.

Therefore, current trendlines involve encouraging shifts in priorities at the governmental and private levels, focus on vulnerable growing cities to the impact of climate change (WEF and Collins 2019).

Urban areas can be considered as living organisms, comprising several interdependent sectors and activities, intimately connected as services. Climate change requires cities to mitigate several hazards in the short term, yet they must develop their potential to improve their resilience (Kim and Lim 2016).

To achieve cities sustainability, we need to analyse urban resilience. Given the growing people and resources concentration on urban environments, as the increasing frequency and intensity of risks that threaten their services, the cities life cycle should be examined. (Sharifi and Yamagata 2018). Urban resilience, as a city system recovery potential facing different hazards, becomes

- 43 relevant taking into account service interruptions worsened by climate change next century.
- 44 (Velasco et al. 2018).
- 45 The interdependence linking the city services, such as water, energy, and public transport as
- 46 critical infrastructure networks, has increased due to technological advances in recent decades.
- 47 This bond has generated incremental improvements in essential city services quality and
- 48 coverage, but a worsened status when a natural hazard event occurs impacting the service
- 49 operational viability. Subsequent, the failure across the network of critical infrastructure services
- spread, known as cascade effects (Evans et al. 2018).
- One of the most critical services for the proper functioning of a city is public transport networks.
- According to the International Association of Public Transport (UITP), the year 2015 noticed an
- 53 18% increase in public transport trips compared to 2000, with 243 billion trips made in 39
- countries (UITP and Saeidizand 2015).
- The backbone of urban mobility is well-integrated high-capacity public transport systems into a
- 56 multimodal arrangement. In both developing and developed countries, most maintain or increase
- 57 the market share of formal public transport (United Nations Human Settlements Programme
- 58 2013).
- Due to the increase in population and awareness to achieve a lower economic, environmental, and
- social impact, cities worldwide are implementing public and non-motorized transport systems as
- 61 Metro networks. Sustainable transport systems have a positive correlation with GDP, while
- 62 vehicle use improves economic and social parameters, albeit with a negative impact on the urban
- environment (Haghshenas and Vaziri 2012).
- The accelerated metro systems development since the 1960s responding to mega-cities growth
- shows their importance holding public mobility in urban areas. Metro infrastructure is less
- bottlenecks-prone than roadways and mitigates long distances to urban activity nodes for the
- 67 population living in peripheral locations. (United Nations Human Settlements Programme 2013).
- 68 According to the cities stimulated growth, consequently, of their metro systems, the higher the
- 69 growth and metro network complexity, the higher the vulnerability to natural hazards (Sun and
- 70 Guan 2016).
- 71 Metro systems concentrate the corridors with the highest volume/length of travel and the greatest
- activity centres in the cities (Yang et al. 2015). Underground transport systems are an essential
- 73 part of the urban lifestyle, as passengers rely on a safe, reliable and accessible system for their
- regular transportation (Mohammadi et al. 2019).

- A variety of definitions of the term "Metro" are accepted such as subway, underground or tube,
- among others. Throughout this document, the term 'Metro system' is used to refer to high capacity
- vinderground urban railway systems, which are operated under an exclusive right of way, using
- 78 the definition suggested by UITP (2018).
- 79 In its report World Metro Figures 2018, UITP (2018) summarizes some facts of urban
- underground transport systems. They operate in 178 cities, 56 countries by 2018, carrying 168
- 81 million passengers per day on average with a 19.5% annual ridership increase worldwide.
- 82 However, to date, no conclusive research is known on metro systems general data, such as
- 83 typology (size, configuration, passengers' number, depth, length), tunnels and infrastructure
- 84 administrative, economic, and physical sustainability. Or even, a hazards summary which
- 85 threatens metro systems as important issues; most studies in underground transport systems have
- 36 just focused on confined conditions.
- 87 This document provides a comprehensive and systematic review of studies on risk assessment for
- 88 underground transport systems, exploring the impact sources and existing assessment
- methodologies.
- 90 The general structure of this literature review has five sections; the introduction presents how
- 91 underground transport systems such as metro respond to urban population growth dynamics and
- 92 natural hazards they face, highlighting the importance of this research.
- 93 The second part presents the methodology implemented for this literature review. Section three
- 94 introduces risk and resilience in transport systems concepts and the link within facing natural
- 95 hazards and developing urban resilience. Section four begins by laying out the knowledge
- 96 dimensions of threat categorization research for Metro systems. The closing section examines the
- 97 results of the literature review.

2. Methodology

- 99 The methodological approach adopted in this article is a mixed methodology based on the work
- of the PRISMA Group (Moher et al. 2009a), whose effort provides a reliable method for
- performing a literature review and is used in similar studies, such as Eckhardt *et al.* (2019). Figure
- 2 provides the summary of the performed approach.
- 103 Literature review first step establishes the relevance of urban transport systems as a key
- 104 component, offering a proper integrated operation. Due to the lack of information natural hazard
- adaptation measures in metro systems, a significant part of the available information comes from
- sources other than academic publications and distribution channels (e.g., newspapers and reports)
- mainly known as grey literature.

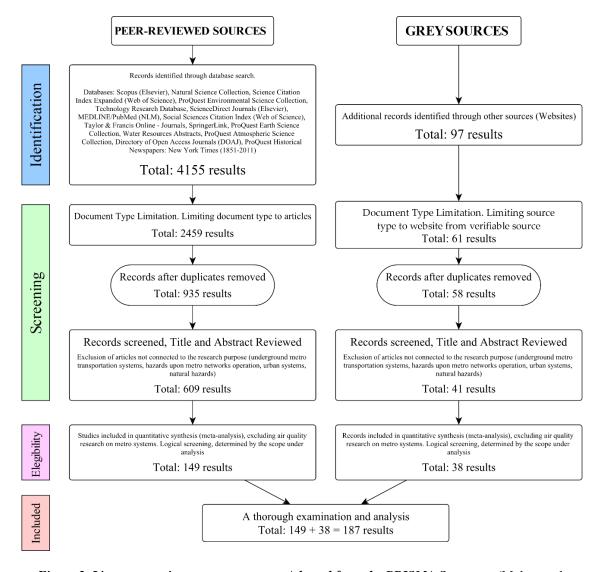


Figure 2. Literature review output summary. Adapted from the PRISMA Statement (Moher et al. 2009b)

Collecting, organizing and analysing information processes applies relevant keywords determination to avoiding bias, similar but unrelated sources to the under investigation topic, and other source limitations. **Error! No se encuentra el origen de la referencia.** presents this information along with the eligibility criteria of the data sources.

| Research component | Criteria establishment procedures | Definition |
|-----------------------|---|---|
| | Description on the keywords generally used to describe hazardous events provoked by nature | "hazard" in any field |
| Research keywords | Definition according to the inclusion of synonyms or other words applied to describe underground transport systems. | • "subway", OR "underground", OR "metro" in any field |
| | Exclusion of results related to anthropogenic hazards, such as terrorism | NOT "terrorism" |
| | Exclusion of the results related to the construction stage of Metro systems | NOT "construction" - for instance, excavation of Urban Subway Tunnel |

| Research component | Criteria establishment procedures | Definition | |
|---------------------------|---|---|--|
| | Research that examines the hazard impact assessments in Metro-type urban underground transport systems. | Studies delimited to the definition of Metro as an underground urban railway transport system different from suburban trains or tram systems | |
| Peer-reviewed | | Health and safety hazards associated with the Metro system | |
| sources - Grey sources | Decuments not related to the recease numbers | Noise levels associated with the Metro system | |
| | Documents not related to the research purpose | Generalization of hazards in metropolitan areas | |
| | | • Simulations of evacuation behaviour during a disaster in the Metro system | |

Table 1. Eligibility criteria for research components

3. Access to vulnerability and resilience concepts in underground transport systems

Due to practical constraints, this paper cannot provide a comprehensive review of the risk and resilience concepts in transportation systems, this study has only considered the context of risk and resilience concepts in underground transportation systems.

In a comprehensive literature outline of resilience concept, Wan *et al.* (2018) identified how growing complexity and unpredictability in transport schemes expose systems to disruptions and risks, varying from natural hazards, such as earthquakes, sea level rising and extreme storms, to critical anthropogenic events such as terrorist attacks and strikes. Also, it defined a summary of discussions and interpretation of terms linked to resilience.

Several studies, in particular, Sun and Guan (2016) discuss the exposure of the metro system operation and summarize the different methods for metro vulnerability assessment. The graphical network theory is the preferred method to perform theses analysis, taking into account the specific topological conditions of the metro system such as passenger flows, length and station capacity, with dynamic traffic redistribution after any failure or attack (Xing et al. 2017).

One of the most used approaches to assess the vulnerability of underground transport services is the service interruptions effects simulation, besides the evaluation of the system-critical elements under demanding conditions (Rodríguez-Núñez and García-Palomares 2014). These studies outline a critical role for passenger flow as a key factor in assessing metro systems vulnerability.

In the same vein, Mattsson and Jenelius (2015) are interested in issues related to a better risk description, such as "a scenario description, the probability and the consequences (a measure of

137 damage) of that scenario" in transportation system operations. This view goes beyond the 138 traditional description of risk as the product of probability and consequence. 139 Resilience and risk curve generation complexity is highlight due to unreliability and vulnerability 140 estimation differences, as risk probability functions in transportation systems. In recent years, 141 available methods have attempted to identify critical nodes in metro networks when assessing the 142 system disruptions impact (M'Cleod et al. 2017). 143 On the other hand, multiple studies have compared many approaches that evaluate the resilience 144 of current city public transport systems because of their critical importance. Approaches such as 145 that established for the London Underground (D'Lima and Medda 2015) relate the time it may take for the system to recover. However, such approaches do not consider the complexities of 146 147 natural hazards such as an extreme rainfall event. 148 As Zhang et al. (2018) conclude, the studies reviewed set a general framework to create a metro 149 system resilience analysis, which studies the network stations connectivity and recovery 150 procedures after network disruptions. 151 Nevertheless, such studies remain limited in their approach that deals with resolving transport 152 network disruptions. Considering the current and future interdependencies linking the several city 153 services, cascading effects generated by metro system disruptions can affect diverse urban 154 services, indicating needs for additional research to evaluate integrated urban resilience such as the European Project "RESCCUE" (Velasco et al. 2018). 155 156 Table 2 summarizes the review of the literature on the components of resilience and vulnerability. 157 As concepts widely implemented in various contexts, this research only covers these notions for 158 metro systems.

| Source classification criterion | Summary | Source |
|--|--|--|
| | This paper introduces a systematic review of transport resilience with an accent on its descriptions, features and analysis techniques employed in several transport operations. It identifies how reliable transport plays an essential role as a central part of global activities. | (Wan et al. 2018) |
| State-of-the-art review on | Within the framework of the "RESOLUTE" project, funded by the EU, this paper examines the methodologies and applications of resilience management for transport systems in several countries, comparing and analysing the impacts of disturbances. | (Gaitanidou et al. 2017) |
| transport system resilience | This paper discusses vulnerability and resilience definitions with related concepts, recognising two diverse ways to study the topic, first, studying transport vulnerability through graph theory, second, demand and supply representation sides. It identifies how short is literature on transport resilience, concerning the response and recovery periods after a failure. | (Mattsson and Jenelius 2015) |
| | This paper suggests a comprehensive conceptual framework aimed at expanding the network resilience concept within transport safety at different scales. | (Reggiani 2013) |
| Resilience associated- stochastic metrics | This paper introduces a resilience measure by presenting a systems' recovery quantification speed from disruptions, employing a mean-reverting stochastic model to analyse the interruptions diffusive effects and implement this model to London Underground case. | (D'Lima and Medda 2015) |
| Step-by-step algorithm for resilience estimation | This paper aims to estimate metro network vulnerability studying disruption from line operation viewpoint using the Shanghai metro network as case research. Results present recommendations on metro system administration for an operational performance potential increase and ridership having an enhanced alternative system when a disruption befalls. | (Sun and Guan 2016) |
| Grid-based (or node) | This paper proposes a network model for the New York City subway system with a strategy based on passenger flow simulations on the shortest path to quantify the setbacks suffered by passengers that appear because of disturbing events, mainly those that occur simultaneously, determining separate disturbance scenarios and their results. | (M'Cleod et al. 2017) |
| vulnerability analysis | This paper develops a methodology for estimating public transport network vulnerability, applied to the Madrid Metro system. The study involves disruption consequences in riding times or trips number lost for the entire system with a complete GIS exploration approach. Results show critical links where has low line density and the high ridership number, noticing the circular line importance as a network robustness factor. | (Rodríguez-Núñez and García- Palomares 2014) |
| Resilience in response to terrorist attacks | This paper studies terrorist attacks occurrences against metro systems, aiming to decrease attacks number by lessening the transport systems attractiveness as a target, within the European FP7 project SecureMetro. This paper defines critical systems and recommends enhancements to metro carriages design, to increase emergency management capacity, learning from the experience of London underground bombings and other emergencies. | (Bruyelle et al. 2014) |

Transport systems
vulnerability and resilience
to cope with flood hazards,
sea level rise and sea storm
surge

Multi-valued resilience and dependency graph frameworks This paper provides an analysis of guided transport systems resilience to flooding hazards through failure mechanisms analysis. By applying operational safety methods and concepts and software design is feasible to anticipate all disruption scenarios and domino effects. This paper provides a vulnerability characterization methodology for guided transport systems facing natural hazards and to associate vulnerability depending on whether the system is in an underground, ground-level, or surface arrangement.

(Gonzva et al. 2017)

(Wu et al. 2018)

This study establishes a graphical interdependency model based on Bayesian network and the Delphi method for dynamic assess the factors determining fire conditions, fireproof/intervention measures, and fire consequences outcomes in metro stations. This research proposes insights into a practical examination for emergency decision-making toward fire emergency reduction considering the limited dependence in the fire spread process and includes fireproof/intervention measures.

Table 2. Literature review on metro systems resilience and vulnerability components

4. An overview of hazards categorization for metro systems

Figure 3 shows the identified hot spots and trend lines of current research on natural hazards and vulnerabilities in urban metro transport systems. This research uses the CiteSpace visualization and bibliographic analysis software (Chen et al. 2010) for two purposes. First, it generates an accurate picture, with their importance, of the approaches applied in metro systems natural hazards and vulnerabilities research; and second, it identifies current research potential gaps.

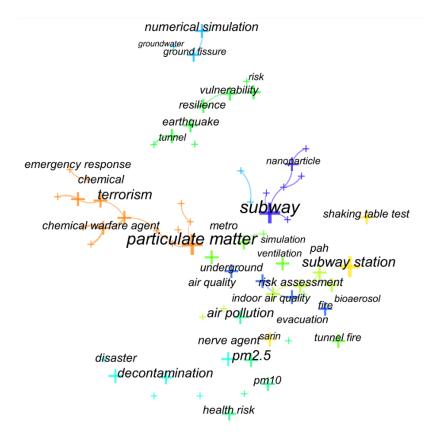


Figure 3. The visualized networks of co-keywords with highest occurrence frequency. Diagram based on pathfinder network scaling and co-citation analysis theory (Chen et al. 2010)

The application of Table 1 filters to improve the results is not possible in all cases, so some issues appear outside the context of this research (e.g., terrorism) as Figure 3 shows. Despite these limitations, Figure 3 represents a comprehensive review of the most important research keywords related to natural hazards on metro systems for current peer-reviewed sources.

Recognize knowledge groups importance and weight within scientific publications related to this study area is perform by graphical analyses of the keywords association. Figure 3 highlights the predominance of air quality risk research affecting metro systems, showing how the role of particulate matter and air pollution has received increased attention in various research settings in recent years.

- Five important research topics emerge from the literature review so far focusing on hazards to metro infrastructure: a) air quality, as airborne particulate matter; b) geohazards, expressed by ground fissures and seismic impacts; c) geohazards, expressed by groundwater flows; d) waterrelated hazards such as pluvial or river flooding; and, e) fire risks with smoke management. By far, to date, water-related hazards in metro networks have received limited attention in the research literature.
- This document, as metro systems hazard comprehensive review, covers many recent studies focus on metro stations fire hazards. We skim 545 articles in relevant journals between 2009 and 2019.

 Numerous studies have attempted to explain how to improve air quality in metro systems including detailed reviews of 160 major studies from over 20 countries were thoroughly examined by Xu and Hao (2017). For example, a major fieldwork project on air quality in metro stations was the EU-funded IMPROVE LIFE project (Moreno et al. 2014, 2015b, a, 2018; Martins et al.

2015, 2016; Moreno and de Miguel 2018; Spanish Research Council 2018).

- Geological hazards are within the typologies of hazards that may threaten metro systems. Much of the available literature (Dashko 2016; Wu et al. 2018c) deals with planning and construction phases since metro stations settlements during excavations are highly subject to geotechnical problems and the influence of the water table (Raben-Levetzau et al. 2004). As this literature review disregards the metro systems development phase hazards, these research types are not addressing here.
- This study identifies a gap in the literature, intending to understand how flooding events in the metro system generate economic and social impacts through metro service disruptions. Reviewing reports of the flood-affected infrastructure in the Tokyo (Ministry of Land 2008), Shanghai (Li et al. 2018a), London (Gonzva et al. 2017), Barcelona (Saurí and Palau-Rof 2017) and New York (MTA New York 2012) systems, it draws attention to considering underground system flood risk assessment as a key factor in an urban resilience analysis.
- Table 3 provides an overview of the hazards assessment approaches for metro systems in an organized manner. The hazard classification mentioned at the beginning relates to the different studies, with a sub-themes detailed summary for hazard category. This summary attempts to highlight the differences between studies focusing on other hazards, extensive, in contrast to the lack of water-related hazards for metro systems.

| Hazard | Study Approach | Reviewed Sources |
|-----------------|---|--|
| Classification | | |
| Airborne Partic | ulate Matter – Air Quality | 25 Papers |
| | a. Studies of the concentration of particulate matter in tunnels and station platforms at a local level | (Cheng et al. 2008; Kam et al. 2011; Querol et al. 2012; Cartenì et al. 2015; Cusack et al. 2015; Perrino et al. 2015; Qiao et al. 2015; Li et al. 2018b; Cartenì and Cascetta 2018) |
| | b. Air quality monitoring and prediction studies at metro stations | (Kim et al. 2010, 2012, 2017) |
| | c. Review studies of air quality in underground metro systems | (Carteni 2016; Hwang et al. 2017; Xu and Hao 2017; Moreno et al. 2018) |
| | d. Studies detailing factors that affect air quality in metro stations | (Moreno et al. 2014, 2015a; Martins et al. 2015, 2016; Li et al. 2018b) |
| | e. Air quality studies in metro systems carried out in developing countries | (Murruni et al. 2009; Mugica-Álvarez et al. 2012) |
| | f. Numerical models of air quality in metro systems | (López González et al. 2014; Qiao et al. 2015; Moreno et al. 2015a) |
| Geohazard: Gro | ound fissures and Seismic impacts | 11 Papers |
| | a. Assessment of the normal stress, shearing stress, or any deformation kind of the section of a Metro underground line | (Huang et al. 2014; Shi et al. 2018) |
| | b. Effects of metro-induced ground-borne vibration | (Wu and Xing 2018) |
| | c. Investigation of the train-induced settlement of a metro tunnel in clays or permeable strata | (Di et al. 2016; Huang et al. 2017a; Tang et al. 2017) |
| | d. Seismic response of a segmented metro tunnel with flexible joints passing through active ground fissures | (Liu et al. 2017) |
| | e. Geotechnical conditions of deep running metro tunnels | (Dashko 2016; Wu et al. 2018c) |
| | f. Failure of metro tunnels that pass obliquely through ground fissures at low angles | (Peng et al. 2016) |
| | g. Countermeasures to mitigate the adverse impact caused by the activity of ground fissure | (Wang et al. 2016) |
| Geohazard: Gro | oundwater flows | 6 Papers |
| | a. A method used to predict time-dependent groundwater inflow into a metro tunnel | (Liu et al. 2018) |
| | b. Methods used for evaluation of steady-state groundwater inflow to a shallow circular cross-section Metro tunnel | (Nikvar Hassani et al. 2018) |
| | c. Impact on aquifers due to the construction of metro tunnels producing changes in the natural groundwater behaviour | (Font-Capo et al. 2015) |
| | d. Groundwater raising or lowering phenomenon modelling due to metro underground infrastructure | (Raben-Levetzau et al. 2004; Gattinoni and Scesi 2017; Colombo et al. 2018) |
| Fire and Smoke | | See Notes |
| | a. Ventilation aided tunnel evacuation systems to create smoke-free evacuation passageway out of the tunnels | (Gao et al. 2013; Liu et al. 2019) |
| | b. Assessment of the evacuation of passengers in a metro fire event | (Zhong et al. 2008; Wang et al. 2013; Lo et al. 2014; Song et al. 2018) |
| | c. Risk analysis frameworks for fire safety in underground metro systems | (Soons et al. 2006; Wu et al. 2018b) |
| | d. Infrastructure of vehicles for passengers' life safety facing challenges from fires in metro stations | (Li and Dong 2011; Wang et al. 2018) |
| | e. Conditions into metro stations during fire events | (Gu et al. 2016) |

| Water-related hazards: Floods due to extreme rainfall or due to river floods | 13 Papers |
|--|--|
| a. Connection linking flood events on the surface with vulnerability to flooding of underground subway infrastructure. | (Lyu et al. 2016) |
| b. Frameworks based on decision-making methods as networks theory and analytic hierarchy process for assessing the | (Lyu et al. 2018; Wu et al. 2018a) |
| flood evolution process and consequences in underground spaces | |
| c. Integration of a stormwater management model into a geographical information system to evaluate the flood risk in | (Herath and Dutta 2004; Li et al. 2018a; Lyu et al. 2019a) |
| a specific metro system | |
| d. Methodologies to obtaining risk level studying both flood intensity and evacuation difficulty in underground spaces | (Han et al. 2019) |
| like metro stations | |
| e. Analysis of metro systems resilience in the face of flood hazards, studying the components failure steps | (Gonzva et al. 2017) |
| f. Risk assessment for metro systems flooding events based on regional flood risk evaluation methods | (Lyu et al. 2019b) |
| g. Evaluation of the waterlogging risk of metro infrastructure caused by rainstorm in a specific Metro system | (Quan et al. 2011) |
| h. Assessment of the risk in a specific metro system against fluvial flooding | (Compton et al. 2009) |
| i. Evacuation of ridership from inundated underground space | (Ishigaki et al. 2008, 2010) |

Table 3. Literature review on hazards affecting metro systems worldwide

5. Discussion and future research directions

210

211 Resilience concept for public transport systems involves ensuring service availability through 212 operation quality and integrated connectivity with the city transport network. The vulnerability of 213 transportation systems is quantified by the transportation network efficiency when nodes, or in 214 this case, metro stations, suffers service disruptions (Zhang et al. 2018). 215 Metro systems resilience improvements have focused on examining transport networks efficiency 216 and return times to normal conditions following mathematical models, irrespective of particular 217 risk management and its importance for metro systems resilience improving, understood as the 218 system's resilience. 219 Studies such as that conducted by Avci and Ozbulut (2018) present a simplified approach to 220 hazard and vulnerability risk assessment for metro stations; focus on setting the overall 221 assessment for each metro system component, but not on how the various hazards may affect the 222 system as a whole. Although each metro system and station are diverse, the risks caused by 223 different hazards change in magnitude and importance according to the hazard impacting the 224 metro service. 225 Decision-makers commit to ensuring the viability of their public transport systems, and that 226 viability entails a priority interest in the system essential operation under normal operating 227 conditions. Geotechnical hazards influence these operational conditions because they involve 228 natural situations such as groundwater intrusion and tunnel fissures, as hazards related to the 229 operation of the system, such as the generation of particulate matter and fires caused by electrical 230 failures. 231 Metro systems hazards classification into five categories by scientific research examine a broad 232 studies spectrum focus on metro stations air quality and the geotechnical hazards that underground 233 infrastructure must control. 234 Because of the increased frequency and intensity of events associated with these hazards, 235 researchers have focused their efforts on them. Incidents such as fires and the presence of smoke, 236 as physical geotechnical circumstances such as earthquakes, significantly affect ridership of 237 metro's underground networks due to the high prevalence of loss of human life in such events, 238 severe damage to existing infrastructure, and dangerous effects for ridership health. 239 Advanced metro systems consider risk management in their processes due to internal system 240 conditions such as equipment or infrastructure maintenance, and its interest nowadays is focusing 241 on extreme weather and climate change hazards, because these event types higher forecasted frequency. An influential example is TfL, Transport for London, system admin who has 242 243 established action plans for managing extreme weather events (Transport for London 2011).

- Researchers have not addressed the water-related hazards in the metro systems in much detail. As
- Willems et al. (2012) argued, vulnerability increases, urban flooding and sewerage surcharge
- hazards do due to climate parameters variabilities like extreme rainfall and temperatures.
- Despite the many events, most hazard research is performed by China and Japan, due to massive
- 248 floods occurrence in metro systems such as Shanghai (Deng et al. 2016; Huang et al. 2017b) and
- Osaka (Hamaguchi et al. 2016; Terada et al. 2017; Sugimoto et al. 2018) metro systems.
- 250 United Nations Global Assessment Report (GAR) 2019 report (UNDRR 2019) indicates urban
- areas global disasters in 1985 and 2015 were triggered by water-related hazards, except in North
- America. The UN concludes that localized hazards, including flash floods, urban flooding and
- 253 other weather-specific events, are responsible for extensive damage to infrastructure and
- livelihoods, representing the highest economic losses and impact on development assets such as
- 255 metro infrastructure (UNDRR 2019).
- 256 While hydrological hazards studies are a growing field, to date, relatively little research on floods
- 257 affecting metro systems exists. The lack of climate change-related hazards studies on metro
- 258 systems is worrisome.

259

6. Conclusion

- 260 This Literature review provides a better understanding of hazards and vulnerabilities in metro
- systems in four novel ways. First, it presents urban population growth and its intrinsic relationship
- with hazards in transport systems, focusing on the metro system as city backbone.
- Second, it emphasizes the interdependence between public transport services and other services
- provided in a city, which leads to increased resilience once have services interconnection. Metro
- systems represent an essential link in urban transport management, and as part of the chain, in
- particular, lacks a summary of the potential hazards that can disrupt their operation.
- 267 Third, it presents a potential hazards summary metro systems can experience, categorizing into
- four classes, identifying one (water-related) as an insufficient studied in-depth hazard type, in
- 269 comparison to the other three types known.
- Fourth, it offers an alternative concept concerning metro systems hazards assessment, beyond the
- 271 conventional view, reflects improving resilience by not just time reduce connecting another
- transportation node, also proposes hazards mitigation, boosting system resilience.
- As the gap identified in this study, we recognized a lack of scientific information of the water-
- 274 related hazards affecting metro systems. One of the expected developments from this research is
- 275 to help inform future developments in water-related hazards as a fundamental component in
- understanding all the hazards that can affect underground transport systems.

| 277 | Acknowledgments |
|-------------------|---|
| 278 | The authors thank the RESCCUE project, which is funded by the EU H2020 (Grant Agreement |
| 279 | No. 700174), whose support is gratefully acknowledged. |
| 280 | References |
| 281 282 | Avci O, Ozbulut O (2018) Threat and vulnerability risk assessment for existing subway stations: A simplified approach. Case Stud Transp Policy 6:663–673. doi: 10.1016/j.cstp.2018.08.005 |
| 283 284 | Carteni A (2016) Particulate matter concentrations in urban metro systems: Case studies and a literature review. In: EEEIC 2016 - International Conference on Environment and Electrical Engineering. IEEE, pp 1–6 |
| 285 286 | Cartenì A, Cascetta F (2018) Particulate matter concentrations in a high-quality rubber-tyred metro system: the case study of Turin in Italy. Int J Environ Sci Technol 15:1921–1930. doi: 10.1007/s13762-017-1566-x |
| 287 288 | Cartenì A, Cascetta F, Campana S (2015) Underground and ground-level particulate matter concentrations in an Italian metro system. Atmos Environ 101:328–337. doi: 10.1016/j.atmosenv.2014.11.030 |
| 289 290 | Chen C, Ibekwe-SanJuan F, Hou J (2010) The structure and dynamics of cocitation clusters: A multiple-perspective cocitation analysis. J Am Soc Inf Sci Technol 61:1386–1409. doi: 10.1002/asi.21309 |
| 291 292 | Cheng YH, Lin YL, Liu CC (2008) Levels of PM10 and PM2.5 in Taipei rapid transit system. Atmos Environ 42:7242–7249. doi: 10.1016/j.atmosenv.2008.07.011 |
| 293 294 295 | Colombo L, Gattinoni P, Scesi L (2018) Stochastic modelling of groundwater flow for hazard assessment along the underground infrastructures in Milan (northern Italy). Tunn Undergr Sp Technol 79:110–120. doi: 10.1016/j.tust.2018.05.007 |
| 296 297 | Compton KL, Faber R, Ermolieva TY, et al (2009) Uncertainty and disaster risk management: modeling the flash flood risk to Vienna and its subway system |
| 298 299 300 | Cusack M, Talbot N, Ondráček J, et al (2015) Variability of aerosols and chemical composition of PM 10 , PM 2.5 and PM 1 on a platform of the Prague underground metro. Atmos Environ 118:176–183. doi: 10.1016/j.atmosenv.2015.08.013 |
| 301 302 | D'Lima M, Medda F (2015) A new measure of resilience: An application to the London Underground. Transp Res Part A Policy Pract 81:35–46. doi: 10.1016/j.tra.2015.05.017 |
| 303 304 305 | Dashko R (2016) Geotechnical analysis of long-term stability of Saint Petersburg metro tunnels in upper Vendian clay. In: 15th International Multidisciplinary Scientific GeoConference SGEM2015, Science and technologies in geology, exploration and mining |
| 306 307 | Deng JL, Shen SL, Xu YS (2016) Investigation into pluvial flooding hazards caused by heavy rain and protection measures in Shanghai, China. Nat. Hazards 83:1301–1320 |
| 308 309 | Di H, Zhou S, Xiao J, et al (2016) Investigation of the long-term settlement of a cut-and-cover metro tunnel in a soft deposit. Eng Geol 204:33–40. doi: 10.1016/j.enggeo.2016.01.016 |
| 310 311 | Eckhardt D, Leiras A, Thomé AMT (2019) Systematic literature review of methodologies for assessing the costs of disasters. Int J Disaster Risk Reduct 33:398–416. doi: 10.1016/J.IJDRR.2018.10.010 |

| 312 313 | Evans B, Chen AS, Prior A, et al (2018) Mapping urban infrastructure interdependencies and fuzzy risks. Procedia Eng 212:816–823. doi: 10.1016/j.proeng.2018.01.105 |
|-------------------|---|
| 314 315 316 | Font-Capo J, Pujades E, Vàzquez-Suñé E, et al (2015) Assessment of the barrier effect caused by underground constructions on porous aquifers with low hydraulic gradient: A case study of the metro construction in Barcelona, Spain. Eng Geol 196:238–250. doi: 10.1016/j.enggeo.2015.07.006 |
| 317 318 | Gao R, Li A, Lei W, et al (2013) A novel evacuation passageway formed by a breathing air supply zone combined with upward ventilation. Phys A Stat Mech its Appl 392:4793–4803. doi: 10.1016/j.physa.2013.06.030 |
| 319 320 321 | Gattinoni P, Scesi L (2017) The groundwater rise in the urban area of Milan (Italy) and its interactions with underground structures and infrastructures. Tunn Undergr Sp Technol 62:103–114. doi: 10.1016/j.tust.2016.12.001 |
| 322 323 | Gonzva M, Barroca B, Gautier PÉ, Diab Y (2017) Modeling disruptions causing domino effects in urban guided transport systems faced by flood hazards. Nat Hazards 86:183–201. doi: 10.1007/s11069-016-2680-7 |
| 324 325 | Gu SN, Zhu GQ, Zan WX (2016) Numerical Study on Transverse Temperature Distribution of Fire Zone in Metro Tunnel Fire. In: Procedia Engineering. pp 376–383 |
| 326 327 | Haghshenas H, Vaziri M (2012) Urban sustainable transportation indicators for global comparison. Ecol Indic 15:115–121. doi: 10.1016/j.ecolind.2011.09.010 |
| 328 329 | Hamaguchi S, Ishigaki T, Shimada H, et al (2016) Underground inundation by storm surge caused by super typhoon. J Japan Soc Civ Eng Ser B1 (Hydraulic Eng 71:I_1387-I_1392. doi: 10.2208/jscejhe.71.i_1387 |
| 330 331 | Han Y, Shin E, Eum T, Song C (2019) Inundation risk assessment of underground space using consequence-probability matrix. Appl Sci 9:1196. doi: 10.3390/app9061196 |
| 332 333 | Herath S, Dutta D (2004) Modeling of urban flooding including underground space. In: 2nd APHW conference 5-8 July 2004 Singapore /Asia Pacific Association of Hydrology and Water Resource. pp 1–9 |
| 334 335 | Huang Q, Huang H wei, Ye B, et al (2017a) Dynamic response and long-term settlement of a metro tunnel in saturated clay due to moving train load. Soils Found 57:1059–1075. doi: 10.1016/j.sandf.2017.08.031 |
| 336 337 | Huang Q, Wang J, Li M, et al (2017b) Modeling the influence of urbanization on urban pluvial flooding: a scenario-based case study in Shanghai, China. Nat Hazards 87:1035–1055. doi: 10.1007/s11069-017-2808-4 |
| 338 339 | Huang W, Liu D, Jiang H (2014) Analytical solution of stresses on lining structure of Xi'an metro crossing ground fissure with 30°. Electron J Geotech Eng 19 M:2899–2907 |
| 340 341 342 | Hwang SH, Park WM, Park JB, Nam T (2017) Characteristics of PM 10 and CO 2 concentrations on 100 underground subway station platforms in 2014 and 2015. Atmos Environ 167:143–149. doi: 10.1016/j.atmosenv.2017.08.019 |
| 343 344 | Ishigaki T, Asai Y, Nakahata Y, et al (2010) Evacuation of aged persons from inundated underground space. Water Sci Technol 62:1807–1812. doi: 10.2166/wst.2010.455 |
| 345 346 | Ishigaki T, Onishi Y, Asai Y, et al (2008) Evacuation criteria during urban flooding in underground space. 11th Int Conf Urban Drain 7 |
| 347 348 | Kam W, Cheung K, Daher N, Sioutas C (2011) Particulate matter (PM) concentrations in underground and ground-level rail systems of the Los Angeles Metro. Atmos Environ 45:1506–1516. doi: |

| 349 | 10.1016/j.atmosenv.2010.12.049 |
|-------------------|---|
| 350 351 | Kim D, Lim U (2016) Urban resilience in climate change adaptation: A conceptual framework. Sustain 8:405. doi: 10.3390/su8040405 |
| 352 353 | Kim M, Park S, Namgung HG, Kwon SB (2017) Estimation of inhaled airborne particle number concentration by subway users in Seoul, Korea. Environ Pollut 231:663–670. doi: 10.1016/j.envpol.2017.08.077 |
| 354 355 | Kim M, Sankararao B, Kang O, et al (2012) Monitoring and prediction of indoor air quality (IAQ) in subway or metro systems using season dependent models. In: Energy and Buildings. pp 48–55 |
| 356 357 | Kim YS, Kim MJ, Lim JJ, et al (2010) Predictive monitoring and diagnosis of periodic air pollution in a subway station. J Hazard Mater 183:448–459. doi: 10.1016/j.jhazmat.2010.07.045 |
| 358 359 | Li M, Kwan MP, Yin J, et al (2018a) The potential effect of a 100-year pluvial flood event on metro accessibility and ridership: A case study of central Shanghai, China. Appl Geogr 100:21–29. doi: 10.1016/j.apgeog.2018.09.001 |
| 360 361 | Li Y, Dong L (2011) Function design of emergency rescue vehicle in metro Fire. In: ICTE 2011. American Society of Civil Engineers, Reston, VA, pp 2946–2951 |
| 362 363 | Li Z, Che W, Frey HC, Lau AKH (2018b) Factors affecting variability in PM2.5 exposure concentrations in a metro system. Environ Res 160:20–26. doi: 10.1016/j.envres.2017.09.006 |
| 364 365 | Liu C, Zhong M, Tian X, et al (2019) Study on emergency ventilation for train fire environment in metro interchange tunnel. Build Environ 147:267–283. doi: 10.1016/j.buildenv.2018.10.022 |
| 366 367 | Liu N, Huang Q, Ma Y, et al (2017) Experimental study of a segmented metro tunnel in a ground fissure area. Soil Dyn Earthq Eng 100:410–416. doi: 10.1016/j.soildyn.2017.06.018 |
| 368 369 | Liu XX, Shen SL, Xu YS, Yin ZY (2018) Analytical approach for time-dependent groundwater inflow into shield tunnel face in confined aquifer. Int J Numer Anal Methods Geomech 42:655–673. doi: 10.1002/nag.2760 |
| 370 371 | Lo SM, Wang WL, Liu SB, Ma J (2014) Using agent-based simulation model for studying fire escape process in metro stations. In: Procedia Computer Science. pp 388–396 |
| 372 373 374 | López González M, Galdo Vega M, Fernández Oro JM, Blanco Marigorta E (2014) Numerical modeling of the piston effect in longitudinal ventilation systems for subway tunnels. Tunn Undergr Sp Technol 40:22–37. doi: 10.1016/j.tust.2013.09.008 |
| 375 376 | Lyu H-M, Shen S-L, Yang J, Yin Z-Y (2019a) Scenario-based inundation analysis of metro systems: a case study in Shanghai. Hydrol Earth Syst Sci Discuss 1–30. doi: 10.5194/hess-2019-28 |
| 377 378 | Lyu HM, Shen SL, Zhou A, Yang J (2019b) Perspectives for flood risk assessment and management for mega-city metro system. Tunn. Undergr. Sp. Technol. 84:31–44 |
| 379 380 | Lyu HM, Sun WJ, Shen SL, Arulrajah A (2018) Flood risk assessment in metro systems of mega-cities using a GIS-based modeling approach. Sci Total Environ 626:1012–1025. doi: 10.1016/j.scitotenv.2018.01.138 |
| 381 382 | Lyu HM, Wang GF, Shen JS, et al (2016) Analysis and GIS mapping of flooding hazards on 10 May 2016, Guangzhou, China. Water (Switzerland) 8:. doi: 10.3390/w8100447 |
| 383 384 | M'Cleod L, Vecsler R, Shi Y, et al (2017) Vulnerability of transportation networks: the New York City subway system under simultaneous disruptive events. In: Procedia Computer Science. pp 42–50 |

| 385 386 | Martins V, Moreno T, Mendes L, et al (2016) Factors controlling air quality in different European subway systems. Environ Res 146:35–46. doi: 10.1016/j.envres.2015.12.007 |
|-------------------|---|
| 387 388 | Martins V, Moreno T, Minguillón MC, et al (2015) Exposure to airborne particulate matter in the subway system. Sci Total Environ 511:711–722. doi: 10.1016/j.scitotenv.2014.12.013 |
| 389 390 | Mattsson LG, Jenelius E (2015) Vulnerability and resilience of transport systems - A discussion of recent research. Transp Res Part A Policy Pract 81:16–34. doi: 10.1016/j.tra.2015.06.002 |
| 391 392 | Ministry of Land I and T (2008) Past flood cases. In: Water Manag Homel. Secur. http://www.mlit.go.jp/river/bousai/main/saigai/jouhou/jieisuibou/bousai-gensai-suibou01-kako.html |
| 393 394 | Mohammadi A, Amador-Jimenez L, Nasiri F (2019) Review of asset management for metro systems: challenges and opportunities. Transp Rev 39:309–326. doi: 10.1080/01441647.2018.1470119 |
| 395 396 | Moher D, Liberati A, Tetzlaff J, et al (2009a) Preferred reporting items for systematic reviews and meta-analyses: The PRISMA statement (Chinese edition). J. Chinese Integr. Med. 7:889–896 |
| 397 398 | Moher D, Liberati A, Tetzlaff J, et al (2009b) Preferred reporting items for systematic reviews and meta-analyses: the PRISMA statement. PLOS Med 6:e1000097 |
| 399 | Moreno T, de Miguel E (2018) Improving air quality in subway systems: An overview. Environ. Pollut. 239:829–831 |
| 400 401 | Moreno T, Martins V, Querol X, et al (2015a) A new look at inhalable metalliferous airborne particles on rail subway platforms. Sci Total Environ 505:367–375. doi: 10.1016/j.scitotenv.2014.10.013 |
| 402 403 | Moreno T, Martins V, Reche C, et al (2018) Air quality in subway systems. In: Non-Exhaust Emissions. Academic Press, pp 289–321 |
| 404 405 | Moreno T, Pérez N, Reche C, et al (2014) Subway platform air quality. Assessing the influences of tunnel ventilation, train piston effect and station design. Atmos Environ 92:461–468. doi: 10.1016/j.atmosenv.2014.04.043 |
| 406 407 | Moreno T, Reche C, Rivas I, et al (2015b) Urban air quality comparison for bus, tram, subway and pedestrian commutes in Barcelona. Environ Res 142:495–510. doi: 10.1016/j.envres.2015.07.022 |
| 408 409 410 | MTA New York (2012) Flood mitigation work begins on seven downtown stations. In: New York, USA. http://web.mta.info/nyct/service/FloodMitigationWorkBeginsat7DowntownStations.htm. Accessed 30 Apr 2019 |
| 411 412 413 | Mugica-Álvarez V, Figueroa-Lara J, Romero-Romo M, et al (2012) Concentrations and properties of airborne particles in the Mexico City subway system. Atmos Environ 49:284–293. doi: 10.1016/j.atmosenv.2011.11.038 |
| 414 415 | Murruni LG, Solanes V, Debray M, et al (2009) Concentrations and elemental composition of particulate matter in the Buenos Aires underground system. Atmos Environ 43:4577–4583. doi: 10.1016/j.atmosenv.2009.06.025 |
| 416 417 | Nikvar Hassani A, Farhadian H, Katibeh H (2018) A comparative study on evaluation of steady-state groundwater inflow into a circular shallow tunnel. Tunn Undergr Sp Technol 73:15–25. doi: 10.1016/j.tust.2017.11.019 |
| 418 419 | Peng J, He K, Tong X, et al (2016) Failure mechanism of an underground metro tunnel intersecting steep ground fissure at low angle. Int J Geomech 17:E4016006. doi: 10.1061/(asce)gm.1943-5622.0000677 |
| 420 | Perrino C, Marcovecchio F, Tofful L, Canepari S (2015) Particulate matter concentration and chemical composition |

| 421 | in the metro system of Rome, Italy. Environ Sci Pollut Res 22:9204–9214. doi: 10.1007/s11356-014-4019-9 |
|-------------------|---|
| 422 423 | Qiao T, Xiu G, Zheng Y, et al (2015) Characterization of PM and microclimate in a Shanghai subway tunnel, China. In: Procedia Engineering. Elsevier, pp 1226–1232 |
| 424 425 426 | Quan R, Zhang L, Liu M, et al (2011) Risk assessment of rainstorm waterlogging on subway in central urban area of Shanghai, China based on scenario simulation. Proc - 2011 19th Int Conf Geoinformatics, Geoinformatics 2011 0–5. doi: 10.1109/GeoInformatics.2011.5981176 |
| 427 428 | Querol X, Moreno T, Karanasiou A, et al (2012) Variability of levels and composition of PM 10 and PM 2.5 in the Barcelona metro system. Atmos Chem Phys 12:5055–5076. doi: 10.5194/acp-12-5055-2012 |
| 429 430 | Raben-Levetzau J, Markussen LM, Bitsch K, Nicolaisen LL (2004) Copenhagen Metro: groundwater control in sensitive urban areas. Tunn Undergr Sp Technol 19:522. doi: 10.1016/j.tust.2004.01.037 |
| 431 432 | Rodríguez-Núñez E, García-Palomares JC (2014) Measuring the vulnerability of public transport networks. J Transp Geogr 35:50–63. doi: 10.1016/j.jtrangeo.2014.01.008 |
| 433 | Saurí D, Palau-Rof L (2017) Urban drainage in barcelona: From hazard to resource? Water Altern 10:475–492 |
| 434 | Sharifi A, Yamagata Y (2018) Resilience-oriented urban planning. In: Lecture Notes in Energy. pp 3–27 |
| 435 436 | Shi Y-J, Xiao X, Li M-G (2018) Long-term longitudinal deformation characteristics of metro lines in soft soil area. J Aerosp Eng 31:04018080. doi: 10.1061/(asce)as.1943-5525.0000910 |
| 437 438 | Song XY, Pan Y, Jiang JC, et al (2018) Numerical investigation on the evacuation of passengers in metro train fire. In: Procedia Engineering. pp 644–650 |
| 439 440 | Soons CJ, Bosch JW, Arends G, van Gelder P (2006) Framework of a quantitative risk analysis for the fire safety in metro systems. Tunn Undergr Sp Technol 21:281. doi: 10.1016/j.tust.2005.12.141 |
| 441 442 | Spanish Research Council (2018) Improve Life: Implementing methodologies and practices to reduce air pollution of the subway environment - LIFE13 ENV/ES/000263 - Final Report. Barcelona, Spain |
| 443 444 445 | Sugimoto K, Okuoka K, Tanikawa H (2018) Establishment of three-dimensional subway GIS data for inundation analysis in urban area. J Japan Soc Civ Eng Ser G (Environmental Res 73:I_283-I_289. doi: 10.2208/jscejer.73.i_283 |
| 446 447 | Sun DJ, Guan S (2016) Measuring vulnerability of urban metro network from line operation perspective. Transp Res Part A Policy Pract 94:348–359. doi: 10.1016/j.tra.2016.09.024 |
| 448 | Tang X-W, Gan P-L, Liu W, Zhao Y (2017) Surface settlements induced by tunneling in permeable strata: a case |
| 449 | history of Shenzhen Metro 渗透性地 层中隧道施工引起的地表沉降—— 以深圳地 铁为例. J Zhejiang Univ |
| 450 | A 18:757–775. doi: 10.1631/jzus.a1600522 |
| 451 452 | Terada M, Okabe R, Ishigaki T, et al (2017) Subway inundation by pluvial flooding in densely urbanized area. J Japan Soc Civ Eng Ser B1 (Hydraulic Eng 72:I_1357-I_1362. doi: 10.2208/jscejhe.72.i_1357 |
| 453 | Transport for London (2011) Providing transport services resilient to extreme weather and climate change |
| 454 | UITP (2018) World Metro Figures 2018 |
| 455 | UITP, Saeidizand P (2015) Urban public transport in the 21St century. 1–8 |

| 456 | UN (2018) World Urbanization Prospects: The 2018 Revision |
|-------------------|--|
| 457 | UNDRR (2019) Global Assessment Report 2019. Geneva, Switzerland |
| 458 | United Nations Human Settlements Programme (2013) Planning and design for sustainable urban mobility |
| 459 460 | Velasco M, Russo B, Martínez M, et al (2018) Resilience to cope with climate change in urban areas-A multisectorial approach focusing on water-The RESCCUE project. Water (Switzerland) 10:1–11. doi: 10.3390/w10101356 |
| 461 462 | Wan C, Yang Z, Zhang D, et al (2018) Resilience in transportation systems: a systematic review and future directions. Transp Rev 38:479–498. doi: 10.1080/01441647.2017.1383532 |
| 463 464 465 | Wang W, He T, Huang W, et al (2018) Optimization of switch modes of fully enclosed platform screen doors during emergency platform fires in underground metro station. Tunn Undergr Sp Technol 81:277–288. doi: 10.1016/j.tust.2018.07.015 |
| 466 467 468 | Wang X, Chen S, Zhou Y, et al (2013) Simulation on passenger evacuation under fire emergency in Metro station. In: IEEE ICIRT 2013 - Proceedings: IEEE International Conference on Intelligent Rail Transportation. IEEE, pp 259–262 |
| 469 470 | Wang ZF, Shen SL, Cheng WC, Xu YS (2016) Ground fissures in Xi'an and measures to prevent damage to the Metro tunnel system due to geohazards. Environ Earth Sci 75:511. doi: 10.1007/s12665-015-5169-x |
| 471 | WEF, Collins A (2019) The Global Risks Report 2019 14th Edition Insight Report |
| 472 473 | Willems P, Olsson J, Arnbjerg-Nielsen K, et al (2012) Impacts of Climate Change on Rainfall Extremes and Urban Drainage Systems. PB - IWA Publishing |
| 474 475 | Wu J, Fang W, Hu Z, Hong B (2018a) Application of Bayesian approach to dynamic assessment of flood in urban underground spaces. Water (Switzerland) 10:. doi: 10.3390/w10091112 |
| 476 477 | Wu J, Hu Z, Chen J, Li Z (2018b) Risk assessment of underground subway stations to fire disasters using Bayesian network. Sustain 10:. doi: 10.3390/su10103810 |
| 478 479 480 | Wu J, Liao M, Li N (2018c) Ground subsidence along Shanghai metro line 6 by PS-InSAR method. In: International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences - ISPRS Archives. pp 1889–1893 |
| 481 482 483 | Wu TX, Xing HL (2018) Assessment of the performance and effects of metro-induced ground-borne vibration for mitigation measures of resilient tracks. Proc Inst Mech Eng Part F J Rail Rapid Transit 232:1448–1463. doi: 10.1177/0954409717731248 |
| 484 485 | Xing Y, Lu J, Chen S, Dissanayake S (2017) Vulnerability analysis of urban rail transit based on complex network theory: a case study of Shanghai Metro. Public Transp 9:501–525. doi: 10.1007/s12469-017-0170-2 |
| 486 487 | Xu B, Hao J (2017) Air quality inside subway metro indoor environment worldwide: A review. Environ. Int. 107:33–46 |
| 488 489 | Yang Y, Liu Y, Zhou M, et al (2015) Robustness assessment of urban rail transit based on complex network theory: A case study of the Beijing Subway. Saf Sci 79:149–162. doi: 10.1016/j.ssci.2015.06.006 |
| 490 491 | Zhang D ming, Du F, Huang H, et al (2018) Resiliency assessment of urban rail transit networks: Shanghai metro as an example. Saf Sci 106:230–243. doi: 10.1016/j.ssci.2018.03.023 |

Zhong M, Shi C, Tu X, et al (2008) Study of the human evacuation simulation of metro fire safety analysis in China.

J Loss Prev Process Ind 21:287–298. doi: 10.1016/j.jlp.2007.08.001