

Extractive waste management: A risk analysis approach

Authors: Mehta, N., Dino, G.A.*, Ajmone-Marsan, F., Lasagna, M., Romè, C., De Luca, D.A.

*Corresponding Author

JOURNAL: Science of the Total Environment

EDITOR: Elsevier B.V.

VOL: 622-623,

PAGES: 900-912

ISSN: 00489697

DOI: 10.1016/j.scitotenv.2017.11.260

SCOPUS ID: 2-s2.0-85037702819

WOS: NOT YET PRESENT

Printed: 1 May 2018,

On-line from December 2017

Extractive waste management: A risk analysis approach

Neha Mehta^a, Giovanna Antonella Dino^{a*}, Franco Ajmone-Marsan^b, Manuela Lasagna^a, Chiara Romè^b, Domenico Antonio De Luca^a

^a Department of Earth Sciences, University of Torino, Via Valperga Caluso 35, 10125, Torino (Italy)

^b Department of Agricultural, Forest and Food Sciences, University of Torino, Via Leonardo Da Vinci 44, 10095, Grugliasco, Torino (Italy)

* Corresponding author's E-mail address: giovanna.dino@unito.it

Abstract:

Abandoned mine sites continue to present serious environmental hazards because the heavy metals associated with extractive waste are continuously released into the environment, where they threaten human life and the environment. Remediating and securing extractive waste are complex, lengthy and costly processes. Thus, in most European countries, a site is considered for intervention when it poses a risk to human health and the surrounding environment. As a consequence, risk analysis presents a viable decisional approach towards the management of extractive waste.

To evaluate the effects posed by extractive waste to human health and groundwater, a risk analysis approach was used for an abandoned nickel extraction site in Campello Monti in North Italy. This site is located in the Southern Italian Alps. The area consists of large and voluminous mafic rocks intruded by mantle peridotite. The mining activities in this area have generated extractive waste.

A risk analysis of the site was performed using Risk Based Corrective Action (RBCA) guidelines, considering the properties of extractive waste and water for the properties of environmental matrices. The results showed the presence of carcinogenic risk due to arsenic and risks to groundwater due to nickel. The results of the risk analysis form a basic understanding of the current situation at the site, which is affected by extractive waste.

Keywords: *risk analysis, mining waste, environmental impacts, extractive waste, abandoned mine, reuse*

1. Introduction

Mining waste, which is also referred to as extractive waste (EW) generated during mining activities for metal exploitation, is represented by huge amounts of materials that are often contaminated by heavy metals and toxins and stored in dumps near the mining sites. After the cessation of mining activities at many sites, the EW facilities were left abandoned, leaving large amounts of waste subjected to erosion and leaching. Climate conditions, topography, hydrology, soil and EW textures, vegetation and site management influence the dispersion of contaminants towards adjacent ecosystems. Due to this dispersion and erosion, high contents of heavy metals have often been reported in ecosystem compartments near metal extraction sites (Béjaoui et al., 2016, Balint et al., 2014, Balint et al., 2015). These heavy metals tend to persist in the environment due to their non-degradable characteristics (Yuan et al., 2004). To measure their environmental impacts and determine future courses of action for the sustainable management of extractive waste, risk analysis approaches can be used.

The use of risk analysis as a formal component of environmental policy is of relatively recent origin. An original aim of this methodology was to help set priorities for environmental protection in an objective and scientific way, thus avoiding conflicts with political and management objectives. In simple terms, risk analysis can be defined as the process of estimating both the probability that an event will occur and the probable magnitude of its adverse effects, whether health/safety-related or ecological, over a specified time period (Gerba, 2009).

Many previous studies have provided methods for using heavy metal distributions and risk analysis in the context of the effects of mining activities on environmental and human health (Li and Thornton, 2001, Väänänen et al., 2016). For example, soil pollution due to lead, zinc, cadmium and copper has been characterized in mine tailings and soil near a Pb-Zn mine in Spain (Rodríguez et al., 2009). The presence of Ni and Cr has been quantified in open cast coal mining areas in Serbia (Ličina et al., 2017). Another study assessed human health hazards arising from the consumption of fish contaminated by mercury released in gold mining areas in Indonesia (Castilhos et al., 2006). The quantification of human health risks due to soil contamination in mining areas in China was studied by Li et al., 2014. The results obtained from these studies provide an important basis for the quantification and management of environmental impacts at mining sites.

The present study addresses an abandoned Ni mining site at Campello Monti in northwest Italy and differs from past studies by also focusing on a comparative analysis due to a change in the location of the EW. Indeed, this work was undertaken to analyse the risk in Campello Monti due to the presence of EW to 1) human health and groundwater in the present situation and 2) human health and groundwater under the hypothesis that the waste is transported to the nearest plain and used, as a by-product, for land rehabilitation or as filling materials for civil works and infrastructures. The second case has to be considered as an alternative to in situ intervention activities; using the waste as a resource is a viable alternative to remediating polluted areas and contemporaneously boosting natural resource savings. The principle of recovering and using waste (with or without treatment) as valuable secondary raw materials for integration with raw materials (RM and critical raw material – CRM) is in line with present EU policy regarding landfill mining and circular economies (Dino et al. 2016, 2017,a). Indeed, securing a sustainable RM and CRM supply and their circular use in the economy is a growing matter of concern at both EU and global levels (Coulomb et al., 2015; Vidal-Legaz et al. 2016). A circular approach can partially supply RM/CRM due to the prominent role of recycling/recovery as an alternative to the exploitation of ore-bodies. Indeed, the recycling rates for each RM (and CRM) are useful for calculating the supply risks connected to single commodities (Blengini et al., 2017). In particular, the integration of extractive waste with natural aggregate supplies is being increasingly realized, and several researchers have investigated opportunities for sustainable recovery and recycling of both clean and contaminated EW, while at the same time reducing pressure on natural aggregate resources, land takes and environmental and landscape contamination. All this entails a general recovery of land, raw materials and eventually the environment (Akbulut and Gürer, 2007; Binici et al., 2008, Careddu et al. 2013; Danielsen and Kuznetsova, 2015; Danielsen et al. 2017; Dino et al. 2017,b; Dino and Marian, 2015; Felekoglu, 2017, Hebhoub, 2011; Gencel et al., 2012; Luodes et al. 2012).

2. Methodology

2.1 General Site Setting

An abandoned Ni mine at Campello Monti was chosen for the present study. The Campello Monti site lies on the boundary of the Valstrona municipality in NW Piemonte (Italy) (45°56'09.39" N and 8°14'13.79" E), as shown in Fig 1. The site is located in the Strona Valley, which is oriented WSW-ENE and lies to the east of Monte Rosa. The valley is confined by the Anzasca Valley to the NW, the Ossola Valley to the E-NE, and the Sesia Valley to the S-SE.

The Campello Monti village is located on the valley floor at 1305 m a.s.l. The Strona Valley reaches its maximum altitude at the terminal sector, which is bordered by the Capezzone Mount (2421 m a.s.l.) and the Altemberg Mount (2394 m a.s.l.).

The extractive waste facilities are mainly located in the north side of the valley, from the eastern margin of the Campello Monti village to approximately 1 km eastward at altitudes ranging from ca. 1200 to 1600 m a.s.l.

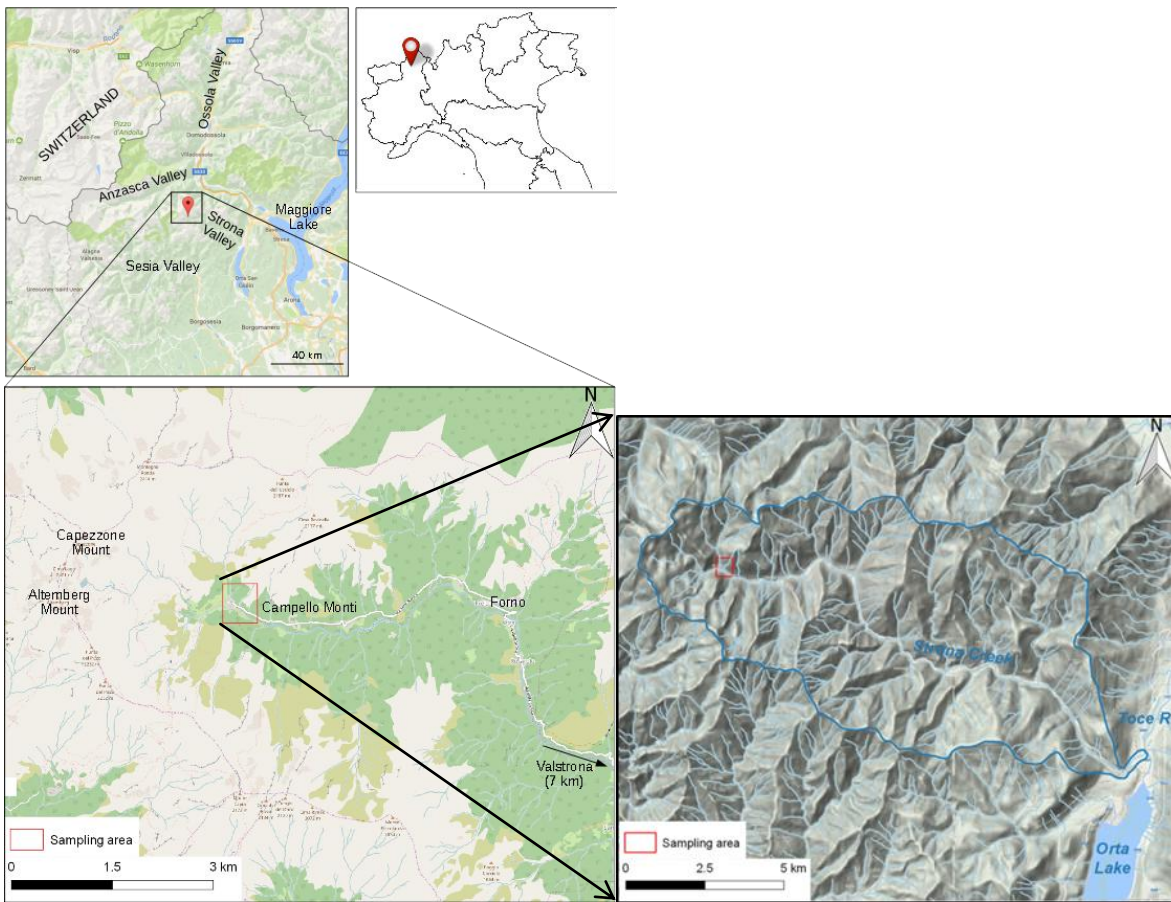


Fig. 1. Geographical location of Campello Monti.

2.1.1 Geological Setting

A metal extraction site is located in the basement of the southern Alps of northwestern Italy in the Ivrea Verbano Zone, which is a tectonic unit that has been cited as an example of an exposed continental crustal section that has preserved the transition from amphibolite to granulite facies (Bea and Montero, 1999). The Ivrea Verbano Zone extends for a distance of 120 km and has a breadth of approximately 14 km (NW-SE direction). The Ivrea Verbano Zone consists of three main petrographic units (Garuti et al., 2001):

- ultramafic rocks known as Mantle Tectonites,
- mafic rocks of the Mafic complex;
- supracrustal rocks of the Kinzigite Formation.

This area consists of large and voluminous mafic rocks that belong to the mafic complex outcrop, which is intruded by the mantle peridotites of the Mantle Tectonites (Fig. 2). At the western border of the area, the Insubric Line borders the Alpine units of the Sesia Lanzo Zone. On the valley floor, the bedrock is buried by recent glacial deposits and alluvial debris.

The detailed lithology of the area (Fig. 2) consists of lherzolites that are accompanied in places by titanolivine in large and smaller masses. In the surrounding regions, on the upstream side of the valley, mylonites are found along the Insubric Line, which are followed by phyllites and schists of the Alpine units. In the downstream sector of the valley, alternations of metabasites and metapelites prevail.

The area was exploited for Fe-Ni-Cu-Co magmatic sulphide deposits that occur from the Sesia to Strona valleys, primarily in the ultramafic layers of the mafic complex of the Ivrea Verbano Zone. Nickel extraction from the ore occurred intensively from 1863 to the 1940s (Rossetti et al., 2017).

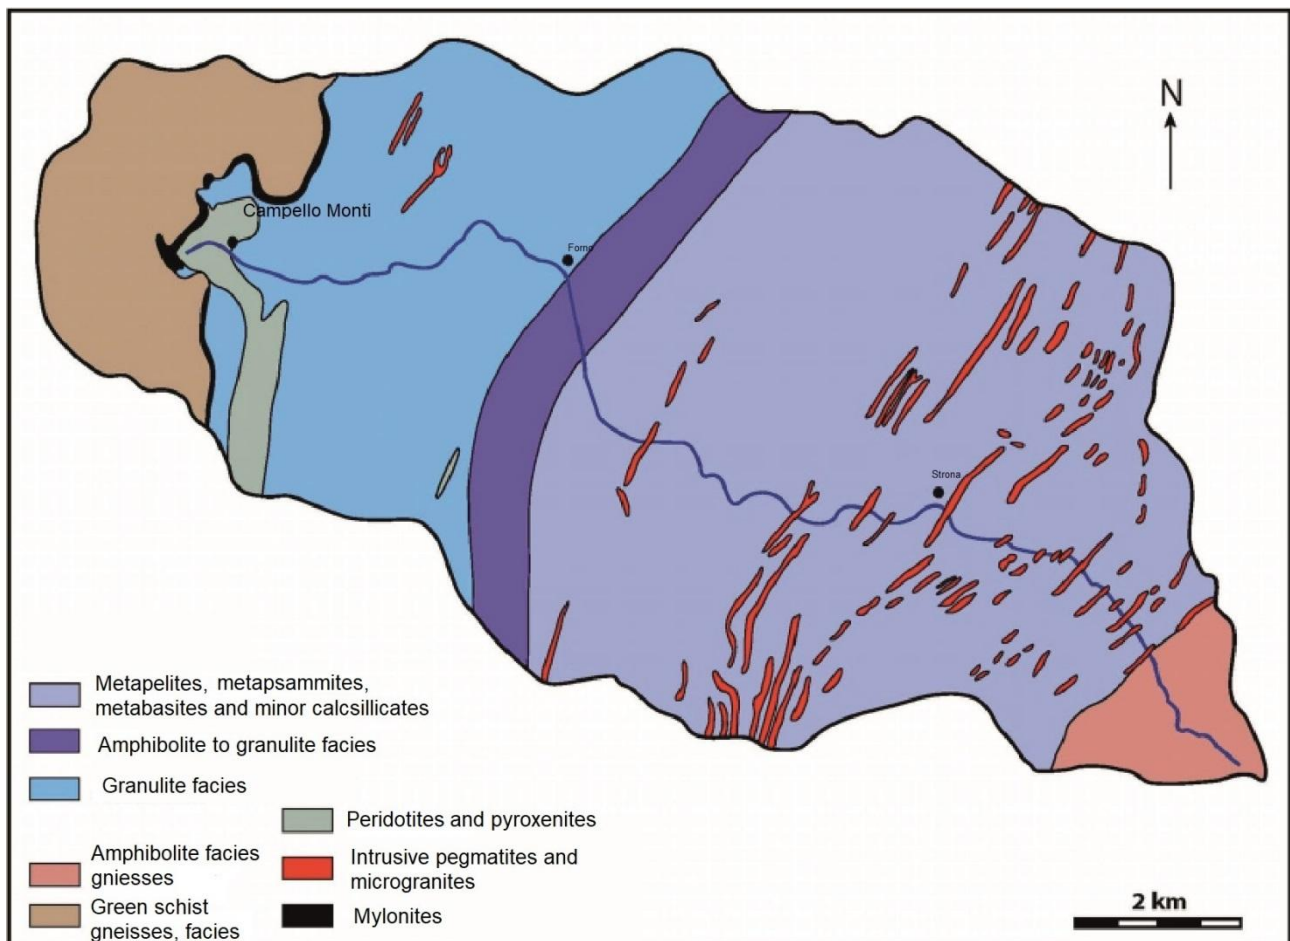


Fig. 2. Simplified lithological map of Val Strona di Omegna (modified from Bea and Montero, 1999).

2.1.2 Hydrography

The Strona stream (also known as the Strona di Omegna stream) is the main stream of the Strona Valley and flows in a WNW-ESE direction (Fig. 1). It is fed by runoff, snow-melt springs and small lakes located in the surrounding relief. The Strona stream begins in the village of Campello Monti and ends in the Toce river, and its total length is approximately 28 km. The hydrographic basin of the Strona stream has an area of approximately 170 km² (Fig. 1). The final destination of the waters of the Toce River is Lake Orta, which is located a few hundred metres from the confluence of the two streams towards the south.

2.1.3 Hydrogeological setting

Campello Monti is located in extremely complex formations of crystalline rocks that consist of metamorphic lithotypes. According to the regional hydrogeological framework, these rocks are essentially impermeable or weakly permeable for fracturing and belong to the hydrogeological series of crystalline complexes of the Alpine chain. A conceptual scheme of groundwater flow in the area is represented in Fig. 3, which shows that groundwater circulation in the area occurs in fractured rocks, detritic cover, waste dumps and tunnels used for extracting metal.

The groundwater flow through detritic cover and waste dumps was considered to be predominant. The groundwater flow in the natural rocks at the site is very low because they are compact metamorphic rocks with reduced levels of fracturing. Indeed, the groundwater drainage in the tunnels shows very low or no discharge. Thus, for the risk analysis, only groundwater in detritic cover and waste dumps was considered, and the proposed flow regime is suitable for use in the risk modelling approach.

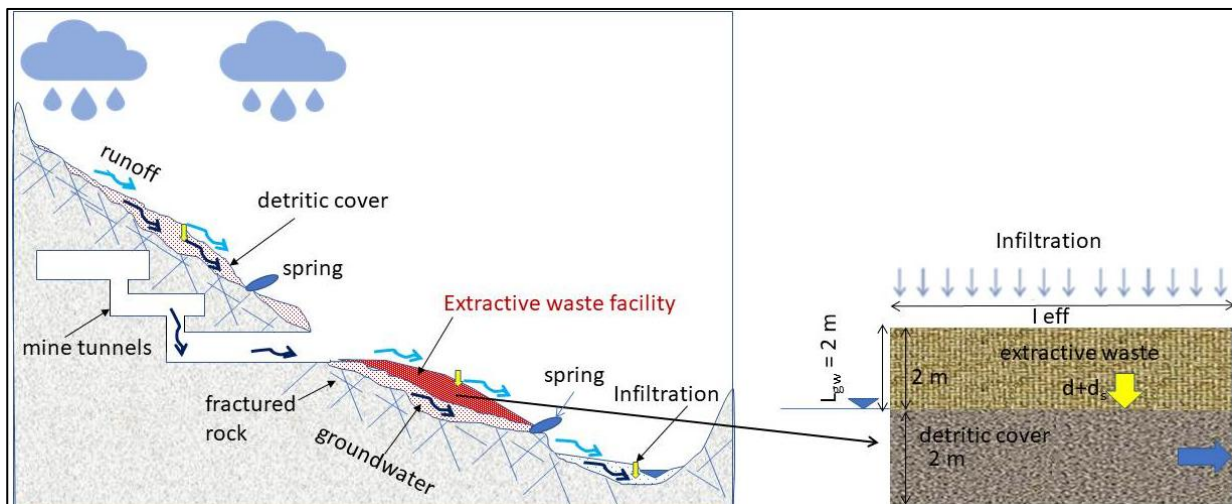


Fig. 3. Conceptual scheme of the groundwater flow at the site.

2.2 Site investigation and sampling strategy

2.2.1 Sampling of extractive waste

The sampling activity comprised preliminary site investigation and preparation of samples for the characterization.

The preliminary site investigation was performed to collect information regarding waste typology and location in order to ensure that the facility was suitable for characterization and sampling. The sampling site comprised different waste rock piles. These waste rock dumps were placed in the north side of the Strona stream and have not been moved or worked since the end of mining activity. The dumps were formed over a period of approximately 100 years by the dumping, in a vertical sequence, of non-valuable mineralizations and non-mineralised rocks from underground extraction activities. The waste rock dumps are unconfined in nature, which has led to a fairly similar distribution of EW in the area. The average thickness of the cover formed by the EW was found to be approximately 2 m. Field observations have demonstrated the presence of both fine and coarse materials.

Locations and numbers of sampling points are often site-specific, but in general, a systematic sampling strategy must be adopted in order to obtain representative data for an entire waste facility. In the Campello Monti area, the waste rock material was sampled using a hand shovel and hammer (where necessary). Each sample (8-10 kg) was collected in an area of 1.5 m², after which the samples were cleaned to remove organic residues. Fig. 4 shows sampling methodology. A total of 26 waste rock samples were collected at the site in July 2016. The sample locations are shown in Fig. 5.

Preparation of waste rock samples for characterization is reported in analytical methods section (section 2.3).



Fig. 4. Waste rock facilities at Campello Monti.

Fig. 4a) General overview of the Campello Monti waste rock facilities.

Fig. 4b) Sampling activity at the Campello Monti waste rock facilities. Net Scheme.

2.2.2 Water sampling

In Campello Monti, two water sampling campaigns were conducted in July and October of 2016. Water samples were collected as groundwater (GW) from springs and water flowing from tunnels and surface water (SW) in the Strona stream and minor creeks in the valley. During the two sampling campaigns, a total of 11 groundwater samples and 7 surface water samples were collected. The sample locations are shown in Fig. 4.

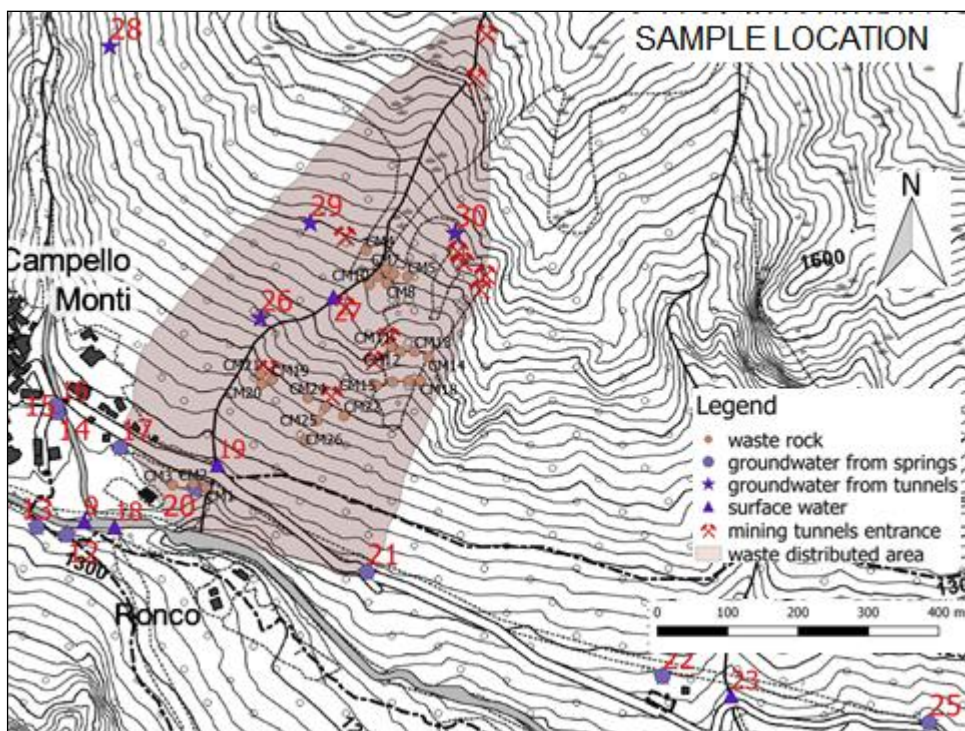


Fig. 5. Waste rock and water sample locations.

2.3 Analytical Methods

The extractive waste samples were dried in an oven for a period of 24 hours to remove any moisture. The samples were then sieved through 20-mm and 2-mm sieves to determine the weights of different fractions. pH was measured in 1:2.5 suspensions of the waste rock samples in water (ISO 10390). The samples were analysed for their concentrations of chemical elements on the fractions of less than 2 mm using the method described in EPA 3051A, (2007) and EPA 6010 C, (2007). The concentrations for risk analysis were calculated on fractions of less than 20 mm following risk analysis guidelines (Ministero dell'ambiente e della tutela del territorio, 2006, APAT, 2008). The concentrations of arsenic, antimony, beryllium, cadmium, cobalt, chromium, mercury, nickel, lead, copper, selenium, tin, thallium, vanadium and zinc were measured using an Ametek Spectro Genesis Inductively Coupled Plasma- Optical Emission Spectrometer (ICP-OES). The instrument was provided with an Ametek monochromator, a cyclonic spray chamber and a Teflon Mira Mist nebulizer. The instrumental conditions included a plasma power of 1.3 kW, sample aspiration rate of 30 rpm, argon nebulizer flow of 1 L/min, argon auxiliary flow of 1 L/min and argon plasma flow of 12 L/min. All the reagents used were of analytical grade. All metal solutions were prepared from concentrated stock solutions (Sigma Aldrich). High-purity water (HPW) produced with a Millipore Milli-Q Academic system was used throughout the analytical process.

The water samples were measured for total alkalinity (sum of $\text{CO}_3^{2-} + \text{HCO}_3^-$), bicarbonate and carbonate alkalinity using the potentiometric method. Anions (NO_2^- , F^- , SO_4^{2-} , NO_3^- , Cl^-) were measured using a 761 Compact IC Metrohm Ion chromatograph with chemical suppression (H_2SO_4 50 mM) and equipped with a monolithic gel column Metrosep a supp 5 150 mm. The eluent ($\text{Na}_2\text{CO}_3 - 3.2 \text{ mM} + \text{NaHCO}_3 - 1 \text{ mM}$) was provided at a flux of 0.7 ml/min. The instrument was equipped with an 813 Compact autosampler with a sampling time of 25 minutes. Before each analysis, the water was filtered using 0.45- μm cellulose nitrate membrane filters, and afterwards, the network was cleaned for 30 s using ethyl alcohol diluted by 70 % in high-purity water.

The contents of major and minor metal cations (Ca^{2+} , Mg^{2+} , Na^+ , K^+ , P, Al, Ag, Fe, Hg, Ni, Mn, B, Ti, Mo, Sb, As, Be, Cd, Co, Cr (total), Cr(VI), Pb, Cu, Se, Tl, Zn, and Sn) were measured using the ICP-OES. Three water samples were analysed for their concentrations of cyanide ions. Those three water samples were taken from 1) the Strona stream to evaluate the presence of cyanide in the main stream (Sample No. 18), 2) the secondary stream that passes through the waste distribution area and is an influent to the Strona stream (Sample No. 19) and 3) the groundwater spring near the Strona stream, which is below the contaminated waste (Sample No. 17).

2.4 Risk Analysis

The human health risks and risks to groundwater due to the presence of contaminants in EW and groundwater were evaluated using Risk-net (Floreani and Zorzet, 2016). Risk-net is a software program that allows users to apply the risk analysis procedure to contaminated sites in accordance with the provisions of Risk Based Corrective Action (RBCA) (ASTM, 1995, ASTM, 2015). This method refers to an approach towards managing contaminated sites that examines the risks posed to human health and the environment due to contaminants. The amount of environmental management required to ensure the protection of human health and the environment is based on a scientific assessment of risks posed by contaminants, both now and in the future. It indicates whether sites should be managed to have low and acceptable risk levels rather than bringing them to pristine levels. The permissible limits for the chemical elements for the risk calculations were taken from the Italian Legislative Decree 152/06 and risk analysis guidelines (Ministero dell'ambiente e della tutela del territorio, 2006, APAT, 2008).

The risk was calculated under following conditions: 1) current site characteristics and exposure parameters and 2) an assumption that the waste is transported to the nearest plain area for use as filling material. The comparative risk analysis aims to provide information on EW management.

2.4.1 Site-specific Conceptual Model

After carrying out the site surveys and analysing the collected and treated samples, a site-specific conceptual model was prepared. The boxes highlighted in green in Fig. 6 refer to the source, pathways and receptors for Campello Monti and the nearest plain. The groundwater in Campello Monti is contaminated due to past activities, which is not the case for the plain. Thus, the sources, pathway and receptors remain the same for the plain, apart from the contaminated groundwater source.

- Distributed EW and the contaminated groundwater form the source.
- Residents living in the study area are the receptors of metals through soil ingestion, dust inhalation and dermal contact from superficial soils, whereas residents living at a distance from the source are only exposed to contaminants through dust inhalation. The exposure times of the residents were adjusted after considering the exposures of children and adults in recreational and residential areas.
- The groundwater is a potential receptor of contaminants through leaching from the superficial soil and deep soil layers due to the presence of extractive waste. The EW layer from 0-1 m was considered to be the superficial soil layer and that from 1-2 m was considered to be the deep soil layer.

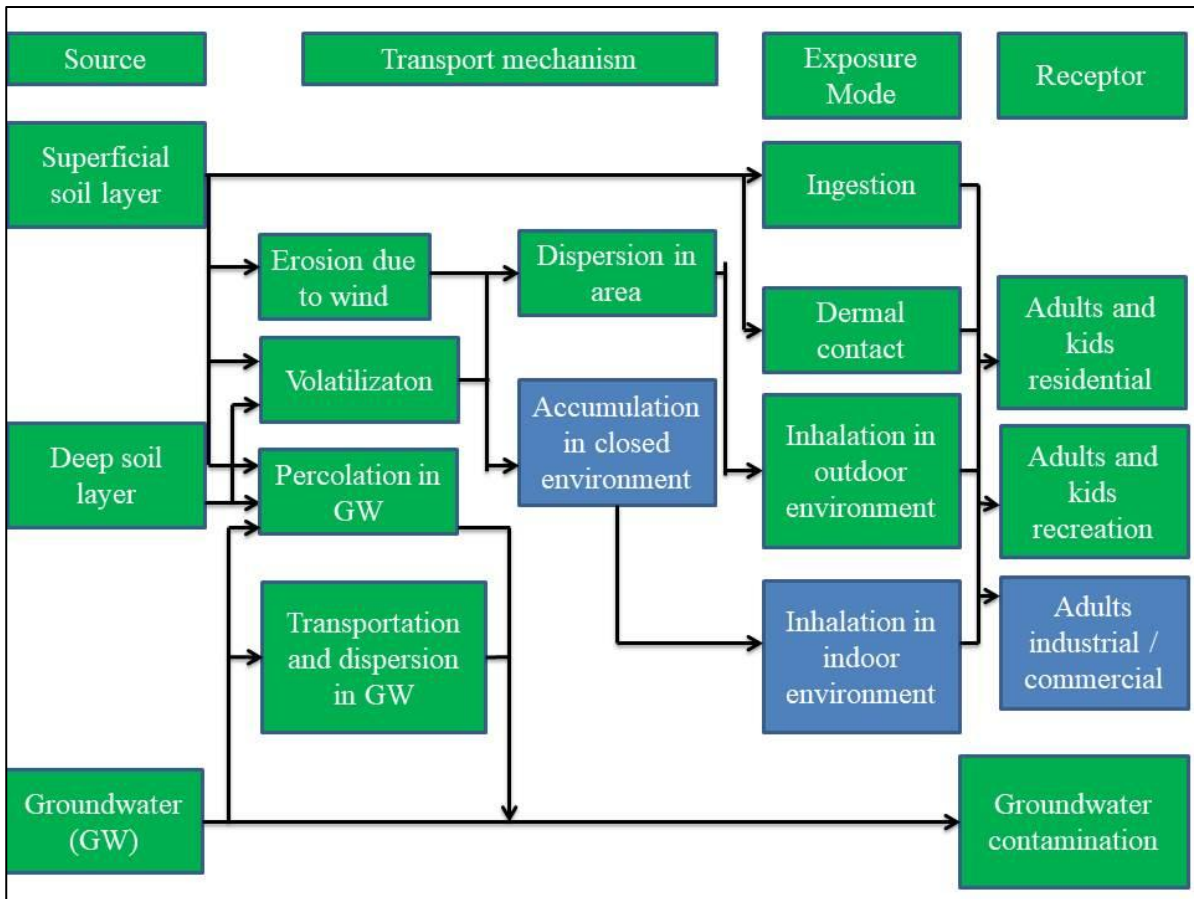


Fig. 6. Site-specific conceptual model developed after site investigations (the active sources, pathways and receptors are highlighted in green, whereas the blue boxes show inactive pathways and receptors for the site).

Because the risk evaluation process considers the most conservative values, the concentrations were considered to be the 95 % upper confidence limits for the concentrations of contaminants at fractions of less than 20 mm provided by the Pro-UCL software (Daniel, 2015). The present study addresses considering the future use of waste without any treatment or alteration of its chemical or physical properties, and the EW concentrations would remain unchanged in the nearest plain.

2.4.2 Site characteristics

Observations collected from the general site setting, field surveys, and previous hydrogeological and climatic studies led to the development of the site characteristics used in the risk analysis (Table 1). Some of the parameters were already fixed in the software, for example, the fractions of organic soil in the unsaturated zone for superficial soil and deep soil ($f_{oc, SS}$ and $f_{oc, SP}$), average leaching duration, soil density (ρ_s), Darcy's velocity (v_{gw}), the average effective rate in the aquifer (v_e), the fraction of organic carbon in saturated soil (f_{oc}), dispersivity (a_x , a_y , and a_z), dilution factor in groundwater (LDF), particulate flow rate per unit area in air (P_e), average stream flow duration ($\tau_{outdoor}$), and dispersion coefficients in air (σ_y and σ_z).

The study site is almost completely covered by EW; thus, the natural soil has been replaced by a layer of EW in a triangular section with a base of approximately 260 m and a height of 520 m, as shown in Fig. 4 (waste distribution area). Groundwater flow occurs within the detritic cover and so was assumed to occur at a depth of 2 m. Wind directions in mountainous areas vary greatly at any

point in time; thus, to arrive at a conservative value, wind flow was assumed to be parallel to the height of the triangle. These characteristics are explained in detail as follows.

- The total thickness of the on-site waste deposits was 2 m, thus leading to superficial soil with a depth of 1 m and deep soil with a depth of 1 m in the waste distribution area, as shown in Fig. 4.
- The groundwater flow through the detritic cover and waste dumps was considered to be predominant. The depth to the groundwater level from the top was 2 m, and thus the thickness of the unsaturated zone was 1.9 m, considering that a thickness of 0.1 m became saturated due to capillary action.
- The hydraulic gradient was approximately equal to the slope of the mountains and was thus 0.3.
- Out of all the types of soil in the software, the physical properties of the EW within the fractions less than 20 mm most closely resembled those of sand. Thus, the effective porosity of the source, volumetric air content and volumetric water content of sand were used.
- The infiltration capacity was measured considering an average precipitation of 140 cm (the average annual precipitation for the period of 1971-2000).
- The wind velocity was taken from a mixing zone height of 2 m, considering a wind velocity measured at a weather station of 3.4 m/s.

If extractive waste is transported to the nearest plain and used as a by-product for use as filling material for an area of 100x100 m², the site characteristics will vary from the initial metamorphic rock conditions. For example, the hydraulic gradients in plains are considerably lower, the infiltration capacities vary due to changes in annual precipitation, and groundwater depths also change. As the area to be filled is considered to have a square shape, the final risk to groundwater is independent of wind and groundwater flow directions. The site characteristics are explained below in detail.

- If EW is used as a filling material in an area of 100x100 m² and a height of 8 m, the top 1 m can be taken as superficial soil, and the remaining 7 m can be taken as deep soil.
- The depth to the groundwater level from the top was 10 m, and thus the thickness of the unsaturated zone was 9.9 m.
- The hydraulic gradient was 0.0027, following a map of the hydraulic gradients in the Piemonte region.
- The properties of the waste remained the same as in the original location.
- The infiltration capacity was measured considering an annual precipitation of 100 cm (the average annual precipitation for the period of 1971-2000).

Table 1. Unsaturated zone, saturated zone and outside environment properties at Campello Monti and the nearest plain area

Parameter	Units	Campello Monti	Nearest plain
L_s (SS) Depth of the top of the source in the surface soil relative to the surface level	m	0	0
L_s (SP) Depth of the top of the source in the deep soil relative to the surface level	m	1	1
d Thickness of the source of contamination in the surface soil (unsaturated)	m	1	1

d_s	Thickness of the source of contamination in the deep soil (unsaturated)	m	1	7
L_{GW}	Depth of the groundwater level (total from the top) (phreatic level)	m	2	10
h_v	Thickness of the unsaturated zone	m	1.9	9.9
pH	pH		5.8	5.8
I_{ef}	Effective infiltration	cm/year	35.3	18
P	Precipitation	cm/year	140	100
W	Extension of the source in the direction of groundwater flow	m	520	100
S_w	Extension of the source in the direction perpendicular to the groundwater flow	m	260	100
d_a	Aquifer thickness	m	2	20
K_{sat}	Hydraulic conductivity of saturated soil	m/s	5 x 10 ⁻⁴	1 x 10 ⁻⁴
i	Hydraulic gradient		0.3	0.0027
v_{gw}	Darcy's velocity	m/s	1.5 x 10 ⁻⁴	2.7 x 10 ⁻⁷
v_e	Average effective rate in the aquifer	m/s	3.9 x 10 ⁻⁴	7.65 x 10 ⁻⁷
θ_{e sat}	Effective porosity of the ground in the saturated zone		0.385	0.353
POC	Distance of the receptor (off-site) (DAF)	m	0	0
δ_{gw}	Thickness of the mixing zone in the aquifer	m	2	12.6
LDF	Dilution factor in groundwater	calculated	52.6	6.96
W'	Extension of the source into the main wind direction	m	520	100
S_w'	Spring extension in the direction orthogonal to that of the wind	m	260	100
U_{air}	Wind velocity	m/s	2.97	1.24

2.4.3 Risk calculation and characterization

The risk calculations and characterizations for different categories were performed using the following procedure:

1) The non-carcinogen health risk to the local habitants through rock waste (that forms the superficial layer) was measured on the basis of the hazard quotient (HQ). HQ is the ratio of the estimated daily exposure of a contaminant through different pathways to the reference dose. It is based on Eqs. (1), (2), (3) and (4) for the inhalation, ingestion and dermal contact of a particular contaminant (U.S.EPA, 2009):

$$HQ = HQ_{\text{ingestion}} + HQ_{\text{inhalation}} + HQ_{\text{dermal contact}}, \quad (1)$$

$$HQ_{\text{ingestion}} = \text{CRS} \cdot \left(\frac{\text{EM}_{\text{ing}} \cdot 10^{-6} \text{ kg/ mg}}{\text{RfD}_{\text{ing}}} \right), \quad (2)$$

$$HQ_{\text{inhalation}} = \text{CRS} \cdot \left(\frac{\text{EM}_{\text{inh}} \cdot \text{PEF} \cdot \text{ADF}}{\text{RfD}_{\text{inh}}} \right) \quad (\text{unitless}), \text{ and} \quad (3)$$

$$HQ_{\text{dermal contact}} = \text{CRS} \cdot \left(\frac{\text{EM}_{\text{conD}} \cdot 10^{-6} \text{ kg/ mg}}{\text{RfD}_{\text{ing}}} \right) \quad (\text{unitless}), \quad (4)$$

where

CRS = concentration of the contaminant in the source (mg/kg),
 EM_{ing} = factor of ingestion,
 EM_{inh} = factor of inhalation,
 EM_{conD} = factor of dermal contact,
 RfD_{ing} = reference dose for ingestion,
 RfD_{inh} = reference dose for inhalation
PEF = outdoor particle concentration, and
ADF = atmospheric dispersion (for on-site exposure, ADF =1).

The Hazard Index (HI) is equal to the sum of the HQs for all the contaminants (Eq. (5)) and is used to assess the overall potential for noncarcinogenic effects posed by more than one contaminant at a site.

$$\text{HI} = \sum_{m=1}^n \text{HQ}_m, \quad (5)$$

where n = no. of contaminants.

HI<1 indicates that there is no significant risk of noncarcinogenic effects. Conversely, if the ratio is >1, the exposed population is likely to experience obvious non-carcinogenic effects with a probability that tends to increase as the value of HI increases.

2) Carcinogenic risk (RI) to human beings is calculated by adding the carcinogenic risks due to ingestion, inhalation and dermal contact for a particular contaminant in the source on the basis of slope factors, as shown in Eqs. (6), (7), (8) and (9):

$$\text{RI} = \text{RI}_{\text{ingestion}} + \text{RI}_{\text{inhalation}} + \text{RI}_{\text{dermal contact}}, \quad (6)$$

$$\text{RI}_{\text{ingestion}} = \text{CRS} \cdot \text{SF}_{\text{ing}} \cdot \text{EM}_{\text{ing}} \cdot 10^{-6} \text{ kg/ mg}, \quad (7)$$

$$\text{RI}_{\text{inhalation}} = \text{CRS} \cdot \text{SF}_{\text{ing}} \cdot \text{EM}_{\text{inh}} \cdot \text{PEF} \cdot \text{ADF}, \text{ and} \quad (8)$$

$$\text{RI}_{\text{dermal contact}} = \text{CRS} \cdot \text{SF}_{\text{conD}} \cdot \text{EM}_{\text{conD}} \cdot 10^{-6} \text{ kg/ mg}, \quad (9)$$

where

SF_{ing} = Slope factor for ingestion,

SF_{conD} = Slope factor for dermal contact.

If the RI for a single contaminant exceeds 1×10^{-6} , that element poses a carcinogenic risk to exposed inhabitants, and the probabilities of the carcinogenic effects increase with increasing RI.

Total carcinogenic risk was calculated for all contaminants and was used to assess the carcinogenic risk due to more than one chemical element at a site. It is defined in Eq. (10):

$$RI_{\text{total}} = \sum_{m=1}^n RI_m \quad (10)$$

$RI_{\text{total}} < 1 \times 10^{-5}$ indicates that there is no significant carcinogenic risk. Conversely, if $RI_{\text{total}} > 1 \times 10^{-5}$, the exposed population is likely to experience obvious carcinogenic effects with probabilities that tend to increase with increasing RI_{total} .

3) The risks to groundwater sources due to elements being leached from the soil are calculated using Eq. (11) and (12):

$$R_{\text{SS.LF}} = \frac{\text{CRS.LF}_{\text{SS}}}{\text{DAF.CSC.}10^{-3} \text{ mg}/\mu\text{g}}, \text{ and} \quad (11)$$

$$R_{\text{DS.LF}} = \frac{\text{CRS.LF}_{\text{DS}}}{\text{DAF.CSC.}10^{-3} \text{ mg}/\mu\text{g}}, \quad (12)$$

where

$R_{\text{SS.LF}}$ = risk to groundwater due to the contaminant in superficial soil,

$R_{\text{DS.LF}}$ = risk to groundwater due to the contaminant in deep soil,

LF_{SS} = leaching in groundwater from the contaminant in superficial soil,

LF_{DS} = leaching in groundwater from the contaminant in deep soil,

DAF = Factor of dilution in groundwater (for on-site exposure, DAF = 1), and

CSC = permissible limit of any element in groundwater (Ministero dell'ambiente e della tutela del territorio, 2006).

2.5 Sensitivity Analysis

After performing the deterministic static risk analysis, it was found that the major contribution to risk to human health and / or groundwater was due to the presence of Ni, Co, Sb, As, Pb, and Cu. Following that conclusion, we performed a Monte Carlo analysis using the human health risk calculations to incorporate the individual input distributions of exposure variables to produce the probability distributions of the health risk estimates and to assess uncertainties in the risk assessment (U.S. EPA, 1997). A similar analysis was undertaken to calculate risk to groundwater after incorporating the distributions of the hydrogeological parameters.

Human health risk and risk to groundwater were calculated over 5000 iterations using randomly selected values derived from the individual probability distributions of the corresponding exposure model parameters. The simulation model was also used for sensitivity analysis, in which the relative importance of each input variable was assessed by calculating its contribution to the total variance.

The soil ingestion rate, body weight and exposure frequency were assumed to be uniformly distributed in the following ranges: 100-200 mg/d, 15-70 kg, and 250-350 d/y, respectively (U.S. EPA, 2011). The exposure parameters for inhalation and dermal contact exposure pathways were also assumed to be uniformly distributed for both carcinogenic and non-carcinogenic risks.

The wind velocities were assumed to vary uniformly, following the actual wind velocities (at 2 m height) ± 50 cm/s for both sites.

Precipitation was chosen based on the individual site locations. An average value of approximately 140 cm/y, uniformly distributed within the range of 120 cm/y and 160 cm/y, was considered for Campello Monti. An average value of approximately 100 cm/y, uniformly distributed within the

range of 80 cm/y and 120 cm/y, was considered for the nearest plain. The ranges of the values of the other site parameters are shown in Table 2. The value of the parameters that were assigned fixed value on the basis of site characteristics are shown in Table 1.

Table 2. Ranges of the input values of the parameters used for the 5000 simulations of the Monte Carlo analysis.

Variable parameters used to assess risk to human health and groundwater for Campello Monti and the nearest plain				
Variable parameters used to assess human health risk at Campello Monti and nearest plain	Symbol	Units	Input Values	Distribution
Body weight	BW	kg	15-70	uniform
Soil Ingestion	IR	mg/d	100-200	uniform
Exposure frequency	EF	d/y	250-350	uniform
Surface area of exposure	SA	cm ²	2800-5700	uniform
Factor of exposure to contaminant for dermal contact	AF	mg/cm ² -d	0.07-0.2	uniform
Inhalation outdoor	EF _{inh}	m ³ /h	0.7-0.9	uniform
Wind velocity Campello Monti	U _{air}	cm/s	247-347	uniform
Wind velocity nearest plain	U _{air}	cm/s	72-172	uniform
Variable parameters used to assess risk to groundwater at Campello Monti				
Precipitation / year	P	cm/y	120-160	uniform
Thickness of aquifer	d _a	cm	200	uniform
i (hydraulic gradient)	i		0.25-0.35	uniform
Variable parameters used to assess risk to groundwater at nearest plain				
depth of groundwater table	L _{gw}	cm	900-1100	uniform
Precipitation / year	P	cm/y	80-120	uniform
Thickness of aquifer	d _a	cm	1000-3000	uniform

3. Results and discussion

3.1 Analysis of extractive waste

The concentration of the elements in the rock waste and pH values are shown in Table 3. The pH values of the samples were found to be in the slightly acidic range to near-neutral conditions (ranging from a pH of 5 to a pH of 7.1, with an average pH of 5.9).

The results indicated that Ni was present at considerable concentrations in the samples, with an average concentration of 277 mg/kg, whereas the concentrations varied from as low as 3.5 mg/kg to as high as 1377 mg/kg. This shows that the fine fraction of the EW currently contains a large amount of Ni. Copper was found to vary from 4.5 to 484 mg/kg, with an average concentration of 120 mg/kg. The Cr concentrations varied from 6 to 338 mg/kg, with an average concentration of 119 mg/kg. The presences of Cr and Cu were consistent with the geological setting and lithology of the area. The concentrations of As varied from 0.09 to 3.09 mg/kg, with an average concentration of 0.85 mg/kg.

All other elements were found to have concentrations below the Italian permissible limits for soils in recreational and habitation areas.

1
2

Table 3. Heavy metal concentrations (mg/ kg) in rock waste samples with sizes of less than 20 mm from Campello Monti

Sample	pH	Sb	As	Be	Cd	Co	Cr	Hg	Ni	Pb	Cu	Se	Sn	Tl	V	Zn
Permissible limit		10	20	2	2	20	150	1	120	100	120	3	1	1	90	150
CM1	6.6	0.5	0.4	0.1	<0.1	6.7	57.1	<0.1	94	3	29	<0.1	0.4	<0.1	9.8	10
CM2	7.1	0.3	0.3	0.1	<0.1	6.5	65.9	<0.1	84	<1	31	<0.1	0.3	<0.1	11.2	5
CM3	7.0	16.8	3.1	0.2	0.1	19.5	135.0	<0.1	341	12	171	<0.1	1.0	<0.1	19.9	26
CM4	6.7	0.6	0.8	0.1	<0.1	14.0	198.0	<0.1	108	2	81	<0.1	0.2	<0.1	19.4	7
CM5	6.1	0.2	0.6	0.0	<0.1	5.4	30.0	<0.1	146	1	79	<0.1	0.2	<0.1	6.2	3
CM6	5.9	0.0	0.1	0.0	<0.1	0.9	6.1	<0.1	27	<1	12	<0.1	<0.1	<0.1	1.1	1
CM7	5.9	0.4	0.6	0.1	<0.1	10.6	138.1	<0.1	170	1	102	<0.1	<0.1	<0.1	5.2	6
CM8	5.9	0.2	0.5	<0.1	<0.1	6.1	107.9	<0.1	103	1	98	<0.1	0.1	<0.1	5.6	4
CM9	5.9	0.1	0.7	<0.1	<0.1	6.2	73.8	<0.1	62	<1	37	<0.1	<0.1	<0.1	11.3	4
CM10	5.7	0.4	1.2	<0.1	<0.1	14.3	174.0	<0.1	235	2	145	<0.1	0.1	<0.1	12.2	8
CM11	6.1	1.4	1.8	0.1	0.1	46.7	252.8	<0.1	1377	5	484	<0.1	0.1	<0.1	13.4	19
CM12	6.0	0.3	0.3	<0.1	<0.1	7.0	85.4	<0.1	135	<1	72	<0.1	<0.1	<0.1	4.0	3
CM13	5.7	0.9	1.4	0.1	0.1	31.8	295.8	<0.1	821	3	330	<0.1	0.1	<0.1	12.1	15
CM14	5.6	0.2	0.3	<0.1	<0.1	5.1	50.8	<0.1	100	1	56	<0.1	<0.1	<0.1	3.2	2
CM15	5.9	1.1	1.3	0.1	0.1	34.1	168.7	<0.1	838	3	317	<0.1	<0.1	<0.1	10.2	11
CM16	5.8	0.5	0.7	<0.1	<0.1	19.2	131.9	<0.1	464	1	176	<0.1	0.1	<0.1	7.7	6
CM17	5.9	0.9	1.3	0.1	0.1	39.3	336.7	<0.1	866	2	340	<0.1	0.1	<0.1	11.8	14
CM18	5.8	0.5	0.8	<0.1	<0.1	9.3	123.0	<0.1	151	1	135	<0.1	0.1	<0.1	7.6	5
CM19	5.4	0.1	0.1	<0.1	<0.1	1.8	21.6	<0.1	13	1	13	<0.1	<0.1	<0.1	6.3	2
CM20	5.6	0.1	0.1	<0.1	<0.1	0.6	9.0	<0.1	4	1	4.5	<0.1	<0.1	<0.1	3.3	1
CM21	5.5	0.2	0.6	<0.1	<0.1	3.2	61.2	<0.1	19	3	28	<0.1	0.2	<0.1	23.8	5
CM22	5.1	0.2	0.9	<0.1	<0.1	9.0	87.0	<0.1	127	1	48	<0.1	<0.1	<0.1	12.5	6
CM23	5.0	0.3	1.0	<0.1	<0.1	12.4	116.6	<0.1	296	1	75	<0.1	<0.1	<0.1	12.2	7
CM24	5.4	0.3	1.1	<0.1	<0.1	13.6	125.6	<0.1	214	1	82	<0.1	0.1	<0.1	16.1	8
CM25	5.5	0.3	0.8	<0.1	<0.1	10.3	114.8	<0.1	177	<1	69	<0.1	0.1	<0.1	14.6	7
CM26	5.5	0.4	1.1	<0.1	<0.1	15.0	124.4	<0.1	232	1	89	<0.1	<0.1	<0.1	16.4	9

3

4 Footnotes – The samples were analysed for their concentrations of chemical elements in size fractions of less than 2 mm. The concentrations used in
5 risk analysis were calculated from fractions of less than 20 mm following risk analysis guidelines (Ministero dell'ambiente e della tutela del
6 territorio, 2006, APAT, 2008).

7 3.2 Water sample analysis

8

9 The results of the analyses performed on water samples are shown in Table 4. It was observed that
10 the temperatures of the water samples varied from 7.0°C to 15.6°C, which can be attributed to the
11 different locations of the water samples and the variations in ambient temperature, as the sampling
12 was conducted in two different months. The water samples were found to have pH values in the
13 alkaline range, possibly due to the presence of mafic silicate mineral phases such as olivine,
14 pyroxene and anorthitic plagioclase, which would cause the mine waters to be neutralized. A similar
15 phenomenon was observed at a nickel sulphide mine hosted in mafic intrusions in Ballangen,
16 Nordland, Norway (Banks et al. 1997). The water samples had total alkalinities from 10 to 40 mg/l
17 of CaCO₃ equivalent, whereas carbonate alkalinity was almost absent.

18

19 In terms of the presence of metals, contamination was present only due to the presence of Ni. Some
20 water samples also showed concentrations greater than the detection limits but less than the
21 maximum allowable concentrations of Al, Cu, Zn, Co, and total Cr, both in groundwater and in
22 surface water. Free cyanides were never detected. The absence of significant contamination might
23 be due to pH values in the alkaline range that prevented the dissolution of metals.

24

25 The nickel concentration was the only parameter that exceeded the permissible limit of 20 µg/l
26 (Ministero dell'ambiente e della tutela del territorio, 2006). The concentrations ranged between
27 values less than the detection limits (1.0 µg/l) and 512 µg/l; 9 samples (5 in GW and 4 in SW)
28 showed concentrations of <20 µg/l, and 8 samples (6 in GW and 2 in SW) showed levels of >20
29 µg/l.

30

31 More specifically, the springs on the south of the Strona River have Ni concentrations that are lower
32 than the detection limit. In the north of the valley, the mine tunnels show concentrations that
33 generally exceed 20 µg/l and are as high as 304 µg/l. High Ni concentrations are also present
34 downstream of the waste distribution area. In SW, Ni concentrations of much less than 20 µg/l were
35 detected in the stream that crosses Campello Monti and in the Strona River. However, one of the
36 streams that crosses the mine area was found to have Ni levels as high as 512 µg/l at the bottom of
37 the mountainside, after having crossed the entire mine area.

38

39 Nickel is present in considerable concentrations because the mines were used for Ni exploitation,
40 and the rock waste dumps were found to have very high concentrations of Ni in the fine fraction.
41 Moreover, the walls of tunnels might still have Ni in exposed surfaces, which can then be dissolved
42 in groundwater.

43

44 Table 4. Physical-chemical properties of the water samples.

Sample	Date*	type	pH	temp °C	EC µS/cm	Total alkalinity mg/l CaCO ₃	Ca ²⁺ mg/l	Mg ²⁺ mg/l	Na ⁺ mg/l	K ⁺ mg/l	Cl ⁻ mg/l	F ⁻ mg/l	NO ₂ ⁻ mg/l	SO ₄ ²⁻ mg/l	NO ₃ ⁻ mg/l	Ni µg/l
9	13/07	SW	7.50	14.9	34.0	20	7.6	0.6	0.6	<0.5	0.4	<0.1	<0.05	3.1	0.9	<1.0
12	13/07	GW	7.20	11.1	35.8	10	4.9	1.1	<0.5	<0.5	0.2	<0.1	<0.05	3.5	5.4	<1.0
13	13/07	GW	7.09	13.3	37.4	10	5.3	1.1	0.5	<0.5	0.2	<0.1	<0.05	4.1	3.4	<1.0
14	13/07	GW	7.50	9.6	16.7	10	4.8	0.3	0.7	<0.5	0.2	<0.1	<0.05	2.9	1.1	<1.0
16	13/07	SW	7.38	14.5	40.7	17	5.8	0.7	0.5	<0.5	0.2	<0.1	<0.05	2.5	0.8	4.1
17	13/07	GW	8.14	10.8	50.8	20	5.0	3.7	<0.5	<0.5	0.5	<0.1	<0.05	7.1	4.2	77.4
18	13/07	SW	7.60	11.0	35.3	20	7.0	0.7	0.5	<0.5	0.2	<0.1	<0.05	2.8	1.0	1.0
19	13/07	SW	7.39	11.2	75.8	30	10.2	3.8	0.6	<0.5	0.3	<0.1	<0.05	13.5	3.1	512.0
20	13/07	GW	7.38	15.6	56.7	17	4.8	4.4	<0.5	<0.5	0.2	<0.1	<0.05	9.7	1.0	57.8
21	13/07	GW	7.46	11.0	68.5	20	6.3	5.0	<0.5	<0.5	0.2	<0.1	<0.05	17.9	2.1	266.0
23	13/07	SW	7.35	12.3	37.0	18	6.3	1.4	<0.5	<0.5	0.1	<0.1	<0.05	3.8	1.5	3.2
25	13/07	GW	7.63	13.5	14.3	10	4.2	0.5	<0.5	<0.5	0.2	<0.1	<0.05	2.2	0.2	<1.0
26	19/10	GW	7.93	8.0	127.4	40	10.0	12.2	<0.5	<0.5	0.4	<0.1	<0.05	27.8	0.6	12.7
27	19/10	SW	7.80	8.5	54.7	20	5.1	4.8	<0.5	<0.5	0.3	<0.1	<0.05	13.2	0.9	97.3
28	19/10	GW	7.69	7.0	121.7	50	14.2	12.1	0.7	0.6	0.6	<0.1	<0.05	26.4	1.4	304.0
29	19/10	GW	8.10	7.4	77.9	40	6.1	9.8	<0.5	<0.5	0.3	<0.1	<0.05	14.1	1.0	47.6
30	19/10	GW	8.10	7.8	68.7	40	11.0	4.6	0.8	<0.5	0.5	<0.1	<0.05	7.8	0.9	31.9

45

46 Footnotes- (The * sign in the table indicates that the sample was collected in 2016).

47 *3.3 Risk Analysis*

48

49 The risk analysis results are shown in Table 5 for the current situation at Campello Monti and the
50 nearest plain. The following results were obtained.

51

52 Carcinogenic risk was defined as the incremental probability of getting cancer over a lifetime and
53 calculated as the lifetime intake multiplied by a slope factor for individual chemical carcinogens.
54 The potential risks for human receptors were calculated in terms of the Risk Index (RI) for cancer-
55 causing elements due to exposure to extractive waste using the procedure described in 2.4.3. There
56 was a presence of carcinogenic risk due to arsenic in Campello Monti, which had an RI equal to
57 2.73×10^{-6} . In the nearest plain to Campello Monti, there was no change in carcinogenic risk due to
58 arsenic. This can be attributed to the fact that there were no major changes in the exposure
59 parameters for the two sites. Risk due to ingestion and dermal contact was found to be an important
60 contributor to overall carcinogenic risk.

61

62 The potential risks for human receptors were calculated in terms of Hazard Quotient (HQ) for non-
63 carcinogenic elements. The total organ HI was calculated by summing over all contaminants,
64 assuming the additive effects of multiple chemicals (U.S. EPA, 1989). The Hazard Index was found
65 to be greater than 1 for both Campello Monti and the nearest plain. The major risk contributors were
66 Ni and Co. This shows that the area is not free from risk to human beings due to the presence of
67 EW. This can be considered as an input should future activity for reuse or to recover the extractive
68 waste to be undertaken at this site.

69

70 The groundwater was at risk due to the presence of Ni in Campello Monti, which was also observed
71 from the water analyses. For the second case, the risk to groundwater due to the presence of Ni
72 increased, and the groundwater was also observed to be at risk due to the leaching of Co. This is
73 because, 1) for the case of filling activities in the plain, the depth of the deep soil layer in the plain
74 exceeded that in the Campello Monti and the 2) geological conditions and climate of the Campello
75 Monti and plain area differ, which were considered when entering site characteristics into risk
76 equations. It should be noted that these results refer to the worst condition, i.e., to a Point of
77 Compliance (POC) positioned directly in the groundwater under the contamination source (i.e.,
78 POC = 0). A displacement in the POC position may lead to further attenuations in the
79 concentrations of groundwater contaminants as a consequence of transport and dispersion
80 phenomena.

81

82 The results obtained for both cases show that before pursuing any reuse method that includes
83 transporting rock waste, it can be a good practice to perform a preliminary risk assessment,
84 assuming the same properties as the original waste but with changes in the geology, hydrogeology,
85 hydrography and climate of the area. This might prevent any public unrest over the transportation of
86 extractive waste and additional costs to preserve the environment in the new location. Consideration
87 of these factors may lead to more viable and sustainable solutions for EW management.

88 Table 5. Human health risks and risks to groundwater in Campello Monti and the nearest plain.

		Superficial layer Campello Monti		Superficial layer in the nearest plain		Campello Monti		Nearest plain	
		Human health risk		Human health risk		Superficial layer	Deep layer	Superficial layer	Deep layer
Contaminant	CRS [mg/kg. d.m.]	Carcinogenic Risk (RI)	Hazard Quotient (HQ)	Carcinogenic Risk (RI)	Hazard Quotient (HQ)	Risk to groundwater (RGW)	Risk to groundwater (RGW)	Risk to groundwater (RGW)	Risk to groundwater (RGW)
Antimony	1.26	---	0.04	---	0.04	0.05	0.10	0.08	0.62
Arsenic	1.06	2.73×10^{-6}	0.05	2.73×10^{-6}	0.05	0.03	0.07	0.05	0.41
Beryllium	0.05	3.28×10^{-11}	3.51×10^{-4}	2.42×10^{-12}	3.47×10^{-4}	1.6×10^{-4}	3.2×10^{-4}	2.4×10^{-4}	1.87×10^{-3}
Cadmium	0.03	1.74×10^{-11}	9.62×10^{-4}	1.28×10^{-12}	9.57×10^{-4}	9.46×10^{-4}	1.90×10^{-3}	1.43×10^{-3}	0.01
Cobalt	18.90	---	0.8	---	0.8	0.1	0.2	0.1	0.9
Chromium (total)	160.00	---	3.05×10^{-3}	---	1.53×10^{-3}	1.7×10^{-5}	3.4×10^{-5}	2.56×10^{-5}	1.99×10^{-4}
Nickel	427.00	2.87×10^{-8}	0.3	2.12×10^{-9}	0.3	3.12	6.24	4.72	36.71
Lead	2.60	---	9.73×10^{-3}	---	9.73×10^{-3}	0.003	0.005	0.004	0.032
Copper	173.00	---	0.06	---	0.06	0.05	0.09	0.07	0.55
Selenium	0.02	---	5.26×10^{-5}	---	5.26×10^{-5}	0.004	0.006	0.006	0.044
Thallium	0.01	---	0.03	---	0.03	0.002	0.002	0.002	0.014
Vanadium	1.25	---	0.04	---	0.04	NA	NA	NA	NA
Zinc	9.98	---	4.37×10^{-4}	---	4.37×10^{-4}	5.1×10^{-4}	0.001	7.71×10^{-4}	0.006

90 3.4 Sensitivity analysis

91

92 To evaluate the potential impacts resulting from a wide range of site conditions, a Monte Carlo
93 analysis was performed with 5000 simulations and randomly varying the input parameters within
94 the ranges reported in Table 2. The source concentration values were used for the concentrations of
95 Sb, As, Ni, Co, Cu, and Pb. Fig. 7. displays the cumulative probability distributions of the simulated
96 results and their associated sensitivity analyses for cancer risk, human health risk due to chronic
97 exposure, and risk to groundwater, for both Campello Monti and the nearest plain.

98

99 For the cancer risk at Campello Monti, the 95 % upper-bound estimate was 19.4×10^{-6} . The
100 sensitivity analysis showed that body weight (BW) and the factor of exposure to the contaminant
101 for dermal contact (AF) made the greatest contributions to the variance of the cancer risk estimates,
102 whereas surface area (SA) and exposure frequency (EF) accounted for another 7.8 % and 2.7 %,
103 respectively. For the cancer risk at the nearest plain, the 95 % upper-bound estimate was 19.8×10^{-6} .
104 The sensitivity analysis showed that the parameters contributing to the variance in cancer
105 remained the same but with small percent differences when compared to those of Campello Monti.

106

107 The 95 % upper bound estimate for the total organ HI value at Campello Monti was found to be
108 0.72. The results showed that for 99 % of the cases, the HI value was less than 1. The sensitivity
109 analysis showed that body weight (BW) and ingestion rate (IR) made the greatest contributions to
110 the variances in the HI values, and exposure frequency (EF) accounted for another 3.2 %. The 95 %
111 upper bound estimate for the total organ HI value at the nearest plain was found to be 0.72.

112

113 The 95 % upper bound estimate for total risk to groundwater at Campello Monti was found to be
114 13.54. The 95 % upper bound estimate for total risk to groundwater at the nearest plain to Campello
115 Monti was found to be 59.6. The sensitivity analysis showed that precipitation (P) contributed most
116 to the variance of risk to groundwater due to the presence of contaminants in the superficial and
117 deep soil layers.


118

119 The presence of risk to human health and groundwater in the plain nearest Campello Monti shows
120 that efforts should be made to reduce them during application of reuse methods. To reduce the
121 probability of groundwater contamination due to the presence of chemical elements in extractive
122 waste, a low- to no-permeability layer can be placed between the ground surface and the EW. This
123 can lead to reductions in EW contaminants leaching into groundwater.


124

125 It should be noted that ingestion was found to be the pathway that contributed most to carcinogenic
126 and non-carcinogenic risks. Therefore, during application of reuse methods, efforts should be made
127 to reduce residents' exposure through ingestion pathways. This can be undertaken by installing
128 covers and/or raising awareness among the general public.


129
130

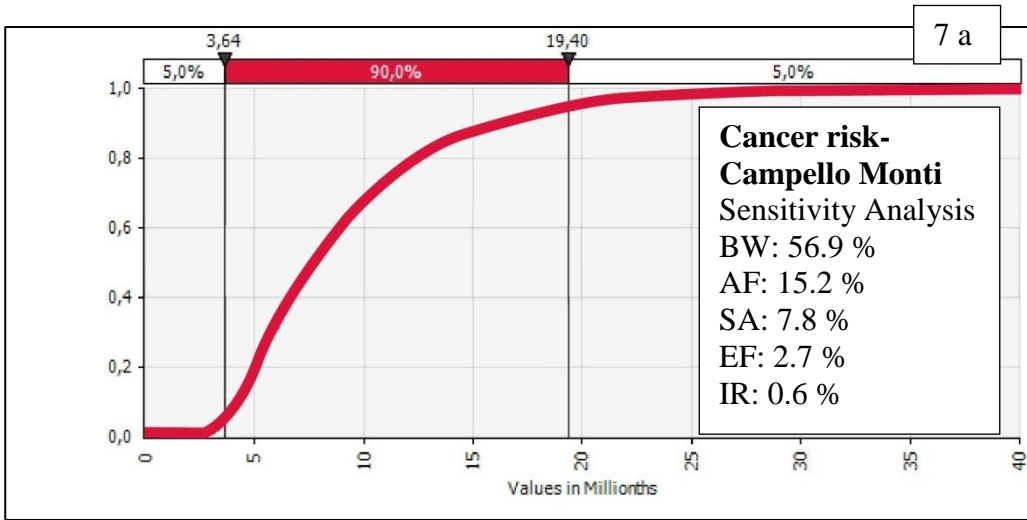


131
132

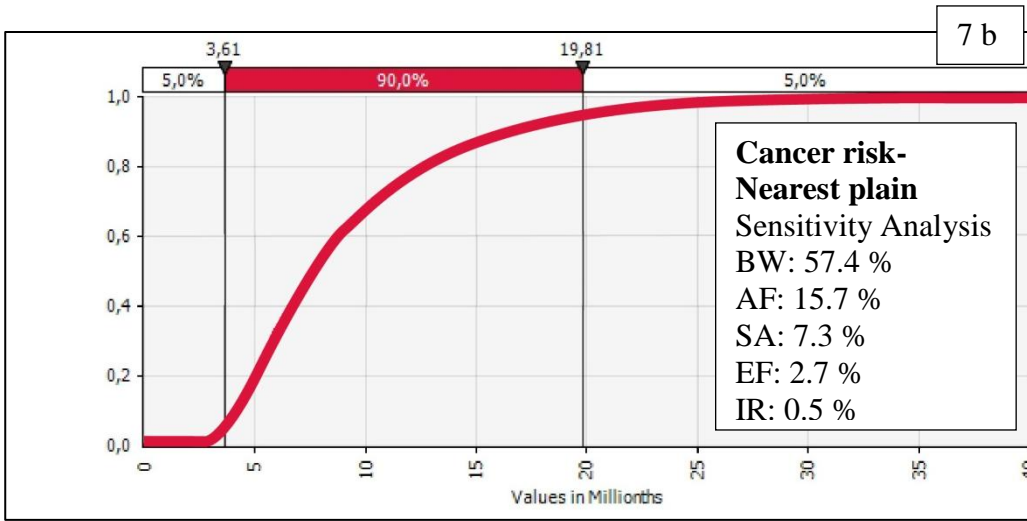


133

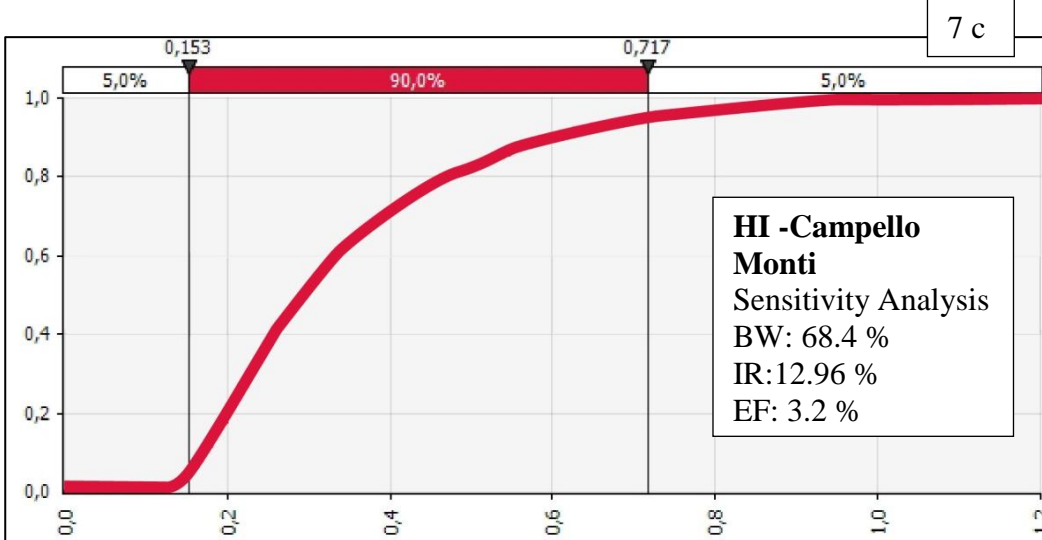


134
135

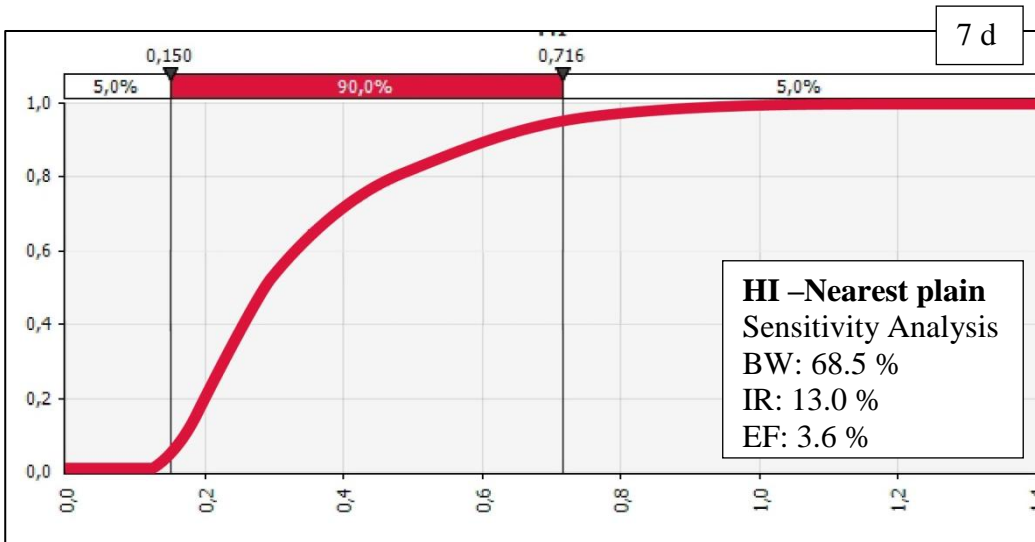

136
137

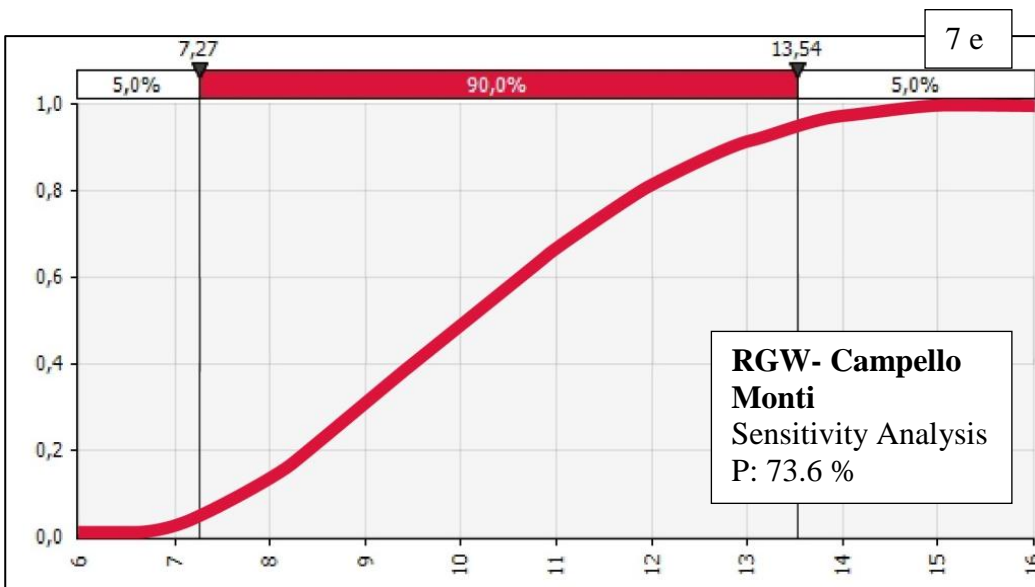

138
139

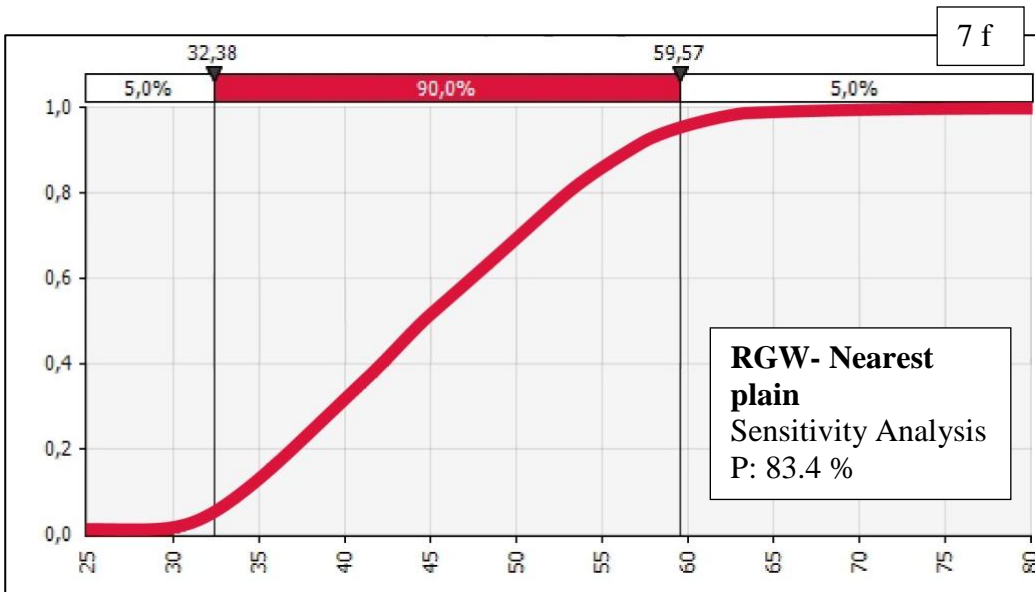

140 **Fig. 7.** Potential risks to human health and groundwater expressed in terms of cumulative frequency
141 calculated through a Monte Carlo analysis.
142 7 a) Carcinogenic risk at Campello Monti expressed as cumulative frequency of RI.

- 143 7 b) Carcinogenic risk at the nearest plain to Campello Monti expressed as cumulative frequency of
144 RI.
145 7 c) Human health risk at Campello Monti expressed as cumulative frequency of HI.
146 7 d) Human health risk at the nearest plain to Campello Monti expressed as cumulative frequency of
147 HI.
148 7 e) Risk to groundwater at Campello Monti expressed as cumulative frequency of RGW.
149 7 f) Risk to groundwater at the nearest plain to Campello Monti expressed as cumulative frequency
150 of RGW.

151

152 **4. Conclusions**

153

154 Risk analysis studies can be used to determine risks in existing situations and future reuse scenarios
155 and thus can aid in determining the usability of extractive waste. To address the human health risk
156 to inhabitants via soil ingestion, dust inhalation and dermal contact, elemental analyses of waste
157 samples were performed.

158

159 This study has provided new data on the heavy metal concentrations of EW in the area. The EW
160 samples were found to be rich in Ni, with average concentrations of up to 277 mg/kg. As, Cr and Cu
161 were also significantly present, with average concentrations of 0.8, 119 and 120 mg/kg,
162 respectively. The water sample analysis aided in determining the hydrogeochemical characteristics
163 of the area. The water samples were found to be contaminated by Ni.

164

165 The study focused on comparisons of human health risk and risk to groundwater due to extractive
166 waste at Campello Monti, hypothesizing the transportation of EW to the nearest plain for land
167 rehabilitation. The risk analysis for the current situation at Campello Monti showed a carcinogenic
168 risk of 2.73×10^{-6} due to the presence of As. The same waste poses risks to groundwater due to Ni,
169 As, Sb, and Pb. The risk analysis for the nearest plain pointed towards human health risks. Risks to
170 groundwater were due to the presence of only Co and Ni, given the changes in the geological
171 features of the site.

172

173 The sensitivity and uncertainty analyses for the elements of major concern were performed using
174 Monte Carlo analysis. The analysis used the concentrations of Ni, Co, As, Sb, Pb, Cu as the source
175 concentrations. The sensitivity analysis showed that body weight was a major contributor to the
176 variance in human health risk. Moreover, precipitation made the greatest contribution to the
177 variance in risk to groundwater due to the presence of contaminants in the superficial and deep soil
178 layers.

179

180 The risk analysis procedure pointed towards unacceptable risks due to extractive waste both in the
181 current situation and after transporting waste to the nearest plain. Thus, the future use of the
182 material should consider mitigation activities to reduce the risks to acceptable levels.

183

184 The quality of the study could be improved in cases wherein different scenarios of reuse conditions
185 are known, on which basis there will be changes in physical and chemical properties of the waste.
186 Nevertheless, the current study was successful in providing a methodology that included both the
187 current scenario and the simplest reuse scenario for risk assessment. These risk evaluations for
188 abandoned mine sites may be used as a basis of further research and to determine suitable pathways
189 for the management of EW. This study points towards the crucial issue of coupling risk assessment
190 studies with reuse. All activities should be assessed for the current problems they pose to the
191 environment and for future potential uses of the contamination source. Projects undertaken to
192 increase sustainability at sites should seek to balance and maximize the overall environmental,

193 social and economic benefits while removing or reducing impacts to soils, groundwater, and surface
194 water to ensure that human health and environmental health are protected.

195

196 *Acknowledgements*

197

198 This work was completed as part of the REMEDIATE (Improved decision-making in contaminated
199 land site investigation and risk assessment) Marie-Curie Innovation Training Network. The network
200 has received funding from the European Union's Horizon 2020 Programme for research,
201 technological development and demonstration under the grant agreement n. 643087. REMEDIATE
202 is coordinated by the QUESTOR Centre at Queen's University Belfast.
203 <http://questor.qub.ac.uk/REMEDiate/>.

204

205 *References*

206

207 Akbulut, H., Gürer, C., 2007. Use of aggregates produced from marble quarry waste in asphalt
208 pavements. *Build. Env.* 42, 1921-1930.

209

210 APAT, 2008 - Agenzia per la Protezione dell'Ambiente e per i Servizi Tecnici, Italy,. Criteri
211 metodologici per l'applicazione dell'analisi assoluta di rischio ai siti contaminati
212 (Methodological criteria for the application of the analysis absolute risk analysis to the
213 contaminated sites). (available at <http://www.isprambiente.gov.it/files/temi/siti-contaminati-02marzo08.pdf> accessed on 14.09.2017).

214

215
216 ASTM, E1739-95e1, ASTM International, West Conshohocken, PA, 1995. Standard guide for
217 Risk Based Corrective action applied at petroleum release sites.

218

219 ASTM, E2081-00, ASTM International, West Conshohocken, PA, 2015. Standard guide for
220 Risk Based Corrective Action.

221

222 Balint, R., Said-Pullicino, D., Ajmone-Marsan, F., 2015. Copper dynamics under alternating
223 redox conditions is influenced by soil properties and contamination source. *J. Contam. Hydrol.*
224 173, 83-91.

225

226 Balint, R., Nechifor, G., Ajmone-Marsan, F., 2014. Leaching potential of heavy metals from
227 contaminated soils under anoxia. *Environ. Sci. : Processes Impacts.* 16, 211-219.

228

229 Banks, D., Younger, P.L., Arenesen, R., Iversen, E.R. and Banks, S.B. 1997. Mine-water
230 chemistry :the good, the bad and the ugly. *Environ. Geol.* 32, 3.

231

232 Bea, F., Montero, P., 1999. Behaviour of accessory phases and redistribution of Zr, REE, Y, Th
233 and U during metamorphism and partial melting of metapelites in the lower crust: An example
234 from the Kinzigite Formation of Ivrea-Verbano, NW Italy. *Geochim. Cosmochim. Acta*, 63,
235 1133–1153.

236

237 Béjaoui, I., Kolsi-Benzina, N., Didler, V.S., Munoz, M., 2016. Health risk assessment in
238 calcareous agricultural soils contaminated by metallic mining activity under mediterranean
239 climate. *CSAWAC* 44, 1261-1427.

240

241 Binici, H., Shah, T., Aksogan, O., Kaplan, H., 2008. Durability of concrete made with granite
242 and marble as recycle aggregates. *J. Mater. Process. Technol.* 208, 299-308.

243

244 Blengini, G.A., Nuss, P., Dewulf, J., Nita, V., Talens Peirò, L., Vidal-Legaz, B., Latunussa, C.,
245 Mancini L., Blagoeva, B., Pennington, D., Pellegrini, M., Van Maercke, A., Solar, S., Grohol,
246 M., Ciupagea, C., 2017. EU methodology for critical raw materials assessment: Policy needs
247 and proposed solutions for incremental improvements. *Resources Policy*. 53, 12–19.
248

249 Careddu, N., Siotto, G., Siotto, R., Tilocca, G., 2013. From landfill to water, land and life: the
250 creation of the Centre for stone materials aimed at secondary processing. *Resources Policy*. 38
251 (2013) 258–265.
252

253 Castilhos, Z.C., Rodrigues-Filho, S., Rodrigues, A.P.C., Villas-Bôas, R.C., Siegel, S., Veiga,
254 M.M., and Beinhoff, C., 2006. Mercury contamination in fish from gold mining areas in
255 Indonesia and human health risk assessment. *Sci. Total Environ*. 368, 320–325.
256

257 Coulomb, R., Dietz, S., Godunova, M., Bligaard Nielsen, T., 2015. *Critical Minerals Today and*
258 *in 2030 (OECD Environment Working Papers)*. Organisation for Economic Cooperation and
259 Development, Paris.
260

261 Daniel, D.L., 2015. A Case Study Perspective on Working with ProUCL and a State
262 Environmental Agency in Determining Background Threshold Values. *Int. J. Environ. Res.*
263 *Public. Health*. 12, 12905–12923.
264

265 Danielsen, S. W., Alnæs, L., Azrague, K., Suleng, J., 2017. Handling of quarry waste from
266 schist production at Oppdal, Norway. *Geophysical Research Abstracts Vol. 19, EGU2017-7749-*
267 *1*.
268

269 Danielsen S. W., Kuznetsova E., 2015. Resource management and a Best available concept for
270 aggregate sustainability. In: Príkryl, R., Tořrořk, A. , Gómez-Heras, M., Miskovsky, K. &
271 Theodoridou, M. (eds) *Sustainable Use of Traditional Geomaterials in Construction Practice*.
272 Geological Society, London, Special Publications, 416.
273

274 Dino, G.A., Danielsen, S.V., Chiappino, C., Engelsen, C.J., 2017.b. Recycling of rock materials
275 as part of sustainable aggregate production in Norway and Italy. *Q. J. Eng. Geol.*
276 *Hydrogeol. Thematic set: Construction Geomaterials*. 50: 412-416.
277

278 Dino, G.A., Marian, M., 2015. Treatment and exploitation of waste coming from quarry
279 industries: reuse as aggregate. In: G. Lollino et al. (eds.), *Engineering Geology for Society and*
280 *Territory*. Ed. Springer, 5: 89-92.
281

282 Dino, G.A., Rossetti, P., Biglia, G., Sapino, M.L., Di Mauro, F., Särkkä, H., Coulon, F., Gomes,
283 D., Parejo-Bravo, L., Zapata Aranda, P., Lorenzo Lopez, A., Lopez, J., Garamvölgyi, E.;
284 Stojanovic S., Pizza A., De La Feld M., 2017.a. SMART GROUND project: a new approach to
285 data accessibility and collection for Raw Materials and Secondary Raw Materials in Europe.
286 *Environ. Eng. Manag. J.* 16 (8), pp. 11 (in press).
287

288 Dino, G.A., Rossetti, P., Biglia, G., Coulon, F., Gomes, D., Wagland, S., Luste, S., Särkkä, H.,
289 Ver, C., Delafeld, M., 2016. SMART GROUND Project: SMART Data Collection and
290 Integration Platform to Enhance Availability and Accessibility of Data and Information in the
291 EU Territory on Secondary Raw Materials. *Energy Procedia*. 97, 15–22.
292

293 Felekoglu, B., 2007. Utilisation of high volumes of limestone quarry wastes in concrete industry
294 (self-compacting concrete case). *Resour. Conserv. Recycl.* 51, 770–791.
295

296 Floreani, A., Zorzet, A., 2016. Stima dell' esposizione e del calcolo del rischio inalatorio
297 nell'analisi di rischio sito specifica: confronto fra diverse linee guida e software.(State of
298 exposure and calculation of inhalation risk in site specific risk analysis: comparison about
299 different guides and software.) *Ingegneria dell' Ambiente* .3.
300

301 Garuti, G., Bea, F., Zaccarini, F. & Montero, P., 2001. Age, geochemistry and petrogenesis of
302 the ultramafic pipes in the Ivrea Zone, NW Italy. *J. Pterol.* 42, 433–457.
303

304 Gencel, O., Ozel, C., Koksall, F., Erdogmus, E., Martínez-Barrera, G., Brostow, W., 2012.
305 Properties of concrete paving blocks made with waste marble. *J. Clean Prod.* 21, 62-70.
306

307 Gerba, C. P., 2009. Risk Assessment, In *Environmental Microbiology* (pp. 575-587). Elsevier
308 Inc.
309

310 Hebhouh, H., Aoun, H, Belachia, M., Houare, H.and Ghorbel, E., 2011. Use of waste marble
311 aggregates in concrete. *Constr. Build. Mater.* 25, 1167-1171.
312

313 Li, X., and Thornton, I., 2001. Chemical partitioning of trace and major elements in soils
314 contaminated by mining and smelting activities. *Appl. Geochem.* 16, 1693–1706.
315

316 Li, Z., Ma, Z., van der Kuijp, T.J., Yuan, Z., and Huang, L., 2014. A review of soil heavy metal
317 pollution from mines in China: Pollution and health risk assessment. *Sci. Total Environ.* 468–
318 469, 843–853.
319

320 Ličina, V., Akšić, M.F., Tomić, Z., Trajković, I., Antić Mladenović, S., Marjanović, M., and
321 Rinklebe, J. 2017. Bioassessment of heavy metals in the surface soil layer of an opencast mine
322 aimed for its rehabilitation. *J. Environ. Manage.* 186. 240–252.
323

324 Luodes, H., Kauppila, P.M., Luodes, N., Aatos, S., Kallioinen, J., Luukkanen, S., Aalto, J.,
325 2012. Characteristics and the environmental acceptability of the natural stone quarrying waste
326 rocks. *Bull. Eng. Geol. Environ.* 71, 257-261.
327

328 Ministero dell'ambiente e della tutela del territorio,2006. Gazzetta Ufficiale n. 88 of 14 Aprile
329 2006 Decreto Legislativo 3 aprile 2006, n. 152"Norme in materia ambientale." (Norms
330 concerning the environment.) (http://efficienzaenergetica.acs.enea.it/doc/dlgs_3-4-06_completo.pdf accessed 14.09.2017)
331
332

333 Rodríguez, L., Ruiz, E., Alonso-Azcárate, J., and Rincón, J., 2009. Heavy metal distribution and
334 chemical speciation in tailings and soils around a Pb–Zn mine in Spain. *J. Environ. Manage.* 90,
335 1106–1116.
336

337 Rossetti, P., Dino, G.A., Biglia, G., Costa, E., 2017. Characterization of secondary raw
338 materials from mine waste: a case study from the Campello Monti Ni±Cu±Co±PGE mining site
339 (Western Alps, Italy). *Proceedings Sardinia 2017 / Sixteenth International Waste Management
340 and Landfill Symposium/ 2 - 6 October 2017S. Margherita di Pula, Cagliari, Italy. (in press)*
341

342 U.S. EPA, Washington, DC, 1989. Risk assessment guidance for Superfund (RAGS), Vol. I,
343 Human health evaluation manual (Part A)—Interim final. EPA/540/1-89/002.
344
345 U.S. EPA, Washington, DC. 1997. Guiding principles for Monte Carlo analysis.
346
347 U.S. EPA, Washington, DC, 2009. Risk assessment guidance for superfund, in Part A: Human
348 Health Evaluation Manual; Part E, Supplemental Guidance for Dermal Risk Assessment; Part F,
349 Supplemental Guidance for Inhalation Risk Assessment.
350
351 U.S. EPA, Washington, DC, 2011. Exposure Factors Handbook 2011 Edition (Final).
352
353 Väänänen, K., Kauppila, T., Mäkinen, J., Leppänen, M.T., Lyytikäinen, M., and Akkanen, J.,
354 2016. Ecological risk assessment of boreal sediments affected by metal mining: Metal
355 geochemistry, seasonality, and comparison of several risk assessment methods. *Integr. Environ.*
356 *Assess. Manag.* 12, 759–771.
357
358 Vidal-Legaz, B., Mancini, L., Blengini, G., Pavel, C., Marmier, A., Blagoeva, D., Latunussa, C.,
359 Nuss, P., Dewulf, J., Nita, V., Kayam, Y., Manfredi, S., Magyar, A., Dias, P., Baranzelli, C.,
360 Tzimas, E., Pennington, D., 2016. EU Raw Materials Scoreboard 1st ed. Publications Office of
361 the European Union, Luxembourg. G.A.
362
363 Yuan, C., Shi, J., He, B., Liu, J., Liang, L., and Jiang, G., 2004. Speciation of heavy metals in
364 marine sediments from the East China Sea by ICP-MS with sequential extraction. *Environ. Int.*
365 30, 769–783.
366