

Indicator modelling and interactive visualisation for urban sustainability assessment

Ruth E. Falconer
John P. Isaacs
Daniel Gilmour
David J. Blackwood

This is the accepted manuscript of the book chapter:

Falconer, RE, Isaacs, JP, Gilmour, D & Blackwood, DJ 2018, Indicator modelling and interactive visualisation for urban sustainability assessment. In IRMA (ed.), *E-planning and collaboration: concepts, methodologies, tools, and applications*. Vol. 1, IGI Global Publishing, Hershey, PA, pp. 486-508.

This has been published in final form at:

<https://doi.org/10.4018/978-1-5225-5646-6.ch023>

Published version ©2018, IGI Global Publishing

INDICATOR MODELLING AND INTERACTIVE VISUALISATION FOR URBAN SUSTAINABILITY ASSESSMENT

*Ruth E. Falconer, John P. Isaacs, Daniel Gilmour and David J. Blackwood,
School of Science, Engineering & Technology, University of Abertay Dundee, DDI 1HG,
United Kingdom. r.falconer@abertay.ac.uk*

ABSTRACT

This chapter presents a novel framework for the integration of the principles of sustainable development within urban design and redevelopment processes. The framework recognises that decision making for sustainable urban planning is a challenging process: requiring an understanding of the complex interactions amongst environmental, economic and social issues. A considerable volume of research has been undertaken into the component parts of this complex problem and a number of tool kits and methodologies have emerged to put sustainability into practice. However there is still a lack of methodologies and toolkits that would support non experts to become more involved in the urban design process. Towards this we have developed an indicator modelling and visualisation tool (Sustainable City Visualization Tool (S-CITY VT)) which comprises 1) indicator selection (these provide the basis for assessment and monitoring of sustainability) according to scale and development 2) modelling techniques that provide indicator values, as not all of the indicators can be measured, and allows spatio-temporal prediction of indicators 3) Interactive 3D virtual world where visualisation techniques are used to present indicator information overlain the virtual world to facilitate effective communication with a wide range of stakeholders. The sustainability modelling and 3D visualisations are shown to have the potential to enhance community engagement within the planning process thus enhancing public acceptance and participation within the urban or rural development project. The framework can also be applied to smaller scale building design projects.

Keywords: Visualisation, Simulation, Analytical Network Protocol, Urban Sustainability, Public Engagement

INTRODUCTION

Sustainable development applied to urban design is an action plan set out to achieve urban sustainability and due to its multi-faceted nature it requires the effective engagement of a wide range of stakeholders e.g., planners, landscape architects, engineers, policy makers and wider communities, which is often a difficult task. These stakeholders will contribute at different stages of the urban planning process but it has been argued that urban planning and design must be fostered at the local level, involving local authorities, communities and local businesses, (Boyko et al., 2005).

A large number of tools, techniques, and guidance documents have been produced to support decision makers in achieving sustainable urban environments. Many approaches apply a sustainability assessment, characterized by an indicator set, which provides tangible information on whether things are getting better or worse. Examples of sustainability indicator sets include: the United Nations (UN) working list of Indicators of Sustainable

Development (ISD's) based on Agenda 21 (Rio de Janeiro 1992), water industry (Water UK, 2000), bioenergy systems (Buchholz et al., 2009) and construction indicators (CIRCA 2001). It is widely accepted that no standard set of indicators exists and indicators should be selected on a case-by-case basis (Ashley et al., 2008; Starkl and Brunner, 2004; CIRIA 2004). Although indicator sets exist there are still weaknesses in the approaches and methodologies that make use of these indicator sets (Walton et al., 2005). Walton et al., (2005) summarized the deficiencies of existing tools and methodologies for sustainable development as:

1. Lack of integrated and multidimensional frameworks that bring existing approaches together.
2. Lack of transparency and communication in the promotion of sustainability assessment amongst a wide-ranging group of stakeholders.
3. Lack of recognition of the context-specific nature of sustainability analysis.
4. Better inclusion of stakeholders in the assessment process.

The technical and cross discipline nature of sustainable development has been a barrier to widening stakeholder engagement. This is confounded by the traditional methods of data communication which is typically Geographical Information Systems (GIS). GIS tools allow geospatial analysis and multiple map overlays, and are extensively used by local authorities for communicating plans and decision making in urban planning (Drummond & French, 2008; Harris & Elmes, 1993; Stevens et al., 2007; States, 2000; Shiffer, 1998; Lodha & Verma, 2000). It has been shown that (Lowe, 2004; Lowe, 2003) non-expert stakeholders have difficulty in understanding data produced by GIS systems. This is in part due to complexity of the GIS software and that the user needs "to think like a geographic information scientist" (Clarke, 2001). GIS is still considered to be a complex, expert oriented tool (Traynor & Williams, 1995) due to its enormous functionality and analysis capabilities. Its use in decision making has made it difficult for non-expert stakeholders, especially the general public, to participate fully in planning decisions (Salter et al., 2009; Al-Kodmany, 2002).

Contrastingly the role of 3D visualization in urban planning has exploded forming an increasingly important role in decision making (Isaacs et al., 2011) and it is expected that visualisations can communicate proposals to both experts and laypersons (Downes & Lange, 2014). This has taken the form of interactive visualisations and augmented reality applications (Bishop, 2014; Cirulis & Brigmanis, 2013). Visualizations can be exploited to aid decision making and widen engagement as has been done in a number of fields where technical detail can be conveyed in an engaging manner: oil and gas industry (Evans et al., 2002), medical data visualisation (Fuchs et al., 1989) and battlefield simulations (Hix et al., 1999). These visualizations can be further enhanced to provide information on the chosen sustainability indicator set and how this varies over space and time, a visual simulation (Isaacs et al., 2013), dependent on the development characteristics. We propose that 3D visualization can be exploited for information provision in built environment, giving users views of plausible urban developments, enabling users to develop an understanding of the strengths and weaknesses associated with alternative proposals, ultimately assisting people to take more informed decisions on urban design proposal.

This chapter presents parts of an integrated framework focusing on the context-specific indicator selection, modelling and visualization of the SAVE framework (Blackwood et al., 2014) applied to Dundee waterfront. This requires the selection of appropriate indicator sets, spatio-temporal modelling of indicator set, and the innovative presentation of indicators in a virtual 3D built environment (S-City VT) using aggregation methods and visualization techniques to display the indicator values. This integrated approach alleviates the shortcomings of existing sustainability methodologies identified by Walton et al (2005) specifically addressing the need to facilitate wider stakeholder input into the planning process and an integrated approach. The reader is referred to Blackwood et al., (2014) for the complete framework which includes a complimentary sustainability enhancement component, not discussed here, which identifies opportunities to positively influence the sustainability of the development and to devise and implement appropriate activities and actions.

CASE STUDY: DUNDEE CITY WATERFRONT

The city of Dundee is located on the north bank of the river Tay Estuary on the east coast of Scotland. The City first established itself as an important commercial hub in the 16th century due to its proximity to the Baltic and North European shipping routes via the River Tay. The city has always had close ties to the river which provided it with rich transport and trade links (McCarthy, 1995). The development of the docks site continued throughout the 17th and 18th centuries but still remained comparatively small (Dundee City Council, 2001). At the beginning of the 19th century the outbreak of the Napoleonic wars brought a period of industrial expansion of the city due to its role in the jute trade and the export of canvas and hessian (McCarthy, 1995). By the 1830s “Dundee had changed from a trading port to the world centre for the jute processing industry” and the city and its port were rapidly expanding (Dundee Waterfront, 2012). Over the next 100 years, more additions to the docks were made, “moving the city further away from the waterfront” (Dundee Waterfront, 2012). The last dock was completed in 1900 and was followed by significant decline in the Jute industry, which had a major effect on the economy of the city (McCarthy, 1995).

Dundee waterfront was largely untouched until 1960 when the City Council accepted a proposal to build a road bridge connecting Dundee to the Fife coast. Major construction of the waterfront area included the filling-in of the former docks to provide a cheap land fall for the new bridge. Dundee’s central waterfront became “a 1960s highway-based solution for the Tay Road Bridge” (Scottish Executive, 2006), unattractive buildings constructed in the 1970s were to form part of a “multi-level, modernist, civic and commercial centre” which was never completed (Dundee Waterfront, 2012). These developments left the city, which had at one time been so heavily entwined with the river, completely severed from the waterfront.

Dundee City does not follow the global trend of urbanization, since the destruction of the harbour in the 1960s and 70s Dundee’s population has declined. With declining economy and population it is possible that Dundee has already become a victim of unsustainable developments. In an attempt to re-connect the city with the waterfront, Dundee City Council released the waterfront redevelopment plan. This £1 billion, 30-year project will reintegrate the city centre with the River Tay Estuary and involves the transformation of 240

ha of development land stretching 8 km along the River Tay. The area is divided into five focused zones: Riverside, Seabraes, the Central Waterfront, City Quay, and Dundee Port. The SAVE framework is applied to the Central Waterfront.

INDICATOR SELECTION

The first activity necessary for sustainability is identify a set of indicators that could provide a means of strategic monitoring of the overall sustainability of the waterfront development. It was essential that a clear understanding of the nature of the information required by stakeholders and their use of the information in the decision-making processes was attained. This ensured the appropriateness of the indicator set as a monitoring tool and also ensured that it could be fully considered by stakeholders in subsequent sustainability enhancement activities. An approach to the indicator identification and selection process was identified from a review of relevant literature (eg, Gilmour et al., 2011; Graymore et al., 2009; Kowalski et a.l, 2009; Sheppard and Meitner, 2005) and consists of three phases. **Phase 1** involved the designing of the conceptual framework and the pre-selection of Potential Benchmark Indicators from literature. **Phase 2** involved selecting and designing the indicators by a process of reduction and rationalisation to identify a more manageable number of the most appropriate indicators based on an analysis of the information needs of the stakeholders. **Phase 3** involved wider stakeholder interviews to finalise and adopt the indicators (Figure 1).

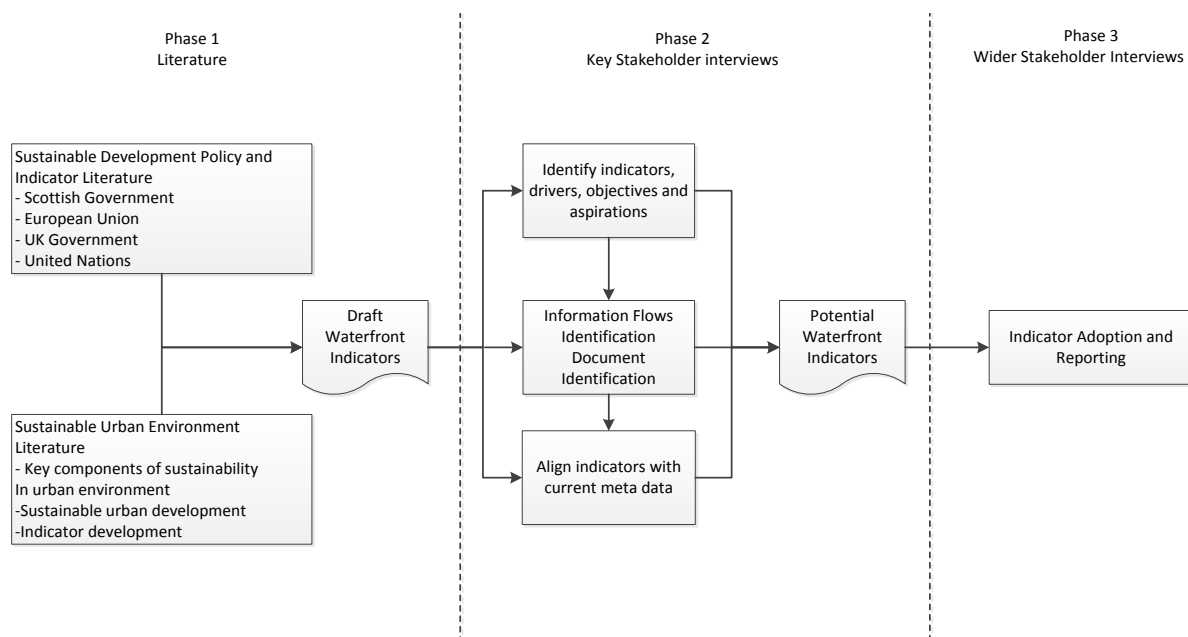


Figure 1 Process to identify context-specific sustainability indicators appropriate for Dundee Waterfront development (Gilmour et al., 2011).

Following the process described in Fig 1 Gilmour et al., 2011 identified a set of sustainability indicators (Table 1) that is used by the Waterfront Development Partners to monitor and enhance the sustainability of the waterfront development. Therefore a verified set of sustainability indicators covering the social, environmental and economic aspects of the development, with robust supporting data, are available.

Table 1 Indicator set for Dundee Waterfront after following the process described above and in Fig 1.

Category	Benchmark indicators	Definition of indicator	Units	Baseline Data	Desired direction/ Target
Economic	Demographics (City Wide)	Population retention	Population number	142, 170	UP
	Retention of skills base (City Wide)	Graduate retention rate	Graduate population	33 %	Up
	Knowledge based employment (City Wide)	Knowledge economy sector jobs	Percentage share of jobs in knowledge industries	28.8 % (09/10)	Up
	Employment (City Wide)	Employment rates	% of resident working age population	72.2%	Up
	Capacity to stimulate investment (Direct)	Total inward investment to waterfront	£ Inward investment	0	Up
	Tourism numbers (City Wide)	Tourists visiting city centre locations	Number	53,535 (-9.5%) 72,061 (+16.8%) 2008	Up
	Tourism (City Wide)	Level of tourism expenditure Dundee	Expenditure	£130.79 million	Up
	Regeneration (Direct)	Increased property value	% Increase	0	Up
	Job creation (Direct)	Number of jobs created	Number	0	UP
	Economic output (City Wide)	Economic output	GDP per capita	£17 335	Up
Environmental	Water* (Direct)	Per capita water use	l/head/day P.E.	Not yet available	Target - to match national best practice

	Noise (Direct)	Noise level impact	Number of complaints related to DCW construction	0	Down
	Energy (Direct)	Energy consumption	Energy use/CO ₂ per M2 of property	N/A	Target - to match national best practice
	Travel (City Wide)	Journeys to work and school made by public or active transport	% Journeys	15%	Up
Social	Housing provision (Direct)	Residential development	% of residential development	21%	21%
	Health & Well being (City Wide)	Positive and sustained destinations (education, higher education, employment or training)	% of school leavers in positive and sustained destinations	85% (2007)	increase
	Community (City Wide)	Neighbourhood satisfaction	% Resident satisfaction with the quality of and access to local services, facilities and environment	Quality 83% Access 93% City Wide	Up
	Active community participation (City Wide)	Informal and formal volunteering	% adults who volunteer regularly	17%	UP
	Acceptability (Direct)	Acceptability to stakeholders	%	96%	Up
	Confidence (City Wide)	Public perception of Dundee	Qualitative: Very good Good Neither Poor Very poor	18 49 24 7 2	UP
	Amenity value (City Wide)	Public perception of amenity of Waterfront area	Qualitative	Not yet available	Excellent

SCITY-VT INDICATOR MODELLING & VISUALISATION

To test if virtual 3D built environments can be exploited for sustainability information provision (SCity-VT) promoting wider stakeholder engagement in the planning processes a prototyping approach was adopted. Six sustainability indicators were chosen from the indicator set to ensure that overall the reduced indicator set; (i) included two indicators from each pillar of sustainability (social, economic and environmental), (ii) represented a variety of quantitative and qualitative data (iii) included indicators with spatial and/or temporal variations, and (iv) were measurable.

A modelling and visualisation framework (S-City VT) was developed to present sustainability indicators, pertaining to different urban design scenarios to stakeholders, using bespoke software developed using C# programming language and the XNA graphics Framework. The Microsoft XNA framework facilitates rapid game engine production by providing a set of tools utilizing a managed runtime environment. XNA essentially relieves much of the repetitive nature of creating a custom engine by providing basic methods and allowing easier access to the rendering and processing ability of computers graphics hardware. Development of the visualisation component using XNA allows the simulation component implemented using C#, to be easily linked to the visualisation. As S-City VT is developed using XNA and C# it can run as a standalone application on consumer hardware, thus requiring no specialist software such as CAD or REVIT. S-City VT can be easily distributed to public stakeholders without licensing issues. S-City VT is split into three main components, scenario design, sustainability modelling & simulation and visualisation which are described in turn below.

Scenario Design Component

S-City VT contains a design component that allows the initial 2D plan to be recreated in 3D. The design component allows the import of architectural and 3D models which can be stored to allow representation of alternative urban design scenarios (Figure 2). Using the designer any stakeholder is able to add, remove or rearrange components of the urban design. These changes are reflected immediately in the 3D virtual world, not requiring the environment to be re-rendered for display as would normally be the case using a CAD based system.

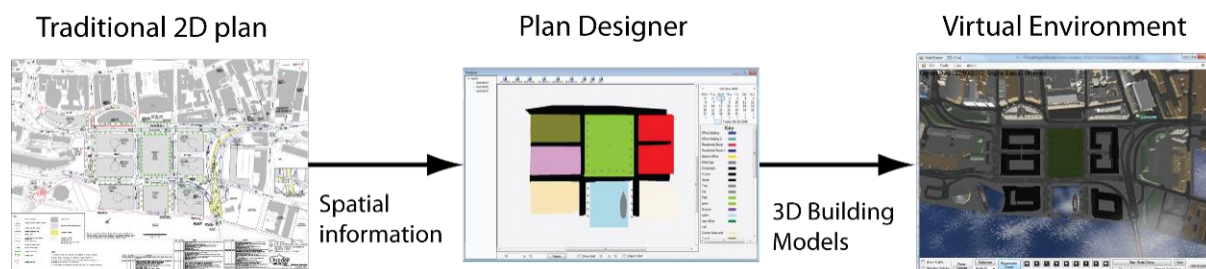


Figure 2 Steps in creating a virtual world from a 2D plan.

Whilst the designer is strongly linked to the visualisation it is also strongly coupled to the modelling and simulation. Changing a building attributes such as size, position or building material, using the designer, will not only update the buildings appearance in the virtual

world but may affect the indicator modelling. For example changing the material attributes of a building may impact on its energy efficiency.

Modelling & Simulation

The indicator modeling involves developing separate indicator models that define how each of the indicators varies over space and time. For the prototype application six sustainability indicators were chosen from the full indicator set identified by Gilmour et al., (2011) and empirical models developed. The six indicators selected for modeling provide a spread across the sustainability domains (economy, society and environment) and were identified as having readily available data at the beginning of the case study. S-City VT is not designed to provide absolute measures of sustainability but to allow the relative sustainability of different scenarios to be compared by non-experts. The models described here are simple in their construction and can be replaced with more detailed models if required, but our main objective was to determine if information provision related to sustainability can be presented and is useful to non-expert stakeholders. The models used in the prototype application are detailed below. The model output was normalization (0 - 100), the process of conversion of diverse unit cardinal scores into dimensionless indicators, where 0 is the lowest sustainability index and 100 is the highest sustainability index. Intermediate scores were determined on a linear 'min-max' basis (Rowley et al., 2012) with the exception of the non-linear noise model.

Energy Efficiency

The energy efficiency model is based on the Nation Calculation Method (NCM), which is the industry standard allowing energy efficiency of buildings to be determined (BRE, 2009). The NCM method takes into account a wide range of factors, including number of doorways, glazing type, exterior construction, and number of floors, etc., to produce a metric describing the energy efficiency of the building. A NCM report was created using the NCM tool, characterizing the typical buildings in the development for a number of design options where external appearance (glass, brick) and different mixes of building use (residential, commercial) varied.

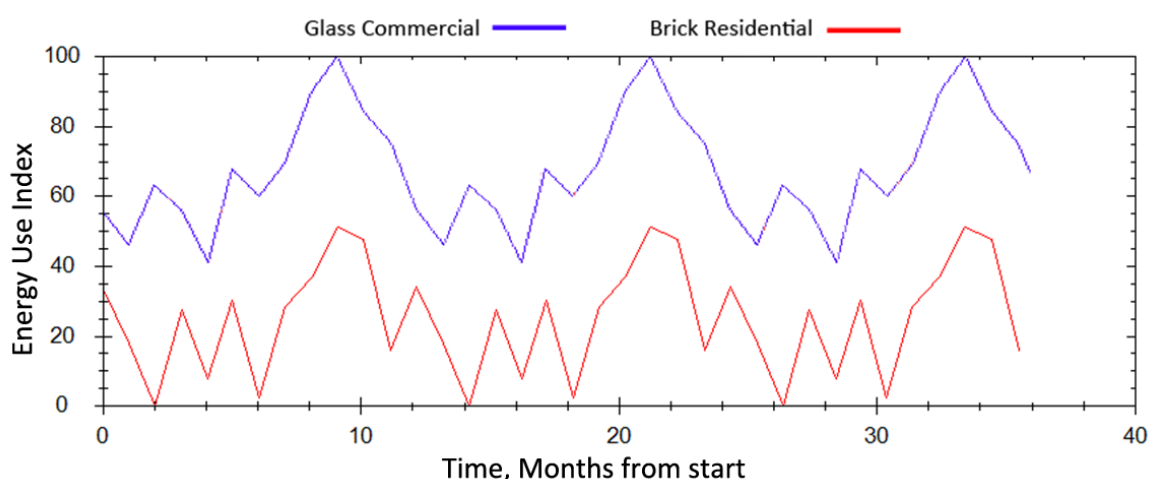


Figure 3 Graph showing temporal changes in the energy use index due monthly energy fluctuations.

This data is input into the energy efficiency model and attenuated with the temporal energy consumption data (BIS, 2009), which reflects how energy use of the buildings change depending on seasonality. Figure 4 shows how the energy use sustainability index changes as a function of time for two different building types and use (e.g., glass, commercial and brick, residential). Whilst the Energy Efficiency indicator model provides an adequate representation of the patterns of energy use in the buildings for prototype testing, other parts of the NCM methodology such as building ventilation, heating or cooling and orientation will be included in future developments of S-City VT.

Noise Pollution

The noise model calculates the levels of traffic noise received at each building and calculates the proportion of people that would deem that noise level unacceptable. Projected traffic flow data for the waterfront development was sourced from Dundee Waterfront Traffic & Signaling Report (White Young Green, 2007). For each road in the proposed 3D virtual development a noise level is calculated from the projected hourly traffic flow. Using a function (equation 1) provided in CRTN (1988), this traffic flow can be transformed into a noise level in decibels (dB(A)) (Figure 4) .

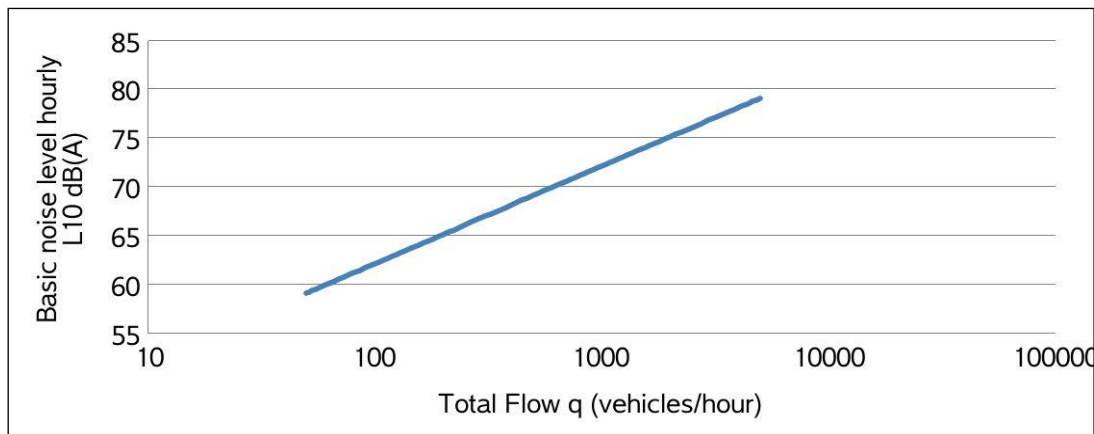


Figure 4. Prediction of the log10 basic noise level hourly in terms of total hourly flow.

$$\text{Basic hourly noise level } L_{10} = 42.2 + 10 \log_{10} q \text{ dB(A)} \quad \text{equation 1}$$

A noise level ‘heard’ at each building based on its location and the traffic volume is calculated based on the shortest Euclidean distance (d) between the noise source (road) and the building (Figure 5). The sound level emanating from each road is obtained by correcting the basic noise level using equation 2. The equation also includes the height (h) of the listener which is assumed constant in these calculations (CRTN, 1988).

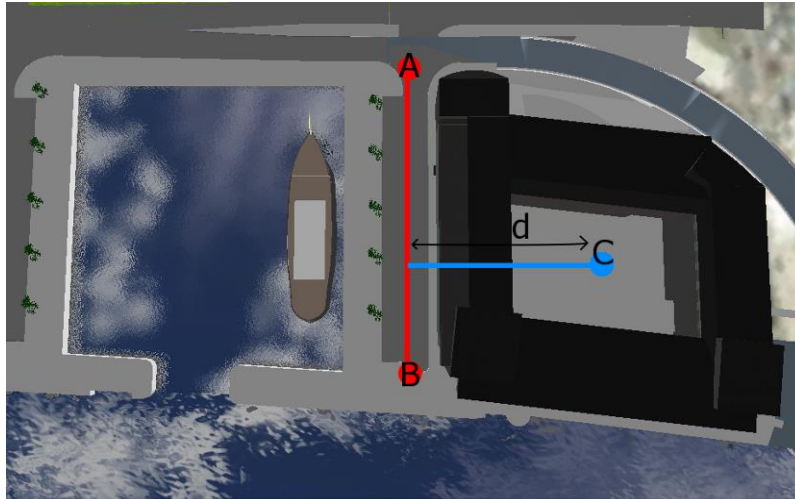


Figure 5. Building distance from traffic noise source.

$$\text{Noise Level Correction} = -10 \log_{10}(d'/13.5) \text{ dB(A)} \quad \text{equation 2}$$

where d' = shortest slant distance from the road $[(d + 3.5)^2 + h^2]^{\frac{1}{2}}$

To determine the total noise level received by the building the corrected noise from each road must be summed over n roads in the development (equation 3).

$$\text{Total noise level} = 10 \log_{10}[\sum_1^n \text{Antilog}_{10}(L_n/10)] \text{ dB(A)} \quad \text{equation 3}$$

Each building has a noise level representing the total level of external noise received at that building location in relation to the roads and their projected traffic flows. The internal noise level in the building would also be influenced by factors such as the building construction materials and these can be included in future versions of S-City VT. Our sustainability index in the prototype is achieved by normalizing the noise level (0-100 scale as before) and applying a non linear function (equation 4 - (Highways Agency, 1994)), this calculates the percentage of people that will be bothered by a specific noise level.

$$\% \text{ Bothered} = \frac{100}{(1 + e^{-\omega})} \quad \text{where } \omega = 0.12 (L \text{ dB(A)}) - 9.08 \quad \text{equation 4}$$

Economic Benefit

There were a number of economic indicators identified for the Dundee Central Waterfront Development. The net present value of the buildings was chosen as the selected indicator for the prototype as it allowed time as a factor. The economic model utilizes a discounted cash flow calculation to determine the worth of a buildings current cash flow for a specific

point in time. The calculation uses a discount rate which allows the cash flows to be discounted back to their present worth. The use of discounting in sustainability assessment is a topic of considerable debate (Stern, 2006). On one hand it would appear unethical to value benefits to future generation at a lower level than we value them to ourselves but there is also inter-generational inequity if discounting is ignored where there might be an expectation that future generations will be richer. The inclusion of a discounting mechanism in the modeling allows such issues to be explored. Comparison of urban design scenarios and sensitivity testing on the impact of assumptions on discount rates can be explored in S-City VT.

$$\text{Net Present Value} = CF_0 + \frac{CF_1}{(1+r_1)} + \frac{CF_2}{(1+r_2)^2} + \dots + \frac{CF_t}{(1+r_t)^t} \quad \text{equation 5}$$

Where CF = cash flow for that year, r = discount rate for that year, t = the year.

In the equation the capital cost for the construction of the first building is represented by CF_0 . Capital costs of subsequent buildings will be discounted to this point time.

Each building in the model has a site preparation and construction phase, during this time the cash flow for that period is taken as zero as the building is neither sold or being rented. The model is able to reflect the differences between cash flows for rented and sold buildings. Buildings which are sold will take a large income at the point of sale. As the building has been sold further cash flows for this building will be zero. The discount factor will also apply to the sale income so for two buildings of equivalent value, a building sold in year one will have a higher present value than building sold in year ten. As the building has been sold the upkeep and maintenance of the building will be borne by the buyer and so it is not modeled here. Buildings which are rented will take a smaller income every year. Rented buildings may have a rent free period, to encourage tenants, and will have a lay period between leases, during these times the cash flow for that period will be zero. A discount factor is applied to the yearly income to determine its present value, based on the time in years from construction (Figure 6).

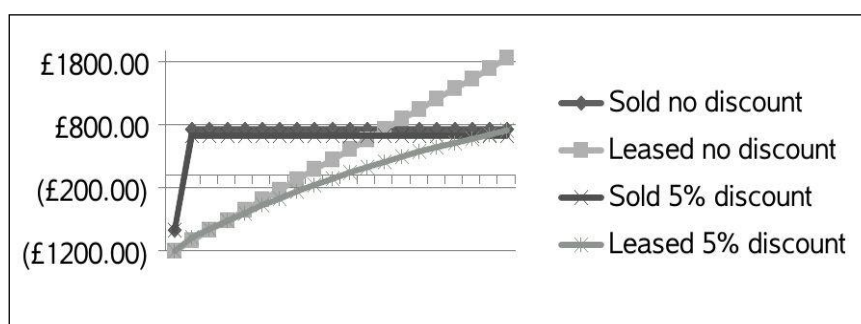


Figure 6: Present Value for a single building, built in year 0, showing differences between leased and sold income with different discount rates.

The initial cost of the buildings are calculated using the building type (e.g. residential, commercial, retail, social) and the cost per square meter for that type of building. The income from sale or rent is likewise calculated using the projected income for that building type. These values were sourced from the Scottish Enterprise Tayside economic report on the waterfront development (Buchanan, 2006). The maximum and minimum values are then mapped onto 0-100 and linearly interpolated.

Acceptance of building use

Social acceptance was identified by the waterfront stakeholders as a key sustainability indicator. This was assessed in terms of the public acceptance of possible building uses within the proposed development. The master plan for Dundee has been developed and through discussion with Dundee council the possible building uses were determined. These are commercial office space, retail units, cafe/bar/restaurant and residential space. A survey was undertaken to determine the preference of building use of a range of stakeholders. The survey used a ranking system where the participant was asked to rank possible building uses in order of preference. A statistical test (Friedman test using SPSS) was performed on the mean rank of each building use. The results of the Friedman test show that there is a significant difference ($p < 0.001$) between how the users ranked the different building uses. Combined with post-hoc analysis of the results it is possible to rank the acceptability of the building uses in the following order; Leisure (highest ranked), Retail & Residential (equal ranked) and Commercial (Lowest Ranked). To create a sustainability index for the acceptability of each building these rankings are mapped onto a 0-100 scale, with Leisure at 100 (highest sustainability), Retail & Residential at 50 and Commercial (lowest sustainability) at 0.

Housing Provision & Employment

The housing provision and Employment models are simple. The Housing provision is calculated by determining the percentage of buildings designated as residential and this is mapped directly onto the sustainability index of 0-100. The Employment model uses existing information regarding different building uses (e.g., commercial, leisure, etc.), and building sizes to provide likely numbers of jobs a specific building might create or sustain given its use and size. More sophisticated models that include jobs created during construction and differentiates between types of jobs created or sustained can be incorporated as data becomes available. Again the maximum and minimum values are then mapped onto 0-100 and linearly interpolated.

Multicriteria opinion analysis

One of the problems with traditional sustainability assessment is involving the views and experiences of a wide range of stakeholders (Isaacs et al., 2010b). Many of the traditional methods of aggregating indicator values, such as Multi Attribute Utility Theory (MAUT), lack transparency leaving the users in a position where they do not fully understand how the resulting weightings have been derived (Dodgson et al., 2009; Paracchini et al., 2008). This is also noted by Walton et al., (2005). Stakeholder engagement in the aggregation of the indicator values is addressed in the selection of the ANP multi-criteria analysis approach, the main strength of which lies in providing the stakeholders with the ability to include their own personal knowledge and opinions of indicator interactions through the use of pair-wise comparisons (Saaty, 2006). The Analytical Network Process (ANP) method uses interactive

network structures which give a more holistic representation of the overall problem (Saaty, 2006). Components of the problem are connected, as appropriate, in pairs with directed lines simulating the influence of one component over another. The components in a network may also be regarded as elements that interact and influence each other in regard to a specific attribute (Saaty, 2006).

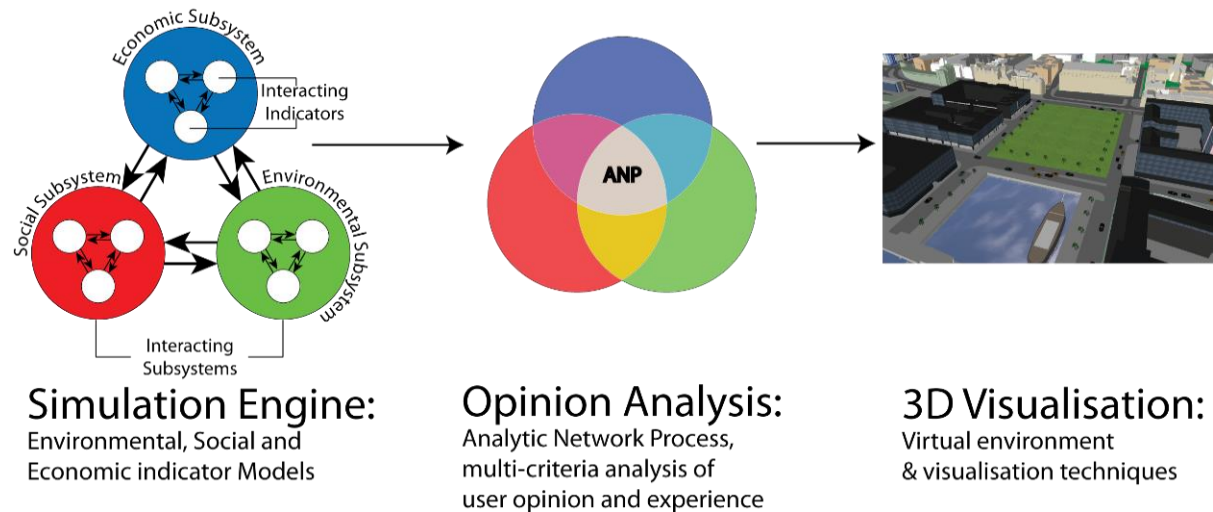


Figure 7: The S-City VT Framework.

To perform an ANP analysis the decision maker must identify the clusters, elements and the relationships and interactions between them (Bottero et al., 2007). Once the network is constructed a supermatrix describing the interactions defined in the network (Gencer & Gurpinar, 2007) is created. Once the supermatrix is created using the fundamental scale and pair-wise method then every interaction is described in terms of every element it interacts with (Saaty, 1999). Once this has been completed the normalised eigenvector calculated from the matrix will generate the normalised prioritised list of elements.

ANP allows cross-cluster interactions as well as inter-relationships between elements, as opposed to similar methods such as AHP which require the decision to be hierarchical. It is structured naturally and allows for a more realistic representation of the problem, but its main strength lies in providing the user with the ability to include their own personal knowledge and opinions about an interaction through the use of pair-wise comparisons (Saaty, 2006; Bottero et al., 2007).

The prototype application allows the user to apply the ANP method to the indicators being modelled, thus defining the network that connects them. The prioritised lists of elements which are derived from the ANP analysis are used in the 3D visualisation to provide a weighting to the indicators being visualised. For example, in the blend method the weightings are used to determine how much of each indicator colour scale contributes to the final blended colour representing the aggregated indicators. For the images shown below equal weighting has been given to the indicators, however since S-City-VT allows users to create their own weights for a set of indicators, the consequences of different weightings on urban sustainability can be explored (Figure 7).

VISUALISATION

As discussed traditional GIS does not provide a realistic physical representation of the city or development being proposed. CAD systems do enable the creation of 3D models which provide the user with a realistic representation of the buildings and the developments (Al-Kodmany, 2002). However, CAD systems provide no ability to overlay additional data and provide little context beyond the building or area being studied. Furthermore CAD systems cannot be seamlessly integrated with simulations.

The visualisation combines GIS and 3D urban models and embeds the 3D models in the surrounding landscape to contextualise the urban area of focus. The ability to visualise part of the city that is undergoing the development or regeneration within the wider city context is likely to improve engagement and bring a greater level of involvement from all participants in the planning process (Levy, 1995).



Figure 8. 3D representation of proposed development within the city-wide context with different lighting and weather conditions.

The user will have interactive control enabling them to view the proposed development from any conceivable viewpoint. Weather and lighting effects can also be manipulated allowing the development to be seen in a different context (Figure 8). This may enable the user to become fully immersed in the proposed development, to a much greater degree than 2D plans, GIS, or rendered 3D stills.

The virtual representation of the built environment represents the outward appearance and design of the development scenarios. The visualisation is however also designed to show the results of the indicator modelling and associated weightings through different visualisation techniques. Previous research (Kapelán et al, 2005; Sahota & Jeffery, 2005) highlights that most existing tools provide a single method to view data and this limits data accessibility and information provision. By providing a number of methods, visualisation techniques, to present the sustainability indicator data it is hoped that users are not constrained to a single view and can use the method that they prefer. The visualization techniques described below generate textures or colour maps using the graphics libraries of XNA, the textures are recomputed each model time step, reflecting the temporal changes in indicator values, and sent to the visualisation system to map onto the building geometry. This approach is only possible by having seamless integration of visualisation and simulation.

Blending

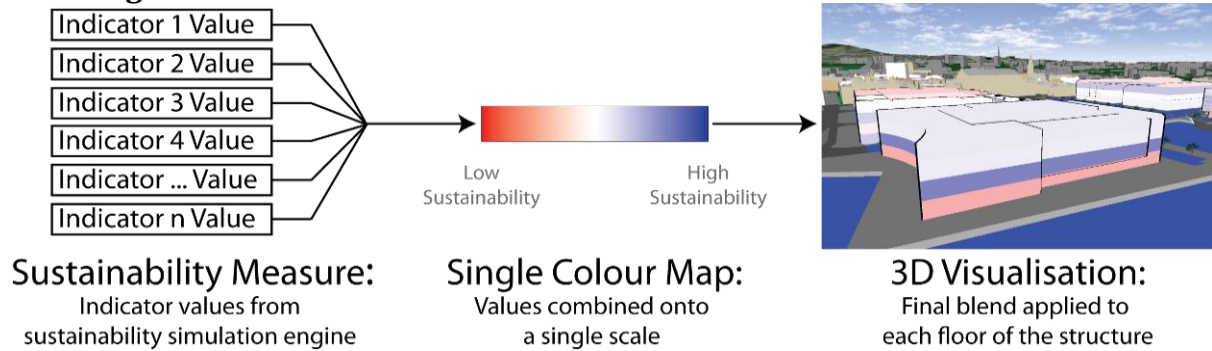


Figure 9. Overview of the indicator blending technique

The simplest visualisation method involves combining the six sustainability indices, calculated by the simulations, into a single sustainability index. This single value is then mapped to a single colour scale. The user is able to select from a number of colour scales suggested by Levkowitz & Herman (1992), which are known for allowing greater discrimination between values. These include the hot-cold, heated object, magenta, local optimised and spectral colour scales. Using the hot-cold scale demonstrated in Figure 9, a building or floor with high relative sustainability would appear blue while a building with low sustainability would appear red. This provides the user with a simple way of identifying which scenario is the most sustainable based on the relative sustainability, which is color mapped, provided by the indicator modelling and then aggregated using ANP.

Weaving

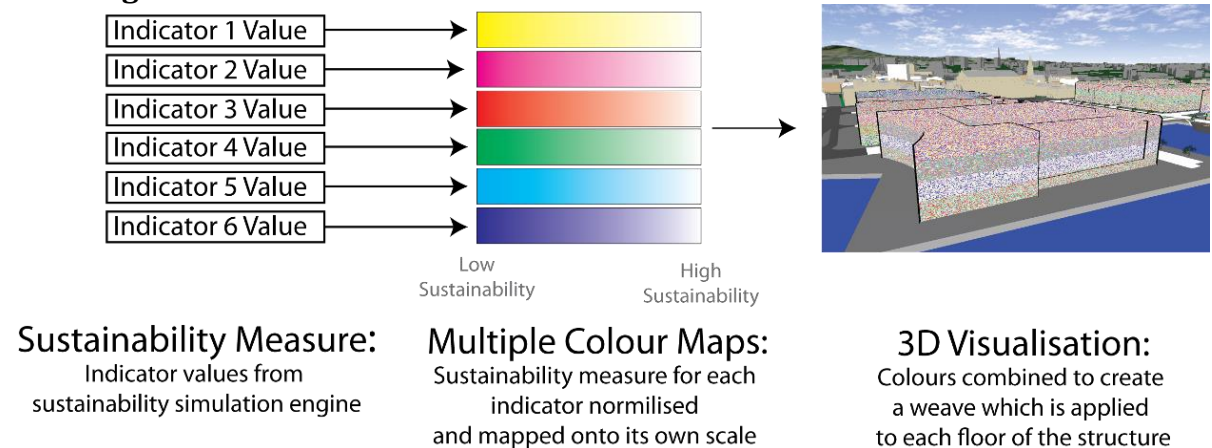


Figure 10. Overview of the indicator weaving technique.

As opposed to the blending method, which combines the six indicator values into a single indicator, the weaving technique is designed to preserve some of the underlying information and indicator aggregation by ANP is not applied. This enables the user to identify which indicators differ across urban designs when they are compared side by side. The colour weaving technique (Hagh-Shenas et al., 2007) uses a different colour scale for each indicator (Figure 10) to attempt to preserve this information. The colours from each scale are then randomly woven into a patchwork like texture which is applied to each floor of the building. The size of the squares or patches in the weave can also be changed

depending on the user's preferences. A small patch size will give an overall representation of the sustainability, with darker shades representing low sustainability and lighter shades representing higher sustainability. A larger patch size will allow user to identify quickly which colours stand out the most, and therefore which indicators are having the greatest impact.

Traditional Graphical Techniques

Radar graphs (Figure 11) allow the stakeholder to compare the sustainability of different buildings based on the indicator values. The shape, size, colour and point values will be different for each building allowing a detailed comparison.

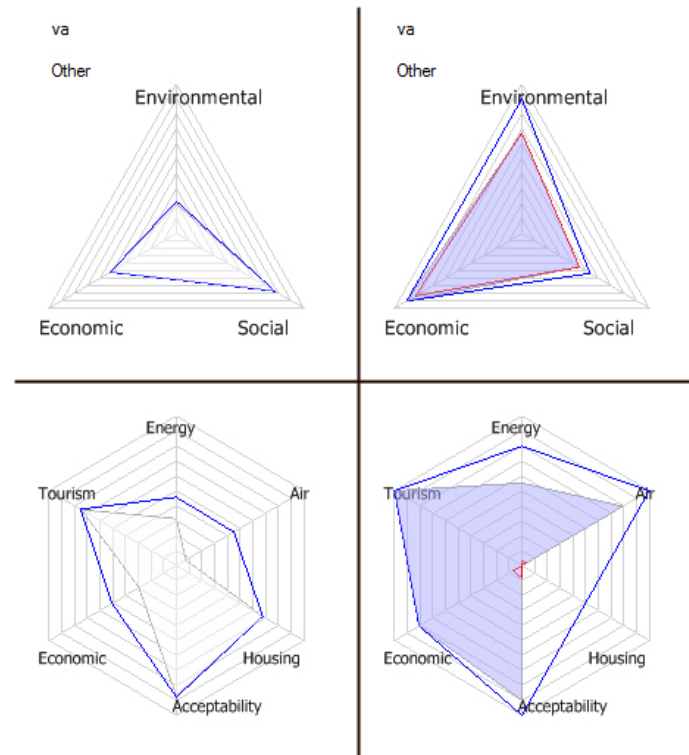


Figure 11. Comparison of scenarios using traditional radar graphs.

Parallel coordinates allow the user to compare all indicator values for all the buildings in a scenario (Figure 12). Buildings can be selected and their trace in the graph is highlighted.

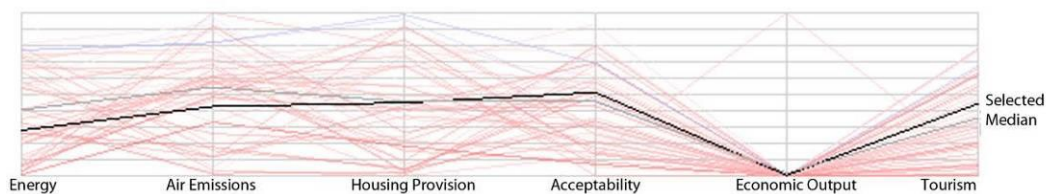


Figure 12. Parallel coordinate graph for sample development.

Simple temporal graphs plot all the indicator values over the life time of the development. These allow the user to identify the interconnectivity of the indicators and to identify where and why sudden changes occur (Figure 13).

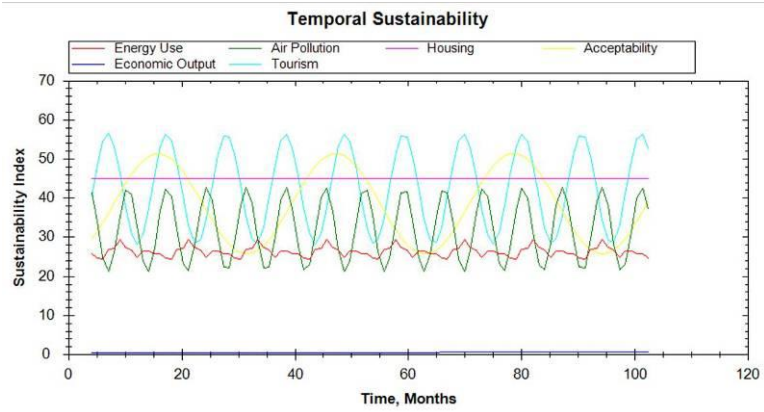


Figure 13. Indicator graph showing changes in 6 indicators over time.

The visualisation utilises a split screen rendering approach which allows the user, using any of the techniques, to compare two scenarios side by side throughout the life cycle of the development. A number of visualisation techniques have been used to display the results of the indicator models which allows the user to not only compare the physical appearance of the different scenarios but also the relative sustainability of each scenario (Figure 14).


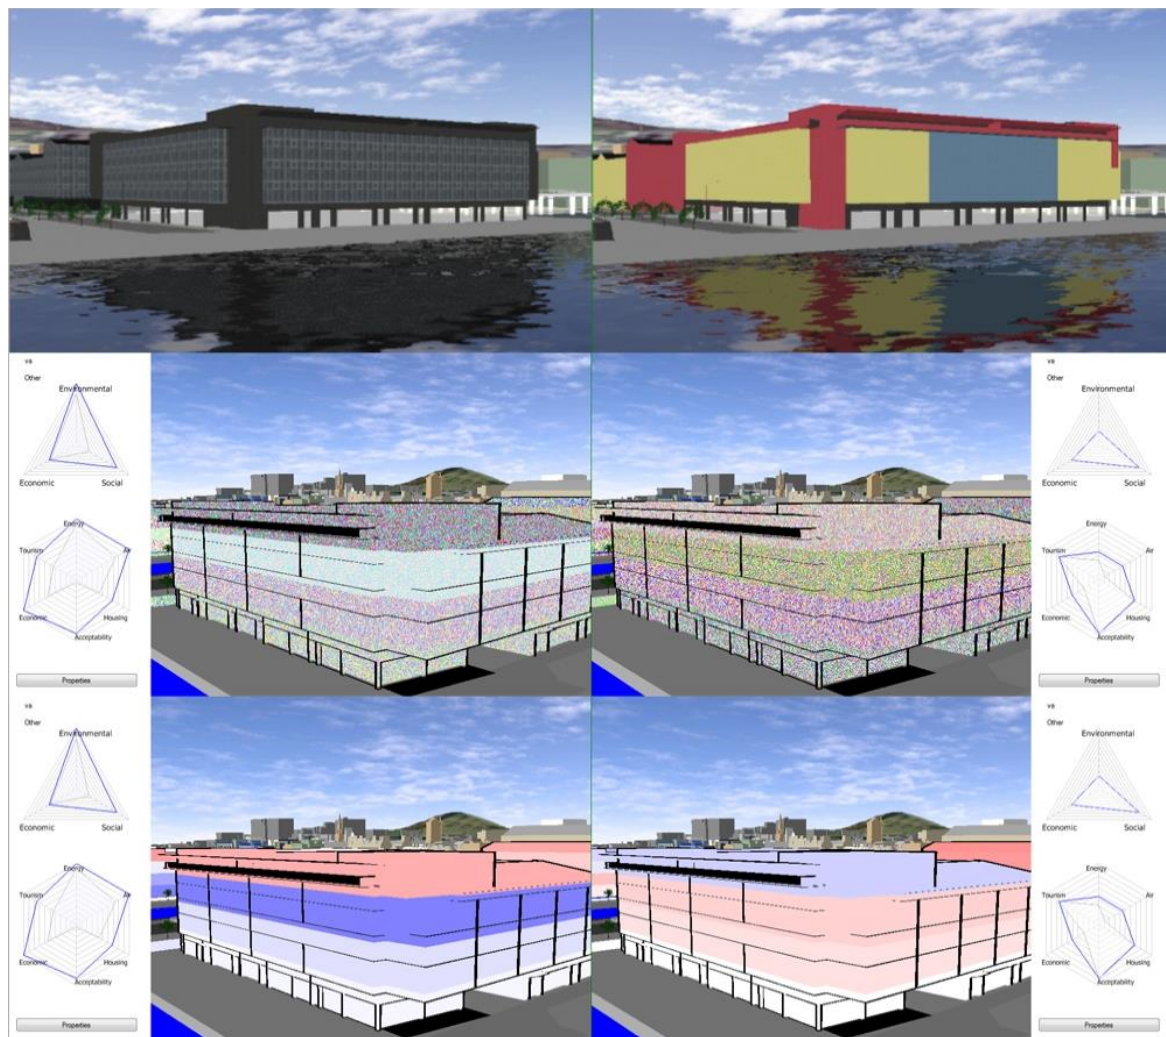


Figure 14. Visualisation techniques used in S-City VT to allow comparison of scenarios in a split screen environment: Top - realistic representation of external building appearance. Middle - weaving technique showing a number of indicator values. Bottom - blending technique combining a number of indicator values into a single indicator.

S-CITY VT PILOT EVALUATION - TESTING THE EFFECTIVENESS OF COMMUNICATING THE SUSTAINABILITY


The pilot consists of a single group testing session and aims to determine if the prototype can communicate differences in sustainability indicators relating to different urban designs. The group was a community-based group and comprised 8 participants. The participants were presented with simulation output of 11 sets of two urban design scenarios. The two urban design scenarios were presented using a split screen method where the two urban designs differed in relative sustainability – the left and right hand urban design is scenario 1 & 2 respectively. Relative sustainability is defined as the difference in the derived sustainability score between the two urban designs. Alternative urban designs were constructed that had relative differences in sustainability of 0, 2, 4, 6, 8, 10, 20, 40, 60, 80 and 100. The images were presented in a random order as in Table 1. Figure 17 shows 3

example simulation outputs presented to the community group where the difference in the sustainability score is 0, 2 and 100% (in Figure 15 a, b & c, respectively).

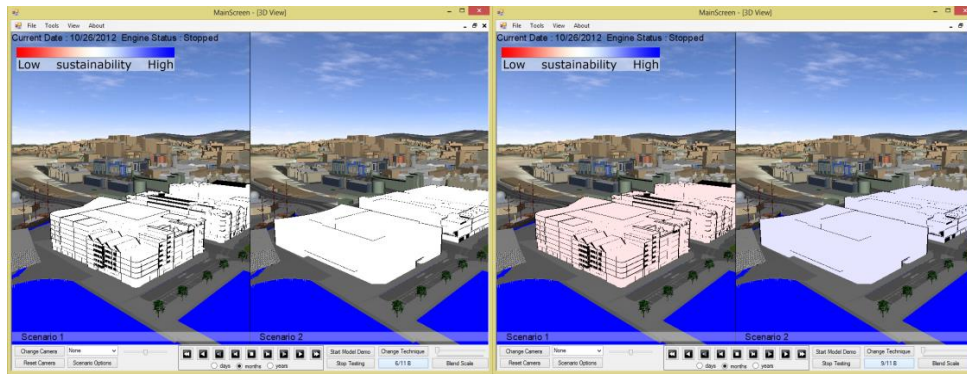

(a)

(b)

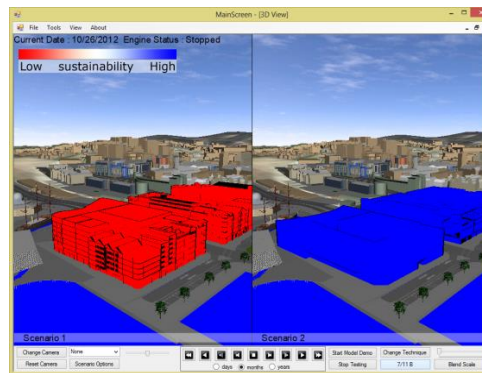

(c)

Figure 15. Screen shots of 3 of the 11 blend tests encapsulating the sustainability indicators, as presented in Table 1, presented to the community group where the difference in the two urban designs sustainability score is 0, 2 and 100% in figures a, b & c.

The blend results presented in Table 2 show that participants were extremely adept in identifying the differences between the two scenarios. Where the participants identified the correct answer, i.e. most sustainable urban design, green shading is applied to the cell. Table 2 show that the group successfully identified which scenario was the most sustainable in all cases.

Test Blend	Chosen Scenario	Actual	
		Scenario	%Difference
1	2	2	80
2	1	1	100
3	1	1	10
4	2	2	8
5	1	1	4
6	2	2	20
7	1	1	40
8	1	1	2
9	0	0	0
10	2	2	6
11	2	2	60

Table 2. Eleven tests of blend technique, participants correctly identified which scenario was most sustainable – where the relative sustainability differed by 0, 2, 4, 6, 8, 10, 20, 40 60, 80 100% results of comparisons using the blend technique. The correctly identified scenarios are shaded green.

The testing was repeated with the weave visualization technique, and the 11 constructed urban designs were presented with the weave technique where the difference in relative sustainability is 0, 2 and 100% as in Figure 16 a, b & c. For the weave technique the group were also able to correctly identify the scenario that was most sustainable in all of the 11 cases, as well as identify which indicators were the cause of the difference in sustainability between the two scenarios.



(a)

(b)



(c)

Figure 16. Three of the eleven weave tests, as described in Table 3, presented to the community group, where the difference in relative sustainability is 0, 2 and 100% in figures a, b & c.

Test Weave	Participant selection		Most sustainable scenario		
	Scenario	Indicator	Scenario	%Difference	Indicator
1	2	housing	2	100	housing
2	2	employment	2	80	employment
3	2	housing	2	20	housing
4	2	economic	2	40	economic
5	0	None	0	0	#N/A
6	2	economic	2	4	economic
7	2	energy	2	8	energy
8	1	noise	1	6	noise
9	1	economic	1	60	economic
10	2	energy	2	2	energy
11	1	housing	1	10	housing

Table 3. Eleven tests of weave technique, participants correctly identified which scenario was most sustainable in all 11 cases (green shading) – where the relative sustainability differed by 0, 2, 4, 6, 8, 10, 20, 40, 60, 80, 100% results of comparisons using the weave technique. The indicator that was the origin of the difference was also correctly identified in all cases.

The results of the pilot study demonstrates that the visualization clearly has the potential to provide sustainability information to stakeholders. The same focus group approach was applied to three different stakeholder groups with similar findings.

CONCLUSIONS & FUTURE DEVELOPMENTS

It is clear that new methodologies are required in urban planning and design to: provide an integrated view of sustainability assessment, promote wider inclusion in the decision making process and aid transparency and communication in the promotion of sustainability. The 3D visualization component, of the SAVE methodology, was successful in widening stakeholder engagement achieved by the positive reaction to, and interpretation of, the visual display of sustainability indicator data by a range of stakeholders. The use of 3D visualization to determine difference between scenarios was successfully presented however whether the virtual world can promote understanding of the interdependent facets of urban sustainability is another matter. This should be tested further to determine if visualisation can change people's level of knowledge and views of urban sustainability. Further development and testing of the visualisation tool is planned during the building design stage and the tool has been extended for use in a BIM context.

REFERENCES

- Al-Kodmany, K. (2002). Visualization tools and methods in community planning: from freehand sketches to virtual reality. *Journal of planning Literature*, 17 (2), p. 189.
- Ashley, R., Blackwood, D., Butler, D., Jowitt, P., Davies, J., Smith, H., Gilmour, D. and Oltean-Dumbrava C., 2008. Making Asset Investment Decisions for Wastewater Systems that include Sustainability. *ASCE Journal of Environmental Engineering*, **134**, No. 3, March, 200-210
- Appleton, K. (2003). GIS-based visualisation of rural landscapes: defining "sufficient" realism for environmental decision-making. *Landscape and Urban Planning*, 65(3), pp.117-131.
- BIS (2009). Energy Consumption in the UK. Available at:
<http://bis.ecgroup.net/Publications/EnergyClimateChangeDECC/EnergyStatistics.aspx>.
- BRE (2009). *National Calculation Method*, Available at: <http://www.ncm.bre.co.uk/>.
- Bishop, I. D. (2014). Location based information to support understanding of landscape futures. *Landscape and Urban Planning*. doi:10.1016/j.landurbplan.2014.06.001
- Blackwood, David J, Gilmour, D, Isaacs, J, Kurka, T. and F. R. (2014). Sustainable Urban Development in Practice: The SAVE concept. *Environmental Planning B*. In Press.
- Bottero, M., Mondini, G., Valle, M. (2007). The use of the Analytic Network Process for the sustainability assessment of an urban transformation project in Glasgow, pp. 209-231.
- Boyko, C.T., Cooper, R. and Davey C., 2005. Sustainability and the urban design process. *Proceedings of the Institution of Civil Engineers - Engineering Sustainability* **158** (3) pp 119-125.

Buchholz T., Luzadis, V.A. and Volk V., 2009. Sustainability criteria for bioenergy systems: results from an expert survey, *J. Clean. Prod.* **17** S86-S98.

Buchanan, C. (2006). Dundee Central Waterfront: Market Appraisal and Economic Impact Assessment. , 1.

CIRIA (Construction Industry Research and Information Association), 2001. Sustainable Construction– Company Indicators. WS Atkins Consultants. CIRIA, London, Publication C563.

CIRIA (Construction Industry Research and Information Association), 2004. Sustainable Construction– Implementing Targets and Indicators. Experiences from Ciria’s Pioneer’s Club. CIRIA, London, Publication C633.

Cirulis, A., & Brigmanis, K. B. (2013). 3D Outdoor Augmented Reality for Architecture and Urban Planning. *Procedia Computer Science*, 25, 71–79. doi:10.1016/j.procs.2013.11.009

CRTN (1988). *Calculation of Road Traffic Noise* Department of Transport, London: HMSO.

Charters, S.M., Knight, C., Thomas, N. & Munro, M. (2002). Visualisation for informed decision making; from code to components. In ACM New York, NY, USA, pp. 765-772.

Clarke, K.C. (2001). *Getting started with geographic information systems*, Prentice Hall Upper Saddle River, NJ.

Danahy, J., Spiller, R. & Verlag, W. (1999). Visualization Data Needs in Urban Environmental Planning and Design. *Landscape Research*.

Davies, A. & Laing, R., (2002). Designing Choice Experiments Using Focus Groups: Results from an Aberdeen Case Study. *Forum: Qualitative Social Research*, 3(3), pp.131-159.

Dodgson, J., Spackman, M., Pearman, A. & Phillips, L. (2009). *Multi-criteria analysis: a manual*, London: Department for Communities and Local Government.

Downes, M., & Lange, E. (2014). What you see is not always what you get: A qualitative, comparative analysis of ex ante visualizations with ex post photography of landscape and architectural projects. *Landscape and Urban Planning*. doi:10.1016/j.landurbplan.2014.06.002

Drummond, W. & French, S. (2008). The Future of GIS in Planning: Converging Technologies and Diverging Interests. *Journal of the American Planning Association*, 74 (2), pp. 161-174.

Dumas, J. S., & Redish, J. (1999). *A practical guide to usability testing*. Intellect Ltd.

Dundee City Council, (2001). Dundee Central Waterfront Development Masterplan 2001 - 2031.

- Dundee City Council (2004). *Population Matters*. Dundee: Planning & Transport Department. Retrieved November 7, 2012, from www.dundee.gov.uk/dundeecity/uploaded.../publication_85.pdf [Accessed].
- Dundee Waterfront (2012). Dundee Waterfront Website. Retrieved November 7, 2012, from <http://www.dundeewaterfront.com/>
- Evans, F., Volz, W., Dorn, G., Fröhlich, B. & Roberts, D.M. (2002). Future trends in oil and gas visualization. In *VIS '02: Proceedings of the conference on Visualization '02*. Washington, DC, USA: IEEE Computer Society, pp. 567-570.
- Foxon, T., McIlkenny, G., Gilmour, D., Oltean-Dumbrava, C., Souter, N., Ashley, R., Butler, D., Pearson, P., Jowitt, P. & Moir, J. (2002). Sustainability criteria for decision support in the UK water industry. *Journal of Environmental Planning and Management*, 45 (2), p. 285–301.
- Fuchs, H., Levoy, M. & Pizer, S.M. (1989). Interactive visualization of 3D medical data. *Computer*, 22 (8), pp. 46-51.
- Gencer, C. & Gurpinar, D., 2007. Analytic network process in supplier selection: A case study in an electronic firm. *Applied Mathematical Modelling*, 31(11), pp.2475-2486.
- Gilbert, G. N. (2001). *Researching social life*. Sage Publications Ltd.
- Gilmour, D., Blackwood, D., Banks, L. & Wilson, F. 2011. Sustainable development indicators for major infrastructure projects. *Municipal Engineer*, 164(ME1), pp.15-24.
- Graymore, M. L. M., Wallis, A.M. and Richards, A. J., 2009. An Index of Regional Sustainability: A GISbased multiple criteria analysis decision support system for progressing sustainability, *Ecol. Complex*. 6 (2009)453-462.
- Hagh-Shenas, H., Kim, S., Interrante, V. & Healey, C. (2007). Weaving versus blending: a quantitative assessment of the information carrying capacities of two alternative methods for conveying multivariate data with color. *IEEE transactions on visualization and computer graphics*, 13 (6), pp. 1270-7.
- Harris, T. & Elmes, G. (1993). The application of GIS in urban and regional planning: a review of the North American experience. *Applied Geography*, pp. 9-27.
- Highways Agency (1994). Design Manual for Roads and Bridges. *Volume 11*.
- Hix, D., Swan, J., Gabbard, J., McGee, M., Durbin, J. & King, T. (1999). User-centered design and evaluation of a real-time battlefield visualization virtual environment. *Proceedings IEEE Virtual Reality (Cat. No. 99CB36316)* pp. 96-103.
- Kowalski K., Stagl S., Madlener R. and Omann I., 2009. Sustainable energy futures: Methodological challenges in combining scenarios and participatory multi-criteria analysis, *Eur. J. Oper. Res.* 197 1063-1074.

- Isaacs, J., Blackwood, D., Falconer, R. & Gilmour, D. (2007). The role of visualisation in effective sustainability assessment. In M. Horner, C. Hardcastle, A. Price, & J. Bebbington *International Conference on Whole Life Urban Sustainability and its Assessment*. Glasgow: Glasgow Caledonian university.
- Isaacs, J., Falconer, R., Gilmour, D., & Blackwood, D. (2011). Enhancing urban sustainability using 3D visualisation. *Proceedings Of The ICE-Urban Design and Planning.*, 164(3), 163–174.
- Isaacs, J., Falconer, R., Gilmour, D. & Blackwood, D. (2010). Sustainable urban developments: stakeholder engagement through 3d visualisation. In *Proceeding of the 11th IASTED International Conference Computer Graphics and Imaging*. Innsbruck: IASTED, pp. 265-271.
- Isaacs, J.P., Blackwood, D., Gilmour, D. & Falconer, R. E. (2013). Real-time visual simulation of urban sustainability. *International Journal of E-Planning Research*, 2(1), 20–42.
- Kapelan, Z., Savic, D. & Walters, G., (2005). Decision-support tools for sustainable urban development. *Engineering Sustainability*, 158(3), pp.135-142.
- Lange, E., (2005). Issues and Questions for Research in Communicating with the Public through Visualizations A Problem Statement , Modes of Communication. *Landscape and Urban Planning*, pp.1-11.
- Levkowitz, H. & Herman, G. (1992). Color scales for image data. *IEEE Computer Graphics and Applications (Cgim)*, p. 72–80.
- Levy, R. (1995). Visualization of urban alternatives. *Environment and Planning B*, 22, p. 343–343.
- Lodha, S.K. & Verma, A.K. (2000). Spatio-temporal visualization of urban crimes on a GIS grid. In ACM New York, NY, USA, pp. 174-179.
- Lowe, R. (2003). Animation and learning: selective processing of information in dynamic graphics. *Learning and Instruction*, 13 (2), pp. 157-176.
- Lowe, R. (2004). Interrogation of a dynamic visualization during learning. *Learning and Instruction*, 14 (3), pp. 257-274.
- McCarthy, J., (1995). The Dundee waterfront: A missed opportunity for planned regeneration. *Land Use Policy*, 12(4), pp.307-319.
- Morgan, D. L. (1997). *Focus groups as qualitative research*. Sage Publications, Inc.
- Paracchini, M.L., Pacini, C., Calvo, S. & Vogt, J. (2008). Weighting and aggregation of indicators for sustainability impact assessment in the SENSOR context. In *Sustainability Impact Assessment of Land Use Changes*. Berlin: Springer, pp. 349-372.

- Parkin, S., Sommer, F. & Uren, S. (2003). Sustainable development: understanding the concept and practical challenge. *Engineering Sustainability*, 156 (1), p. 19–26.
- Rowley, H., Peter. G.M., Lundie, S. & Moore S.J. (2012) Aggregating sustainability indicators: Beyond the weighted sum. *Journal of Environmental Management*, 111, p.24-33.
- Sahota, P.S. & Jeffrey, P., (2005). Decision-support tools: moving beyond a technical orientation. *Proceedings of the Institution of Civil Engineers, Engineering Sustainability*, 158(ES3), pp.127-134.
- Salter, J.D., Campbell, C., Journeay, M. & Sheppard, S.R. (2009). The digital workshop: exploring the use of interactive and immersive visualisation tools in participatory planning. *Journal of environmental management*, 90 (6), pp. 2090-101.
- Saaty, T.L., 2006. The Analytic Network Process. In Melbourne: Idea Group Inc.
- Saaty, T.L. 1999. Fundamentals of the analytic network process in *Proceedings of International Symposium on Analytical Hierarchy Process*. Kobi, Japan, pp. 1 -14.
- Scottish Executive, 2006. Choosing our future. Sustainable Development Indicator Set. Measuring Progress on Scotland's Sustainable Development Strategy. July 2006.
- Scottish Government, 2007. National Performance Framework. The Scottish Government, November 2011.
- Sheppard, S. R. J. and Meitner, M., 2005. Using multi-criteria analysis and visualisation for sustainable forest management planning with stakeholder groups, *Forest Ecol. Manag.* **207** 171-187.
- Shiffer, M. (1998). Multimedia GIS for planning support and public discourse. *Cartography and Geographic Information Science*, 25 (2), p. 89–94.
- Starkl, M. and Brunner, N., 2004. Feasibility versus sustainability in urban water management. *Journal of Environmental Management* **71**(3): 245–260.
- States, U. (2000). A Summary of Models for Assessing the Land-Use Patterns. *Environmental Protection* (September).
- Stern, N. (2006). Stern Review on The Economics of Climate Change. HM Treasury, London.
- Stevens, D., Dragicevic, S. & Rothley, K. (2007). iCity: A GIS–CA modelling tool for urban planning and decision making. *Environmental Modelling & Software*, 22 (6), pp. 761-773.
- Traynor, C. & Williams, M.G. (1995). Why are geographic information systems hard to use? In *CHI '95: Conference companion on Human factors in computing systems*. New York, NY, USA: ACM, pp. 288-289.

WCED (1987). *Our Common Future*. Members of the World Commission on Environment, Oxford Univ. Press Oxford. [Available at; <http://www.un-documents.net/wced-ocf.htm>]

Walton, J.S., El-Haram, M., Castillo, N.H., Horner, R.M.W., Price, A.D.F and Hardcastle, C., 2005. Integrated assessment of urban sustainability, *Proceedings of Institution of Civil Engineers; Engineering Sustainability*, **158**, Issue, (June 2005), pp. 57–65.

Water UK, 2000. *Towards Environmental Sustainability: UK Water Industry Environmental Sustainability Indicators* (London, Water UK).

White Young Green, (2007). *Dundee Waterfront Traffic Signalling Modelling Report*, White Young Green Ltd, Anstey, Leicestershire.