



University of HUDDERSFIELD

University of Huddersfield Repository

Stetsyuk, V., Hardalupas, Y. and Taylor, A. M. K. P.

Experimental Study of flow and Scalar Mixing in Swirl-stabilised burners

Original Citation

Stetsyuk, V., Hardalupas, Y. and Taylor, A. M. K. P. (2013) Experimental Study of flow and Scalar Mixing in Swirl-stabilised burners. In: *Current Research in Combustion: A Forum for Research Students and Early Career Researchers*, 24th September 2013, Loughborough University, Leicestershire, UK. (Submitted)

This version is available at <http://eprints.hud.ac.uk/27904/>

The University Repository is a digital collection of the research output of the University, available on Open Access. Copyright and Moral Rights for the items on this site are retained by the individual author and/or other copyright owners. Users may access full items free of charge; copies of full text items generally can be reproduced, displayed or performed and given to third parties in any format or medium for personal research or study, educational or not-for-profit purposes without prior permission or charge, provided:

- The authors, title and full bibliographic details is credited in any copy;
- A hyperlink and/or URL is included for the original metadata page; and
- The content is not changed in any way.

For more information, including our policy and submission procedure, please contact the Repository Team at: E.mailbox@hud.ac.uk.

<http://eprints.hud.ac.uk/>

Experimental study of flow and scalar mixing in swirl-stabilised burners

V. Stetsyuk

Under the supervision of Yannis Hardalupas and Alex Taylor

Multiscale Flow Dynamics Group, Thermofluids Division, Mechanical Engineering Department
Imperial College London, London, UK

IOP Institute of Physics

Current Research in Combustion

A Forum for Research Students and Early Career Researchers

24 September 2013, Loughborough University, Loughborough, UK



Contents

- Introduction.
- Swirl-stabilised burner.
- Optical arrangement.
- Flow structure.
- Scalar mixing and combustion.
- General conclusions.


Introduction

Swirling flows are used: (Syred & Beer, Comb. and Flame 23, 1974)

1. To reduce combustion length by producing higher rates of mixing.
2. To improve flame stability as a result of the formation of recirculation zones.
3. To minimize flame impingement on the burner.

RR Derwent

RR Trent

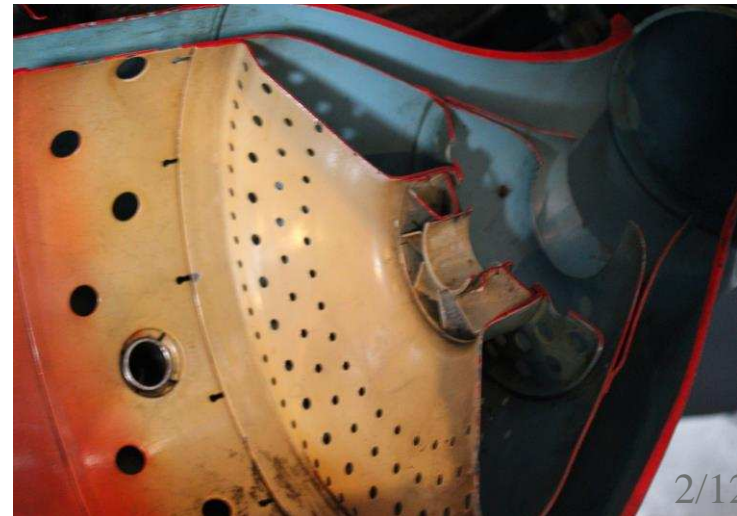


Objectives


1. To further understand the flow dynamics in reacting and non-reacting swirling flows in practical configurations.
2. To gather complete experimental data from practical configurations (velocity, temperature, scalar distribution).

Typical test cases → 3. Rod-stabilized flames

1. Cabra flames



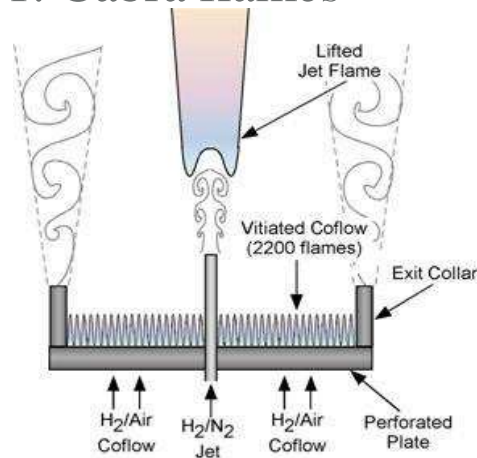


2. Sandia flames

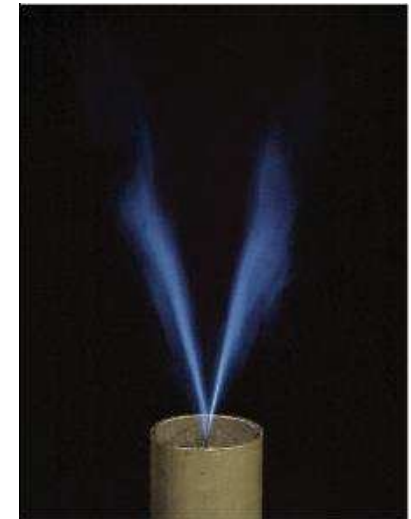

1. <http://www.me.berkeley.edu/cal/vcb/data/VCHNData.html>
2. <http://www.sandia.gov/TNF/DataArch/FlameD.html>
3. <https://ccse.lbl.gov/Research/Combustion/V-flames.html>

Swirl-Stabilised Burner

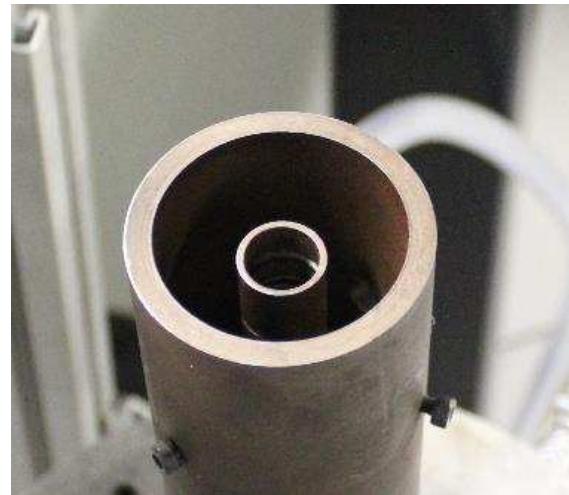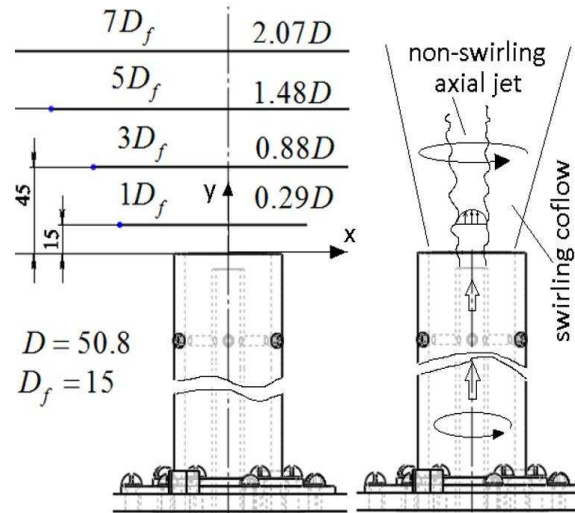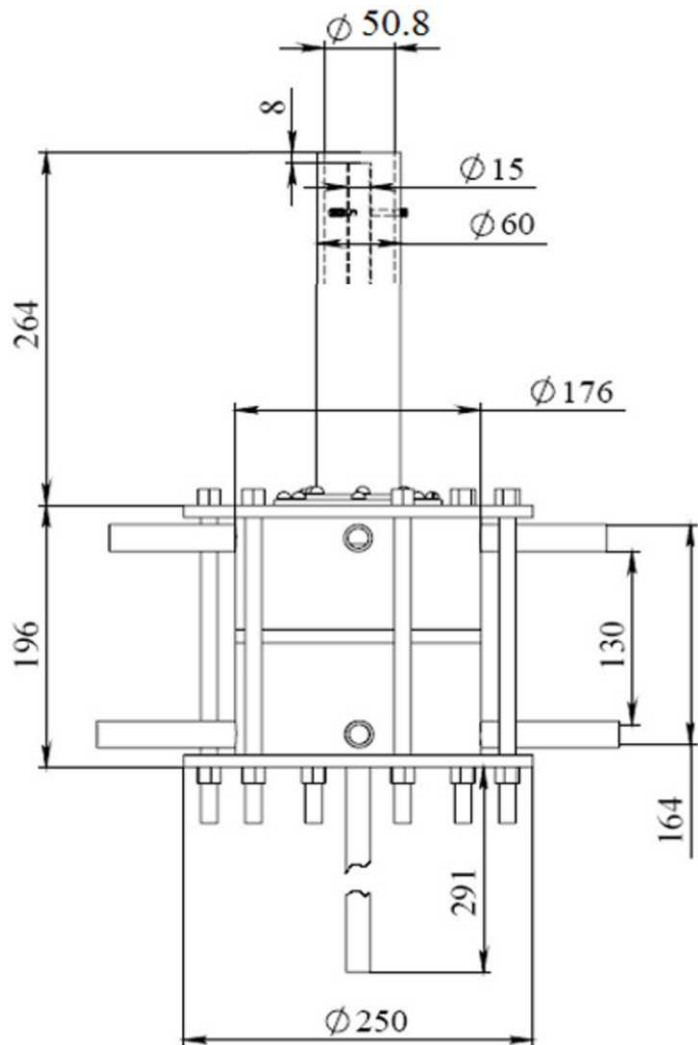


$S = 0.3, 0.58, 1.07$
 $Re = 29000$
 $V = 8.46$ (m/s)
 $\lambda_\beta = 0.3$ (mm)


Methods used:

- a) non-reacting case
 1. LIF (acetone)
 2. PIV
- b) reacting case
 1. Rayleigh
 2. PIV


Optical Arrangements

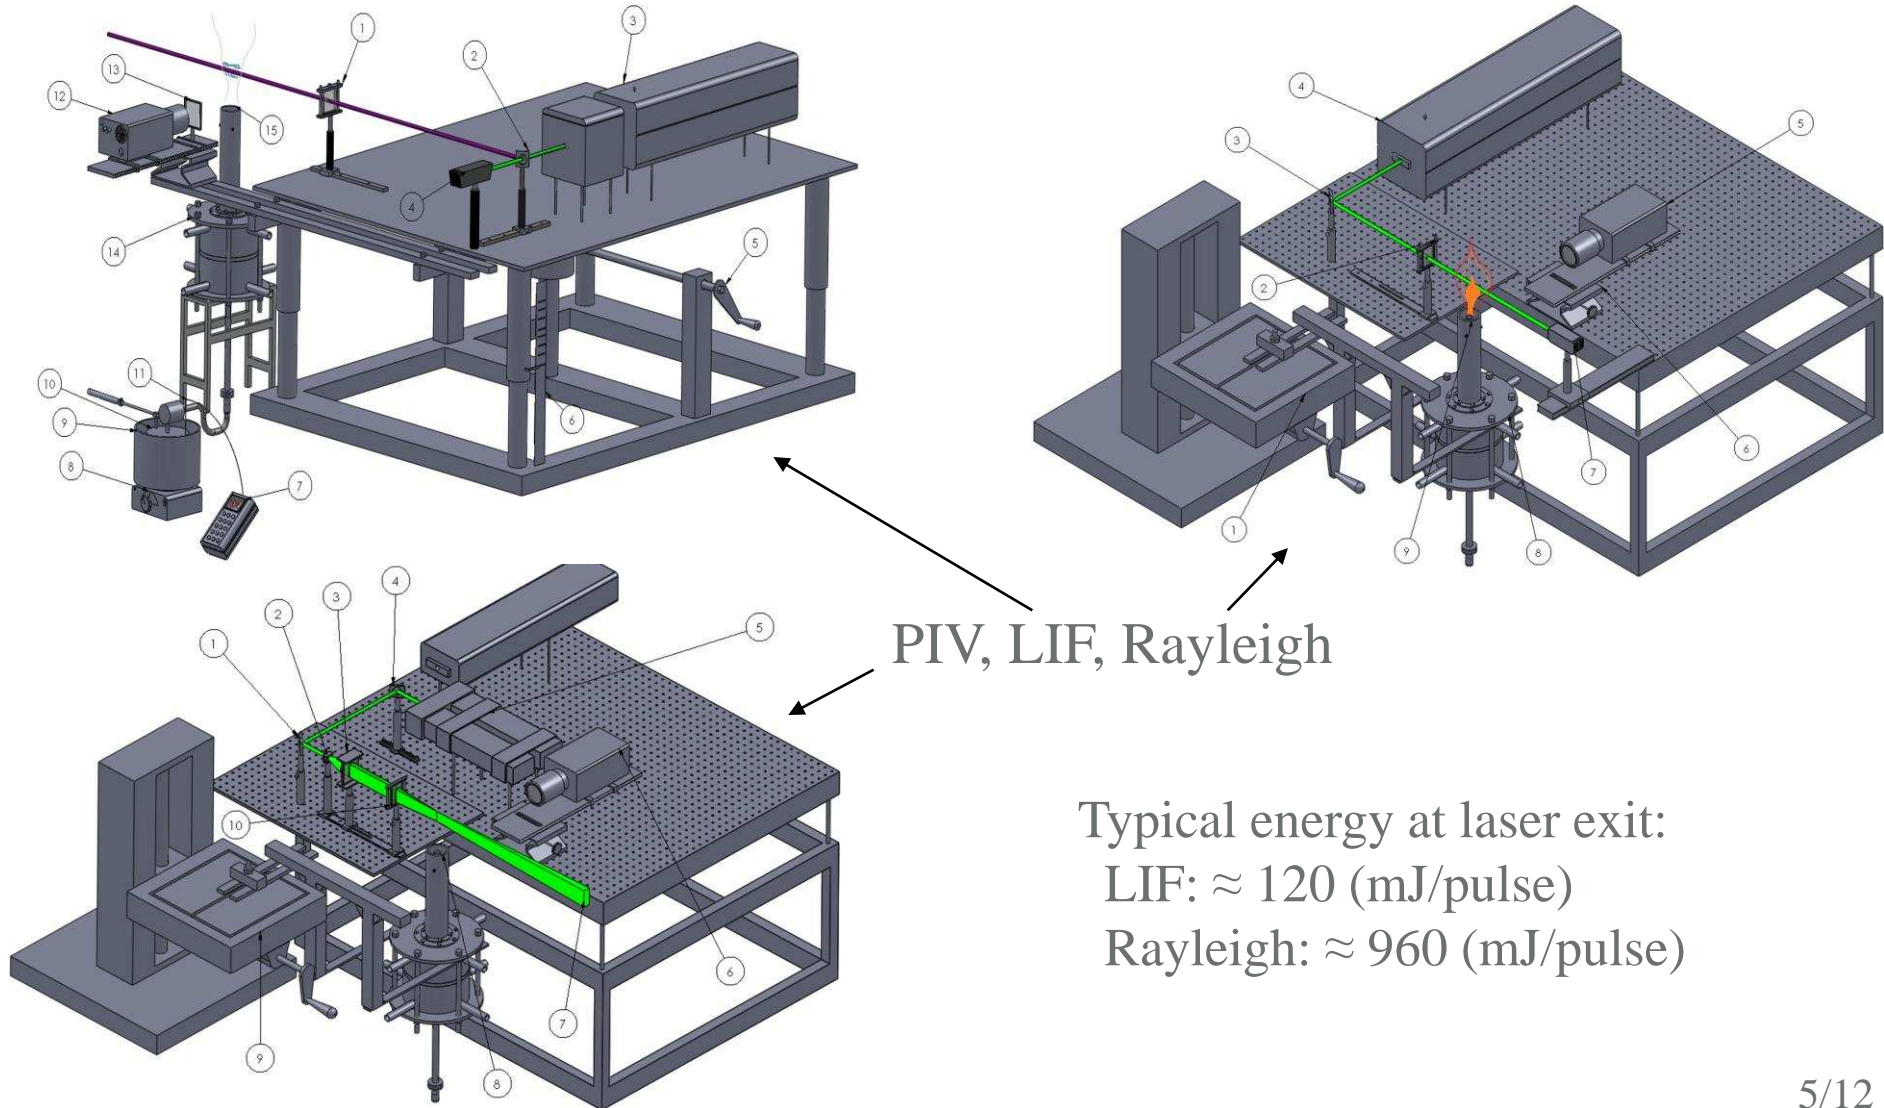

Flow Structure (Mean velocity; $S=0.3$)

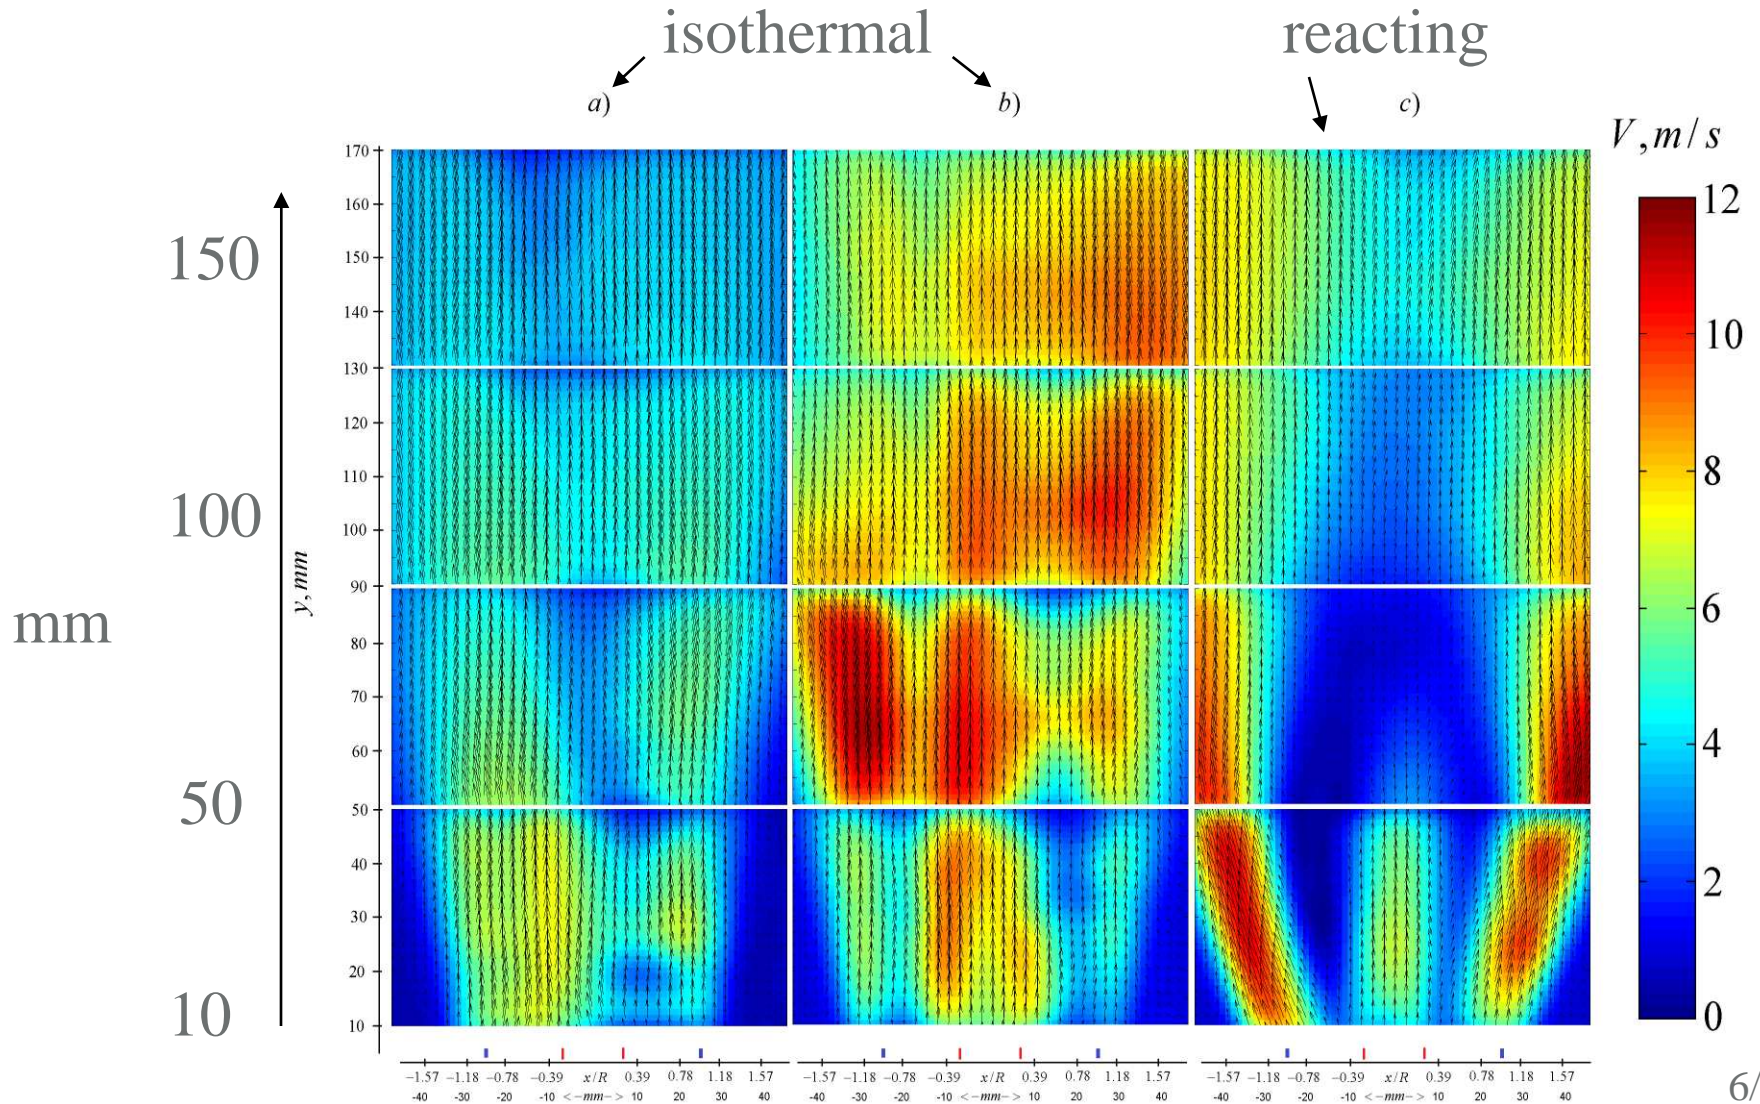


Flow structure (Mean velocity; $S=1.07$)

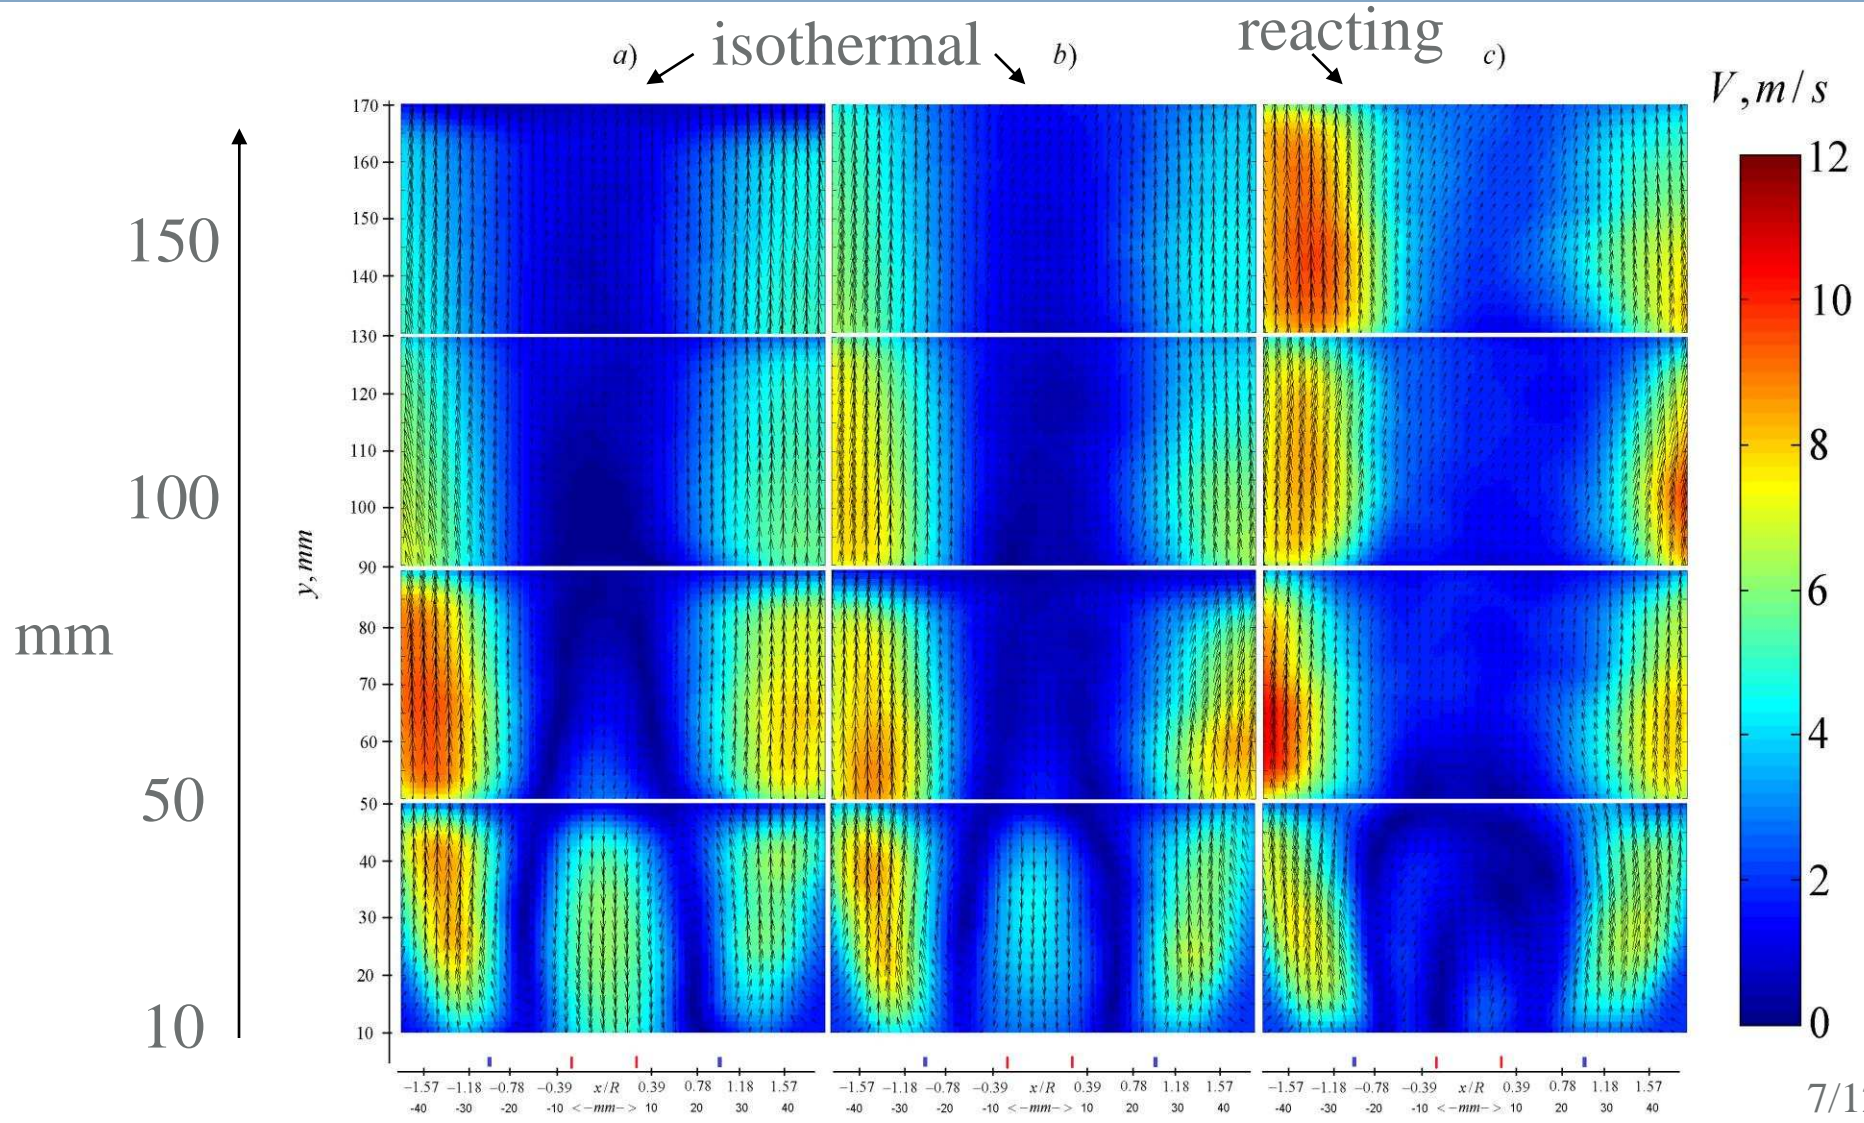


Scalar mixing and Combustion ($S=0.3-1.07$)

Instantaneous distribution at $y=15\text{mm}$ of {top to bottom: $S=1.07, 0.58, 0.3$ }:

Mixture fraction

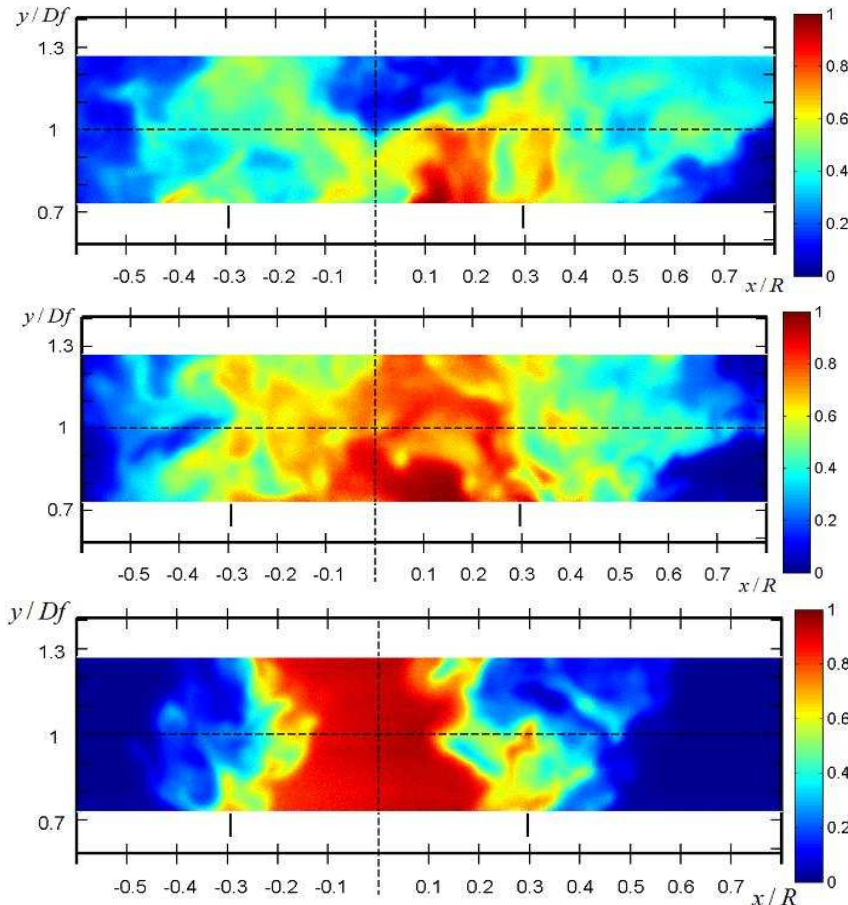



Temperature

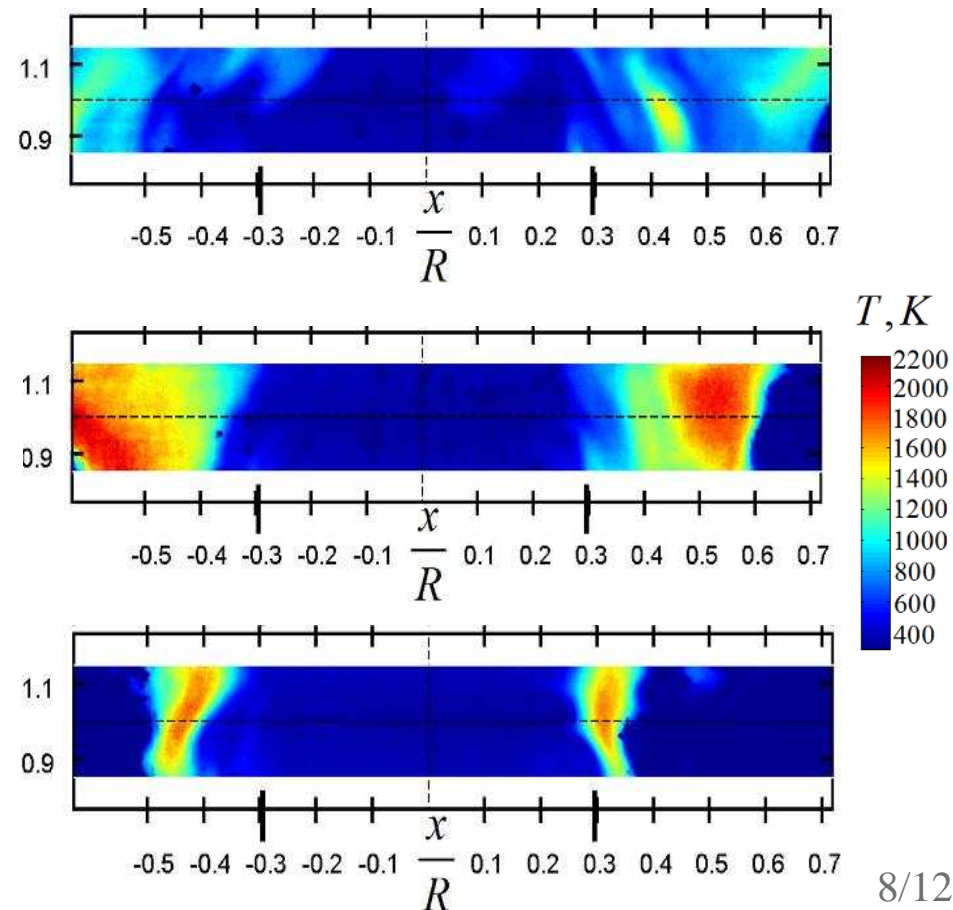

Scalar mixing and Combustion ($S=0.3$)

Distribution of mean:



Temperature, Mixture fraction

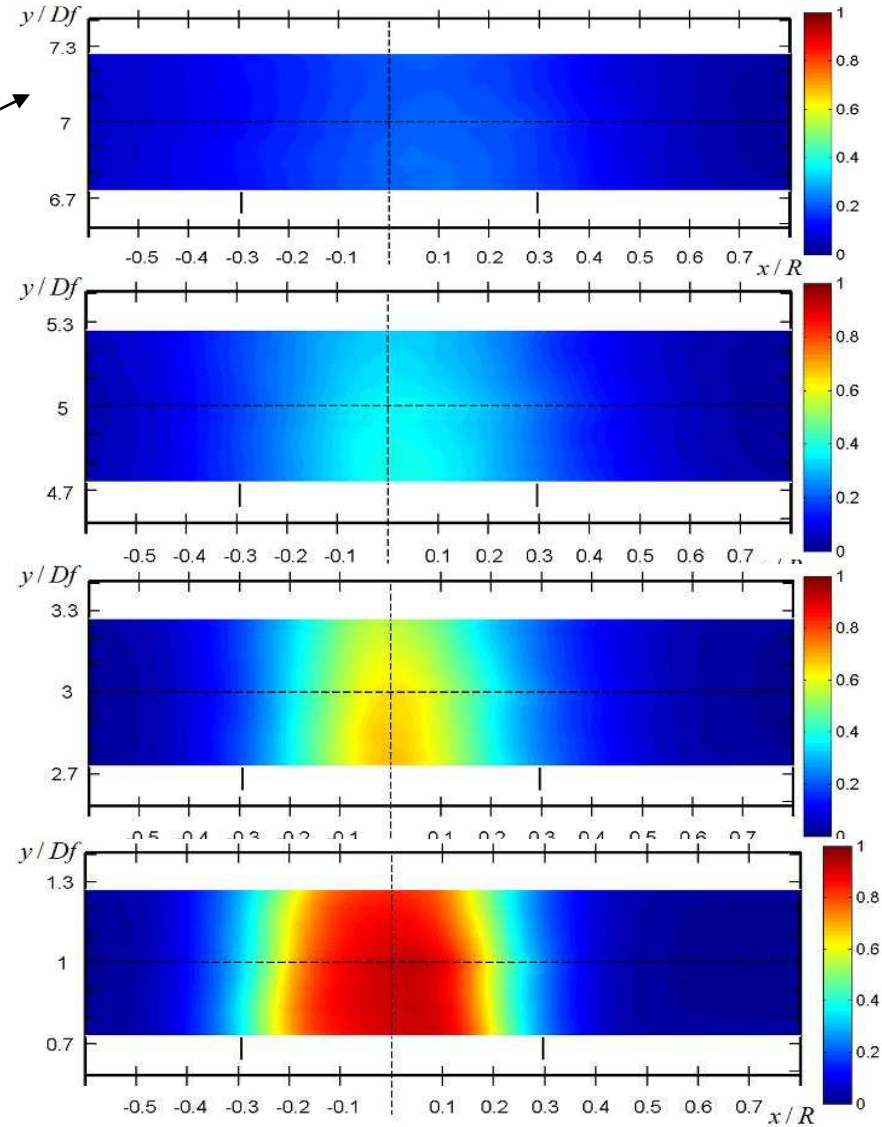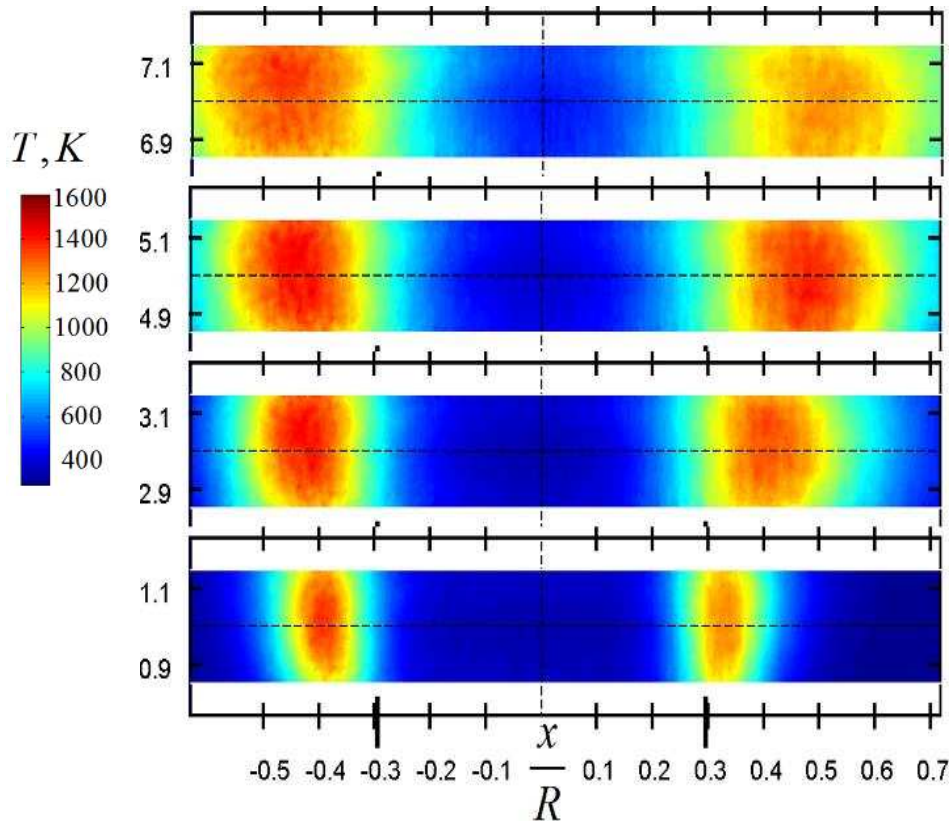

Scalar mixing and Combustion ($S=1.07$)

Distribution of mean:

Temperature, Mixture fraction

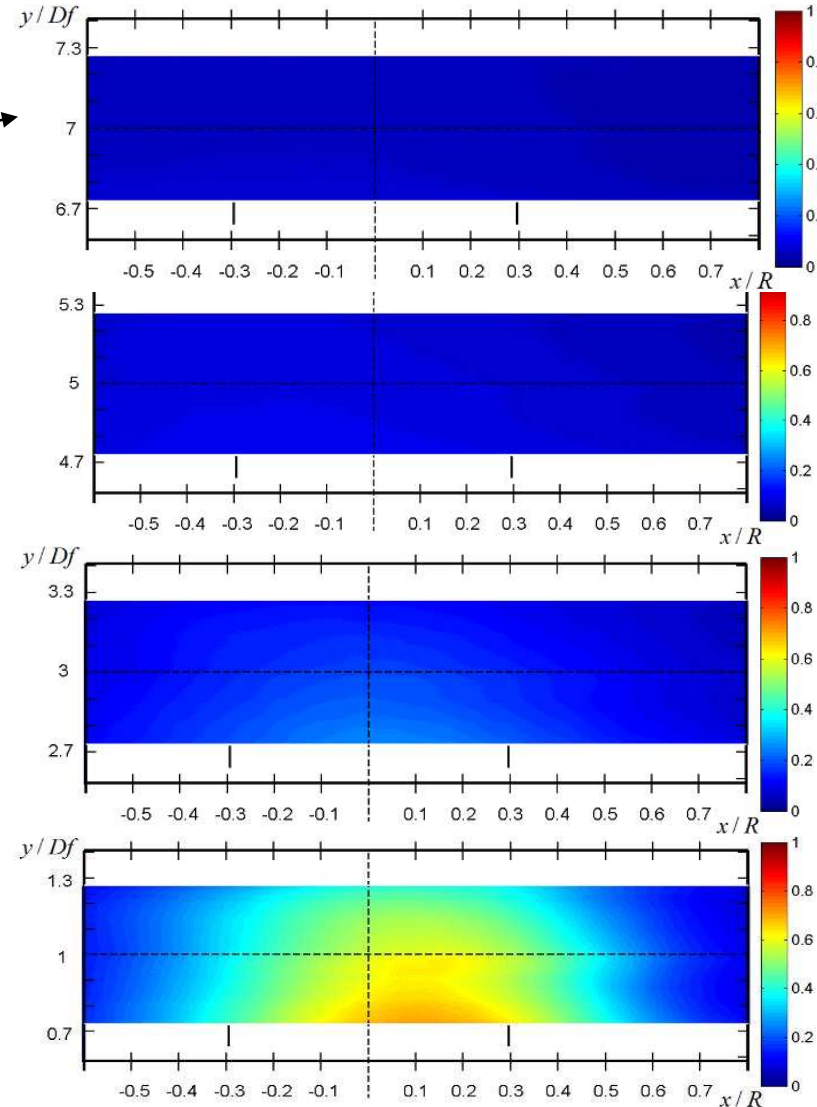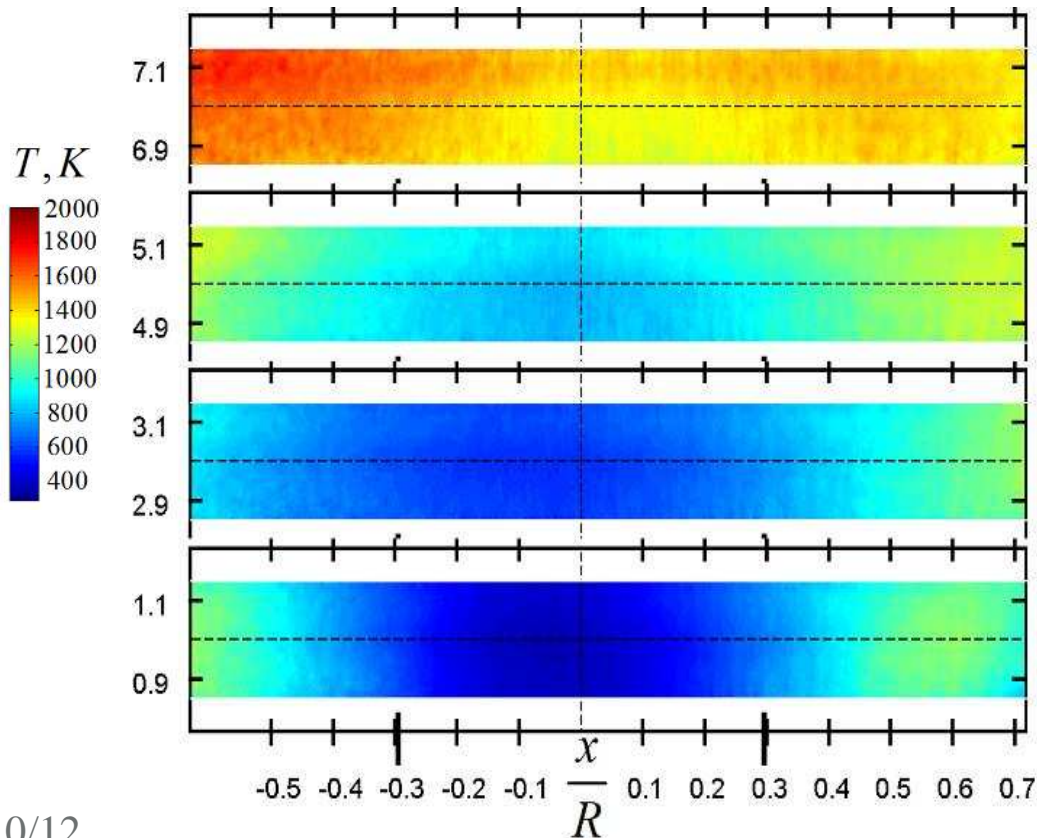

Parameters evaluated (as a function of 'S')

Isothermal case:

- ✓ Mixture fraction statistics.
- ✓ Scalar dissipation rate (instantaneous, mean, fluctuations, conditional).
- ✓ Filtered density functions (in the context of LES).
- ✓ Velocity statistics.
- ✓ Vorticity and flow structure (proper orthogonal decomposition).

Reacting case:

- ✓ Temperature statistics.
- ✓ Thermal dissipation rate.
- ✓ Velocity statistics.
- ✓ Vorticity and flow structure.

General Conclusions

1. Isothermal and reacting swirling flows produced by a 'real' burner were investigated.
2. Statistics were obtained and relevant quantities were assessed.
 - ✓ $S=0.3$ flame was not stabilised by the recirculation zone.
 - ✓ $S = 0.58$ and $S=1.07$ flame was stabilised by the recirculation zone.
 - ✓ Highly inhomogeneous instantaneous scalar and temperature distributions near the burner exit.
 - ✓ High scalar and temperature fluctuations near the burner exit.

Specific conclusions (on scalar dissipation rate, temperature statistics etc.) are not presented here.

Thank you

Experimental study of flow and scalar mixing in swirl-stabilised burners

V. Stetsyuk

Under the supervision of Yannis Hardalupas and Alex Taylor

Multiscale Flow Dynamics Group, Thermofluids Division, Mechanical Engineering Department
Imperial College London, London, UK

IOP Institute of Physics

Current Research in Combustion

A Forum for Research Students and Early Career Researchers

24 September 2013, Loughborough University, Loughborough, UK

