

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.

For more information visit www.intechopen.com



Field Experiments on Wave Propagation and Vibration Isolation by Using Wave Barriers

Seyhan Fırat¹, Erkan Çelebi², Günay Beyhan³, İlyas Çankaya⁴,
Osman Kırtel² and İsa Vural¹

¹*Sakarya University, Technical Education Faculty, Construction Department*

²*Sakarya University, Engineering Faculty, Civil Engineering Department*

³*Sakarya University, Engineering Faculty, Geophysical Engineering Department*

⁴*Sakarya University, Technical Education Faculty, Electronics and Computer Department
Turkey*

1. Introduction

In most cases the major part of the vibration energy induced by dynamic sources transferred by the Rayleigh waves propagating in the region nearby soil surface may cause strong ground motions and stress levels that transmit the vibrations through the subsoil to the structures. Therefore, the permanent adversely effects of these excessive vibrations on the foundations, particularly supported on the soft soil deposits, cause structural damage to the adjacent structures. These vibrations give even disturbances to the nearby housing, sensitive electronic equipment, measuring installations and undesired actions on human comfort in the buildings. This type of vibrations in the frequency range from about 4-50 Hz may cause some structures to resonance with their vertical modes [1-2].

For an effective protection of the buildings from structural damage due to dynamic loads generated by man-made activities, such as rock drilling and blasting in road construction, working engine foundations in industrial areas, heavy and dense transport traffics due to increasing interconnections of residential regions etc., there are many possibilities to be considered as vibration screening systems. Especially, the development in passenger transport with high speed and the increased weight of high speed trains will cause strong ground and structural vibrations at the load path and in its neighborhood, particularly in intensively populated urban areas [3-4].

The special attention to this subject from the field of civil and railway engineering in association with the design of the railway track structures originates an increasing interest in methods, which can be classified as numerical, analytical or semi-empirical approaches for isolating vibrations. Published literature reveals several analytical studies [5-8] and some numerical models taking advances of both finite and boundary element approaches combined with analytical solutions for analysis of wave propagation problems in elastic medium with emphasis on soil-structure interaction due to moving loads [9-16].

The reduction of the structural response may be accomplished as: a) by adjusting the frequency contents of the excitation, b) by changing the location and direction of the vibratory source, c) by modifying the wave dissipation characteristics of the soil deposit,

Source: Wave Propagation in Materials for Modern Applications, Book edited by: Andrey Petrin,
ISBN 978-953-7619-65-7, pp. 526, January 2010, INTECH, Croatia, downloaded from SCIYO.COM

and d) by partially interrupting the spreading of waves into the structure or by providing the structure more damping by means of installation certain devices such as additional dampers or other base isolation systems. It is also possible to modify the dynamic transmitting behavior of local sub-soil through a complex mechanism of wave reflection and mode alteration around the vibration source by constructing a suitable wave barrier in the path of the propagating waves between the dynamic load and the affected structures to be protected. When the wave barrier is located nearby the vibratory source, such application is known as active (near field) isolation. If the barrier is situated away from the source but around the structure to be protected from incoming waves, such far field isolation is known as passive isolation.

Both open trench and solid barrier, such as an in-filled trench with suitable materials, can be useful as vibration measures. There is a wide range of construction types of wave barriers, varying from very stiff concrete walls or row of piles to very flexible gas mattresses or wave impeding barriers, where the latter is based on the cut-off frequency of a soil layer over rigid bedrock. Because of screening efficiency, without great difficulty to realize and low cost, both open and in-filled trenches are the most common in practical engineering applications as isolation measures. Many researches have primarily dealt with the development of different numerical techniques as a tool for analyzing the influences of different parameters on the vibration screening by means of trench barriers [16-20] to compare with the few experimental studies which are carried out full scale tests on site and laboratory model investigations only for particular cases [21-24]. The effect of soil heterogeneity and layering on the wave screening efficiency of vibration isolation systems under plane strain conditions are also investigated by using frequency domain formulations for numerical analysis [25, 26].

In this chapter, as an experimental study, electrodynamic shaker is used to produce vertical harmonic vibrations in the certain frequency range and accelerometers are used to obtain generated values that are stored on the computer by using signal calculator program. Two footings are constructed with clear distance where Rayleigh wave becomes dominant on site close to Sakarya city (Turkey). The first footing is used to produce the harmonic load and the other for accelerometers record and vice versa. A number of experiments are carried out on site in order to examine the screening efficiency of open and in-filled trench barriers, such as backfilled with water, bentonite (softer material than soil) and concrete (stiffer material than soil). The screening effectiveness of those barriers is determined from field measurements by comparing site data without barriers. Two different approaches are considered for vibration isolation, namely active and passive isolations.

2. Test site investigation

Site investigation is the procedure by which geophysical, geotechnical and other pertinent knowledge which might influence the construction or performance of a civil engineering or building project is gained.

Subsoil conditions can be explored by drilling and sampling, seismic surveying, excavation of test pits, and by the study of existing data. Extensive soil investigation will be necessary even for minor structures if the area is suspected of having deep fill, a high water table or swelling soil problems [27].

Properties of the local soil conditions should be determined to investigate isolation effect of the wave barriers accurately. Boring logs are conducted on the site for ground exploration

and soil strata definition. Borings were located where site refraction tests indicated possible anomalies, e.g., water or air filled voids, fractures etc. Two additional borings were drilled for correlation purposes. Test borings in soil material were conducted using hollow stem auger. A hollow-stem auger consists of a continuous flight auger surrounding a hollow drill stem. The hollow-stem auger is advanced similar to other augers; however, removal of the hollow stem auger is not necessary for sampling. SPT and undisturbed samples are obtained through the hollow drill stem, which acts like a casing to hold the hole open. This increases usage of hollow-stem augers in soft and loose soils [28].

The case study site is 2.5 km² flat area. The test site consists of thick alluvial deposits that are transported by the river. Area covered by water was filled by floods of the Sakarya River that occurs nearly every two years. At present, almost all the area is developed to be a flat area and marsh is seldom seen. As indicated in this geological history, surface soil of the area is very young Holocene soil developed for recent 200 years.

2.1 Standard penetration test

The standard penetration test (SPT) is an in-situ dynamic penetration test designed to provide information on the geotechnical engineering properties of soil. The test uses a thick-walled sample tube, with an outside diameter of 50 mm and an inside diameter of 35 mm, and a length of around 650 mm. This is driven into the ground at the bottom of a borehole by blows from a slide hammer with a weight of 63.5 kg falling through a distance of 760 mm. The sample tube is driven 150 mm into the ground and then the number of blows needed for the tube to penetrate each 150 mm up to a depth of 450 mm is recorded. In cases where 50 blows are insufficient to advance it through a 150 mm interval the penetration after 50 blows is recorded. The blow count provides an indication of the density of the ground, and it is used in many empirical geotechnical engineering formulae.

The key reason of the test is to supply an indication of the relative density of granular deposits, for example sands and gravels from which it is virtually impossible to obtain undisturbed samples. The soil strength parameters which can be inferred are approximate, but may give a useful guide in ground conditions where it may not be possible to obtain borehole samples of adequate quality like gravels, sands, silts, clay containing sand or gravel and weak rock. In conditions where the quality of the undisturbed sample is suspect, e.g. very silty or very sandy clays, or hard clays, it is often advantageous to alternate the sampling with standard penetration tests to check the strength [29].

2.2 Soil classification

Soil is created by many processes out of a wide variety of materials. Because deposition is irregular, soils are notoriously variable, and often have properties which are undesirable from the point of view of a proposed structure. Soil classification systems are set up to allow the expected properties of the soil in a given condition to be conveyed in a shorthand form. The stability and performance of a structure founded on soil depend on the subsoil conditions, ground surface features, type of construction, and sometimes the meteorological changes. Soil, in the engineering sense, is the relatively soft and uncemented material which overlies the rock of the outer part of the Earth's crust [30].

The water table is generally high to be about 1 to 3 meters and it may come closer the ground surface in rainy season. The ground dominantly consists of gravely and silty sand having different densities and contains low plasticity silty and clay bandage at some places.

Site soils are characterized as clay, silty clays, silty gravel and gravel. Material properties of the test site are given in Table 1.

SUMMARY OF TESTING RESULTS											
Report No:		06/0327		Sieve			Atterberg			Hydrometer	
Project Name	Soil Structure Profile	Analysis		Limits			Soil Classification	Water content	Hydrometer		
		+ # 4	- # 200	LL	PL	PI			-0,076	-0,005	
Hole No	Specimen No	Depth (m)	%	%	%	%	%	TS1500	%	%	%
SK1	SPT 1	1.00-1.45	0	98	42	22	20	CI	32	98	46
	SPT2	2.00-2.45	0	87	27	20	7	CL	32	87	18
	UD1	2.50-3.00	0	85	26	20	6	CL	32	85	16
	SPT 3	3.00-3.45	50	21	NP	NP	NP	GM	9		
	SPT 4	4.50-4.95	59	5	NP	NP	NP	GW-GM	7		
	SPT 5	6.00-6.45	0	84	28	22	6	CL	26	84	14
	SPT 6	7.50-7.95	46	6	NP	NP	NP	GW-GM	12		
	SPT 7	9.00-9.45	62	5	NP	NP	NP	GW-GM	7		
SK2	SPT 8	10.00-10.45	91	1	NP	NP	NP	GW	4		
	SPT1	1.50-1.95	0	98	39	21	18	CI	28		
	UD1	2.50-3.00	0	95	40	21	19	CI	35		
	SPT2	3.00-3.45	0	93	38	22	16	CI	33		
	SPT3	4.50-4.95	54	5	NP	NP	NP	GW-GM	9		
	SPT4	6.00-6.45	0	88	28	21	7	CL	37	88	18
	SPT5	7.50-7.95	47	21	NP	NP	NP	GM	14		
	SPT6	9.00-9.45	81	6	NP	NP	NP	GW-GM	6		

Table 1. Material properties of the test site.

2.3 Seismic refraction and reflection tests

In reflection and refraction prospecting, body waves are the source of information used to image the Earth's interior. In reflection experiments, analysis is concentrated on energy arriving after the initial ground motion. Specifically, the analysis concentrates on ground movement that has been reflected off of subsurface interfaces. Subsurface structures can be complex in shape but like the refraction methods are interpreted in terms of boundaries separating material with differing elastic parameters. Refraction experiments are based on the times of arrival of the initial ground movement generated by a source recorded at a variety of distances. Later arriving complications in the recorded ground motion are discarded. These are then interpreted in term of the depths to subsurface interfaces and the speeds at which motion travels through the subsurface within each layer. These speeds are controlled by a set of physical constants, called elastic parameters that describe the material [31]. In this study, thumper is used for both seismic refraction and reflection tests as an energy source. Soil dynamic parameters that are obtained by the tests are given in Table 2.

Soil Dynamic Parameters						
Parameters	Symbol	Unit	1. Layer	2. Layer	3. Layer	4. Layer
P (Compression) Wave Velocity	C_p	m/s	370	580	1012	1739
S (Shear) Wave Velocity	C_s	m/s	133	220	341	570
Layer Thickness	h	m	0.7	1.2	1.8	2.3
Density	ρ	kN/m ³	13.6	15.2	17.5	18.9
Maximum Shear Module	G_{max}	kN/m ²	23545	72098	199075	625615
Elasticity Module	E	kN/m ²	67155	204174	571727	1319592
Poisson Ratio	ν	-	0.42	0.44	0.35	0.30
Soil Vibration Period	T_0	s	0.6			

Table 2. Soil dynamic parameters in the test site.

3. Measurements for vibration screening performance

Evaluation of the screening effectiveness precisely depends on the barrier material stiffness. Hence, a series of experiments are necessary to understand the propagating characteristics of the waves. The test layout for both active and passive isolation cases is shown in Fig. 1.

The layout consists of exciter, two concrete footing, wave barrier, and 2 measurement points. Electrodynamics shaker, which induces a sinusoidal motion, shown in Fig. 2 is used as a stationary vibration source to produce vertical harmonic force of maximum amplitude of 250 N in a frequency range of practical importance of 10 Hz to 95 Hz. Besides accelerometers are employed to obtain generated values that are stored on computer by using signal calculator program. The excitation frequency is increased progressively in $\Delta f = 5$ Hz steps. The noise in the signals recorded during the test was eliminated during signal processing by digital filtering with a band-pass filter.

The shaker is mounted on thin metal plate and placed centrally above the rigid square footing in order to excite only vertical vibrations. Two concrete surface footings with dimensions 1.0 m x 1.0 m x 0.5 m which are built on the site with clear distance of $L_F = 25$ m are used. For research purposes, a rectangular, $D_t = 3$ m long open trench is constructed symmetrical about the center line between these footings. The first footing is used to produce the harmonic load and the other for accelerometers record and vice versa. The installed source on footing is placed at a distance of 4 m from the trench for the measurement of active isolation case and a distance of $L_t = 20$ m for measurement of passive isolation. The vertical components of harmonic vibrations are recorded with those accelerometers located on these foundations, which corresponds to a time interval of $\Delta t = 0.0005$ sec. The displacement amplitudes are computed from the acceleration data.

The screening performance of the material stiffness of the trench compared to soil and the excitation frequency range are investigated by conducting a series of field tests of source and receiver isolation barrier, namely active and passive vibration screens. The considered parameters are summarized in Table 3.

The length of Rayleigh (λ_R) wave of the generated vibration is one of the most critical factors to determine the screening effectiveness of wave barriers. Provided that the minimum depth of open trench should be at least $0.6\lambda_R$ at a point $10\lambda_R$ away from such trench for active isolation and $1.33\lambda_R$ for the passive when the measurement point is located at a distance

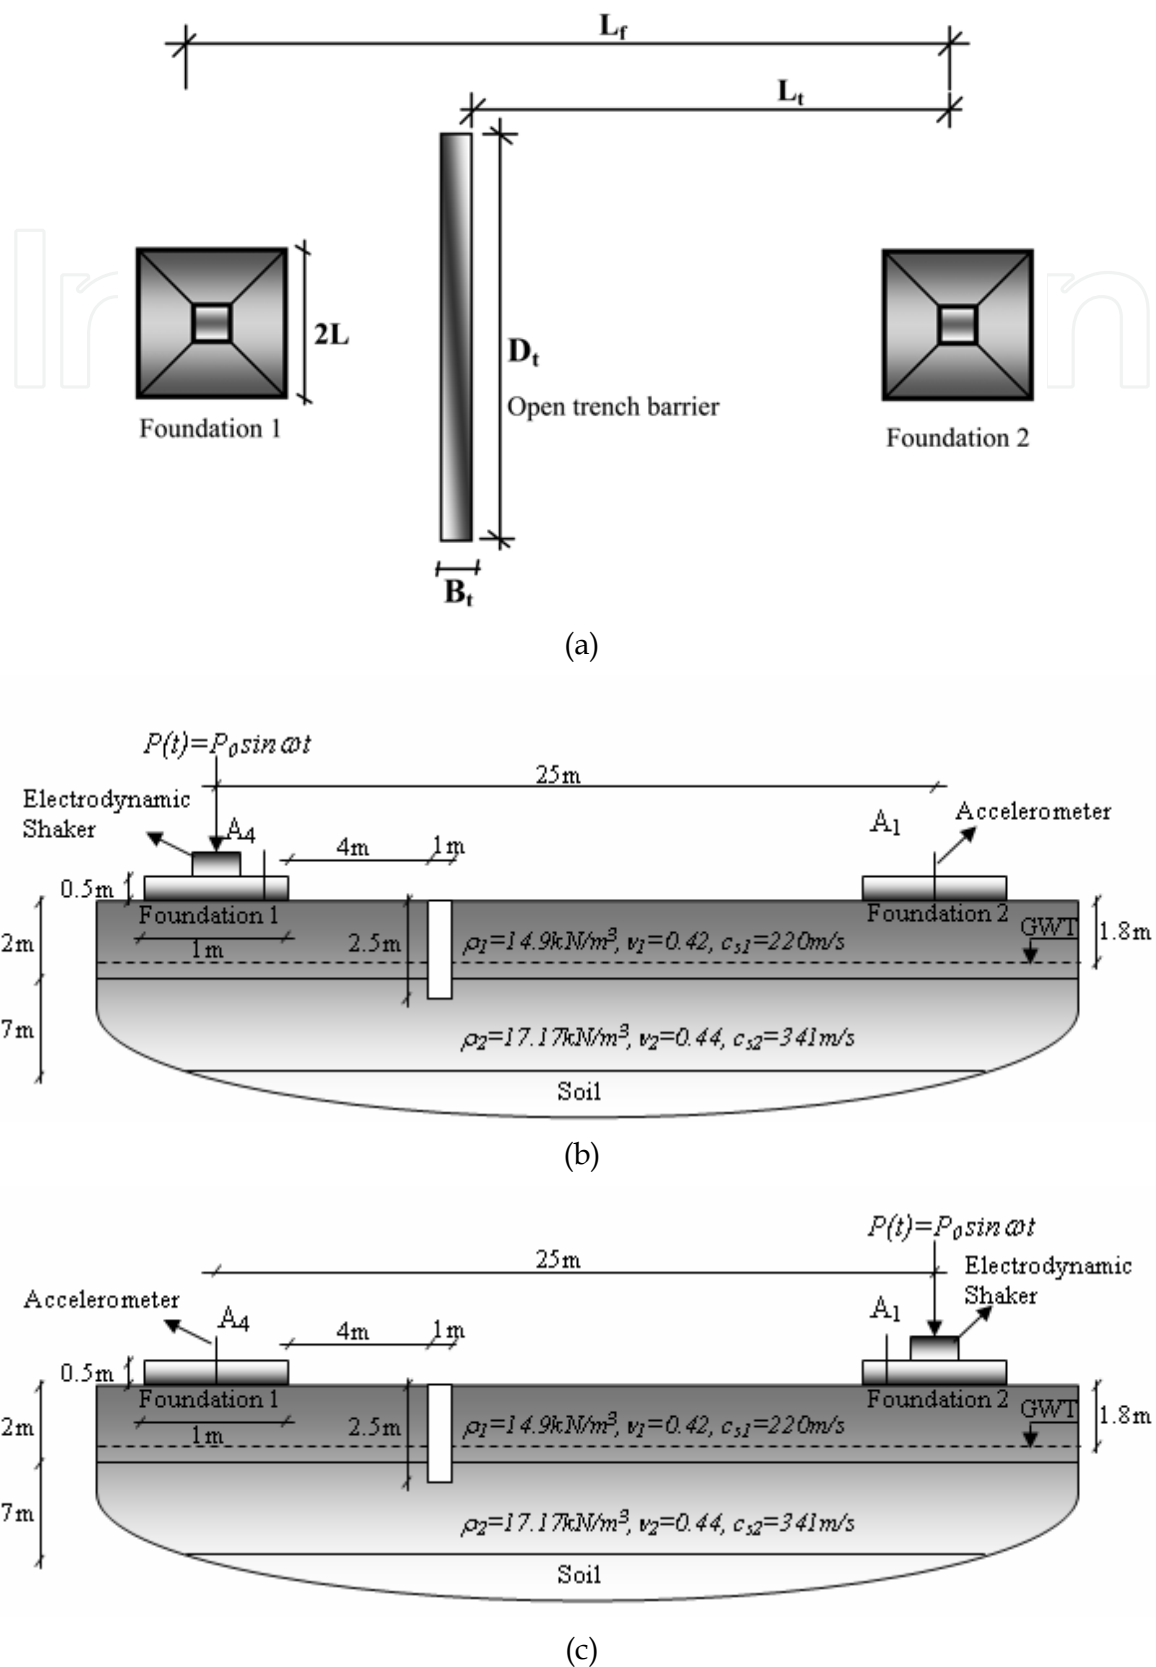


Fig. 1. Field test model for active and passive isolation cases: a) Plan view, b) Active isolation, c) Passive isolation.

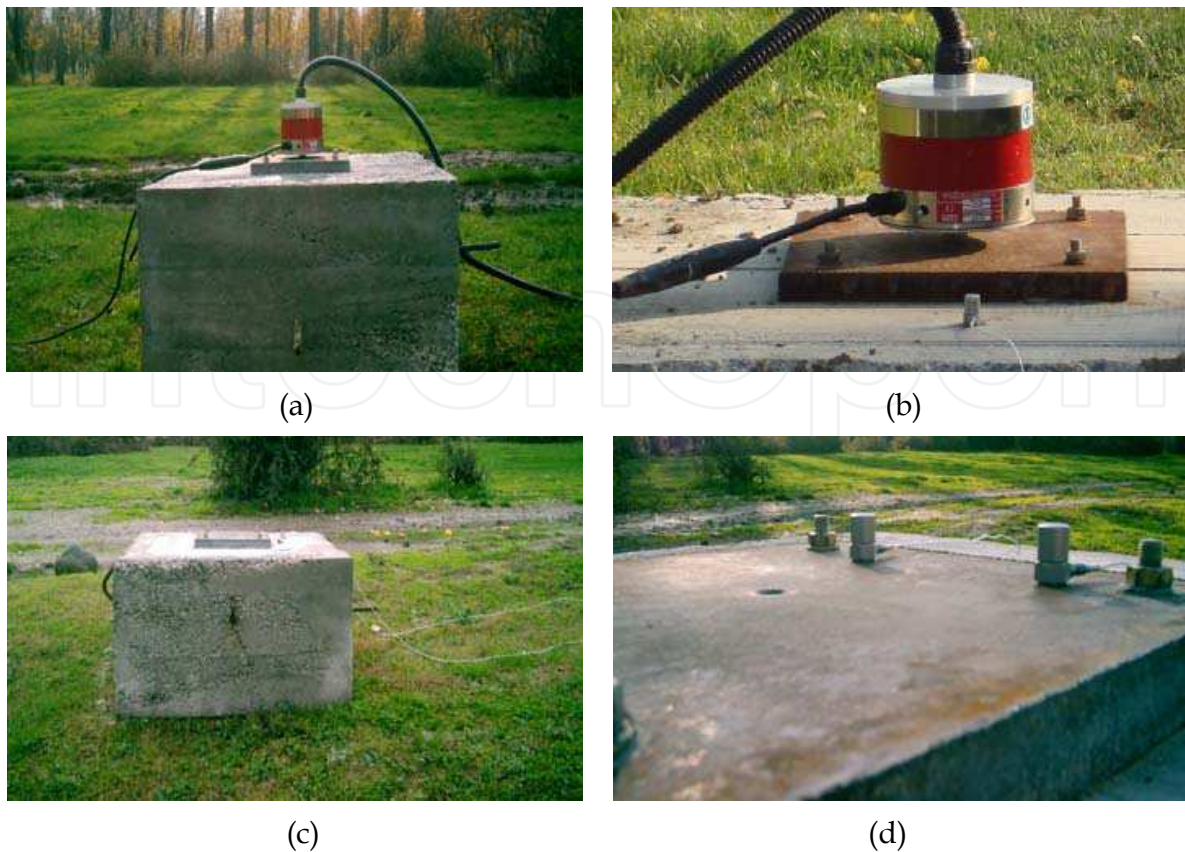


Fig. 2. Electrodynamic shaker and accelerometers placed on the foundations: a) Electrodynamic shaker placed on the foundation, b) Electrodynamic shaker and accelerometer, c) Measurements recorded foundation, d) Accelerometers placed on the foundation.

Material	Mass density, ρ (t/m ³)	Pressure wave velocity, C_p (m/s)	Shear wave velocity, C_s (m/s)	Poisson's ratio, ν	Geometry	Depth of trench, H_t (m)	Width of trench, B_t (m)
Bentonite (softer) trench	1.65	400	100	0.35	Rectangular	2.5	1.0
Concrete (stiffer) barrier	2.40	5000	2400	0.20	Rectangular	2.5	1.0
Water filled trench	0.98	-	-	0	Rectangular	2.5	1.0

Table 3. Material properties and geometric parameters of the in-filled trench barrier.

between $2\lambda_R$ and $7\lambda_R$ from the wave barrier. The trench width has to be built between $0.1\lambda_R$ and $0.5\lambda_R$ to accomplish such remarkable reduction in vertical soil vibrations [21-23]. The predominant values of the applied excitation frequencies in these experimental studies and the related Rayleigh wavelengths are given in Table 4 in order to determine the optimum

geometrical parameters of the rectangular trench barrier an average for an effective protection and to avoid the difficulties in their practical applications such as instability of soil, high water table levels, and high costs.

Frequency of exciter (f) (Hz)	Wave length of Rayleigh waves (λ_R) (m)	Trench width, B_t (min. $0.1\lambda_R$) (m)	Active isolation		Passive isolation	
			Trench depth, H_t (min. $0.6\lambda_R$) (m)	Measurement point from trench, L_t (min. $10\lambda_R$) (m)	Trench depth, H_t (min. $1.33\lambda_R$) (m)	Measurement point from trench (min. $2\lambda_R$) (m)
25	7.92	0.79	4.75	79.2	10.53	15.84
50	3.96	0.40	2.37	39.6	5.26	7.92
75	2.64	0.26	1.58	26.4	3.51	5.28
100	1.98	0.20	1.19	19.8	2.63	3.96
All	All	1.00	2.50	20.0	2.50	5.00

Table 4. Rayleigh wavelength and minimum conditions for the screening effectiveness of an open trench barrier.

Four types of trench barriers are used to obtain better result of vibration control. For the case of in-filled trenches as shown in Fig. 3, the backfill material compared to soil is respectively considered as water, bentonite as softer material and concrete as stiffer material in place of the open trenches. For the sake of slope stability the trench walls are sealed by reinforced concrete in a width of 0.15 m.

In the experimental program, A_1 is denoted as observation point where foundation to be protected and A_4 as excited foundation for active isolation case. A_1 is donated as excited foundation and A_4 to be protected foundation for passive isolation case.

2.4 Data processing

The data is obtained experimentally on the site, which is unrefined, for the case of active and passive isolations then refined by using SeismoSignal 3.02 programme which is defined as band-pass filtration (See Fig. 4 and 5). Then, the filtrated data is reproduced in Matlab environment to obtain the graphs. These obtained data for A_1 and A_4 recorded stations of displacement-time history graphs are figured out for all harmonic loadings and consequently for both active and passive cases (Fig. 6).

3.1 A_1 measurement for active isolation

The resulting time histories of the vertical response at point A_1 for active isolation measures in the case of no trench, rectangular open trench and an in-filled trench are compared in Fig. 6. The wave propagation pattern of the transmitted vibrations in the case of both open and in-filled trench barriers is similar to the case of no trench. This general trend of the observed behavior changes only for an excitation frequency of 50 Hz. However, any time delay does not exist between the amplitudes of the spreading waves.

The amplitude reduction factor R_f is defined as the vertical displacement amplitude after the presence of the trench barriers relative to the amplitude on the undisturbed site (without trench barriers). An effective screening exists when the calculated reduction factor from the experimental data is less than 0.6 for the applied excitation frequencies.

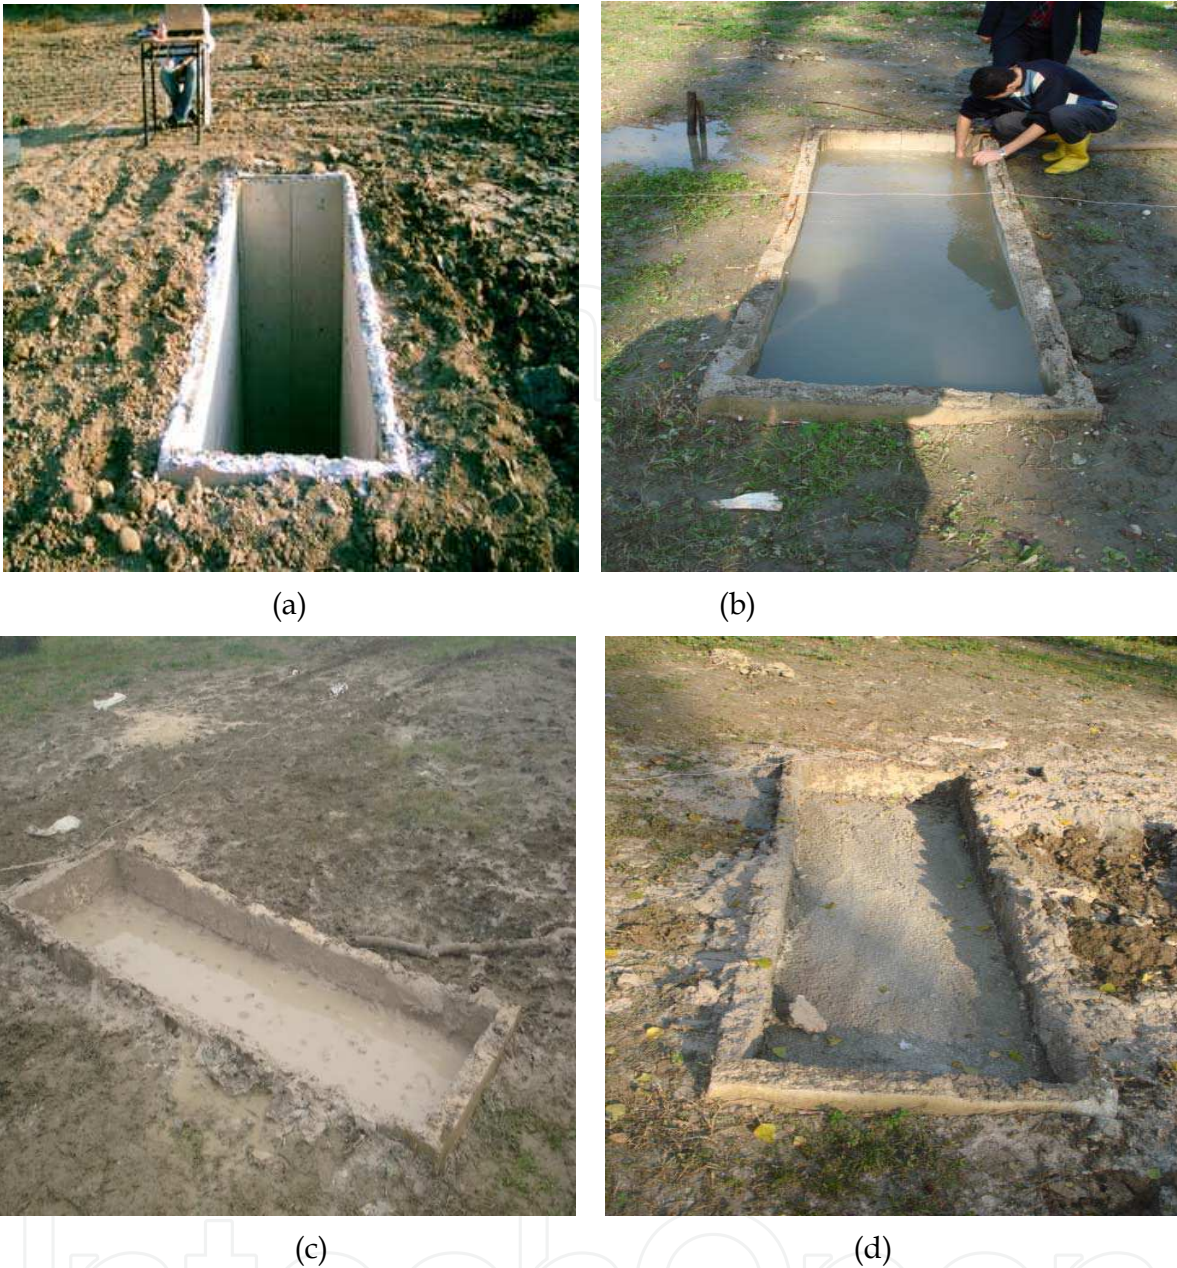


Fig. 3. Trench barriers: a) Open trench, b) Water filled trench, c) Bentonite filled trench and d) Concrete filled trench.

The amplitude reduction factor of vertical displacement due to harmonic sinusoidal load with different frequencies applied for A_1 measurements are shown in Fig. 7. At almost all considered source frequencies the trench causes significantly amplification of the soil vibration (R_f is greater than 1.0). The influence of the distance (L_t) between the measurement point and the barrier location is significant for wave propagation. It should be over 10 times the wavelength of Rayleigh wave ($L_t = \min 10\lambda_R$) for a considerable reduction in the vibration level. In this study, the predominant values of applied excitation frequencies give Rayleigh wavelengths λ_R to vary between 1.98 m and 7.92 m, which result in inadequate screening (see Table 4). For insufficient distances (here, $L_t = 20$ m), strong wave interactions with wave interference effects occur between the vibratory source and affected foundation to be protected.

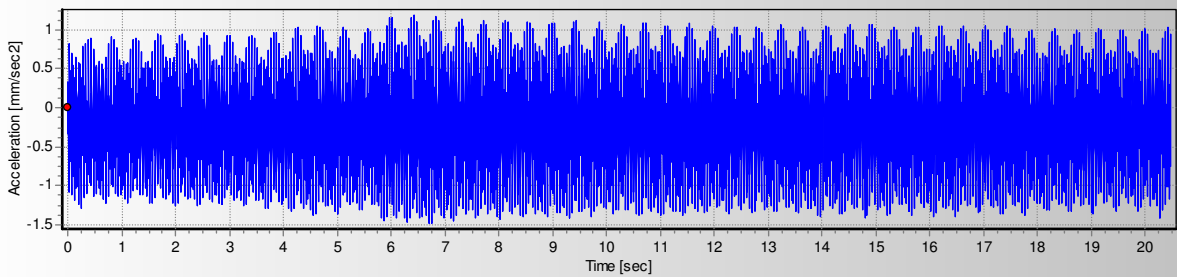


Fig. 4. A₁ active isolation for unrefined recorded data from accelerometer (25 Hz).

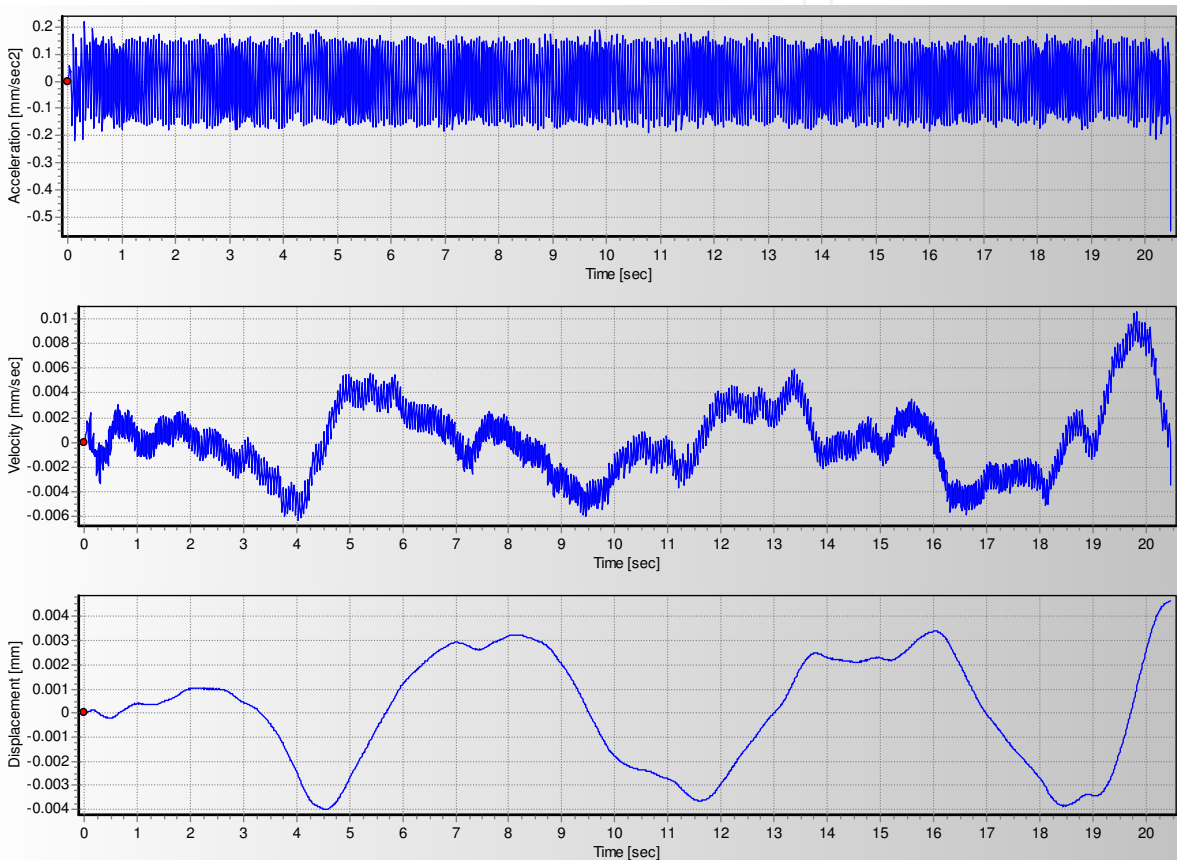


Fig. 5. A₁ active isolation for refined recorded data for acceleration, velocity and displacement (25 Hz).

3.2 A₄ measurement for active isolation

The reduction factor as a function of excited frequencies for the different backfill material properties of the trench barriers to isolate vibrations at measurement point A₄, where it is located an accelerometer near the vibratory source on the foundation is obtained as shown in Fig. 8. Screening effects of installing rectangular open trench, water filled trench, bentonite and concrete trench barriers are compared at the same experimental site. Nevertheless, the measured data of the undisturbed site (without trench) is included in the comparison. From in-situ measurements of amplitude in case of soil medium with and

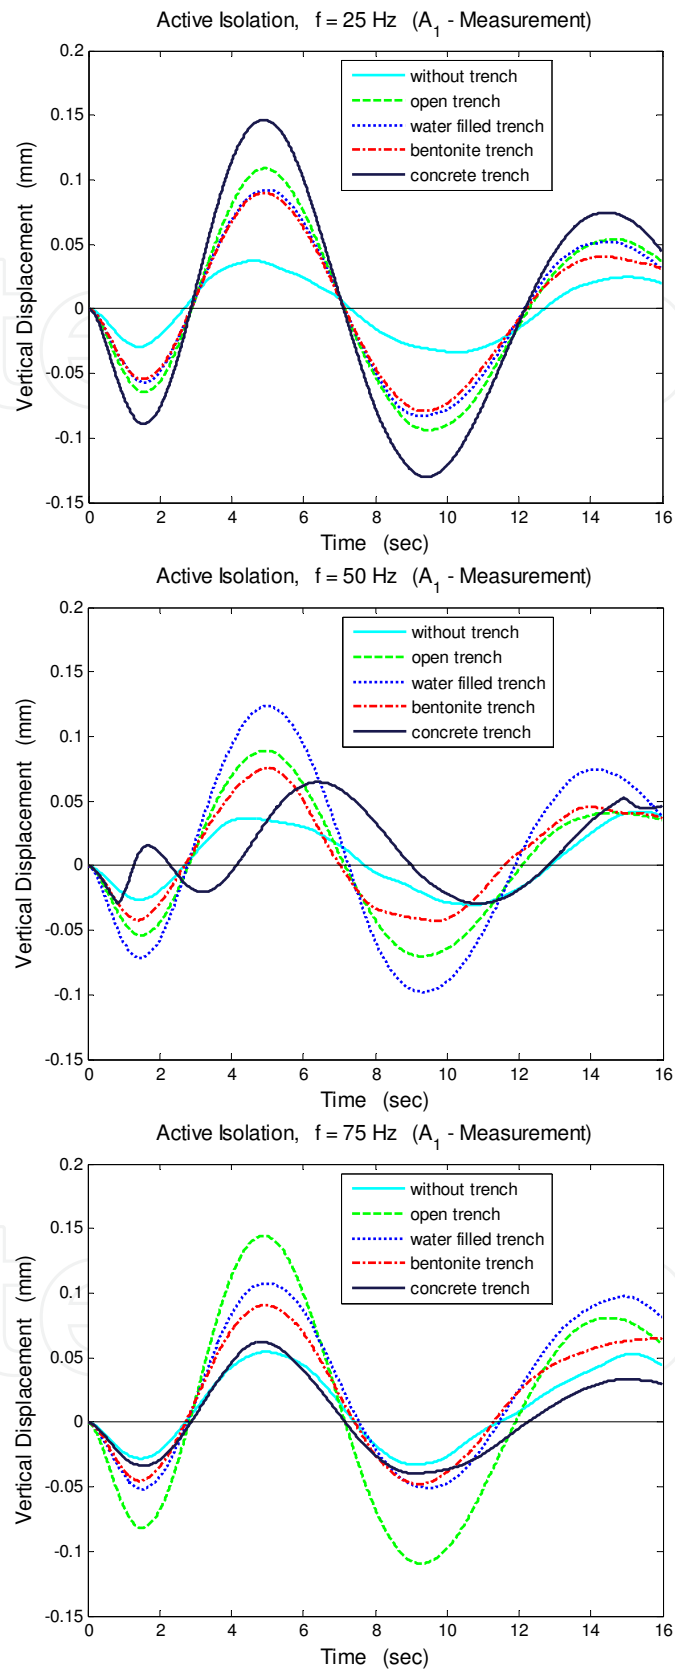


Fig. 6. Comparison of the vertical displacement time histories at point A_1 for active isolation measures due to three different frequencies of the exciter

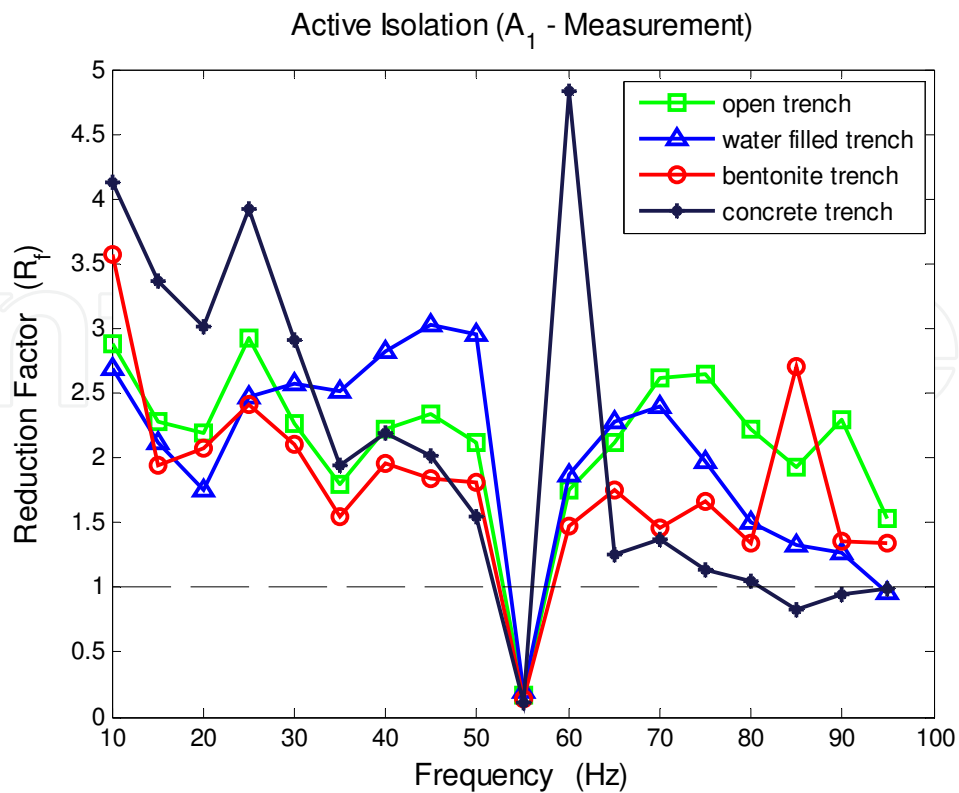


Fig. 7. Vertical amplitude reduction factor as a function of excited frequencies for active isolation at measurement point A_1

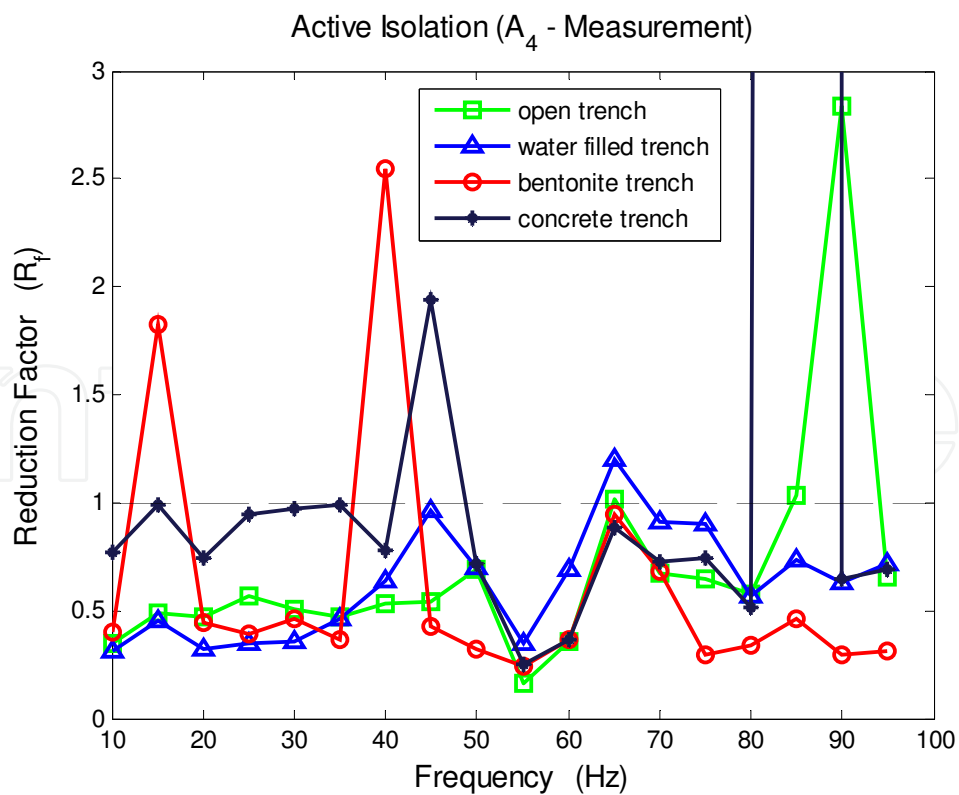


Fig. 8. Vertical amplitude reduction factor as a function of excited frequencies for active isolation at measurement point A_4

without any reduction measure, very effective vibration screening is observed for applied frequencies. For both 10 and 25 Hz frequencies of exciter, water filled trench gives a good isolation ($R_f = 0.27$) that achieve a reduction level up to 200% of the maximum vertical displacements at observation time about $t = 5$ sec compared in case of subsoil without trench barrier ($R_f = 1.0$). For these frequencies the isolation effect of bentonite and concrete trenches follows that of the water filled trench, respectively. Because of the traveling a longer propagation path surrounding the trench barrier, there is a certain time delay in the incoming waves to the source. Bentonite trench barrier gives the best isolation measures in high frequency values of 50, 75 and 95 Hz in Fig. 8. It reduces the maximum response respect to the original site from 0.16 mm to 0.05 mm ($R_f = 0.31$) at about $t = 5$ sec for excitation frequency of 50 Hz. Comparing the screening effects of bentonite trench with that of the concrete barrier at 75 Hz, vibration isolation by bentonite trench is reduced the maximum values about 2.5 times more than that of concrete barrier. The differences of the screening efficiency depend on propagating wave characteristics which occur after hitting an obstacle such as reflection, refraction and diffraction varied with the in-filled material properties of the trench barriers.

3.3 A_1 measurement for passive isolation

The Fig. 9 illustrates a significant isolation effect in the vertical displacement amplitudes in the case of both open and in-filled trench barrier. The maximum displacement ($u_{zmax} = 0.2$

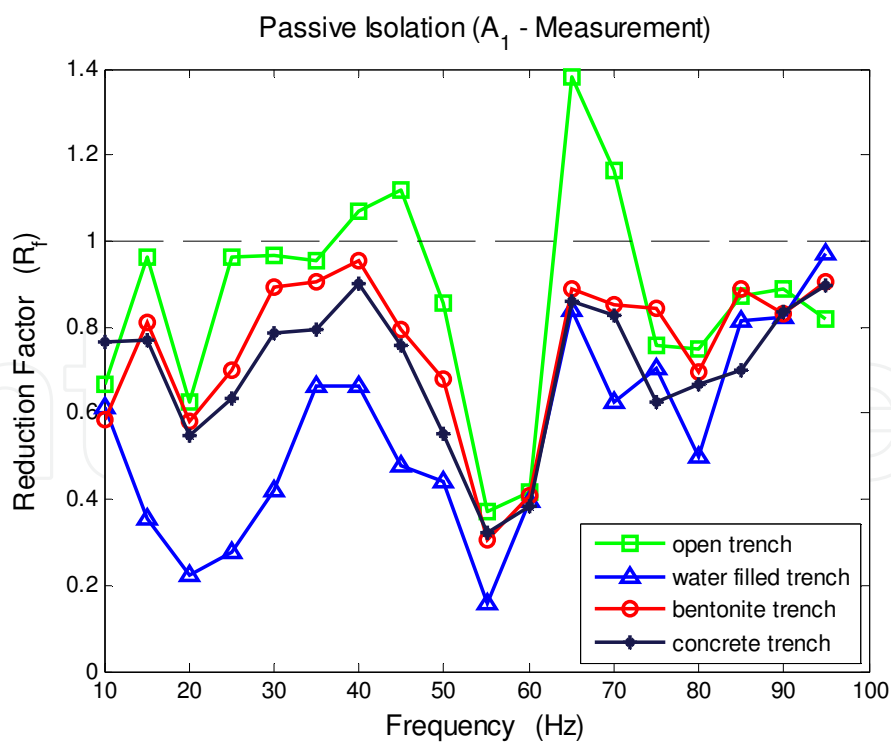


Fig. 9. Vertical amplitude reduction factor as a function of excited frequencies for passive isolation at measurement point A_1

mm) is obtained in the excitation frequency of 10 Hz with no trench case as expected ($R_f = 1.0$). It is observed that certain time delay occurs between the amplitudes of the spreading waves. At all considered source frequencies, the trench barriers cause significantly reduction of the soil vibrations ($0 < t < 10$ sec). Water filled trench gives the best screening effect ($0.2 < R_f < 0.6$) in the range of the excitation frequencies from 10 Hz to 60 Hz. It reduces the maximum vertical response from 0.15 mm to 0.025 mm at $t = 4$ sec for applied frequency of 55 Hz. Concrete barrier, bentonite filled trench, open trench, and no trench follows in that case. The displacement values are scattering in low frequency but the values are identical in high frequency cases. Waves are traveling near the surface in high frequency. This causes to be identical for all isolation measures.

3.4 A_4 measurement for passive isolation

In Fig. 10 the resulting time history on vertical displacements at measurement point A_4 for passive isolation is shown for the cases of subsoil without any reduction measure as well as a trench barrier with various in-filled materials as reduction measures. The wave propagation form of the transmitted vibrations in the case of both open and in-filled trench barriers is almost similar to the case of no trench for low frequency values. When increasing the frequency values of the stationary exciter the wave pattern becomes irregular due to soil formations and complex mechanism of wave reflection varied with the in-filled material properties of the trench barriers. Soil layers are more inhomogeneous near to the ground surface. It is well known that waves penetrate to lower soil layers in low frequency values. Bentonite filled trench barrier gives the best isolation effect in the frequency of 10 Hz. The reduction efficiency of this trench barrier can reach around 40%. As shown in field test results, the isolation effect of water filled trench is more effective for excitation frequency of 25 Hz. It reduces the maximum response respect to the undisturbed field from 0.038 mm to 0.0175 mm at about $t = 5$ sec. In high frequency values water and bentonite filled trenches are effective. But in those cases waves are traveling near to surface and are named as noise type of waves. Comparing the screening effects of bentonite barrier with that of the water filled trench at 75 Hz of vibratory source, vibration isolation by water filled trench is reduced the maximum values about 20% more than that of bentonite barrier. It is anticipated that a softer material compared to soil is also performed as backfill material for an in-filled trench barrier.

Table 5 compares the presented data with the empirical formula [23], numerical solutions [16] and laboratory test results of Haupt [22]. For possible comparisons some values are normalized as H_t/λ_R (Trench Depth/Rayleigh Wave), B_t/λ_R (Trench Width/Rayleigh Wave) and L_t/λ_R (Distance from the Vibration Source/Rayleigh Wave) in terms of amplitude reduction ratio A_r which is the ratio of the vertical displacement amplitudes at the point in the presence and in the absence of the trench.

Wave characteristics such as reflection and diffraction at layer interfaces and the heterogeneous nature of the soil play significant role on the results with the material properties of the barrier especially for the experimental measurements. Also, it is not easy to make available close results with published data due to the nature of the soil (water table level, soil structure, layering effect, heterogeneity etc.).

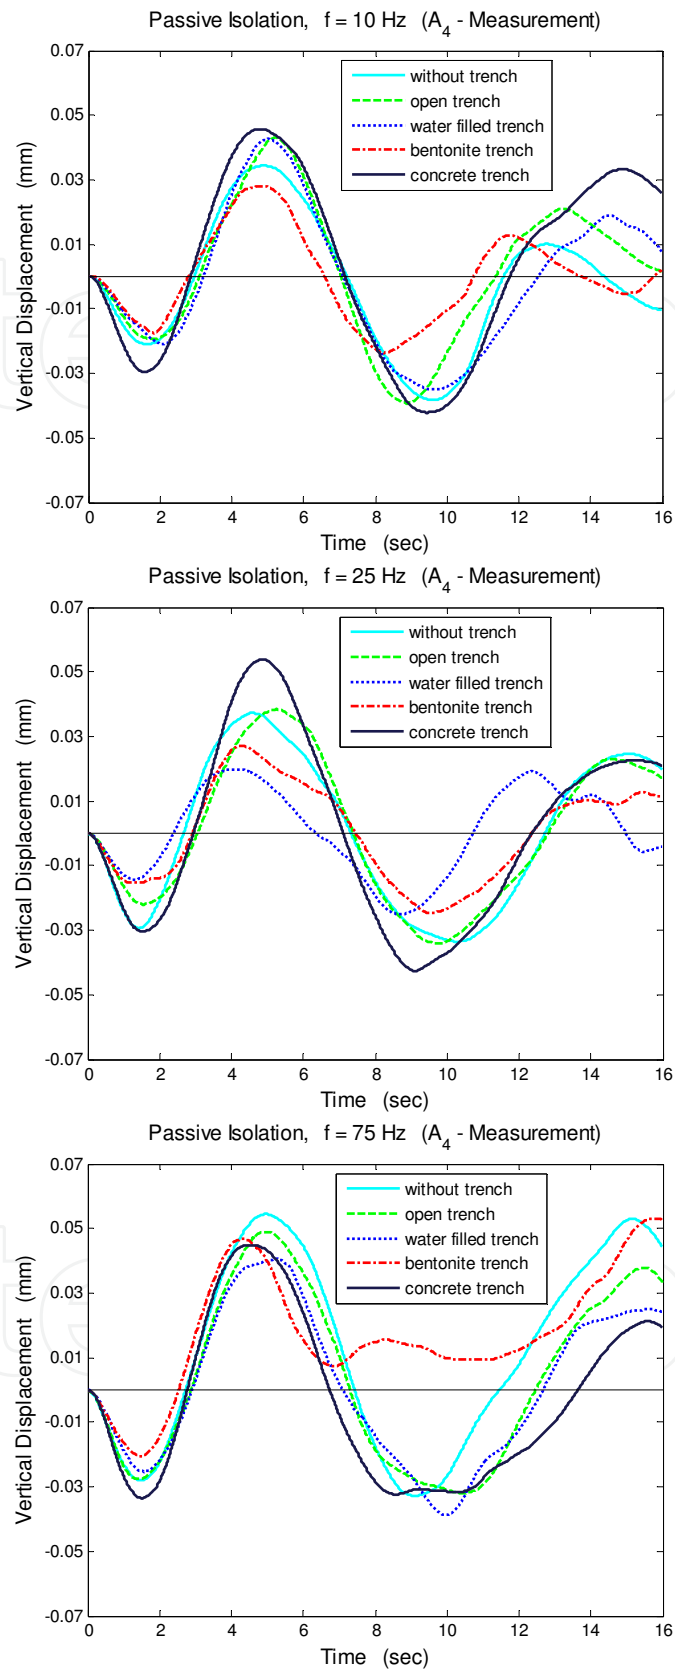


Fig. 10. Comparison of the vertical displacement time histories at point A_4 for passive isolation measures due to three different frequencies of the exciter

Vibration screening case	Normalized parameters			Present data	Reduction ratio (A_r)		
	H_t/λ_R	B_t/λ_R	L_t/λ_R		Ref. [16]	Ref. [22]	Ref. [23]
Open trench	0.64	0.26	5	0.21	0.28	0.35	0.27
Concrete barrier	0.96	0.40	7.5	0.65	0.54	0.47	0.50

Table 5. Comparison with presented and published experimental data, empirical formula and Boundary Element Method results on passive isolation.

4. Conclusions

A detailed investigation on the reduction of foundation vibrations due to a harmonic load which is produced by electrodynamic shaker using a trench barrier has been presented. The effectiveness of using open or in-filled trench as a reduction measure has been demonstrated through a site measurement study depending on the obtained results. Time dependent displacement values are reduced for both cases of active and passive isolations. In this case wave absorption plays very important role. Maximum displacements are obtained at 2-10 seconds.

Using open or in-filled trench barriers can reduce the vibrations of a structure and the resulting internal forces significantly. The use of an open trench is more effective than using an in-filled trench but its practical application is limited to relatively shallow depths. On the other hand, using softer backfill material increases the effectiveness of in-filled trench and allows for larger trench depth with no supporting measures of the vertical walls of the trench. The barriers have been found to be generally more effective in passive isolation compared to active isolation for both measurement points.

The current study aimed to provide a few general guidelines for the design of vibration isolation measures by means of trenches. It should be noted, however, that in many practical cases it seems to be appropriate to perform a more detailed investigation of the structure/soil/trench system under consideration similar as it has been done in this contribution. Designing the optimum trench with respect to its depth and width study should be performed for each particular case.

5. References

- [1] C.J.C. Jones, J.R. Block. Prediction of ground vibration from freight trains. *J. Sound Vibration* 1996; 193 (1):205–213.
- [2] A.T. Peplow, C.J.C. Jones, M. Petyt. Surface vibration propagation over a layered elastic half-space with an inclusion. *Appl. Acoust* 1999;56:283-296.
- [3] V.V. Krylov. Vibration impact of high-speed trains effects of track dynamics. *J. Acous. Soc. Am* 1996; 100 (5):3121–3133.
- [4] K.R. Massarsch. Settlements and damage caused by construction-induced vibration. In: *Proceedings of International Workshop Wave 2000*. Chouw and Schmid (eds), Bochum, Rotterdam: Balkema, 13-15 December 2000, 299-315.

- [5] R.G. Payton. Transient motion of an elastic half-space due to a moving surface line load. *International Journal of Engineering Sciences* 1967; 5:49-79.
- [6] E. Kausel. Thin-layer method. *Int. J. Numer. Meth. Eng.* 1994;37:927-941.
- [7] J.R. Barber. Surface displacements due to a steadily moving point force. *J. Appl. Mech.* 1996;63:245-251.
- [8] X. Sheng, C.J.C. Jones, M. Petyt. Ground vibration generated by a harmonic load acting on a railway track. *Journal of Sound and Vibration* 1999;225 (1):3-28.
- [9] G. Schmid, B. Verbic. Modellierung der Erschütterung aus dem Schienenverkehr mit der Randelementmethode. In: H. Bachmann (Ed.), *Erdbebensicherung bestehender Bauwerke und aktuelle Fragen der Baudynamik* 1997; Tagungsband D-A-CH'97, SIA, Dokumentation DO145.
- [10] M. Adam, G. Pflanz, G. Schmid. Two- and three-dimensional modeling of half-space and train-track embankment under dynamic loading. *Soil Dyn. Earthquake Eng.* 2000; 19 (8):559-573.
- [11] B.Y. Yang, H.H. Hung. A 2.5D finite/infinite element approach for modeling visco-elastic bodies subjected to moving loads. *Int. J. Numer. Meth. Eng.* 2001; 240:1317-1336.
- [12] C. Bode, R. Hirschauer, S.A. Savadis. Soil-structure interaction in the time domain using half-space Green's functions. *Soil Dyn. Earthquake Eng.* 2002;22 (4):283-295.
- [13] E. Celebi, G. Schmid. Investigation of ground vibrations induced by moving loads. *Engineering Structures* 2005;27:1981-1998.
- [14] J.O'Brien, D.C. Rizos. A 3D BEM-FEM methodology for simulation of high speed train induced vibrations. *Soil Dyn. Earthquake Eng.* 2005;25:289-301.
- [15] E. Celebi. Three-dimensional modeling of train-track and sub-soil analysis for surface vibrations due to moving loads. *Applied Mathematics and Computation* 2006; 79:209-230.
- [16] D.E. Beskos, G. Dasgupta, I.G. Vardoulakis. Vibration isolation using open or filled trenches part 1: 2-D homogeneous soil. *Comput. Mech.* 1986;1 (1):43-63.
- [17] R. Klein, H. Antes, D. Le Houedec. Efficient 3D modeling of vibration isolation by open trenches. *Computers & Structures* 1997;Vol. 64, No. 1-4:809-817.
- [18] G. Pflanz, K. Hashimoto, N. Chouw. Reduction of structural vibrations induced by a moving load. *J. Appl. Mech.* 2002;5:555-563.
- [19] M. Adam, O. von Estorff b. Reduction of train-induced building vibrations by using open and filled trenches. *Computers and Structures* 2005;83:11-24.
- [20] E. Celebi, S. Firat, I. Cankaya. The effectiveness of wave barriers on the dynamic stiffness coefficients of foundations using boundary element method. *Applied Mathematics and Computation* 2006;180:683-699.
- [21] R.D. Woods. Screening of surface waves in soils. *J. Soil Mech. Found. Eng. Div. ASCE* 1968; 94 (4):951-979.
- [22] W. A. Haupt. Model tests on screening of surface waves. In: *Proceedings of the 10th International Conference on Soil Mech. Found. Eng., Stockholm, 1981, vol. 3, 215-222.*
- [23] S. Ahmad, T.M. Al-Hussaini. Simplified design for vibration screening by open and infilled trenches. *Journal of Geotechnical Engineering* 1991;117 (1):67-88.
- [24] H. Antes, R. Klein, D. Le Houedec, J.P. Region. Validation in-situ de la theorie des barrieres de discontinuite dans le sol. In: *Troisieme Colloque National, Genie*

- Parasismique et Aspects Vibratoires dans le Genie Civil, 1993, Paris, Association Francaise du Genie Parasismique.
- [25] K. L. Leung, D.E. Beskos, I. G. Vardoulakis. Vibration isolation using open and infilled trenches. Part 3: 2-D non-homogenous soil. *Computational Mechanics* 1990;7:137-148.
- [26] K. L. Leung, I. G. Vardoulakis, D.E. Beskos, J. L. Tassoulas. Vibration isolation by trenches in continuously non-homogenous soil by the BEM. *Soil Dynamics and Earthquake Engineering* 1991; Vol. 10(3):172-179.
- [27] F. H. Chen. *Soil Engineering and testing, Design and Remediation*, CRC Press, 2000.
- [28] *Soils and Foundations Handbook*, State Materials Office, Gainesville, Florida, April 2004.
- [29] http://en.wikipedia.org/wiki/Standard_penetration_test
- [30] C. R. I. Clayton, M. C. Matthews and N. E. Simons. *Soil Classification (Site Investigation)*, Second Edition, *Department of Civil Engineering, University of Surrey*.
- [31] S. H. Danbom. *Reflection Seismic Data Processing, Through the Looking Glass of Applied Exploration Geophysics*, P.G. for Rice University ESCI 444, 2009.

IntechOpen



Wave Propagation in Materials for Modern Applications

Edited by Andrey Petrin

ISBN 978-953-7619-65-7

Hard cover, 526 pages

Publisher InTech

Published online 01, January, 2010

Published in print edition January, 2010

In the recent decades, there has been a growing interest in micro- and nanotechnology. The advances in nanotechnology give rise to new applications and new types of materials with unique electromagnetic and mechanical properties. This book is devoted to the modern methods in electrodynamics and acoustics, which have been developed to describe wave propagation in these modern materials and nanodevices. The book consists of original works of leading scientists in the field of wave propagation who produced new theoretical and experimental methods in the research field and obtained new and important results. The first part of the book consists of chapters with general mathematical methods and approaches to the problem of wave propagation. A special attention is attracted to the advanced numerical methods fruitfully applied in the field of wave propagation. The second part of the book is devoted to the problems of wave propagation in newly developed metamaterials, micro- and nanostructures and porous media. In this part the interested reader will find important and fundamental results on electromagnetic wave propagation in media with negative refraction index and electromagnetic imaging in devices based on the materials. The third part of the book is devoted to the problems of wave propagation in elastic and piezoelectric media. In the fourth part, the works on the problems of wave propagation in plasma are collected. The fifth, sixth and seventh parts are devoted to the problems of wave propagation in media with chemical reactions, in nonlinear and disperse media, respectively. And finally, in the eighth part of the book some experimental methods in wave propagations are considered. It is necessary to emphasize that this book is not a textbook. It is important that the results combined in it are taken "from the desks of researchers". Therefore, I am sure that in this book the interested and actively working readers (scientists, engineers and students) will find many interesting results and new ideas.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Seyhan Fırat, Erkan Çelebi, Günay Beyhan, İlyas Çankaya, Osman Kırtel and İsa Vural (2010). Field Experiments on Wave Propagation and Vibration Isolation by Using Wave Barriers, Wave Propagation in Materials for Modern Applications, Andrey Petrin (Ed.), ISBN: 978-953-7619-65-7, InTech, Available from: <http://www.intechopen.com/books/wave-propagation-in-materials-for-modern-applications/field-experiments-on-wave-propagation-and-vibration-isolation-by-using-wave-barriers>

INTECH
open science | open minds

InTech Europe

InTech China

www.intechopen.com

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

IntechOpen

IntechOpen

© 2010 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](#), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen