

# We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

**4,800**

Open access books available

**122,000**

International authors and editors

**135M**

Downloads

Our authors are among the

**154**

Countries delivered to

**TOP 1%**

most cited scientists

**12.2%**

Contributors from top 500 universities



**WEB OF SCIENCE™**

Selection of our books indexed in the Book Citation Index  
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?  
Contact [book.department@intechopen.com](mailto:book.department@intechopen.com)

Numbers displayed above are based on latest data collected.

For more information visit [www.intechopen.com](http://www.intechopen.com)



# Unsaturated Hydraulic Conductivity for Evaporation in Heterogeneous Soils

Dongmin Sun<sup>1</sup> and Jianting Zhu<sup>2</sup>

<sup>1</sup>University of Houston-Clear Lake, Environmental Science Program,

<sup>2</sup>Desert Research Institute, Nevada System of Higher Education,  
U.S.A.

## 1. Introduction

Simulations of vadose zone moisture flow and contaminant transport typically use closed-form soil hydraulic properties (i.e., unsaturated hydraulic conductivity and soil water retention characteristics). Understanding large-scale vadose zone hydrological processes requires a solid approach to characterizing the large degree of heterogeneity of hydraulic properties in the field (e.g., Dagan & Bresler, 1983; Bresler & Dagan, 1983; Vereecken et al., 2007). As a result, the impact of soil heterogeneity on vadose zone flow and transport has been the focus of considerable research in recent decades (e.g., Hopmans & Stricker, 1989; Butters & Jury, 1989; Ellsworth & Jury, 1991; Destouni, 1992; Russo, 1993, 1998; Mallants et al., 1996; Hendrayanto et al., 2000; Avaniidou & Paleologos, 2002; Hristopulos, 2003; Jhorar et al., 2004; Das & Hassanizadeh, 2005; Kozak & Ahuja, 2005; Kozak et al., 2005; Neuweiler & Cirpka, 2005; Ward et al., 2006; Lu et al., 2007; Coppola, et al., 2009). Local scale soil hydraulic properties have been studied extensively (e.g., Gardner, 1958; Brooks & Corey, 1964; Laliberte, 1969; Farrell & Larson, 1972; Campbell, 1974; Mualem, 1976; Clapp & Hornberger, 1978; van Genuchten, 1980; Libardi et al., 1980; van Genuchten & Nielson, 1985; Hutson & Cass, 1987; Russo, 1988; Bumb et al., 1992; Setiawan & Nakano, 1993; Rossi & Nimmo, 1994; Kosugi, 1994; Zhang & van Genuchten, 1994; Leij et al., 1997). However, connecting heterogeneous properties and processes at different scales remains a major scientific challenge in hydrology (Dagan, 1989; Gelhar, 1993; Renard & de Marsily, 1996; Sposito, 1998; Grayson & Blöchl, 2000; Kasteel et al., 2000; Cushman et al., 2002; Farmer, 2002; Zhang, 2002; Williams & Ahuja, 2003; Pachepsky et al., 2003; Zhang et al., 2004; Vereecken et al., 2007). One way to connect soil hydrologic processes at different scales is to employ hydraulic property upscaling. The upscaling algorithms seek to aggregate a mesh of hydraulic properties defined at the small (support) scale into a coarser mesh with “effective” hydraulic properties that can be used in large-scale (e.g., landscape-scale, watershed-scale, basin-scale) hydro-climate models. The main goal of using effective hydraulic properties is to capture particular flow and transport processes in a heterogeneous soil, through conceptualization of heterogeneous formation as an equivalent homogeneous formation. In this way, the heterogeneous system is replaced by an equivalent homogeneous medium (e.g., Rubin, 2003; Zhu & Mohanty, 2003a,b; Zhu & Mohanty, 2004; Zhu et al., 2007; Zhu, 2008; Zhu & Sun, 2009; Zhu & Sun, 2010). Hydraulic parameters that define the equivalent homogeneous medium are known as effective parameters.

However, upscaling studies have revealed significant challenges and problems in representing soil hydrologic processes and parameters at different scales (e.g., Bresler & Dagan, 1983; Milly & Eagleson, 1987; Kim & Stricker, 1996; Smith & Diekkruger, 1996; Kim et al., 1997; Harter & Hopmans, 2004). For example, upscaled effective hydraulic properties derived from stochastic analysis, which account for local-scale hydraulic property heterogeneities perform well for deep and unbounded unsaturated zones where gravity-dominated flow is the main process and where the mean hydraulic gradient is approximately constant (e.g., Zhang et al., 1998). The gravitational flow regime enables the use of relatively simple approaches in stochastic analysis of subsurface flow (e.g., Tartakovsky et al., 1999; Harter & Zhang, 1999; Russo, 2003; Severino et al., 2003; Severino & Santini, 2005; Russo, 2005; Russo & Fiori, 2009). In a recent study, Zhang (2010) investigated the effective hydraulic conductivity of unsaturated media through numerical experiments of gravity-induced flow with multidimensional heterogeneity. Under this flow scenario, the use of average unit hydraulic gradient assumption implies that pressure head is constant throughout the profile. It should be pointed out that the unit-gradient assumption is applicable for a limited range of infiltration conditions where the pressure gradient is close to zero; and thus this assumption may be of limited applicability for near-surface processes, such as vadose zone and atmosphere interactions. On the other hand, many studies on hydraulic property upscaling that focus on near-ground surface interactions mostly deal with steady state flux exchanges (e.g., Zhu & Mohanty, 2002a,b; 2003a; Zhu et al., 2006) and results indicate that upscaling behaviors are distinctly different for infiltration and evaporation and an effective hydraulic property is usually more difficult to define for evaporation. In a study of effective hydraulic parameters for transient hydrological processes, Zhu and Mohanty (2006) combined the one-dimensional local process and the Miller-Miller (Miller & Miller, 1956) media concept, thereby illustrating that effective hydraulic parameters depend on the time frame being considered. Zhu & Sun (2009) investigated the use of effective soil hydraulic properties (expressed in terms of hydraulic parameters) applicable to near surface large-scale transient infiltration problems in a landscape with horizontally heterogeneous soil hydraulic properties. These studies show that methods to aggregate and upscale local hydraulic parameters are critical to improve the understanding of near surface large-scale hydrologic processes.

Two widely used upscaling approaches in vadose zone flows include homogenization theory and Monte Carlo type of simulations based on the stream tube approximation. In the homogenization theory, an upscaled flow equation is developed based on a separation of length scales in the medium for the limit at which the typical length scale of heterogeneities became negligible compared to the size of the medium (e.g., Svierecki et al., 2009; Neuweiler & Eichel, 2006; Neuweiler & Cirpka, 2005; Lewandowska & Laurent, 2001). The second approach is the stream tube approach in which the heterogeneous field is conceptualized as a series of vertically homogeneous and horizontally independent stream tubes or parallel columns (Dagan & Bresler, 1983; Bresler & Dagan, 1983; Govindaraju et al., 1992; Rubin & Or, 1993; Chen et al., 1994a,b; Toride & Leij, 1996a, b; Kim et al., 1997; Wildenschild & Jensen, 1999; Zhu & Mohanty, 2002b). Both approaches have challenges and limitations in dealing with heterogeneity and upscaling of hydraulic properties.

First, the homogenization theory uses an approach based on a separation of length scales in the medium and aims at deriving an upscaled flow equation in a heterogeneous medium for the limit at which the typical length scale of heterogeneities became negligible compared with the size of the medium (e.g., Hornung, 1997). In other words, a clear separation of

scales is required to derive upscaled model based on the homogenization theory. The flow system is sorted for the different orders and solved for each order separately, which requires that system dimensionless numbers, as well as parameter ratios, be of a fixed order of this length scale ratio. Different orders of dimensionless numbers and different parameter ratios could lead to different upscaled flow models (e.g., Van Duijn et al., 2002 and Lewandowska et al., 2004, respectively). The homogenization approach is mostly applicable to a certain flow and parameter regime. Previous studies using homogenization theory usually considered two flow regimes. The first flow regime was quantified by small Bond number, meaning forces due to pressure gradients are dominant at the small scale. The second flow regime is quantified by large Bond number, meaning that forces due to pressure gradients and gravity contribute equally at the small scale. Most notably, Bond number is assumed to be a fixed order in relation to the ratio between the small and the large scale. In addition, due to its requirement of separation of scales, the homogenization theory is difficult to use for formation without clear scale separation such as in the situation when there are only a finite number of layers in the soil formations.

Second, the stream tube approach is often used in upscaling vadose zone hydrological processes in which many studies conceptualize the heterogeneous field as a series of vertically homogeneous and horizontally independent stream tubes or parallel columns. In the study of Severino et al. (2003), the effective hydraulic conductivity was obtained by an ensemble average over all the stream tubes of a local analytical solution of Richards equation that regards the hydraulic parameters as horizontally correlated random space functions. Leij et al. (2007) simulated and aggregated unsaturated zone flows using the stream tube approach in which the heterogeneous field is conceptualized as a series of vertically homogeneous and horizontally independent stream tubes or parallel columns. Leij et al. (2007) focused on aggregating a posteriori unsaturated flow processes and illustrated that a priori aggregation (effective hydraulic properties) would overestimate the large-scale average infiltration by more than 40%, if the effective water retention curve was obtained from the aggregated suction head and the water content and the arithmetic mean of the saturated hydraulic conductivity. More recently, Coppola et al. (2009) studied the effects of using unimodal and bimodal interpretative models of hydraulic properties on the ensemble hydrological behavior of stream tubes by comparing predictions to mean water contents measured over time at several field scale sites. Zhu & Sun (2009) examined how the effective hydraulic parameters are sensitive to the time frame of hydrologic processes, by using the stream tube concept to study the effective hydraulic parameters for transient infiltration. Ahuja et al. (2010) who also used the steam tube approach, explored effective parameter sets to describe field-average infiltration and redistribution under different rainfall conditions and investigated whether an effective field saturated hydraulic conductivity and correlated hydraulic parameters derived from matching early-stage average ponded infiltration could give reasonable results for infiltration under lower rainfall rates as well as for soil water redistribution. These results showed that there were no unique effective average properties that gave the best results for both infiltration and redistribution, even for the same initial pressure-head condition. It should be emphasized that when the stream tube approach is used, no interactions among these tubes are considered. The stream tube approach is most appropriate to model flows where the effective cross-sectional diameter of a "tube" or "column" is larger than its length (e.g., Protopapas and Bras, 1991; Leij et al., 2006; Leij et al., 2007).

In this chapter, we seek to provide some practical guidelines of how the commonly used simple averaging schemes (arithmetic, geometric, or harmonic mean) perform in simulating large scale evaporation in a heterogeneous landscape. As discussed earlier, previous studies on hydraulic property upscaling focusing on steady state flux exchanges illustrated that an effective hydraulic property is usually more difficult to define for evaporation. This chapter mainly focuses on upscaling hydraulic properties of large scale transient evaporation dynamics based on the stream tube approach. Specifically, we examine large scale hydraulic parameters in two practical aspects: (1) if the three simple averaging schemes (i.e., arithmetic, geometric and harmonic means) of hydraulic parameters are appropriate in representing large scale evaporation processes, and (2) how the applicability of these simple averaging schemes depends on the time scale of evaporation processes in heterogeneous soils. Multiple realizations of local evaporation processes are carried out using HYDRUS-1D computational code (Simunek et al, 1998). The three averaging schemes of soil hydraulic parameters are used to simulate the cumulative flux exchange, which is then compared to the large scale average cumulative evaporation. The relative error between the cumulative evaporation based on simple averaging schemes and the average cumulative evaporation is used to judge the applicability of the simple averaging schemes in predicting the large scale evaporation from the heterogeneous soils. The sensitivity of the relative errors to the time frame of evaporation processes is also discussed.

## 2. Methods

### 2.1 Hydraulic properties and hydraulic parameters

The hydraulic properties are characterized by the soil water retention curve which defines the water content ( $\theta$ ) as a function of the suction head ( $h$ ), and the hydraulic conductivity function which establishes the relationship between the hydraulic conductivity ( $K$ ) and the water content or the suction head. Some of the more commonly used models describing these functional relationships include: the Gardner-Russo model (Gardner, 1958; Russo, 1988), the Brooks-Corey model (Brooks & Corey, 1964), and the van Genuchten (1980) model.

The unsaturated hydraulic conductivity ( $K$ )-suction head ( $h$ ) and the suction head ( $h$ )-water content ( $\theta$ ) are represented by the Gardner-Russo model (Gardner, 1958; Russo, 1988),

$$Se(h) = [e^{-0.5\alpha h} (1 + 0.5\alpha h)]^{-2/(l+2)} \quad (1)$$

$$K(h) = K_s e^{-\alpha h} \quad (2)$$

where  $Se = (\theta - \theta_r) / (\theta_s - \theta_r)$  is the effective degree of saturation,  $\theta$  is the volumetric water content,  $\theta_r$  is the residual volumetric water content,  $\theta_s$  is the saturated volumetric water content,  $h$  is the suction head (positive for unsaturated soils),  $K$  is the hydraulic conductivity,  $K_s$  is the saturated hydraulic conductivity,  $\alpha$  is related to pore-size distributions,  $l$  is a parameter which accounts for the dependence of the tortuosity, and the correlation factors on the water content estimated to be about 0.5 as an average for many soils.

Brooks & Corey (1964) established the constitutive relationship between  $K$  and  $h$  and between  $Se$  and  $h$  using the following empirical equations from the analysis of a large soil database,

$$Se(h) = (\alpha h)^{-\lambda} \quad (\alpha h > 1) \quad (3a)$$

$$Se(h) = 1 \quad (\alpha h \leq 1) \quad (3b)$$

$$K(h) = K_S (\alpha h)^{-\beta} \quad (\alpha h > 1) \quad (4a)$$

$$K(h) = K_S \quad (\alpha h \leq 1) \quad (4b)$$

where  $\lambda$  is a pore-size distribution parameter affecting the slope of the retention function, and  $\beta = \lambda(l+2) + 2$ .

The model developed by van Genuchten (1980) is an S-shaped function. The function was combined with Mualem's hydraulic conductivity function (Mualem, 1976) to predict the unsaturated hydraulic conductivity. Van Genuchten's equations for the soil water retention curve and the hydraulic conductivity can be expressed as follows,

$$Se(h) = [1 + (\alpha h)^n]^{-m} \quad (5)$$

$$K(h) = K_S Se^l \left\{ 1 - \left( 1 - Se^{1/m} \right)^m \right\}^2, \quad m = 1 - 1/m \quad (6)$$

where  $m$  and  $n$  are empirical parameters.

In this chapter, we use van Genuchten model since it closely fits measured water-retention data for many types of soils (Leij et al., 1997). Other hydraulic property models can also be similarly used. While results of simulated hydrologic processes using other hydraulic property models may differ quantitatively, they demonstrate similar trends.

## 2.2 Field-measured and re-generated hydraulic parameter data

Heterogeneity in hydraulic properties (as expressed in terms of hydraulic parameters) largely determines the variability in the water content and flux. The hydraulic parameters we used in this study are an 84-point set of van Genuchten parameters that were derived from field measurements at the Corn Creek Fan Complex (see Fig. 1) at the Desert National Wildlife Refuge, north of Las Vegas, Nevada, U.S.A. (Young et al., 2005). One main purpose of the study by Young et al. (2005) was to characterize the hydraulic properties of surface materials that exist in distinct geomorphic surfaces at the study site. Field work first identified distinct geologic units on both the proximal and distal portions of the Corn Creek Fan, where each unit had distinct morphologic or geologic surface features. After digitizing the geologic unit identification into a geographic information system database, hydraulic and physical properties were obtained from 84 locations in a large area of >100 km<sup>2</sup>. Hydraulic properties, including soil water retention and hydraulic conductivity functions, were estimated at sites underneath plant canopies and at intercanopy locations. The locations were chosen based on the geologic unit mosaic of the Corn Creek Fan to cover the various geologic units present on the site, assuming that each unit has distinct hydraulic property characteristics. The field work hence was not designed to obtain a detailed spatial structure for the study site. We use the data set, which has a strong correlation between  $K_S$

and  $\alpha$ , along with synthetic hydraulic parameter data sets having different levels of parameter correlation, to investigate the effects of hydraulic parameter correlations, not the spatial autocorrelations of the parameters. The soil hydraulic properties of the surface soil at each field site were determined using tension infiltrometry. Hydraulic and physical properties were obtained from 84 locations resulting in 84 samples. Full van Genuchten hydraulic parameters were estimated using the tension infiltrometer, resulting in a hydraulic parameter set of 84 points (called Field Set in the subsequent analysis). Additional details of the field test methodology and procedures are given by Young et al. (2005). Table 1 lists the basic statistics for the Field Set.

In practice, van Genuchten parameter  $n$  can be determined with greater certainty than the other van Genuchten parameters (e.g., Schaap & Leij, 1998). Hills et al. (1992) also demonstrated that random variability of  $\alpha$  is more important than that of other van Genuchten parameters. Spatial variability in  $\alpha$  has a larger impact on the ensemble behavior of soil hydrologic processes than that in other van Genuchten parameters (Zhu & Mohanty, 2002b). Therefore, it is reasonable to treat  $n$  as deterministic to examine the influence of more important hydraulic parameters. Following these findings, we treated  $n$  as a deterministic parameter using the mean value from the Field Set in this study. The variabilities of other van Genuchten parameters,  $\theta_r$  and  $\theta_s$ , are also relatively insignificant in comparison to  $K_s$  and  $\alpha$  due to the fact that we are mainly concerned with the cumulative evaporation, not the moisture content.

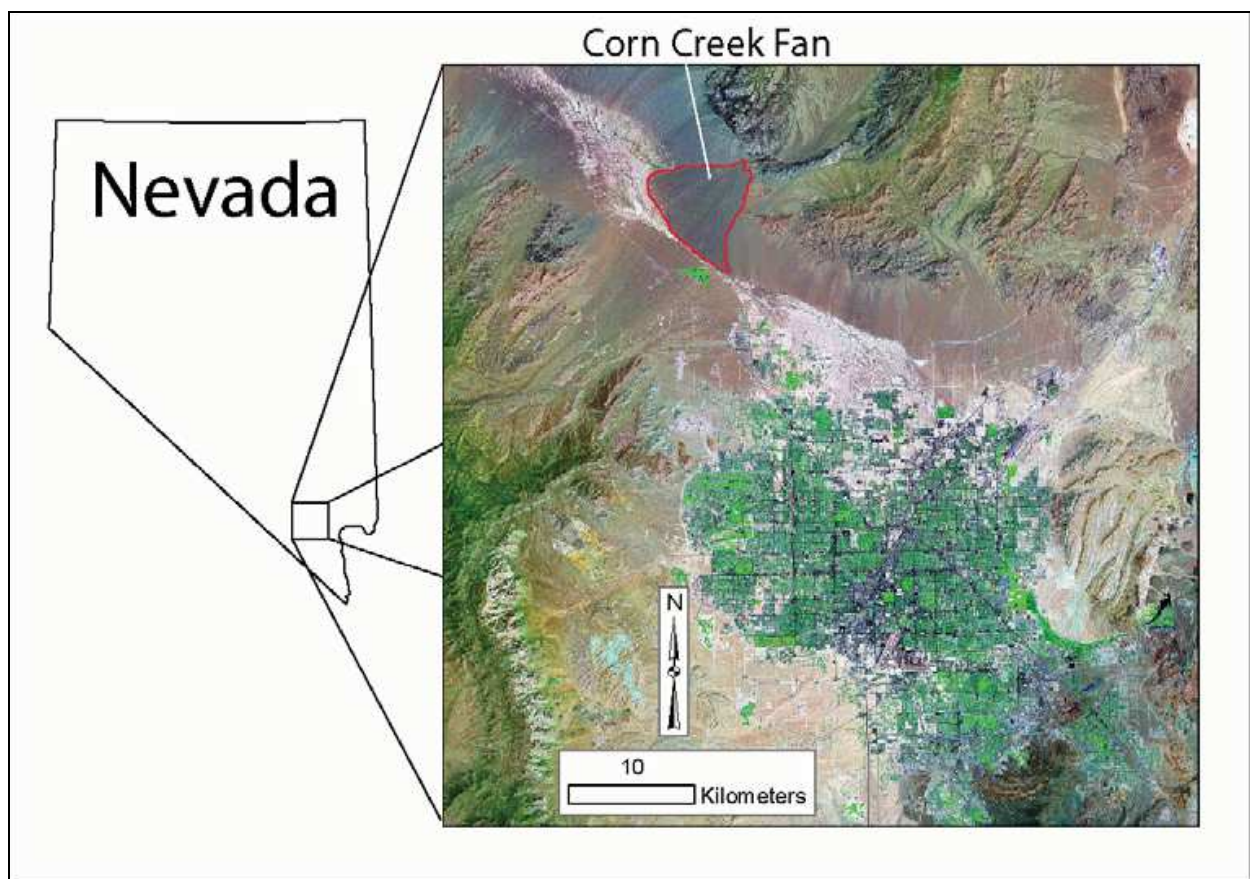


Fig. 1. Location of the Corn Creek Fan Complex, north of Las Vegas, Nevada, U.S.A., where the variability of the hydraulic parameters were characterized.

Since the field measurement-derived hydraulic parameter data set that we use for the subsequent analysis in the upscaling context indicates a fairly strong correlation between the two parameters  $K_S$  and  $\alpha$  and has only 84 measured points, we seek to investigate the influence of hydraulic parameter correlation, the variances of hydraulic parameters on appropriateness of averaging schemes by synthetically re-generating random hydraulic parameter fields for those two parameters. In doing so, we generate two additional data sets for the  $K_S$  and  $\alpha$ : 1) an 84-point set that has the same mean and variance with the Field Set, but has zero correlation between the  $K_S$  and  $\alpha$  (called Set 1), 2) an 84-point set that has the same mean but has two times bigger variance in comparison to the Field Set and also has zero correlation between the  $K_S$  and  $\alpha$  (called Set 2). Specifically, Set 1 is designed to examine the importance of parameter correlation, since it only differs in correlation level between the  $K_S$  and  $\alpha$  in comparison to the Field Set. Set 2 can be used to investigate the influence of parameter variance since it has larger variance than the Field Set. The basic statistics of the hydraulic parameter data sets that will be used in the subsequent analyses is listed in Table 1.

Data set	$\langle K_S \rangle$ (cm/min)	$\langle \alpha \rangle$ (1/cm)	CV( $K_S$ )	CV( $\alpha$ )	CC( $K_S, \alpha$ )
Field Set	0.123	0.092	0.837	0.287	0.74
Set 1	0.123	0.092	0.837	0.287	0.0
Set 2	0.123	0.092	1.18	0.41	0.0

Table 1. Basic statistics of field hydraulic parameter set and regenerated sets.  $\langle K_S \rangle$  and  $\langle \alpha \rangle$  represent means of  $K_S$  and  $\alpha$  respectively; CV( $K_S$ ) and CV( $\alpha$ ) are the variances of  $K_S$  and  $\alpha$  respectively; CC( $K_S, \alpha$ ) is the coefficient of correlation between  $K_S$  and  $\alpha$ .

### 2.3 Aggregation of local scale evaporation processes and relative error calculation

For the local scale evaporation process, we use HYDRUS-1D package (Simunek et al, 1998) to simulate the one-dimensional flow subjected to the head-type conditions on the land surface (1000cm) and on the bottom (1cm or 10cm). The HYDRUS-1D modular program uses fully implicit, Galerkin-type linear finite element solutions of the governing equation for a variably-saturated porous medium (Richards, 1931). Initial suction is assumed to be constant in the profile representing initial wetness of soils. A large suction head of 1000 cm is used as top boundary condition to induce the evaporation. Multiple realizations (84) of HYDRUS-1D simulations are performed and the average cumulative evaporation is calculated. Another simulation is performed to calculate the cumulative evaporation using the simple averaging schemes for the  $K_S$  and  $\alpha$ . Three simple averaging schemes are used for  $K_S$  and  $\alpha$ , as described in the following.

#### 1. Arithmetic mean

$$AM(K_S) = \langle K_S \rangle \quad (7)$$

$$AM(\alpha) = \langle \alpha \rangle \quad (8)$$



## 2. Geometric mean

$$GM(K_S) = \exp[\langle \ln K_S \rangle] \quad (9)$$

$$GM(\alpha) = \exp[\langle \ln \alpha \rangle] \quad (10)$$

## 3. Harmonic mean

$$HM(K_S) = [\langle 1/K_S \rangle]^{-1} \quad (11)$$

$$HM(\alpha) = [\langle 1/\alpha \rangle]^{-1} \quad (12)$$

In the above expressions, “ $\langle \rangle$ ” denote simple average (i.e., arithmetic mean).

Relative error of using the simple averaging schemes to simulate average evaporation in a large scale heterogeneous landscape is then defined as

$$e(t) = [E_{SA}(t) - \langle E(t) \rangle] / \langle E(t) \rangle \quad (13)$$

where  $E_{SA}(t)$  denotes the cumulative evaporation calculated using the simple averaging schemes of hydraulic parameters,  $\langle E(t) \rangle$  is the average cumulative evaporation for the heterogeneous landscape. A close to zero  $e(t)$  indicates that the simple averaging hydraulic parameters represent the large scale average evaporation well. Positive  $e(t)$  simply means the simple averaging hydraulic parameters over-predict the large scale average evaporation, while negative  $e(t)$  signals the under-prediction of large scale evaporation by using the simple averaging hydraulic parameters.

### 3. Discussion

Evolution of relative errors by using the simple averaging schemes of hydraulic parameters to simulate large scale cumulative evaporation as functions of time when the initial suction head is 1 cm is shown in Fig. 2 to Fig. 4 for Field Set, Set 1 and Set 2, respectively. The initial suction head of only 1 cm indicates a wet initial condition close to saturation prior to the evaporation. The geometric mean of hydraulic parameters leads to the smallest relative errors, illustrating geometric mean is the most optimal averaging scheme. The relative errors tend to be larger at the beginning, and decrease as time evolves. The arithmetic mean over-predicts the average evaporation, while the harmonic mean under-predicts the average evaporation. As expected, a larger variance would result in larger relative errors, as evidenced from Fig. 4 in comparison to Fig. 2 and Fig. 3.

In Fig. 5 to Fig. 7, we plot the results of relative errors under otherwise same conditions as Fig. 2 to Fig. 4, but for the initial suction head of 10 cm. This initial condition indicates a drier condition as the water content decreases dramatically as the suction head increases. In general, drier initial condition leads to relatively smaller errors, but signifies an increasing difficulty in selecting a consistent simple averaging scheme that can be used in predicting the average evaporation. The most appropriate simple averaging scheme changes with correlation between the hydraulic parameters and the variances of hydraulic parameters. Under initial drier condition, the simple averaging schemes work better when the hydraulic

parameters are correlated (see Fig. 5). Under drier condition with uncorrelated hydraulic parameters, the three simple averaging schemes all under-predict average evaporation (see Fig. 6 and Fig. 7).

In general, the results indicate that the effective hydraulic parameters are mostly constant (i.e., do not change much with time) except during the initial stage of evaporation, when the errors of using simple averaging schemes vary more significantly with time. In later stage, the errors tend to be more uniform with time. This suggests that the average evaporation behavior at the initial stage in a heterogeneous soil is more difficult to represent using an equivalent homogeneous medium.

#### 4. Conclusions

In this chapter, we examined how the time frame of hydrologic processes affects the performance of averaging schemes and how the hydraulic parameter correlation and variability impact the performance of simple averaging schemes. The average cumulative evaporation in the heterogeneous soils was quantified through multiple realizations of local scale evaporation processes. The suitability of using the simple averaging schemes to represent the heterogeneous evaporation processes was quantified by the difference between the cumulative evaporation based on the simple averaging schemes and the average cumulative evaporation.

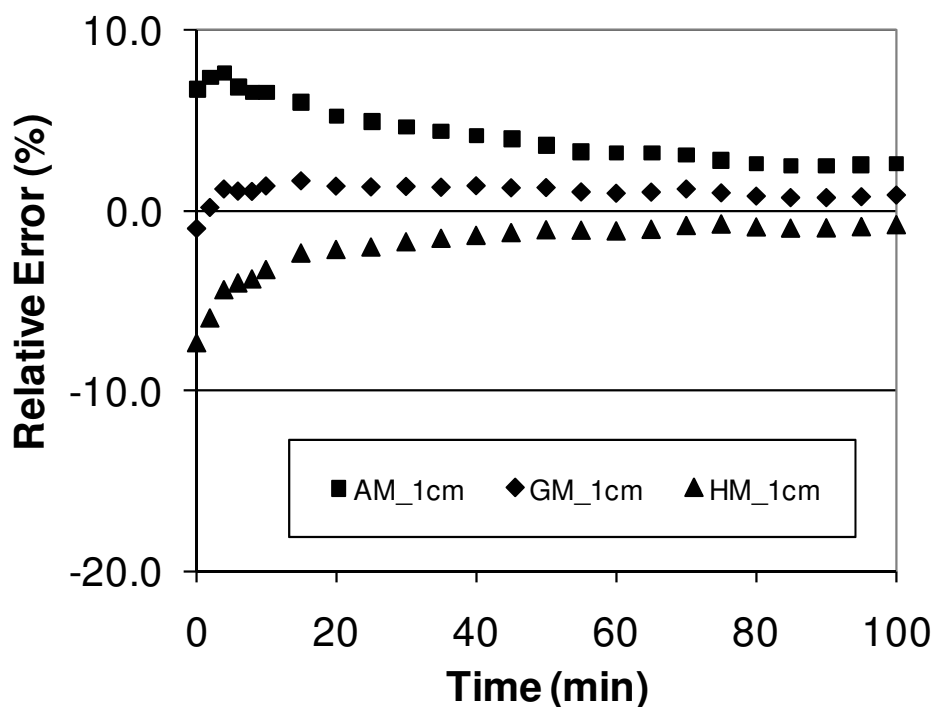


Fig. 2. Evolution of the relative errors for the cumulative evaporation when the surface suction head is 1000 cm. The initial suction head is 1 cm. Results based on Field Set. AM=Arithmetic mean, GM=Geometric mean, HM=Harmonic mean.

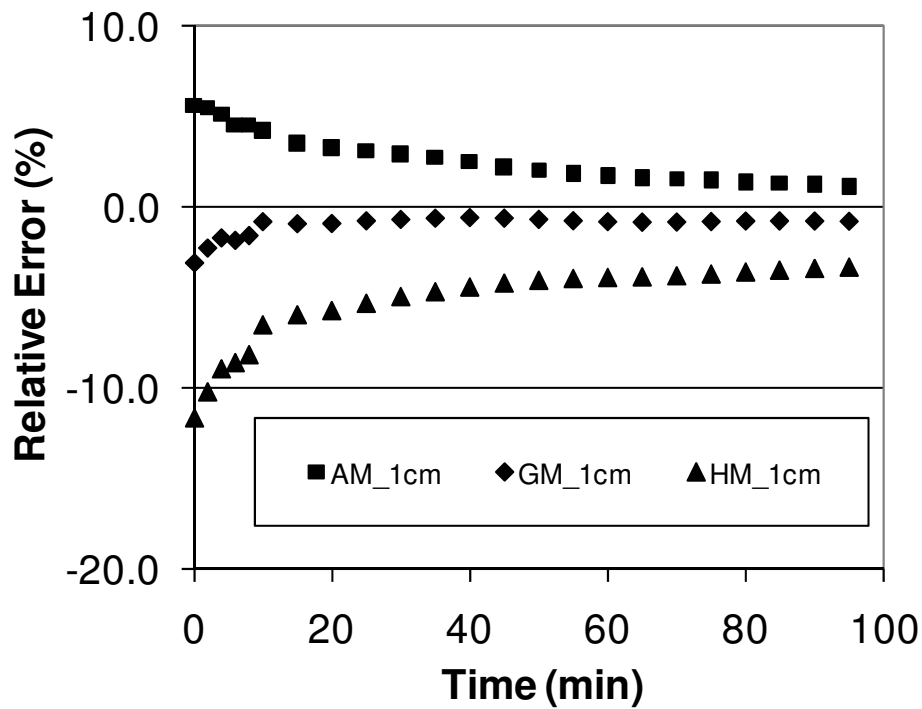


Fig. 3. Evolution of the relative errors for the cumulative evaporation when the surface suction head is 1000 cm. The initial suction head is 1 cm. Results based on Set 1. AM=Arithmetic mean, GM=Geometric mean, HM=Harmonic mean.

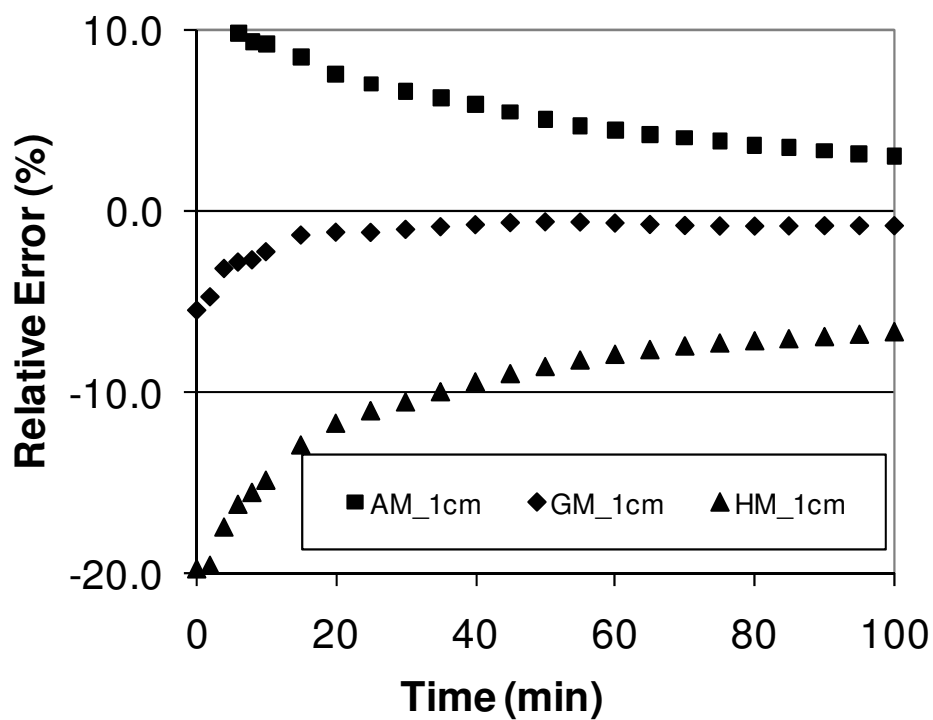


Fig. 4. Evolution of the relative errors for the cumulative evaporation when the surface suction head is 1000 cm. The initial suction head is 1 cm. Results based on Set 2. AM=Arithmetic mean, GM=Geometric mean, HM=Harmonic mean.

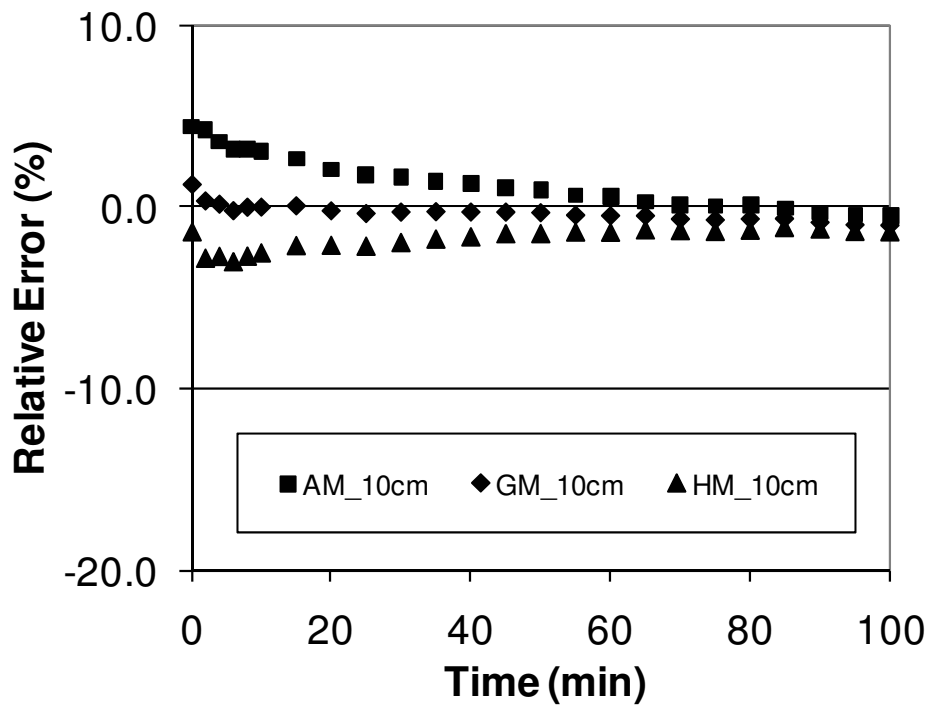


Fig. 5. Evolution of the relative errors for the cumulative evaporation when the surface suction head is 1000 cm. The initial suction head is 10 cm. Results based on Field Set. AM=Arithmetic mean, GM=Geometric mean, HM=Harmonic mean.

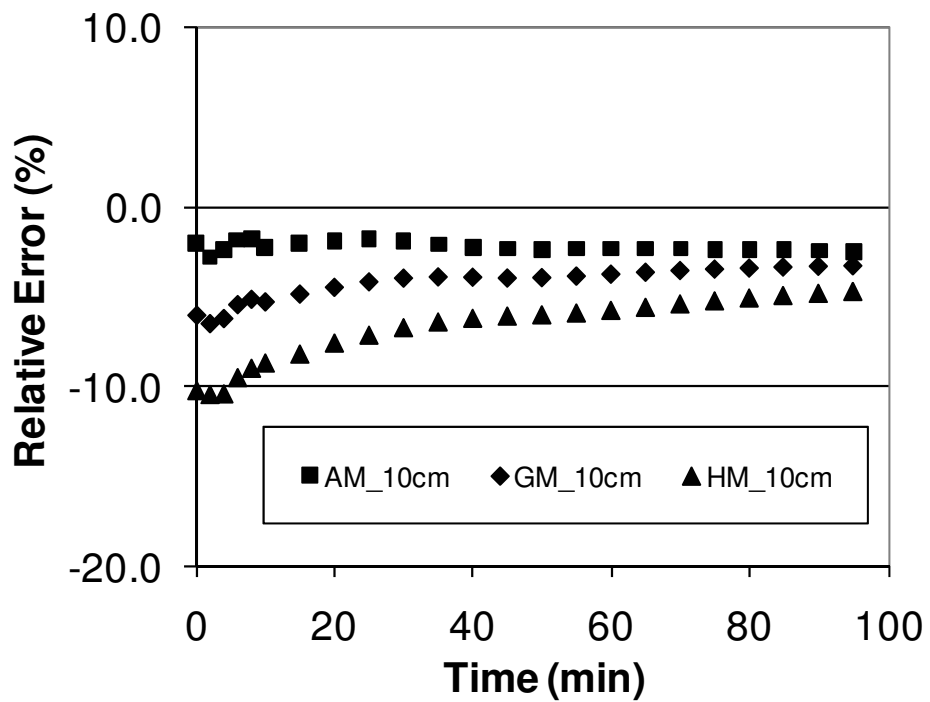


Fig. 6. Evolution of the relative errors for the cumulative evaporation when the surface suction head is 1000 cm. The initial suction head is 10 cm. Results based on Set 1. AM=Arithmetic mean, GM=Geometric mean, HM=Harmonic mean.

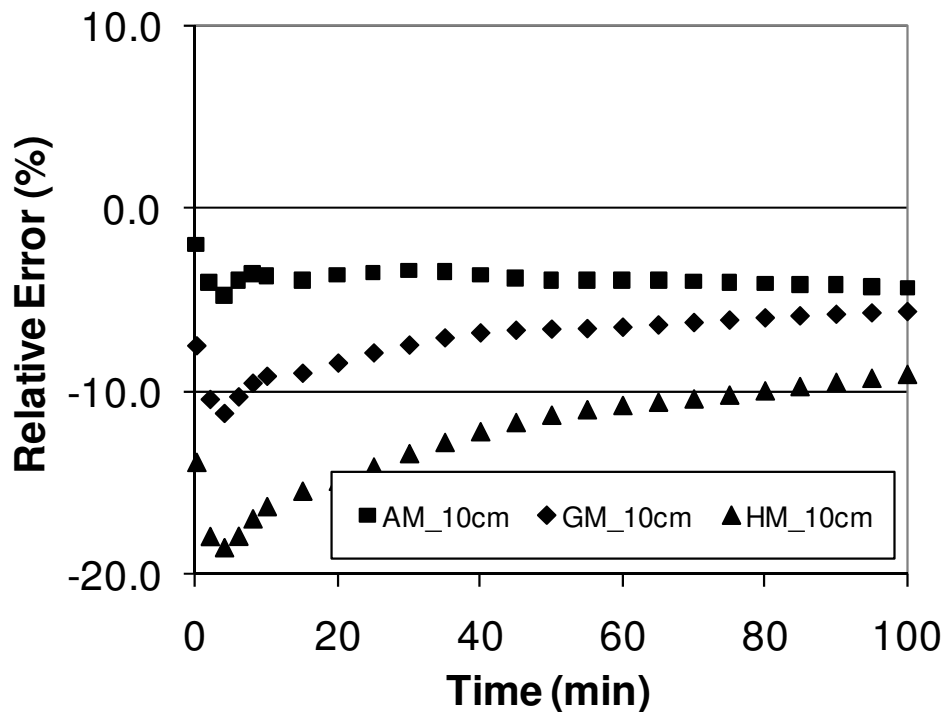


Fig. 7. Evolution of the relative errors for the cumulative evaporation when the surface suction head is 1000 cm. The initial suction head is 10 cm. Results based on Set 2.

AM=Arithmetic mean, GM=Geometric mean, HM=Harmonic mean.

In general, all averaging schemes produce larger deviation from averaged evaporative fluxes at the beginning of evaporation. Relative Errors based on using the simple averaging schemes of hydraulic parameters are generally larger for initial wetter conditions due to larger pressure gradient near the surface. The appropriateness of different averaging schemes is sensitive to the correlation between the hydraulic parameters and the variances of hydraulic parameters. At most time frames, average large scale evaporation behavior is better captured (i.e., relative errors of cumulative evaporation are smaller) when the geometric mean is used as the effective parameters. As expected, larger hydraulic parameter variances would introduce larger relative errors when using the simple averaging schemes of hydraulic parameters of the heterogeneous soils.

## 5. References

- Ahuja, L. R.; Ma, L. & Green, T.R. (2010). Effective soil Properties of heterogeneous areas for modeling infiltration and redistribution. *Soil Sci. Soc. Am. J.*, 74, 1469-1482, doi:10.2136/sssaj2010.0073.
- Avanidou, T. & Paleologos, E.K. (2002). Infiltration in stratified, heterogeneous soils: relative importance of parameters and model variations. *Water Resour. Res.*, 38(11), 1232, doi:10.1029/2001WR000725.
- Bresler, E. & Dagan, G. (1983). Unsaturated flow in spatially variable fields, 2. Application of water flow models to various fields. *Water Resour. Res.*, 19, 421-428.
- Brooks, R.H. & Corey, A.T. (1964). *Hydraulic Properties of Porous Media*, Colorado State Univ., Hydrology Paper No. 3, 27 pp, Fort Collins, CO., U.S.

- Bumb, A.C.; Murphy, C.L. & Everett, L.G. (1992). A comparison of three functional forms for representing soil moisture characteristics. *Ground Water*, 3, 177-185.
- Butters, G.L. & Jury, W.A. (1989). Field scale transport of bromide in an unsaturated soil. 2. Dispersion modeling. *Water Resour. Res.*, 25, 1583-1589.
- Campbell, G.S. (1974). A simple method for determining unsaturated conductivity from moisture retention data. *Soil Sci.*, 117, 311-314.
- Chen, Z.; Govindaraju, R.S. & Kavvas, M.L. (1994a). Spatial averaging of unsaturated flow equations under infiltration conditions over areally heterogeneous fields, 1, Development of models. *Water Resour. Res.*, 30(2), 523-533.
- Chen, Z.; Govindaraju, R. S. & Kavvas, M.L. (1994b). Spatial averaging of unsaturated flow equations under infiltration conditions over areally heterogeneous fields, 2, Numerical simulations. *Water Resour. Res.*, 30(2), 535-548.
- Clapp, B.E. & Hornberger, G.M. (1978). Empirical equations for some soil hydraulic properties. *Water Resour. Res.*, 14, 601-604.
- Coppola, A.; Basile, A., Comegna, A. & Lamaddalena, N. (2009). Monte Carlo analysis of field water flow comparing uni- and bimodal effective hydraulic parameters for structured soil. *J. Contam. Hydrol.*, 104, 153-165, doi:10.1016/j.jconhyd.2008.09.007.
- Cushman, J. H.; Bennethum, L.S. & Hu, B. X. (2002). A primer on upscaling tools for porous media. *Adv. Water Resour.*, 25, 1043-1067.
- Dagan, G. & Bresler, E. (1979). Solute dispersion in unsaturated heterogeneous soil at field scale: I. Theory. *Soil Sci. Soc. Am. J.*, 43, 461-467.
- Dagan, G. & Bresler, E. (1983). Unsaturated flow in spatially variable fields, 1. Derivation of models of infiltration and redistribution. *Water Resour. Res.*, 19, 413-420.
- Das, D.B. & Hassanizadeh, S.M. (2005). *Upscaling Multiphase Flow in Porous Media: From Pore to Core and Beyond*, Springer, Berlin.
- Destouni, G. (1992). Prediction uncertainty in solute flux through heterogeneous soils. *Water Resour. Res.*, 28, 793-801.
- Ellsworth, T.R. & Jury, W.A. (1991). A three-dimensional field study of solute transport through unsaturated, layered porous media. 2. Characterization of vertical dispersion. *Water Resour. Res.*, 27, 967-981.
- Farmer, C.L. (2002). Upscaling: A review. *Int. J. Numerical Meth. Fluids*, 40, 63-78.
- Farrell, D.W. & Larson, W.E. (1972). Modeling the pore structure of porous media. *Water Resour. Res.*, 3, 699-706.
- Gardner, W.R. (1958). Some steady state solutions of unsaturated moisture flow equations with applications to evaporation from a water table. *Soil Sci.*, 85(4), 228-232.
- Gelhar, L.W. (1993). *Stochastic Subsurface Hydrology*, Prentice Hall, Upper Saddle River, NJ.
- Govindaraju, R.S.; Or, D., Kavvas, M.L., Rolston, D.E. & Biggay, J. (1992). Error analyses of simplified unsaturated flow models under large uncertainty in hydraulic properties. *Water Resour. Res.*, 28(11), 2913-2924.
- Grayson, R. & Blöschl, G. (2000). *Spatial Patterns in Catchment Hydrology*, Cambridge Univ. Press, Cambridge, UK.
- Harter, T. & Hopmans, J.W. (2004). Role of vadose zone flow processes in regional scale hydrology: Review, opportunities and challenges. *Unsaturated Zone Modeling:*

- Processes, Applications, and Challenges*, eds. Feddes, R.A.; de Rooij, G.H. & van Dam, J.C., Kluwer, 179–208.
- Harter, T. & Zhang, D. (1999). Water flow and solute spreading in heterogeneous soils with spatially variable water content. *Water Resour. Res.*, 35, 415–426.
- Hendrayanto, K.; Kosugi K. & Mizuyama, T. (2000). Scaling hydraulic properties of forest soils. *Hydrol. Process.*, 14, 521–538.
- Hills, R.G.; Hudson, D.B. & Wierenga, P.J. (1992). Spatial variability at the Las Cruces trench site. *Indirect Methods for Estimating the Hydraulic Properties of Unsaturated Soils*, eds. van Genuchten, M. Th.; Leij, F.J. & Lund, L.J.), University of California, Riverside, CA., pp.529–538.
- Hopmans, J.W. & Stricker, J.N.M. (1989). Stochastic analysis of soil water regime in a watershed. *J. Hydrol.*, 105, 557–584.
- Hornung, U. (1997). *Homogenization and Porous Media*, Springer, New York.
- Hristopulos, D.T. (2003). Renormalization group methods in subsurface hydrology: Overview and applications in hydraulic conductivity upscaling. *Adv. Water Resour.*, 26, 1279–1308.
- Hutson, J.L. & Cass, A. (1987). A retentivity function for use in soil-water simulation model. *J. Soil Sci.*, 38, 105–113.
- Jhorar, R.K.; van Dam, J.C., Bastiaanssen, W.G.M. & Feddes, R.A. (2004). Calibration of effective soil hydraulic parameters of heterogeneous soil profiles. *J. Hydrol.*, 285, 233–247.
- Kasteel, R.; Vogel, H. & Roth, K. (2000). From local scale hydraulic properties to effective transport properties in soils. *Eur. J. Soil Sci.*, 51, 81–91.
- Kim, C.P. & Stricker, J.N.M. (1996). Influence of spatially variable soil hydraulic properties and rainfall intensity on the water budget. *Water Resour. Res.*, 32(6), 1699–1712.
- Kim, C.P.; Stricker, J.N.M. & Feddes, R.A. (1997). Impact of soil heterogeneity on the water budget of the unsaturated zone. *Water Resour. Res.*, 33(5), 991–999.
- Kosugi, K. (1994). Three-parameter lognormal distribution model for soil water retention. *Water Resour. Res.*, 30, 891–901.
- Kozak, J.A. & Ahuja, L.R. (2005). Scaling of infiltration and redistribution of water across soil textural classes. *Soil Sci. Soc. Am. J.*, 69, 816–827.
- Kozak, J.A.; Ahuja, L.R. & Green, T.R. (2005). Scaling and estimation of evaporation and transpiration of water across soil textures. *Vadose Zone J.*, 4, 418–427.
- Laliberte, G.E. (1969). A mathematical function for describing capillary pressure-desaturation data. *Bull. Int. Assoc. Sci. Hydrol.*, 14, 131–149.
- Leij, F.J.; Russell, W.B. & Lesch, S.M. (1997). Closed-form expressions for water retention and conductivity data. *Ground Water*, 35(5), 848–858.
- Leij, F.J.; Sciortino, A. & Warrick, A.W. (2006). Infiltration in two parallel soil columns. *Water Resour. Res.*, 42, W12408. doi:10.1029/2006WR005000.
- Leij, F.J.; Sciortino, A., Haverkamp, R. & Ugalde, J.M.S. (2007). Aggregation of vertical flow in the vadose zone with auto- and cross-correlated hydraulic properties. *J. Hydrol.*, 338, 96–112.

- Lewandowska, J. & Lautent, J.-P. (2001). Homogenization modeling and parametric study of moisture transfer in an unsaturated heterogeneous porous media. *Transp. Porous Media*, 45, 321-345.
- Lewandowska, J.; Szymkiewicz, A., Burzynski, K. & Vauclin, M. (2004). Modeling of unsaturated water flow in double-porosity soils by the homogenization approach. *Adv. Water Resour.*, 27, 283-296.
- Libardi, P.L.; Reichardt, K., Nielsen, D.R. & Biggar, J.W. (1980). Simple field methods for estimating soil hydraulic conductivity. *Soil Sci. Soc. Am. J.*, 44, 3-7.
- Lu, Z.; Zhang, D. & Robinson, B.A. (2007). Explicit analytical solutions for one-dimensional steady state flow in layered, heterogeneous unsaturated soils under random boundary conditions. *Water Resour. Res.*, 43, W09413, doi:10.1029/2005WR004795.
- Mallants, D.; Jacques, D., Vanclooster, M., Diels, J. & Feyen, J. (1996). Stochastic approach to simulate water flow in a macroporous soil. *Geoderma*, 70(2-4), 299-324.
- Miller, E.E. & Miller, R.D. (1956). Physical theory of capillary flow phenomena. *J. Appl. Phys.*, 27, 324-332.
- Milly, P.C.D. & Eagleson, P.S. (1987). Effects of spatial variability on annual average water balance. *Water Resour. Res.*, 23(11), 2135-2143.
- Mualem, Y. (1976). A new model for predicting the hydraulic conductivity of unsaturated porous media. *Water Resour. Res.*, 12, 513-522.
- Neuweiler, I. & Cirpka, O.A. (2005). Homogenization of Richards equation in permeability fields with different connectivities. *Water Resour. Res.*, 41, W02009, doi:10.1029/2004WR003329.
- Neuweiler, I. & Eichel, H. (2006). Effective parameter functions for the Richards equation in layered porous media. *Vadose Zone J.*, 5, 963-977.
- Pachepsky, Y.; Radcliffe, D. & Selim, H.M. (2003). *Scaling Methods in Soil Physics*, CRC Press, Boca Raton, FL.
- Protopapas, A.L. & Bras, R. L. (1991). The one-dimensional approximation for infiltration in heterogeneous soils. *Water Resour. Res.*, 27, 1019-1027.
- Renard, P. & de Marsily, G. (1996). Calculating equivalent permeability: A review. *Adv. Water Resour.*, 20, 253-278.
- Richards, L.A. (1931). Capillary conduction of liquids through porous media. *Physics*, 1, 318-333.
- Rossi, C. & Nimmo, J.R. (1994). Modeling of soil water retention from saturation to oven dryness. *Water Resour. Res.*, 30, 701-708.
- Rubin, Y. (2003). *Applied Stochastic Hydrogeology*, Oxford Univ. Press, New York.
- Rubin, Y. & Or, D. (1993). Stochastic modeling of unsaturated flow in heterogeneous soils with water uptake by plant roots: The parallel columns model. *Water Resour. Res.*, 29, 619-631.
- Russo, D. (1988). Determining soil hydraulic properties by parameter estimation: On the selection of a model for the hydraulic properties. *Water Resour. Res.*, 24(3), 453-459.
- Russo, D. (1993). Stochastic modeling of macrodispersion for solute transport in a heterogeneous unsaturated porous formation. *Water Resour. Res.*, 29, 383-397.




- Russo, D. (1998). Stochastic analysis of flow and transport in unsaturated heterogeneous porous formation: Effects of variability in water saturation. *Water Resour. Res.*, 34, 569–581.
- Russo, D. (2003). Upscaled conductivity in gravity-dominated flow through variably saturated heterogeneous formations. *Water Resour Res.*, 39, 7–11.
- Russo, D. (2005). Stochastic analysis of solute mass flux in gravity-dominated flow through bimodal heterogeneous unsaturated formations. *Vadose Zone J.*, 4, 939–953, doi:10.2136/vzj2004.0183.
- Russo, D. & Fiori, A. (2009). Stochastic analysis of transport in a combined heterogeneous vadose zone-groundwater flow system. *Water Resour. Res.*, 45, W03426, doi:10.1029/2008WR007157, 2009.
- Schaap, M.G. & Leij, F.J. (1998). Database-related accuracy and uncertainty of pedotransfer functions. *Soil Sci.*, 163, 765–779.
- Setiawan, B.I. & Nakano, M. (1993). On the determination of unsaturated hydraulic conductivity from soil moisture profiles and from water retention curves. *Soil Sci.*, 156, 389–395.
- Severino, G. & Santini, A. (2005). On the effective hydraulic conductivity in mean vertical unsaturated steady flows. *Adv. Water Resour.*, 28, 964–974.
- Severino, G.; Santini, A. & Sommella, A. (2003). Determining the soil hydraulic conductivity by means of a field scale internal drainage. *J. Hydrol.*, 273, 234–248.
- Simunek, J.; Šejna, M. & van Genuchten, M.Th. (1998). *The HYDRUS-1D Software Package for Simulating One-dimensional Movement of Water, Heat, and Multiple Solutes in Variably Saturated Media*, Version 2.0, IGWMC - TPS - 70, International Ground Water Modeling Center, Colorado School of Mines, Golden, Colorado, 186 pp.
- Smith, R.E. & Diekkruger, B. (1996). Effective soil water characteristics and ensemble soil water profile in heterogeneous soils. *Water Resour. Res.*, 32, 1993–2002.
- Sposito, G. (1998). *Scale Dependence and Scale Invariance in Hydrology*, Cambridge Univ. Press, Cambridge, UK.
- Sviercoski, R.F.; Warrick, A.W. & Winter, C.L. (2009). Two-scale analytical homogenization of Richards' equation for flows through block inclusions. *Water Resour. Res.*, 45, W05403, doi:10.1029/2006WR005598.
- Tartakovsky, D. M.; Neuman, S.P. & Lu, Z. (1999). Conditional stochastic averaging of steady state unsaturated flow by means of Kirchhoff transformation. *Water Resour Res.*, 35, 731–45.
- Toride, N. & Leij, F.J. (1996a). Convective-dispersive stream tube model for field-scale solute transport: I. Moment analysis. *Soil Sci. Soc. Am. J.*, 60, 342–352.
- Toride, N. & Leij, F.J. (1996b). Convective-dispersive stream tube model for field-scale solute transport: II. Examples and calibration. *Soil Sci. Soc. Am. J.*, 60, 352–361.
- Van Duijn, C.J.; Mikelic, A. & Pop. I.S. (2002). Effective equations for two-phase flow with trapping on the micro scale. *SIAM J. Appl. Math.*, 62, 1531–1568.
- van Genuchten, M.Th. (1980). A closed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil Sci. Soc. Am. J.*, 44, 892–898.
- van Genuchten, M.Th. & Nielsen, D.R. (1985). On describing and predicting the hydraulic conductivity of unsaturated soils. *Annales Geophysicae*, 3, 615–628.

- Vereecken, H.; Kasteel, R., Vanderborgh, J. & Harter, T. (2007). Upscaling hydraulic properties and soil water flow processes in heterogeneous soils: A review. *Vadose Zone J.*, 6, 1-28.
- Ward, A.L.; Zhang, Z.F. & Gee, G.W. (2006). Upscaling unsaturated hydraulic parameters for flow through heterogeneous anisotropic sediments. *Adv. Water Resour.*, 29, 268-280.
- Wildenschild, D & Jensen. K.H. (1999). Numerical modeling of observed effective flow behavior in unsaturated heterogeneous sands. *Water Resour. Res.*, 35, 29-42.
- Williams, R.D. & Ahuja. R.L. (2003). Scaling and estimating the soil water characteristic using a one-parameter model, *Scaling Methods in Soil Physics*, p. 35-48, CRC Press, London.
- Young, M.H.; Mcdonald, E.V., Caldwell, T.G., Benner, S.G. & Meadows, D.G. (2004). Hydraulic properties of a desert soil chronosequence in the Mojave Desert. *Vadose Zone J.*, 3, 956-963.
- Zhang, D. (2002). *Stochastic Methods for Flow in Porous Media: Coping with Uncertainties*, Academic Press, San Diego.
- Zhang, R. & van Genuchten, M.Th. (1994). New models for unsaturated soil hydraulic properties. *Soil Sci.*, 158, 77-85.
- Zhang, D.; Wallstrom, T.C. & Winter, C.L. (1998). Stochastic analysis of steady-state unsaturated flow in heterogeneous media: Comparison of the Brooks-Corey and Gardner-Russo models. *Water Resour. Res.*, 34(6), 1437-1449.
- Zhang, Z.F. (2010). Effective hydraulic conductivity of unsaturated isotropic soils with multidimensional heterogeneity. *Soil Sci. Soc. Am. J.*, 74, 734-743, doi:10.2136/sssaj2009.0405.
- Zhang, Z.F.; Ward, A.L. & Gee, G.W. (2004). A combined parameter scaling and inverse technique to upscale the unsaturated hydraulic parameters for heterogeneous soils. *Water Resour. Res.*, 40, W08306. doi:10.1029/2003WR002925.
- Zhu, J. (2008). Equivalent parallel and perpendicular unsaturated hydraulic conductivities: Arithmetic mean or harmonic mean?. *Soil Sci. Soc. Am. J.*, 72, 1226-1233, doi:10.2136/sssaj2007.0337.
- Zhu, J. & Mohanty, B.P. (2002a). Upscaling of hydraulic properties for steady state evaporation and infiltration. *Water Resour. Res.*, 38(9), 1178, doi:10.1029/2001WR000704.
- Zhu, J. & Mohanty, B.P. (2002b). Spatial averaging of van Genuchten hydraulic parameters for steady-state flow in heterogeneous soils: A numerical study. *Vadose Zone J.*, 1, 261-272.
- Zhu, J. & Mohanty, B.P. (2003a). Effective hydraulic parameters for steady state flows in heterogeneous soils. *Water Resour. Res.*, 39(8), 1227, doi:10.1029/2002WR001831.
- Zhu, J. & Mohanty, B.P. (2003b). Upscaling of hydraulic properties in heterogeneous soils. *Scaling Methods in Soil Physics*, eds., Pachepsky, Y.; Radcliffe, D.E. & Selim, H.M., CRC Press, 97- 117.
- Zhu, J. & Mohanty, B.P. (2004). Soil hydraulic parameter upscaling for steady-state flow with root water uptake. *Vadose Zone J.*, 3, 1464-1470.

- Zhu, J. & Mohanty, B.P. (2006). Effective scaling factor for transient infiltration in heterogeneous soils. *J. Hydrol.*, 319(3), 96-108.
- Zhu, J.; Mohanty, B.P. & Das, N.N. (2006). On the effective averaging schemes of hydraulic properties at the landscape scale. *Vadose Zone J.*, 5, 308-316.
- Zhu, J. & Sun, D. (2009). Effective soil hydraulic parameters for transient flows in heterogeneous soils. *Vadose Zone J.*, 8, 301-309, doi:10.2136/vzj2008.0004.
- Zhu, J. & Sun, D. (2010). Capillary pressure-dependent anisotropy of unsaturated soils. *Can. J. Soil Sci.*, 90(2), 319-329.
- Zhu, J.; Young, M.H. & van Genuchten, M.Th. (2007). Upscaling schemes and relationships for the Gardner and van Genuchten hydraulic functions for heterogeneous soils. *Vadose Zone J.*, 6, 186-195.

IntechOpen

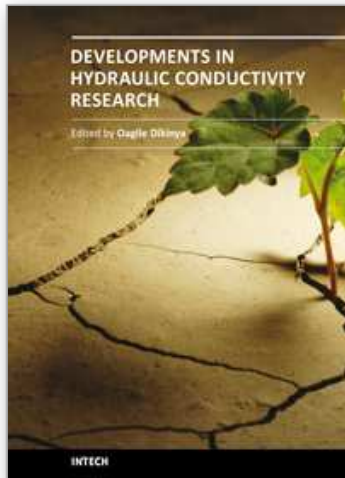

## **Developments in Hydraulic Conductivity Research**

Edited by Dr. Oagile Dikinya

ISBN 978-953-307-470-2

Hard cover, 270 pages

**Publisher** InTech

**Published online** 28, February, 2011

**Published in print edition** February, 2011

This book provides the state of the art of the investigation and the in-depth analysis of hydraulic conductivity from the theoretical to semi-empirical models perspective as well as policy development associated with management of land resources emanating from drainage-problem soils. A group of international experts contributed to the development of this book. It is envisaged that this thought provoking book will excite and appeal to academics, engineers, researchers and University students who seek to explore the breadth and in-depth knowledge about hydraulic conductivity. Investigation into hydraulic conductivity is important to the understanding of the movement of solutes and water in the terrestrial environment. Transport of these fluids has various implications on the ecology and quality of environment and subsequently sustenance of livelihoods of the increasing world population. In particular, water flow in the vadose zone is of fundamental importance to geoscientists, soil scientists, hydrogeologists and hydrologists and allied professionals.

### **How to reference**

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Dongmin Sun and Jianting Zhu (2011). Unsaturated Hydraulic Conductivity for Evaporation in Heterogeneous Soils, *Developments in Hydraulic Conductivity Research*, Dr. Oagile Dikinya (Ed.), ISBN: 978-953-307-470-2, InTech, Available from: <http://www.intechopen.com/books/developments-in-hydraulic-conductivity-research/unsaturated-hydraulic-conductivity-for-evaporation-in-heterogeneous-soils>

**INTECH**  
open science | open minds

### **InTech Europe**

University Campus STeP Ri  
Slavka Krautzeka 83/A  
51000 Rijeka, Croatia  
Phone: +385 (51) 770 447  
Fax: +385 (51) 686 166  
[www.intechopen.com](http://www.intechopen.com)

### **InTech China**

Unit 405, Office Block, Hotel Equatorial Shanghai  
No.65, Yan An Road (West), Shanghai, 200040, China  
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元  
Phone: +86-21-62489820  
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](#), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen